
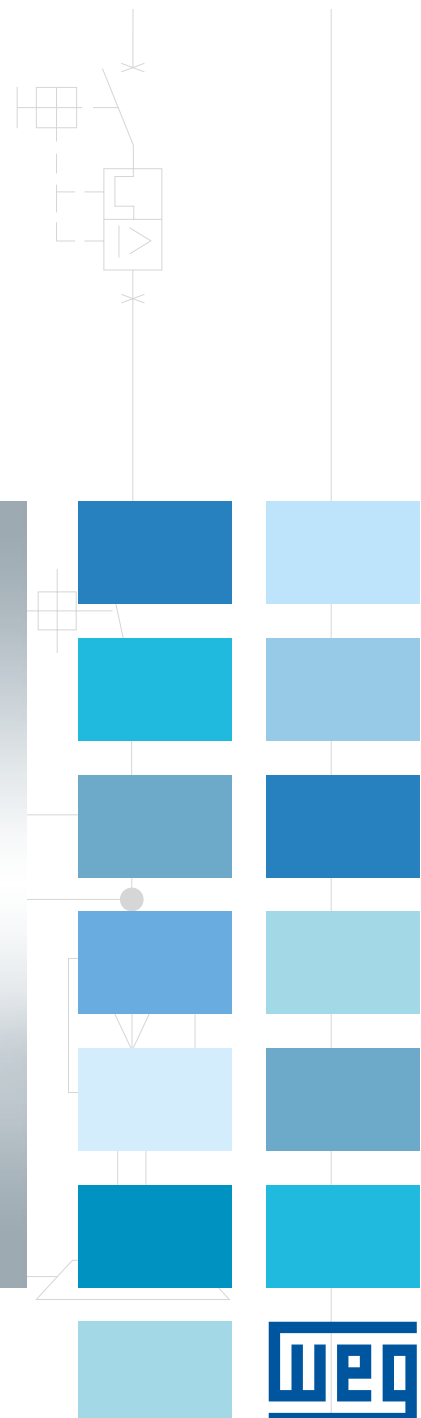


# CFW100 - Mini Drive


## Variable Speed Drive

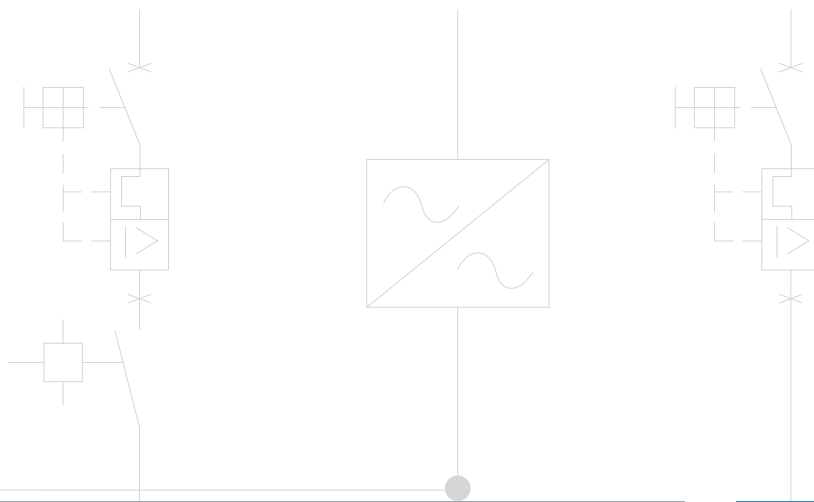

# CFW100

## Mini Drive

Technology is at your fingertips with the incredibly smallest volume VSD on the market. The CFW100 is a single-phase variable speed drive developed for simple applications ranging from 0.18 kW to 0.75 kW (0.25 to 1 hp). Suitable for OEMs, it gives induction motors a selectable scalar (V/F) or voltage vector control (VWV), HMI and plug and play philosophy, with easy and fast installation and operation.

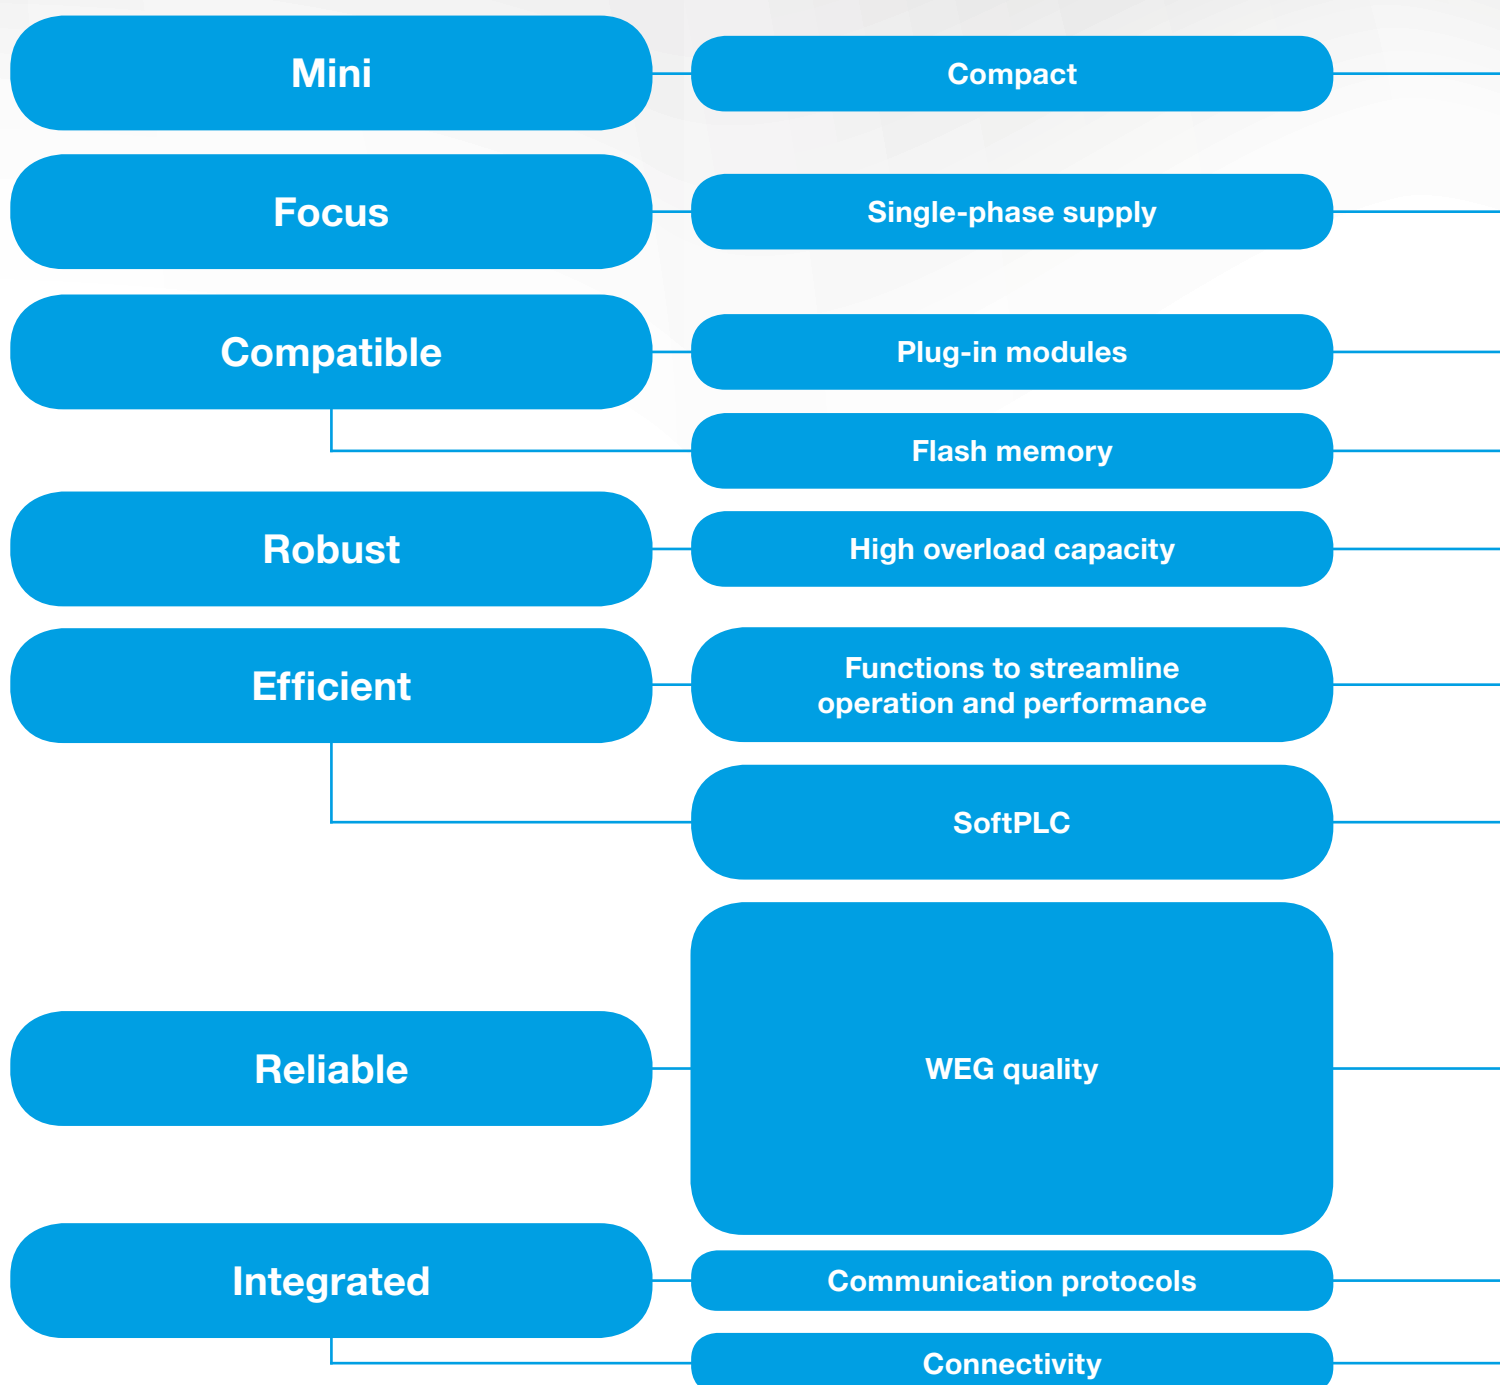

Many  
applications...

at your  
fingertips!



### Advantages

### Benefits

The smallest VSD on the market, able to operate with 50 °C ambient temperature without derating.

Reduction in the electrical panel space.

Appropriate for commercial and residential applications, however still suitable for industrial environments.

Saving time and installation cost when compared to three-phase applications.

The optional communication network and I/O modules are fast and easily installed, allowing adaptation of the standard VSD to each application.

Time saving, standardization and optimized costs.

Within seconds, it is possible to download the programming from a CFW100 to others without powering them up.

Fast, easy and reliable programming for manufacturers that produce machines in large quantities.

It withstands an overload of 150% for one minute every 10 minutes, at an ambient temperature of 50 °C.

Does not require oversizing of the VSD.

**PID:** process control with SoftPLC. **Sleep:** disables the VSD automatically. **Flying start:** allows control of a motor that is turning freely, accelerating it from the speed at which it was running. **Ride through:** keeps the VSD in operation during voltage dips.

Energy saving. It enables fast operating response of the machine and prevents occasional mechanical breakdowns. It prevents machine stoppage and downtime.

Built-in PLC, enabling the VSD, motor and application to work in an interactive way. It allows the user to implement customized logic and applications.

It eliminates the need for an external PLC, reducing costs, optimizing space and simplifying the system.

100% of the VSDs are tested with load at the factory under rated conditions.

High reliability.

Protection against ground fault, short circuit, over temperature and others.

It prevents damage to the inverter which can be caused by adverse conditions.

Thermal protection of IGBTs based on manufacturer curve.

Conformal Coating (tropicalization) as Standard. Classified as 3C2 according to IEC 60721-3-3.

VSD lifespan is extended: protection against dust, humidity, high temperatures and chemicals.

Modbus (RS485) and CANopen (coming soon).


Full integration with process network.

USB, Bluetooth® and Infrared.

Higher global connections with and without cables.


## Easy Configuration Fitting Everywhere

- Fast commissioning. Innovative design, extremely compact and uniform. Optimised cost x benefit

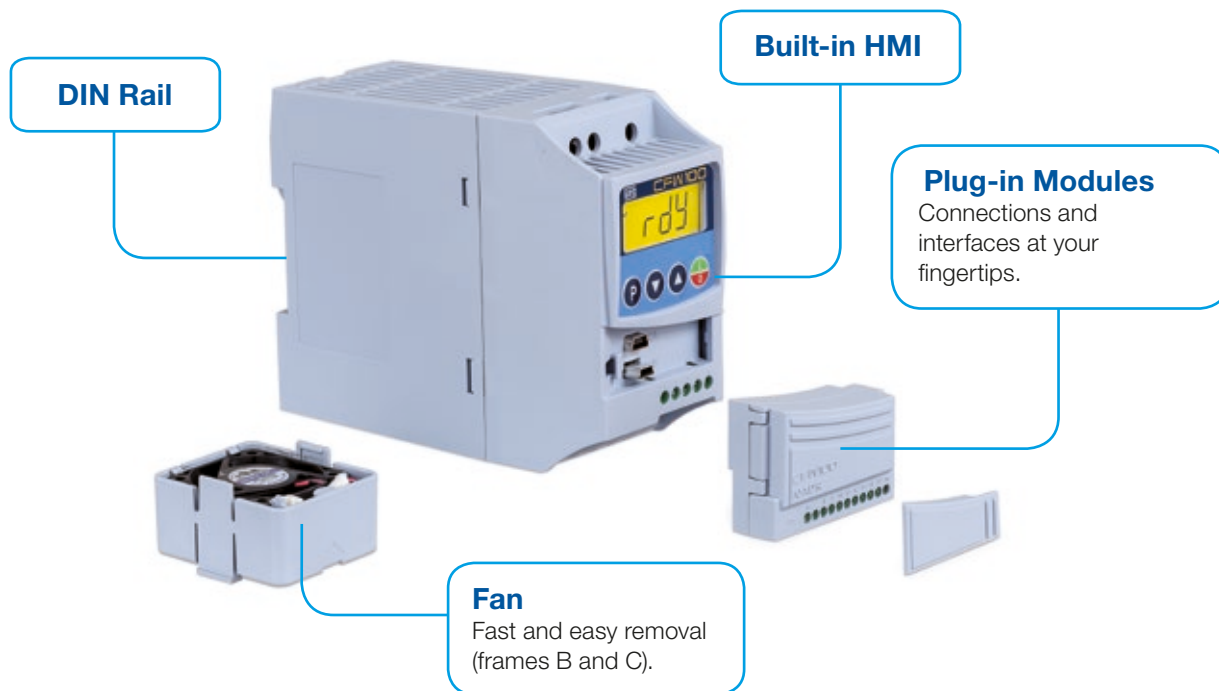

## Human-Machine Interface

- View two selected parameters at the same time. Unique in this category of VSD.

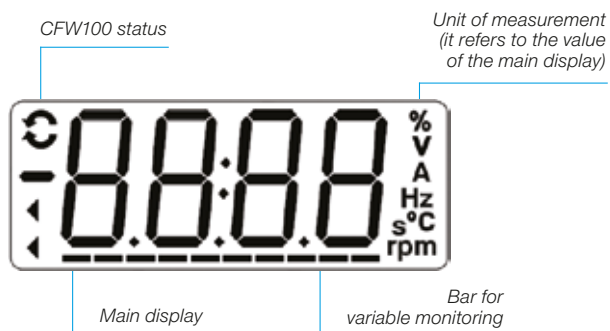

### Friendly Programming

- Built-in HMI for the standard product
- Oriented start-up: programming step by step



### Remote HMI

Solution for panel door or machine console.

## Easy replacement for contactors or similar product.

### Standard product no plug-in needs


- 1 - Supply terminals
- 2 - Plug-in modules ONLY
- 3 - Digital inputs
- 4 - Motor terminals

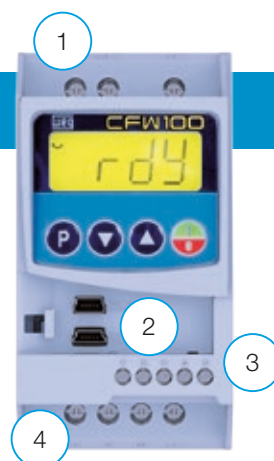


## Conectivity

### SoftPLC

Functionalities of a PLC available as standard, allowing the creation of applications. The WLP software and the SoftPLC functionality are a smart and simple way to make your CFW100, motor and application work together. For connect to a computer should have a plug-in module.

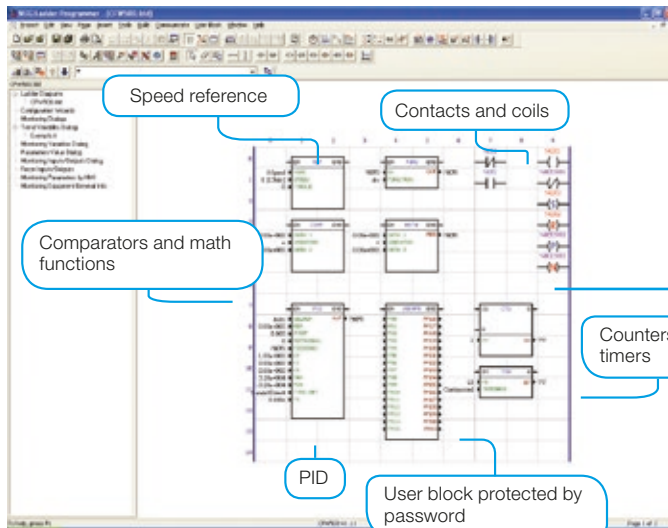

### USB

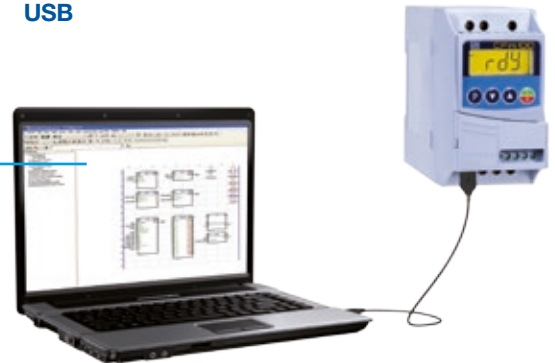

USB cable


### Bluetooth®



Plug-in module  
CFW100-CBLT



### Infrared Remote Control



Remote control



Plug-in module CFW100 - IOADR

## Flexibility



CFW100-CRS485  
Plug-in module



CFW100-KHMIR  
IP54



Flash memory  
CFW100-MMF



A 3 meters cable  
comes together with  
the remote HMI





## SuperDrive G2

Software application for programming, control and monitoring of WEG VSD. For connect to a computer should have a plug-in module.



Free on [www.weg.net](http://www.weg.net)

### Trend Function

- On-line graphic monitoring of parameters/variables
- Able to export an image with the respective graph according to the selected period




### Changing and Monitoring of Parameters in a List/Table

Parameter settings can be stored in a computer file format.

| Number | Function                | Minimum   | Maximum   | Factory Setting | User Setting | Unit |
|--------|-------------------------|-----------|-----------|-----------------|--------------|------|
| 0      | Access to Parameters    | 0         | 9999      | 0               | 0            |      |
| 1      | Speed Reference         | 0         | 65535     | 0               | 30           |      |
| 2      | Motor Speed             | 0         | 65535     | 0               | 30           |      |
| 3      | Motor Current           | 0         | 200       | 0               | 0.1          | A    |
| 4      | DC Link Voltage (Vd)    | 0         | 2000      | 0               | 311          | V    |
| 5      | Motor Frequency         | 0         | 500       | 0               | 2.5          | Hz   |
| 6      | VFD Status              | 0         | 7         | 0: Ready        | 3: Run       |      |
| 7      | Motor Voltage           | 0         | 2000      | 0               | 23           | V    |
| 9      | Motor Torque            | -1000     | 1000      | 0               | -5.2         | Nm   |
| 11     | Motor Current           | -1        | 1         | 0               | 0.25         |      |
| 12     | DOB to DO1 Status       | 00000000b | 11111111b | 00000000b       | 00000000b    |      |
| 13     | DO5 to DO1 Status       | 00000000b | 01111111b | 00000000b       | 00000001b    |      |
| 14     | AO1 Value               | 0         | 100       | 0               | 4.3          | %    |
| 15     | AO2 Value               | 0         | 100       | 0               | 3.4          | %    |
| 16     | FO % Value              | 0         | 100       | 0               | 0            | %    |
| 17     | FO Hz Value             | 0         | 20000     | 0               | 0            | Hz   |
| 18     | AI1 Value               | -100      | 100       | 0               | 0            | %    |
| 19     | AI2 Value               | -100      | 100       | 0               | 0            | %    |
| 20     | AI3 Value               | -100      | 100       | 0               | -140         | %    |
| 21     | PI % Value              | -100      | 100       | 0               | 0            | %    |
| 22     | PI Hz Value             | 0         | 20000     | 0               | 0            | Hz   |
| 23     | Mean Srv Version        | 0         | 65535     | 0               | 1.34         |      |
| 24     | Sec. SW Version         | 0         | 65535     | 1.11            | 1            |      |
| 27     | Plug-in Mod. Config.    | 00000000b | 00001001b | 00000000b       | 00000001b    |      |
| 29     | Power FWD Config.       | 00000000b | 00111111b | 00000000b       | 00000011b    |      |
| 30     | Heatsink Temperature    | -20       | 150       | 0               | 25           | °C   |
| 37     | Motor Overload Int.     | 0         | 100       | 0               | 0            | %    |
| 40     | PID Process Variable    | 0         | 3000      | 0               | 0            |      |
| 41     | PID Setpoint Value      | 0         | 3000      | 0               | 0            |      |
| 47     | COFF State              | 0         | 999       | 0               | 0            |      |
| 48     | Present Alarm           | 0         | 999       | 0               | 0            |      |
| 49     | Present Fault           | 0         | 999       | 0               | 0            |      |
| 50     | Last Fault              | 0         | 999       | 0               | 0            |      |
| 51     | Current At Last Fault   | 0         | 200       | 0               | 0            | A    |
| 52     | DC Link At Last Fault   | 0         | 2000      | 0               | 0            | V    |
| 53     | Power Off At Last Fault | 0         | 1000      | 0               | 0            | Hz   |


- Transfer of parameters from the PC to the CFW100 and vice versa
- Off-line editing of the parameters stored on the PC

### Status Monitoring

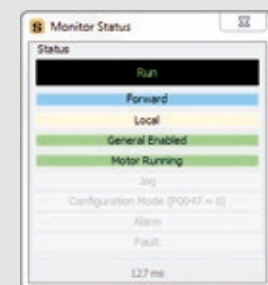

### Operation with HMI

On-line parameter programming.



## OEM Solutions



Mini frequency inverters with integrated micro-PLC are particularly suitable for simple technical applications in the commercial sector and OEM users, such as lift doors or fitness equipment, as well as small fans, mixing machines, roller tables and special-purpose machines for small processes. Combining extensive functionality with compact size, the CFW100 is easily integrates into electrical cabinets and many machines.

### Certifications



## Applications

### Dryers

Centrifugal pumps

Fans / Exhausters

Process dosing pumps

Stirrers / Mixers

Granulators / Palletizers



Rotary filters

Roller tables

Small handling applications



## Coding

The CFW100 code identifies its construction characteristics, nominal current, voltage range and available options. Using the smart code, it is possible to select the CFW100 required for your application.

| Product and series | Model identification                      |               |              |               | Degree of protection | Conducted emission level | Hardware version | Software version |
|--------------------|---|---------------|--------------|---------------|----------------------|--------------------------|------------------|------------------|
|                    | Frame size                                | Rated current | N° of phases | Rated voltage |                      |                          |                  |                  |
| CFW100             | A   | 01P6          | S            | 2             | 20                   | ---                      | ---              | ---              |
| CFW100             | Check table below                         |               |              |               | 20                   | ---                      | ---              | ---              |
|                    | 20 = IP20                                 |               |              |               |                      |                          |                  |                  |
|                    | Blank = with no internal RFI filter       |               |              |               |                      |                          |                  |                  |
|                    | Blank = standard<br>Hx = special hardware |               |              |               |                      |                          |                  |                  |
|                    | Blank = standard<br>Sx = special software |               |              |               |                      |                          |                  |                  |

| Frame size | Output current | Input                         | Power supply voltage | Degree of protection | Conducted emission level |
|------------|----------------|-------------------------------|----------------------|----------------------|--------------------------|
| A          | 01P6 = 1.6 A   | S = single-phase power supply | 2 = 200...240 V      | IP20 = 20            | External filter          |
| B          | 02P6 = 2.6 A   |                               |                      |                      |                          |
| C          | 04P2 = 4.2 A   |                               |                      |                      |                          |

## Drive Ratings

The correct way to select a VSD is by matching its output current to the motor rated current. However, the tables below present the expected motor power for each VSD model. Use the motor power ratings below only as a guide. Motor rated currents may vary with speed and manufacturer. IEC motor powers are based on WEG 4-pole motors, NEMA motors powers are based on NEC table 430-150.

### Motor Voltages Between 220 V and 230 V

| Power supply |    |                  | Model | Rated current | IEC                     |                | NEMA           |
|--------------|----|------------------|-------|---------------|-------------------------|----------------|----------------|
|              |    |                  |       |               | 50 Hz<br>220 V<br>230 V | 60 Hz<br>220 V | 60 Hz<br>230 V |
|              |    |                  |       | A             | kW                      | hp             | hp             |
| 200-240 V    | 10 | CFW100 A 01P6 S2 | 1.6   | 0.18          | 0.25                    | 0.33           |                |
|              |    | CFW100 A 02P6 S2 | 2.6   | 0.37          | 0.5                     | 0.5            |                |
|              |    | CFW100 A 04P2 S2 | 4.2   | 0.75          | 1                       | 1              |                |

## Dimensions and Weights

### IP20

| Frame size | H mm  | W mm | D mm | Weight Kg |
|------------|-------|------|------|-----------|
| A          | 100   | 55   | 129  | 0.48      |
| B          | 117   | 55   | 129  | 0.57      |
| C          | 125.6 | 55   | 129  | 0.61      |

Note: dimension and weights do no take into consideration external RFI filter.





## Accessories and Optionals

The CFW100 VSD was developed to meet the hardware configurations required by a wide range of applications. The table below presents the available options:

| Option   | Type <sup>1)</sup> | Description  | Optional item code <sup>2)</sup> | Accessory model  | Available  |
|--|--------------------|--|----------------------------------|--|--|
| RFI filter                                     | Optional           | Used to reduce the disturbance conducted from the CFW100 to the power supply, in the high frequency band (>150 kHz), according to standards 61800-3 and EM 55011 | -                                | External Filter  | Please check a local supplier, the WEG Branch or the User's Manual |
| I/Os expansion modules (plug-in) <sup>3)</sup> | Accessory          | Used to configure the I/O points according to the needs of the application/machine   | -                                | CFW100-IOAR  | User installation  |
| Communication module (plug-in) <sup>3)</sup>   | Accessory          | Used for the communication of the CFW100 with the main networks of the market (Fieldbus)   | -                                | CFW100-CUSB (USB)<br>CFW100-CRS485 (RS485)<br>CFW100-CCAN (CANopen)      | -  |
|  | Accessory          | Used for communication of VSD with a computer or to control the VSD remotely   | -                                | CFW100-CUSB (USB)<br>CFW100-CBLT (Bluetooth®)<br>CFW100-IOADR (Infrared) | -  |
| Flash memory module (plug-in) <sup>3)</sup>    | Accessory          | Used to download the programming of a CFW100 to others without having to power them up   | -                                | CFW100-MMF   | -  |
| Remote HMI                                     | Accessory          | Used to transfer the operation to the panel door or machine console. Maximum distance of 3 m without external supply <sup>4)</sup> . Degree of protection: IP54  | -                                | CFW100-HMIR  | -  |

Notes: 1) Optional = hardware resources added to the CFW100 in the manufacturing process. Accessory = hardware resource requested as a separated item.

2) Request the product according to the code available on page 8.

3) The CFW100 allows installation of one plug-in module per unit.

4) For more than 3 meters, please use RS485 connection with external power supply.

## Plug-In Modules Specification


| Plug-in module | Options |                       |               |     |            |          |                        |         |
|----------------|---------|-----------------------|---------------|-----|------------|----------|------------------------|---------|
|                | Inputs  |                       | Output        | USB | Bluetooth® | Infrared | Fieldbus communication |         |
|                | Analog  | Digital <sup>1)</sup> | Digital relay |     |            |          | RS485                  | CANopen |
| CFW100-IOAR    | 1       | 4                     | 1             | -   | -          | -        | -                      | -       |
| CFW100-CUSB    | -       | 4                     | -             | 1   | -          | -        | -                      | -       |
| CFW100-CBLT    | -       | 4                     | -             | -   | 1          | -        | -                      | -       |
| CFW100-IOADR   | 1       | 4                     | 3             | -   | -          | 1        | -                      | -       |
| CFW100-CRS485  | -       | 4                     | -             | -   | -          | -        | 1                      | -       |
| CFW100-CCAN    | -       | 4                     | -             | -   | -          | -        | -                      | 1       |

Notes: 1) Digital inputs are available in the standard product.

### Step by Step



## Block Diagram

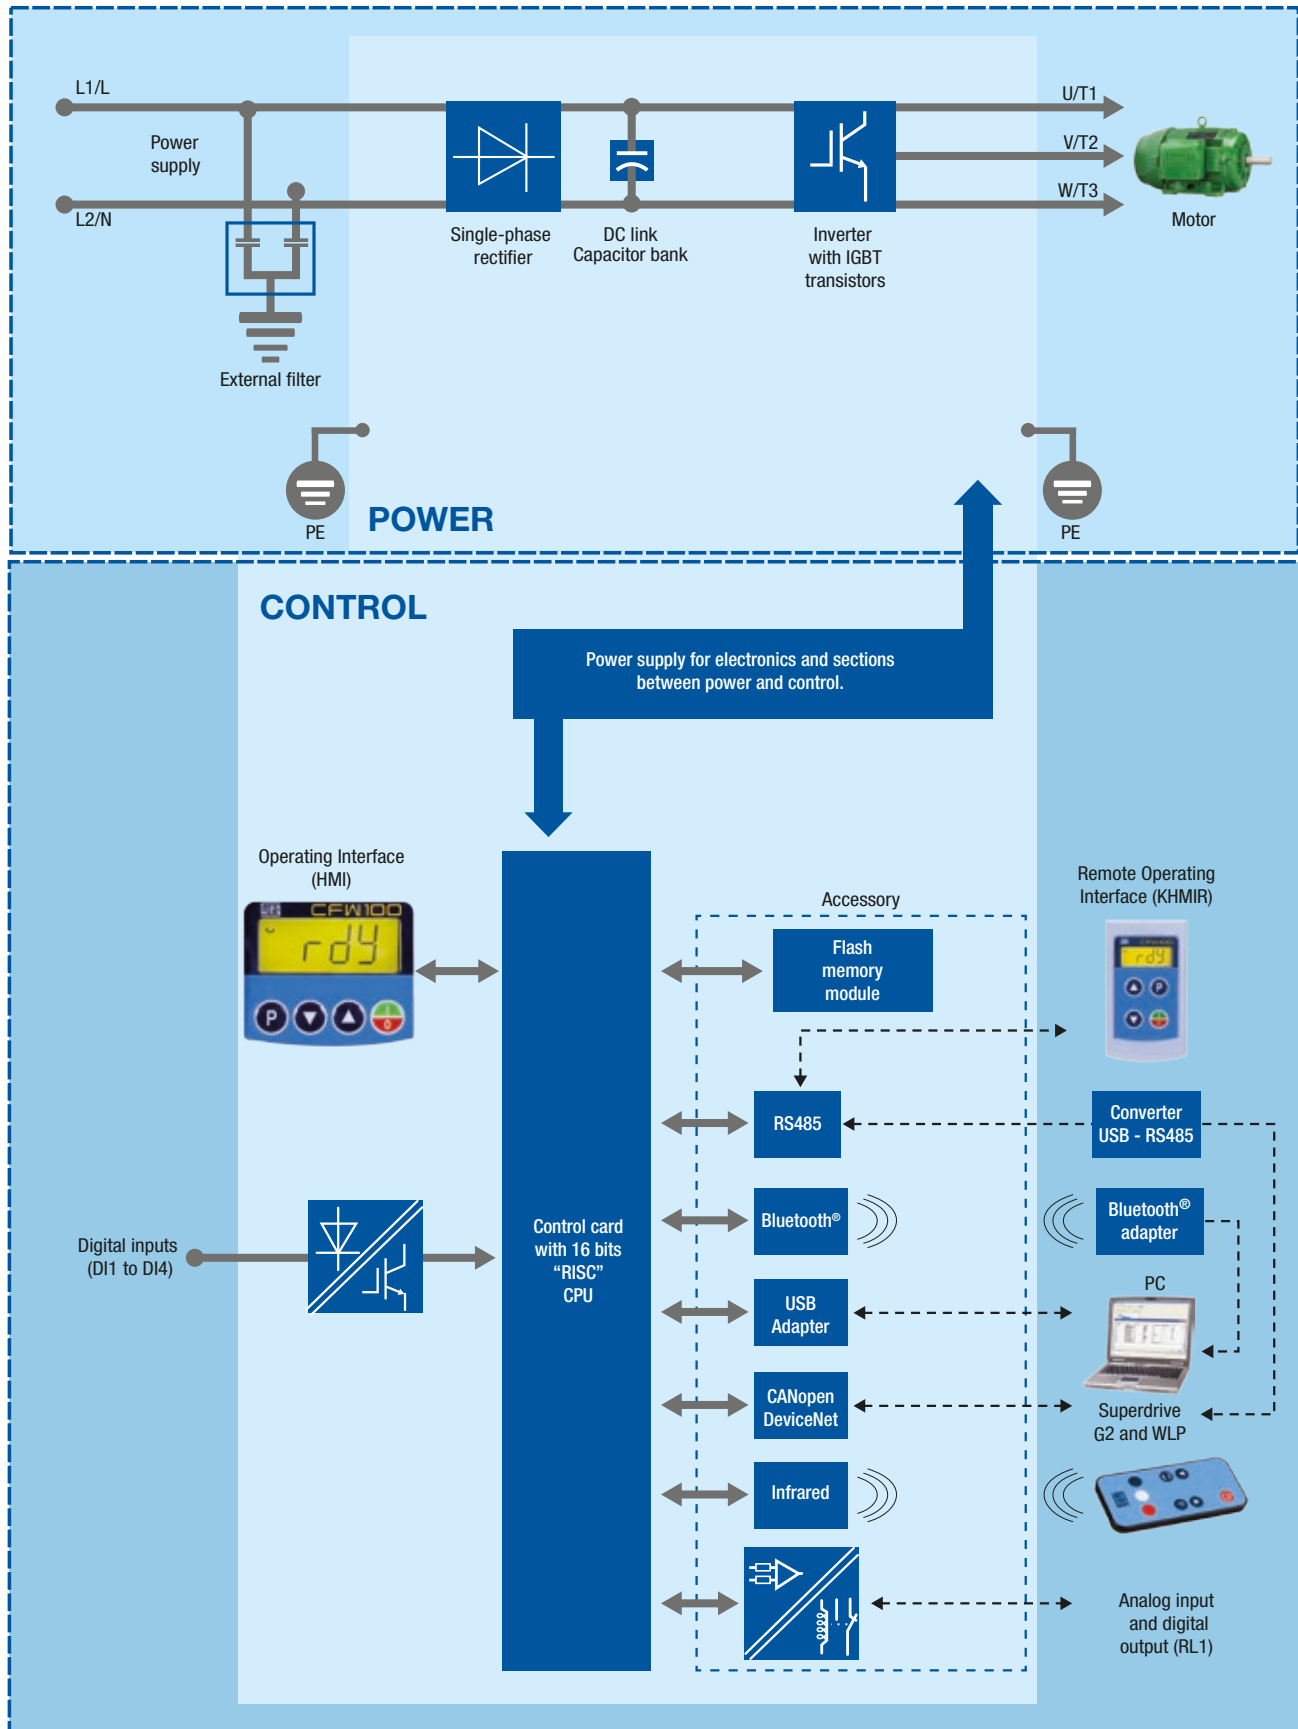

## Technical Data

|                        |                           |   |
|------------------------|---------------------------|---|
| Mains supply           | Voltage and power range   | 1-phase, 200-240 V ac (+10% - 15%)<br>0.18 to 0.75 kW (0.5 to 1 hp)   |
|                        | Supply frequency          | 50/60 Hz (48 Hz a 62 Hz)  |
| Motor connection       | Voltage                   | 3-phase, 0-100% of supply voltage   |
|                        | Output frequency          | 0 to 300 Hz, regulation of 0.1 Hz   |
|                        | Displacement power factor | >0.97   |
|                        | Overload capacity         | 1.5 x I <sub>n</sub> (drive) for 1 minute every 6 minutes   |
|                        | Switching frequency       | Default 5 kHz (selectable 2.5 to 15 kHz)  |
|                        | Acceleration time         | 0.1 to 999s   |
|                        | Deceleration time         | 0.1 to 999s   |
| Environment            | Temperature               | 50 °C - IP20 without RFI filter<br>2% current derating for each °C above the specific operating temperature, limited to 60 °C |
|                        | Air relative humidity     | 5% to 90 % non-condensing   |
|                        | Altitude                  | Up to 1,000 m<br>1,000 m to 4,000 m - 1% current derating for each 100 m above 1,000 m  |
|                        | Degree of protection      | IP20  |
| Performance            | V/F control               | Speed regulation: 1% of the rated speed (with slip compensation)<br>Speed variation range: 1:20                               |
|                        | Vector control (VW)       | Speed regulation: 1% of the rated speed<br>Speed variation range: 1:30  |
| Safety                 | Protection                | Overcurrent/phase-phase short circuit in the output   |
|                        |                           | Overcurrent/phase-ground short circuit in the output  |
|                        |                           | Under/overvoltage   |
|                        |                           | Overtemperature in the heatsink   |
|                        |                           | Overload in the motor   |
|                        |                           | Overload in the power module (IGBTs)  |
|                        |                           | External alarm / fault<br>Setting error   |
| Communication protocol | Modbus-RTU                | Plug-in modules for RS485   |
|                        | CANopen                   | Plug-in module CFW100-CCAN  |
| Connectivity           | USB                       | Plug-in modules CFW100 - CUSB   |
|                        | Bluetooth®                | Plug-in modules CFW100 - CBLT   |
|                        | Infrared                  | Plug-in modules CFW100 - IOADR  |

## Standards

|  |                    |   |
|--|--------------------|---|
| Safety standards   | UL 508C            | Power conversion equipment.   |
|  | UL 840             | Insulation coordination including clearances and creepage distances for electrical equipment.   |
|  | EN 61800-5-1       | Safety requirements electrical, thermal and energy.   |
|  | EN 50178           | Electronic equipment for use in power installations.  |
|  | EN 60204-1         | Safety of machinery. Electrical equipment of machines. Part 1: General requirements.<br><i>Note: For the machine to comply with this standard, the manufacturer of the machine is responsible for installing an emergency stop device and equipment to disconnect the input power supply.</i> |
|  | EN 60146 (IEC 146) | Semiconductor converters.   |
|  | EN 61800-2         | Adjustable speed electrical power drive systems - Part 2: General requirements - Rating specifications for low voltage adjustable frequency AC power drive systems.   |
| Electromagnetic compatibility (EMC) standards (with external filter) | EN 61800-3         | Adjustable speed electrical power drive systems - Part 3: EMC product standard including specific test methods.   |
|  | EN 55011           | Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) radio-frequency equipment.   |
|  | CISPR 11           | Industrial, scientific and medical (ISM) radio-frequency equipment - Electromagnetic disturbance characteristics - Limits and methods of measurement.   |
|  | EN 61000-4-2       | Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 2: Electrostatic discharge immunity test.  |
|  | EN 61000-4-3       | Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 3: Radiated, radio-frequency, electromagnetic field immunity test.   |
|  | EN 61000-4-4       | Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 4: Electrical fast transient/burst immunity test.  |
|  | EN 61000-4-5       | Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 5: Surge immunity test.  |
| Mechanical construction standards                                    | EN 61000-4-6       | Electromagnetic compatibility (EMC) - Part 4: Testing and measurement techniques - Section 6: Immunity to conducted disturbances, induced by radio-frequency fields.  |
|  | EN 60529           | Degrees of protection provided by enclosures (IP code).   |
|  | UL 50              | Enclosures for electrical equipment.  |

# WEG Worldwide Operations

## ARGENTINA

WEG EQUIPAMIENTOS  
ELECTRICOS  
San Francisco - Cordoba  
Phone: +54 3564 421 484  
[info-ar@weg.net](mailto:info-ar@weg.net)  
[www.weg.net/ar](http://www.weg.net/ar)

WEG PINTURAS - Pulverlux  
Buenos Aires  
Phone: +54 11 4299 8000  
[tintas@weg.net](mailto:tintas@weg.net)

## AUSTRALIA

WEG AUSTRALIA  
Victoria  
Phone: +61 3 9765 4600  
[info-au@weg.net](mailto:info-au@weg.net)  
[www.weg.net/au](http://www.weg.net/au)

## AUSTRIA

WATT DRIVE - WEG Group  
Markt Piesting - Vienna  
Phone: +43 2633 404 0  
[watt.wattdrive.com](http://watt.wattdrive.com)  
[www.wattdrive.com](http://www.wattdrive.com)

## BELGIUM

WEG BENELUX  
Nivelles - Belgium  
Phone: +32 67 88 84 20  
[info-be@weg.net](mailto:info-be@weg.net)  
[www.weg.net/be](http://www.weg.net/be)

## BRAZIL

WEG EQUIPAMENTOS ELÉTRICOS  
Jaraguá do Sul - Santa Catarina  
Phone: +55 47 3276-4002  
[info-br@weg.net](mailto:info-br@weg.net)  
[www.weg.net/br](http://www.weg.net/br)

## CHILE

WEG CHILE  
Santiago  
Phone: +56 2 784 8900  
[info-cl@weg.net](mailto:info-cl@weg.net)  
[www.weg.net/cl](http://www.weg.net/cl)

## CHINA

WEG NANTONG  
Nantong - Jiangsu  
Phone: +86 0513 8598 9333  
[info-cn@weg.net](mailto:info-cn@weg.net)  
[www.weg.net/cn](http://www.weg.net/cn)

## COLOMBIA

WEG COLOMBIA  
Bogotá  
Phone: +57 1 416 0166  
[info-co@weg.net](mailto:info-co@weg.net)  
[www.weg.net/co](http://www.weg.net/co)

## ECUADOR

WEG ECUADOR  
Quito  
Phone: 5144 339/342/317  
[wegecuador@weg.net](mailto:wegecuador@weg.net)  
[www.weg.net/ec](http://www.weg.net/ec)

## FRANCE

WEG FRANCE  
Saint Quentin Fallavier - Lyon  
Phone: +33 4 74 99 11 35  
[info-fr@weg.net](mailto:info-fr@weg.net)  
[www.weg.net/fr](http://www.weg.net/fr)

## GERMANY

WEG GERMANY  
Kerpen - North Rhine Westphalia  
Phone: +49 2237 9291 0  
[info-de@weg.net](mailto:info-de@weg.net)  
[www.weg.net/de](http://www.weg.net/de)

## GHANA

ZEST ELECTRIC GHANA  
WEG Group  
Accra  
Phone: +233 30 27 664 90  
[info@zestghana.com.gh](mailto:info@zestghana.com.gh)  
[www.zestghana.com.gh](http://www.zestghana.com.gh)

## INDIA

WEG ELECTRIC INDIA  
Bangalore - Karnataka  
Phone: +91 80 4128 2007  
[info-in@weg.net](mailto:info-in@weg.net)  
[www.weg.net/in](http://www.weg.net/in)

## WEG INDUSTRIES INDIA

Hosur - Tamil Nadu  
Phone: +91 4344 301 577  
[info-in@weg.net](mailto:info-in@weg.net)  
[www.weg.net/in](http://www.weg.net/in)

## ITALY

WEG ITALIA  
Cinisello Balsamo - Milano  
Phone: +39 02 6129 3535  
[info-it@weg.net](mailto:info-it@weg.net)  
[www.weg.net/it](http://www.weg.net/it)

## JAPAN

WEG ELECTRIC MOTORS  
JAPAN  
Yokohama City - Kanagawa  
Phone: +81 45 550 3030  
[info-jp@weg.net](mailto:info-jp@weg.net)  
[www.weg.net/jp](http://www.weg.net/jp)

## MALAYSIA

WATT EURO-DRIVE - WEG Group  
Shah Alam, Selangor  
Phone: 603 78591626  
[info@wattdrive.com.my](mailto:info@wattdrive.com.my)  
[www.wattdrive.com](http://www.wattdrive.com)

## MEXICO

WEG MEXICO  
Huehuetoca  
Phone: +52 55 5321 4231  
[info-mx@weg.net](mailto:info-mx@weg.net)  
[www.weg.net/mx](http://www.weg.net/mx)

## VOLTRAN - WEG Group

Tizayuca - Hidalgo  
Phone: +52 77 5350 9354  
[www.voltran.com.mx](http://www.voltran.com.mx)

## NETHERLANDS

WEG NETHERLANDS  
Oldenzaal - Overijssel  
Phone: +31 541 571 080  
[info-nl@weg.net](mailto:info-nl@weg.net)  
[www.weg.net/nl](http://www.weg.net/nl)

## PERU

WEG PERU  
Lima  
Phone: +51 1 209 7600  
[info-pe@weg.net](mailto:info-pe@weg.net)  
[www.weg.net/pe](http://www.weg.net/pe)

## PORTUGAL

WEG EURO  
Maia - Porto  
Phone: +351 22 9477705  
[info-pt@weg.net](mailto:info-pt@weg.net)  
[www.weg.net/pt](http://www.weg.net/pt)

## RUSSIA and CIS

WEG ELECTRIC CIS  
Saint Petersburg  
Phone: +7 812 363 2172  
[info-ru@weg.net](mailto:info-ru@weg.net)  
[www.weg.net/ru](http://www.weg.net/ru)

## SOUTH AFRICA

ZEST ELECTRIC MOTORS  
WEG Group  
Johannesburg  
Phone: +27 11 723 6000  
[info@zest.co.za](mailto:info@zest.co.za)  
[www.zest.co.za](http://www.zest.co.za)

## SPAIN

WEG IBERIA  
Madrid  
Phone: +34 91 655 30 08  
[info-es@weg.net](mailto:info-es@weg.net)  
[www.weg.net/es](http://www.weg.net/es)

## SINGAPORE

WEG SINGAPORE  
Singapore  
Phone: +65 68589081  
[info-sg@weg.net](mailto:info-sg@weg.net)  
[www.weg.net/sg](http://www.weg.net/sg)

## SCANDINAVIA

WEG SCANDINAVIA  
Kungsbacka - Sweden  
Phone: +46 300 73 400  
[info-se@weg.net](mailto:info-se@weg.net)  
[www.weg.net/se](http://www.weg.net/se)

## UK

WEG ELECTRIC MOTORS U.K.  
Redditch - Worcestershire  
Phone: +44 1527 513 800  
[info-uk@weg.net](mailto:info-uk@weg.net)  
[www.weg.net/uk](http://www.weg.net/uk)

## UNITED ARAB EMIRATES

WEG MIDDLE EAST  
Dubai  
Phone: +971 4 813 0800  
[info-ae@weg.net](mailto:info-ae@weg.net)  
[www.weg.net/ae](http://www.weg.net/ae)

## USA

WEG ELECTRIC  
Duluth - Georgia  
Phone: +1 678 249 2000  
[info-us@weg.net](mailto:info-us@weg.net)  
[www.weg.net/us](http://www.weg.net/us)

## ELECTRIC MACHINERY

WEG Group  
Minneapolis - Minnesota  
Phone: +1 612 378 8000  
[www.electricmachinery.com](http://www.electricmachinery.com)

## VENEZUELA

WEG INDUSTRIAS VENEZUELA  
Valencia - Carabobo  
Phone: +58 241 821 0582  
[info-ve@weg.net](mailto:info-ve@weg.net)  
[www.weg.net/ve](http://www.weg.net/ve)

For those countries where there is not a WEG own operation, find our local distributor at [www.weg.net](http://www.weg.net).



WEG Group - Automation Business Unit  
Jaraguá do Sul - SC - Brazil  
Phone: +55 47 3276 4000  
[automacao@weg.net](mailto:automacao@weg.net)  
[www.weg.net](http://www.weg.net)

