

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



JUMO diraTRON DR100

Universal controller for mounting on DIN rail 35 mm

Brief description

The diraTRON DR 100 controller is a universally applicable DIN rail controller for controlling temperature, pressure, and other process variables. The device can be used as a two-state/three-step controller, and can also be used as a continuous controller with the analog output option.

The measurement input is user configurable and can be used for

- RTD temperature probes,
- single and double thermocouples,
- resistance transmitters,
- resistance potentiometers
- and current or voltage signals.


The device is characterized by simple, clearly structured operation that is supported with texts. The device is optionally available with an RS485 interface, an additional digital input, and an analog output. The basic type includes autotuning, a ramp function, manual mode, limit value monitoring function, and digital control signals. Measured values are visualized on a dot-matrix LCD display with white backlight. The operating status is indicated by a two-color LED. In the event of a fault, the LED lights up red and if there is no fault, it lights up green.

The device can be configured via a setup program or via the four keys on the device.



Type 702061

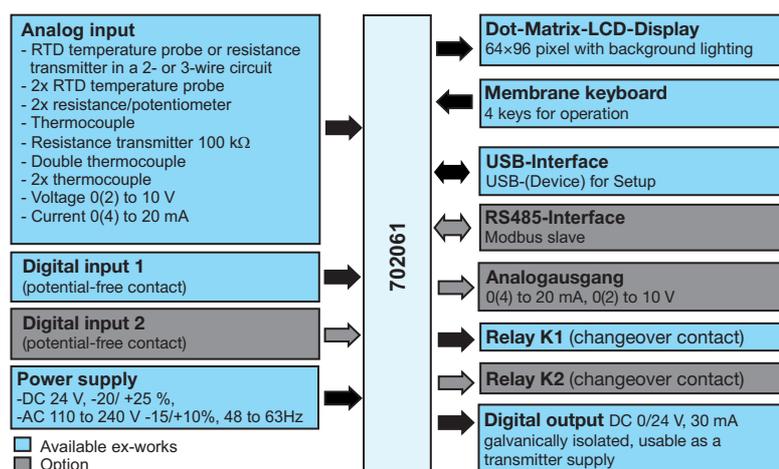Block diagram



Special features

- Universal analog input
- Temperature difference measurement
- Fast wiring due to spring-cage terminals
- Connection of up to 10 devices next to one another via the rear wall bus
- Digital output can also be used as transmitter supply
- Analog output optionally as actual value, setpoint value, or controller output
- RS485 interface
- Autotuning
- Service and operating hours counter

JUMO GmbH & Co. KG

Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO UK LTD

JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.

6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com



Description

Inputs and outputs

The device has a universal analog input (for RTD temperature probe, 2 RTD temperature probes, thermocouple, double thermocouple, 2 thermocouples, current, voltage, resistance/potentiometer, resistance transmitter), a digital input and a digital output. The digital output delivers a logic signal 0/24 V, can serve as voltage supply for transmitters, and is galvanically isolated. A K1 relay (changeover contact) is also available as standard. An additional K2 relay (changeover contact), digital input 2, and an analog output is also optionally available. The digital inputs are provided to connect a potential-free contact.

USB interface

The device is equipped with a USB device interface (Micro-B socket on the front) that is provided for connecting to a PC and is only used for the setup program.

RS485 interface

An RS485 interface is also available as an optional extra, which is provided for communication with a Modbus master. The Modbus RTU protocol is used for communication, which is expanded with an additional layer of security during safety-relevant communication.

Electrical connection

The electrical connection saves time by using practical spring-cage terminals according to DIN EN 60998-1 (PUSH IN technology).

Rear wall terminals

They can be ordered as accessories.

The PUSH IN connection terminal is required for the voltage supply and connection of the RS485 interface (option) via the rear wall terminal. A wireless connection from device to device via the mounting rail rear wall terminal is still possible (see accessories).

Controller

The controller structures (P, I, PD, PI, PID) including autotuning are available. A two-state controller (via the K2 relay) or a continuous controller (with the analog output option) can be realized.

Autotuning

Autotuning (oscillation method and step response) also makes it possible for the controller to be matched to the control process by users who are not control technology experts. The way the control process reacts to changes

in the actuating variable is evaluated in the process and suitable controller parameters are calculated.

Service

The switching cycles of the K1 and K2 relays are counted. When the set limit value is reached, a binary signal is activated that needs to be acknowledged.

Setup program

The setup program provides the user with an easy and convenient way to configure the device using a PC. This allows data records to be created, edited, saved, and transferred to the device, as well as extracted from there.

Expertise protection is implemented with password protection (code).

If expertise protection is active, the read configuration is not displayed in the setup. A setup file with active expertise protection cannot be loaded into any devices; the protection has to be canceled beforehand.

Customer-specific linearization

Sensor signals with special characteristic line properties can also be used through customer-specific linearization. Programming is carried out in the setup program on the basis of a value table with up to 40 value pairs or through a formula (4th order polynomial).

JUMO GmbH & Co. KG

Delivery address: Mackenrodtstraße 14
36039 Fulda, Germany
Postal address: 36035 Fulda, Germany
Phone: +49 661 6003-0
Fax: +49 661 6003-607
Email: mail@jumo.net
Internet: www.jumo.net

JUMO UK LTD

JUMO House
Temple Bank, Riverway
Harlow, Essex, CM20 2DY, UK
Phone: +44 1279 63 55 33
Fax: +44 1279 62 50 29
Email: sales@jumo.co.uk
Internet: www.jumo.co.uk

JUMO Process Control, Inc.

6724 Joy Road
East Syracuse, NY 13057, USA
Phone: +1 315 437 5866
Fax: +1 315 437 5860
Email: info.us@jumo.net
Internet: www.jumousa.com



Controller parameters

The following table shows the controller's parameter block. The optional controller (extra code = 032) must be available for this. The transmission behavior is specified by the selection of the controller structure and determined by the configuration of the parameters for the proportional band (P component), derivative time (D component), and reset time (I component).

Parameter	Value	Default setting	Unit	Description
Controller structure 1	P, I, PD, PI, PID	PID	-	Transmission behavior of the controller output.
Proportional band P_b	0 to 9999	0	Physical unit of the controller size	Size of the proportional band. The controller structure is not effective with 0 (behavior identical to limit value monitoring function). With a continuous controller, P_b has to be > 0 .
Derivative time d_t	0 to 9999	80	s	Impacts the differential component of the controller output signal.
Reset time r_t	0 to 9999	350	s	Impacts the integral component of the controller output signal.
Cycle time C_y	0 to 9999	20	s	When using a switching output, the cycle time should be chosen so that the energy supply to the process is almost continuous, and the switching elements are not overloaded.
Switching differential X_d	0 to 9999	1	Physical unit of the controller size	Hysteresis for a switching controller with proportional band $P_b = 0$
Working point Y_0	-100 to +100	0	%	Output level for P and PD controllers (if $x = w$, $y = Y_0$).
Output value limit Y_1	0 to 100	100	%	Maximum output value limit (only effective if $P_b > 0$).
Output value limit Y_2	0 to 100	0	%	Minimum output value limit (only effective if $P_b > 0$).
Minimum relay switch-on time T_c	0 to 9999	0	s	Limitation of the switching frequency in the case of switching outputs (digital outputs).

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Technical data

Analog input

RTD temperature probe

Designation	Standard	ITS	Connection type	Measuring range	Accuracy ^a
Pt100 Pt500 Pt1000 $T_c=3.851 \times 10^{-3} \text{ 1/K}$	DIN EN IEC 60751:2023-06	ITS-90	Two/three-wire	-200 °C to +850 °C	±0.1 %
Pt100 $T_c=3.917 \times 10^{-3} \text{ 1/K}$	GOST 6651-2009 A.2	ITS-90	Two/three-wire	-200 °C to +850 °C	±0.1 %
Pt50 $T_c=3.917 \times 10^{-3} \text{ 1/K}$	GOST 6651-2009 A.2	ITS-90	Two/three-wire	-200 °C to +850 °C	±0.1 %
Ni100 Ni500 Ni1000 $T_c=6.18 \times 10^{-3} \text{ 1/K}$	DIN 43760:1987-09	IPTS-68	Two/three-wire	-60 °C to +250 °C	±0.1 %
Ni100 $T_c=6.17 \times 10^{-3} \text{ 1/K}$	GOST 6651-2009 A.5	ITS-90	Two/three-wire	-60 °C to +180 °C	±0.1 %
Cu50 $T_c=4.28 \times 10^{-3} \text{ 1/K}$	GOST 6651-2009 A.3	ITS-90	Two/three-wire	-180 °C to +200 °C	±0.1 %
Cu100 $T_c=4.28 \times 10^{-3} \text{ 1/K}$	GOST 6651-2009 A.3	ITS-90	Two/three-wire	-180 °C to +200 °C	±0.1 %

^a Accuracy refers to the measuring range.

General specifications	
Connection type	Two-wire circuit Three-wire circuit Two RTD temperature probes in two-wire circuit
Ambient temperature influence	≤ 50 ppm/K referring to 22 °C
Sensor line resistance	Maximum 50 Ω per line, automatic compensation with three-wire circuit
Sensor current	< 1 mA
Input filter	Digital filter, 2nd order; filter constant can be set from 0 s to 100 s
Sampling rate	210 ms

Thermocouples

Designation	Type	Standard	ITS	Measuring range	Accuracy ^a
Fe-CuNi	L	DIN 43710:1985-12	IPTS-68	-200 °C to +900 °C	±0.4 %
Fe-CuNi	J	IEC 60584-1:2013 DIN EN 60584-1:2014	ITS-90	-210 °C to +1200 °C	±0.4 % from -100 °C
Cu-CuNi	U	DIN 43710:1985-12	IPTS-68	-200 °C to +600 °C	±0.4 % from -100 °C
Cu-CuNi	T	IEC 60584-1:2013 DIN EN 60584-1:2014	ITS-90	-200 °C to +400 °C	±0.4 % from -150 °C
NiCr-Ni	K	IEC 60584-1:2013 DIN EN 60584-1:2014	ITS-90	-200 °C to +1300 °C	±0.4 % from -50 °C
NiCr-CuNi	E	IEC 60584-1:2013 DIN EN 60584-1:2014	ITS-90	-200 °C to +1000 °C	±0.4 % from -80 °C
NiCrSi-NiSi	N	IEC 60584-1:2013 DIN EN 60584-1:2014	ITS-90	-200 °C to +1300 °C	±0.4 % from -80 °C
Pt10Rh-Pt	S	IEC 60584-1:2013 DIN EN 60584-1:2014	ITS-90	-50 °C to +1768 °C	±0.4 % from +20 °C

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Designation	Type	Standard	ITS	Measuring range	Accuracy ^a
Pt13Rh-Pt	R	IEC 60584-1:2013 DIN EN 60584-1:2014	ITS-90	-50 °C to +1768 °C	±0.4 % from +50 °C
Pt30Rh-Pt6Rh	B	IEC 60584-1:2013 DIN EN 60584-1:2014	ITS-90	-50 °C to +1820 °C	±0.4 % from +400 °C
W5Re-W26Re	C	IEC 60584-1:2013 DIN EN 60584-1:2014	ITS-90	0 °C to 2315 °C	±0.4 %
W5Re-W20Re	A	IEC 60584-1:2013 DIN EN 60584-1:2014	ITS-90	0 °C to 2500 °C	±0.4 %
W3Re-W25Re	D	ASTM E1751M-20	ITS-90	0 °C to 2315 °C	±0.4 %
Chromel®-COPEL®	L	GOST R 8.585-2001	ITS-90	-200 °C to +800 °C	±0.4 % from -80 °C
Chromel®-Alumel®	K	GOST R 8.585-2001	ITS-90	-270 °C to +1372 °C	±0.4 % from -80 °C
Platinel II®		ASTM E1751M-20	ITS-90	0 °C to 1395 °C	±0.4 %

^a Accuracy refers to the maximum measuring range.

General specifications	
Connection type	Thermocouple Double thermocouple 2 × thermocouple
Ambient temperature influence	≤ 100 ppm/K referring to 22 °C, plus accuracy of the cold junction
Cold junction	Internal (Pt1000) or external (fixed value)
Cold junction accuracy	±1 K
Cold junction temperature (constant fixed value)	-20 °C to +80 °C (adjustable)
Input filter	Digital filter, 2nd order; filter constant can be set from 0 s to 100 s
Sampling rate	Thermocouple: 210 ms

Voltage, current (standard signals)

Designation	Measuring range	Accuracy ^a	Input resistance
Voltage	0 V to 10 V	±0.1 %	> 500 kΩ
	2 V to 10 V	±0.1 %	> 500 kΩ
	-20 to +90 mV	≤ 0.4 %	> 500 kΩ

^a Accuracy refers to the maximum measuring range.

Designation	Measuring range	Accuracy ^a	Compliance voltage
Current	4 mA to 20 mA	±0.2 %	≤ 3 V
	0 mA to 20 mA	±0.2 %	≤ 3 V

^a Accuracy refers to the maximum measuring range.

General specifications	
Ambient temperature influence	≤ 150 ppm/K referring to 22 °C
Measuring range limits	According to NAMUR Recommendation NE 43
Input filter	Digital filter, 2nd order; filter constant can be set from 0 to 100 s
Sampling rate	210 ms

Resistance transmitter

General specifications		Accuracy ^a
Measuring range	0 Ω to 100000 Ω	0.1 %
Connection type	Resistance transmitter in three-wire connection	
Ambient temperature influence	≤ 50 ppm/K referring to 22 °C	
Input filter	Digital filter, 2nd order; filter constant can be set from 0 s to 100 s	
Sampling rate	210 ms	

^a Accuracy refers to the measuring range.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Resistance potentiometer

Designation	Measuring range	Accuracy ^a
Resistance	0 Ω to 400 Ω	≤ 0.1 %
	0 Ω to 4000 Ω	≤ 0.1 %

^a Accuracy refers to the maximum measuring range.

General specifications	
Connection type	Two-wire connection Three-wire connection Two resistance potentiometers in two-wire connection
Ambient temperature influence	≤ 50 ppm/K referring to 22 °C
Sensor line resistance	Maximum 50 Ω per line
Sensor current	< 1 mA
Input filter	Digital filter, 2nd order; filter constant can be set from 0 s to 100 s
Sampling rate	210 ms

Measuring circuit monitoring

The device behavior in the event of a fault is configurable.

Measuring probe	Measuring range undershoot	Measuring range exceedance	Break of probe or line	short-circuit Probe
RTD temperature probe	Is detected	Is detected	Is detected	Is detected
Thermocouple and 2 × thermocouple	Is detected	Is detected	Is detected	Is not detected
Double thermocouple	Is detected	Is detected	Is detected	Is detected ^a
Resistance transmitter	Is not detected	Is not detected	Is not detected	Is not detected
Resistance potentiometer	Is not detected	Is detected	Is detected	Is not detected
Current 0 mA to 20 mA	Is detected	Is detected	Is not detected	Is not detected
Current 4 mA to 20 mA	Is detected	Is detected	Is detected	Is detected
Voltage 0 V to 10 V	Is detected	Is detected	Is not detected	Is not detected
Voltage 2 V to 10 V	Is detected	Is detected	Is detected	Is detected

^a Probe short circuit can only be detected with a double thermocouple (via double thermocouple fault limit)

Analog output

Voltage	
Output signal	DC 0 V to 10 V or 2 V to 10 V
Load resistance	≥ 500 Ω
Load influence	±15 mV
Current	
Output signal	DC 0 mA to 20 mA or 4 mA to 20 mA
Burden	≤ 500 Ω
Burden influence	±0.05 mA/100 Ω
Accuracy ^a	±0.5 %
Ambient temperature influence	≤ 150 ppm/K
Standard or option	Option 2
Galvanic isolation	No

^a Accuracy refers to the measuring range end value.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Digital inputs

Digital input 1

Operating mode	Potential-free contact
Switching voltage, current	internal voltage source DC 3.3 V, 1 mA
Function	Contact closed: input is active ($R_{ON} < 1 \text{ k}\Omega$)
	Contact open: input is inactive ($R_{OFF} > 100 \text{ k}\Omega$)
Galvanic isolation	No
Standard or option	Standard

Digital input 2

Operating mode	Potential-free contact
Switching voltage, current	internal voltage source DC 24 V, 5 mA
Function	Contact closed: input is active ($R_{ON} < 1 \text{ k}\Omega$)
	Contact open: input is inactive ($R_{OFF} > 100 \text{ k}\Omega$)
Galvanic isolation	Yes
Standard or option	Option 1

Digital outputs

Relay K1 (changeover contact)

Switching capacity	Relay (changeover contact) with contact protection circuit: installed fuse cut-out 3.15 AT in pole arm.
Contact life	100000 switching cycles at AC 250 V, 3 A resistive load 250000 switching cycles at 1 A (relay K1 is always only used for switch-off)
Contact capability	AC 230 V or 24 V; 3 A at $\cos \varphi = 1$; (0.5 A at $\cos \varphi \geq 0.6$); 50 Hz DC 24 V; 3 A; (0.5 A at $\tau = 7 \text{ ms}$) UL 60730 AC 230 V; 3 A D300; 30 k AC/DC 24 V; 3 A
Minimum current	DC 24 V, 100 mA
Standard or option	Standard

Relay K2 (changeover contact)

Switching capacity	Relay (changeover contact) with contact protection circuit: installed fuse cut-out 3.15 AT in pole arm.
Contact life	100000 switching cycles at AC 250 V, 3 A resistive load 250000 switching cycles at 1 A (for temperature controller function)
Contact capability	AC 230 V or 24 V; 3 A at $\cos \varphi = 1$; (0.5 A at $\cos \varphi \geq 0.6$); 50 Hz DC 24 V; 3 A; (0.5 A at $\tau = 7 \text{ ms}$) UL 60730 AC 230 V; 3 A D300; 30 k AC/DC 24 V; 3 A
Minimum current	DC 24 V, 100 mA
Standard or option	Option 1

Digital output

Output signal	DC 0 V or 24 V, $\pm 15 \%$
Current	Max. 30 mA
Transmitter feed	The digital output can be configured to be permanently switched to DC 24 V and supply the transmitter.
Standard or option	Standard

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Interfaces

USB interface

Connector type	Micro-B (socket)
Standard	Low-Speed, Full-Speed
Max. cable length	5 m
Standard or option	Standard

RS485 interface

Baud rate	9600 baud 19200 baud 38400 baud 57600 baud 115200 baud
Data format (Data bit / parity / stop bit)	8 / no / 1 (8N1) 8 / odd / 1 (8O1) 8 / even / 1 (8E1) 8 / no / 2 (8N2)
Protocol	Modbus RTU, as slave
Standard or option	Option 2 or 3

Display

Type	Dot-matrix LCD
Resolution	64 px × 96 px
Brightness setting	Contrast can be adjusted on device. Backlight can be switched off manually or via timeout.
Decimal places	0, 1, 2 (user configurable)

Electrical data

Voltage supply Galvanically isolated	AC 110 V to 240 V, -15 % / +10 %, 48 Hz to 63 Hz	DC 24 V, -20 % / +25 % The device may only be connected to SELV electrical circuits
Power consumption	3.8 W	3.0 W
Electrical safety	According to DIN EN 14597:2015 and DIN EN 60730-2-9:2021; Overvoltage category III, Rated surge voltage 4000 V Pollution degree 2	
Protection rating	I with internal isolation from SELV	
Electrical connection	Spring-cage terminals (PUSH IN technology) Type of mounting type Y	
Conductor cross section Wire or stranded wire (without ferrule) Stranded wire with ferrule (for flexible line)	Min. 0.2 mm ² , max. 2.5 mm ² , AWG 24 to 14 Without plastic collar: min. 0.25 mm ² , max. 2.5 mm ² With plastic collar: min. 0.25 mm ² , max. 2.5 mm ²	
Stripping length	10 mm	

Test voltage according to EN 60730-1

Input or output to voltage supply	3.28 kV / 50 Hz
-----------------------------------	-----------------

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Air gaps and creepage distances

According to DIN EN IEC 60730-2-9:2021-01, chapter 20	Air gap	Creepage distances
Mains voltage to electronic components and probes	≥ 6 mm	≥ 5 mm
Mains voltage to relays	≥ 6 mm	≥ 5 mm
Relays to relays	≥ 6 mm	≥ 5 mm
Relays to electronic components and probes	≥ 6 mm	≥ 5 mm

Environmental influences

Ambient temperature range	
Storage	-30 °C to +70 °C
Operation	-10 °C to +55 °C
Site altitude	Max. 2000 m above sea level
Climatic environmental influences	According to DIN EN 60721-3 with extended temperature range
Resistance to climatic conditions	≤ 95 % rel. humidity without condensation
Storage	According to class 3K22
Operation	According to class 3K22
Electromagnetic compatibility (EMC)	According to DIN EN IEC 60730-2-9:2021-01
Interference emission	Class B
Interference immunity	Industrial requirement

Case


Housing type	Plastic housing for DIN rail (indoor use only)
Housing front	Housing: cobalt blue RAL 5013 Membrane keyboard – with SIL/PL: signal yellow RAL 1003 Membrane keyboard – without SIL/PL: silver gray RAL 7001
Housing mounting	On DIN rail according to DIN EN 60715 with the dimensions 35 mm × 7.5 mm
Operating position	Vertical
Protection type	IP20 according to DIN EN 60529
Flammability class	V-1 according to UL94
Weight	Maximum 200 g

Approval marks and certificates


Approval mark	Test facility	Certificates/certification numbers	Inspection basis	Valid for
UL requested	Underwriters Laboratories	File no.: E325456	UL/CSA 60730-1 UL/CSA 60730-2-9	for all versions



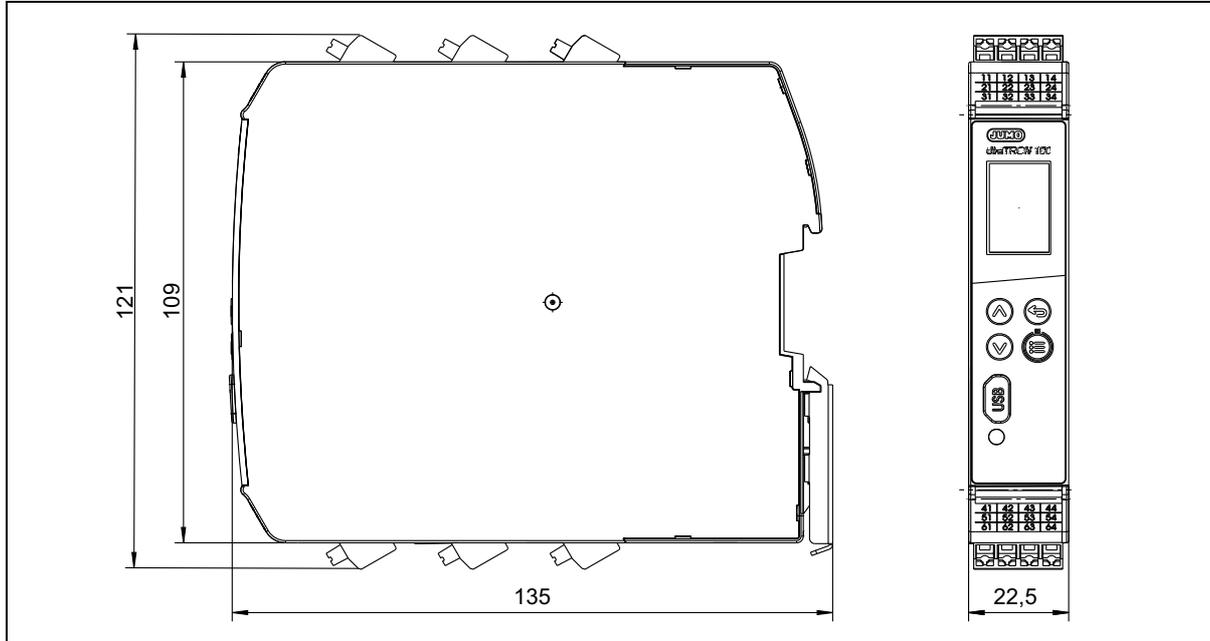Dimensions



Electrical isolation

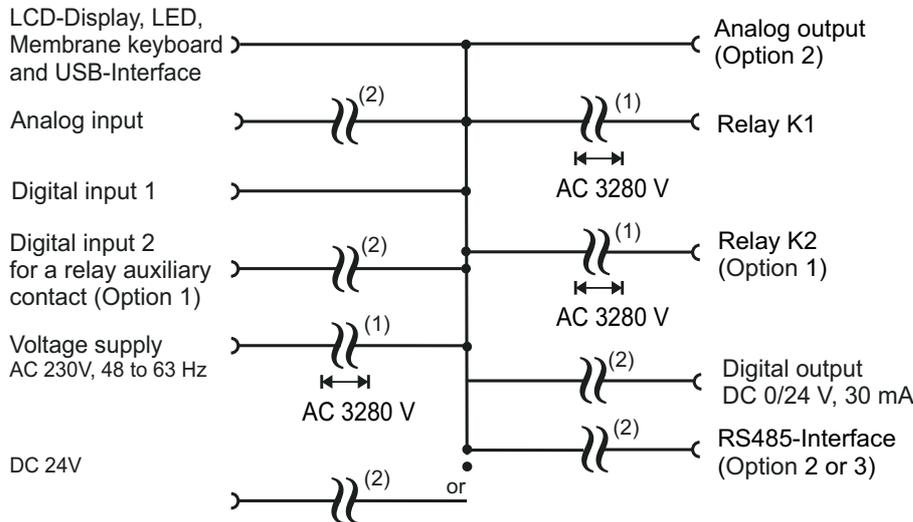


(1) The voltage specifications correspond to the test voltages (alternating voltage, rms values) according to DIN EN 60730-1 (VDE 0631-1):2021-06 EN 60730-1:2016 + A1:2019 for type testing.

(2) Functional galvanic isolation for connecting SELV or PELV electrical circuits.




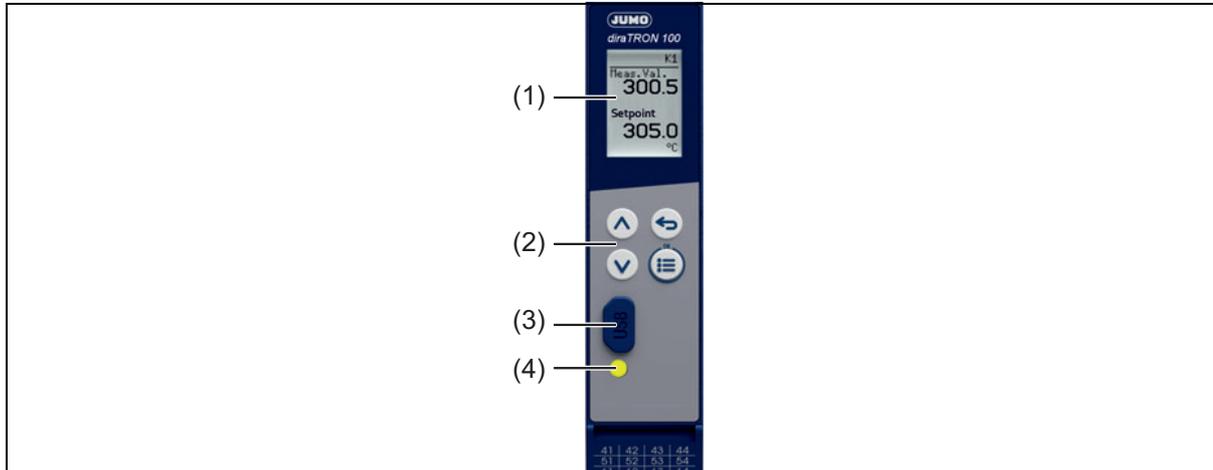Display and control elements



- 1 Black/white dot-matrix LCD display with backlight
- 2 Keys for operating the device
- 3 Micro USB connection cover
- 4 Two-colored status LED

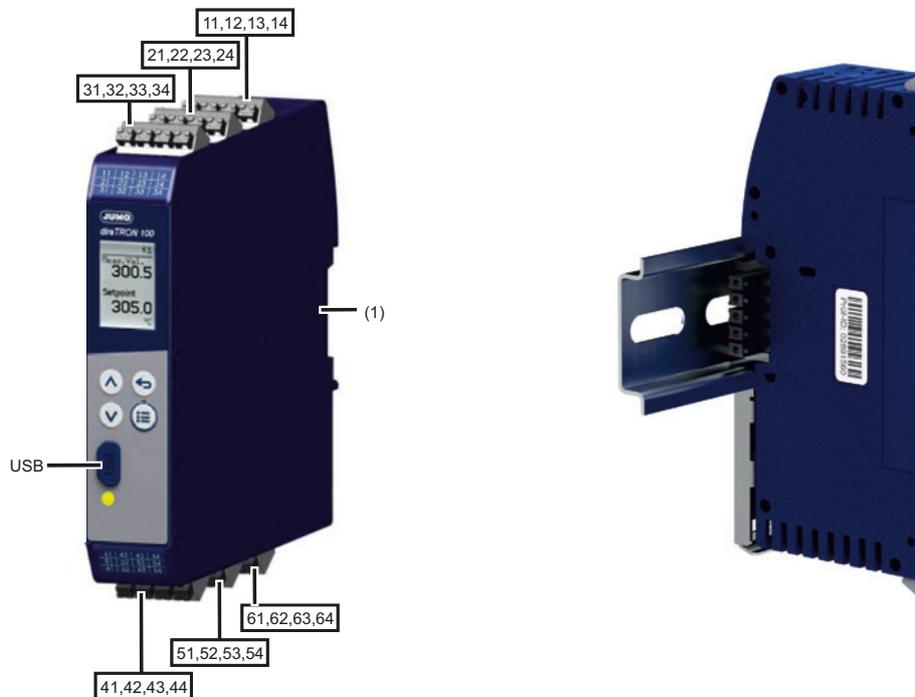Connection elements



- | | | | |
|----------------|-------------------------------------------------|----------------|------------------|
| (1) | Mounting rail rear wall terminal | 33, 34 | Digital input 1 |
| 11, 12 | Option: Analog output or RS485 interface | 41, 42, 43, 44 | K1 relay |
| 13, 14 | Option: Digital input 2 (galvanically isolated) | 51, 52, 53, 54 | Option: K2 relay |
| 21, 22, 23, 24 | Analog input | 61, 62, 63, 64 | Voltage supply |
| 31, 32 | Digital output (galvanically isolated) | USB | USB connection |

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com










Connection diagram

The connection diagram in the data sheet provides information on product selection.

For the electrical connection, only use the installation instructions or the operating manual.

When connecting the device to an external PELV electrical circuit, the existing internal SELV electrical circuit becomes a PELV electrical circuit. In this case, protection against electric shock is provided via double or reinforced insulation and voltage limitation. A connection to the protective ground is not required.

Analog input

Connection	Terminals	Symbol and terminal designation	
RTD temperature probe in two-wire circuit	(21,24)		
RTD temperature probe in three-wire circuit	(21, 22, 24)		
2 × RTD temperature probe in two-wire circuit	(21, 22, 24) Input 1: 21, 22 Input 2: 22, 24		For example for differential measurement
Resistance potentiometer in two-wire circuit	(21,24)		
Resistance potentiometer in three-wire circuit	(21, 22, 24)		
2 × resistance potentiometer in two-wire circuit	(21, 22, 24) Input 1: 21, 22 Input 2: 22, 24		For example for differential measurement
Thermocouple	(22, 24)		

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Connection	Terminals	Symbol and terminal designation	
2 × Thermocouple	(22, 24) Input 1: 22, 24		For example for differential measurement
	(21, 24) Input 2: 21, 24		
Double thermocouple not galvanically isolated	(22, 24) Input 1: 22, 24 (21, 24) Input 2: 21, 24		
Voltage DC 0 V to 10 V DC 2 V to 10 V	(23, 24)		
Current DC 0 mA to 20 mA DC 4 mA to 20 mA	(22, 24)		
Resistance transmitter E = End S = Sliding contact B = Beginning	(21, 23, 24)		

Analog output (option)

Connection	Terminals	Symbol and terminal designation	
Current DC 0 mA to 20 mA DC 4 mA to 20 mA (user configurable)	(11, 12)		
Spannung DC 0 V bis 10 V DC 2 V bis 10 V (user configurable)	(11, 12)		

Digital input 1

Connection	Terminals	Symbol and terminal designation	
Potential-free contact Switching current 1 mA	(33, 34)		

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Digital input 2 (option)

Connection	Terminals	Symbol and terminal designation
DC 24 V, 5 mA Galvanically isolated	(13, 14)	

Relay K1

Connection	Terminals	Symbol and terminal designation
(safe operating state according to quiescent current principle)		
Changeover contact with installed 3.15 A slow-blow microfuse in pole arm P: Pole NO: normally open NC: normally closed	(41, 43, 44)	

Relay K2 (option)

Connection	Terminals	Symbol and terminal designation
Changeover contact with installed 3.15 A slow-blow microfuse in pole arm P: Pole NO: normally open NC: normally closed	(51, 53, 54)	

Digital output

Connection	Terminals	Symbol and terminal designation
DC 0 V / 24 V, 30 mA Galvanically isolated	(31, 32)	 DC 0/24V, 30 mA
DC 24 V, 30 mA Transmitter feed; Galvanically isolated	(31, 32)	 DC 24V, 30 mA

Voltage supply

Connection	Terminals	Symbol and terminal designation
AC 110 V bis 240 V, -15 % / +10 %, 48 Hz to 63 Hz (Galvanically isolated)	(61, 62)	 L N L N (L+) (L-) (L+) (L-)
DC 24 V, -20 % / +25 % (Galvanically isolated)		
Terminals 63 and 64 are intended for looping through a maximum of 10 adjacent devices.	(63, 64)	

The device may only be connected to SELV electrical circuits.

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



RS485 interface

Connection	Terminals	Symbol and terminal designation	
RS485-interface - as option 2	11 12 or via mounting rail rear wall terminal	TxD+/RxD+ (11) TxD-/RxD- (12)	Transmission/received data + Transmission/received data -
RS485-interface - as option 3	via mounting rail rear wall terminal	TxD+/RxD+ TxD-/RxD-	Transmission/received data + Transmission/received data -

USB interface

Connection	Terminals	Symbol and terminal designation
USB-interface (Device)	(USB-Socket)	Micro-B-connector, standard (5-pole), front side

Rear wall contacts: PUSH IN connection terminal

It enables the DC 24 V voltage supply and RS485 interface to be connected in conjunction with the mounting rail rear wall terminal.

Note: It is not suitable for connecting AC 230 V.

Connection	Terminals	Symbol and terminal designation	
Voltage supply	1 2 3	(L+) (L-) not used	
RS485-interface - as option 3	4 5	TxD-/RxD - TxD+/RxD +	

Rear wall contacts: Mounting rail rear wall terminal

Other devices can therefore be connected via the back cover connection.

A maximum of 10 devices can be supplied.

Connection	Terminals	Symbol and terminal designation	
Voltage supply	1 2 3	(L+) (L-) not used	
RS485-interface - as option 3	4 5	TxD-/RxD - TxD+/RxD +	

JUMO GmbH & Co. KG
 Delivery address: Mackenrodtstraße 14
 36039 Fulda, Germany
 Postal address: 36035 Fulda, Germany
 Phone: +49 661 6003-0
 Fax: +49 661 6003-607
 Email: mail@jumo.net
 Internet: www.jumo.net

JUMO UK LTD
 JUMO House
 Temple Bank, Riverway
 Harlow, Essex, CM20 2DY, UK
 Phone: +44 1279 63 55 33
 Fax: +44 1279 62 50 29
 Email: sales@jumo.co.uk
 Internet: www.jumo.co.uk

JUMO Process Control, Inc.
 6724 Joy Road
 East Syracuse, NY 13057, USA
 Phone: +1 315 437 5866
 Fax: +1 315 437 5860
 Email: info.us@jumo.net
 Internet: www.jumousa.com



Order details

(1) Basic type	
702061	JUMO diraTRON DR100 with 1 analog input, digital input 1, digital output, K1 relay (changeover contact)
(2) Version	
0	Standard with default settings
1	Customer-specifically modified hardware
2	Customer-specifically modified software
3	Customer-specifically modified hardware and software
(3) Option 1	
0	None
1	K2 relay (changeover contact) and digital input 2 (galvanically isolated)
(4) Option 2	
0	None
3	Analog output
4	RS485 interface ^a
(5) Option 3	
0	None
7	RS485 interface ^b
(6) Voltage supply	
23	AC 110 to 240 V, -15/+10 %, 48 to 63 Hz
36	DC 24 V, -20 /+25 %

^a Connection of RS485 via connection terminals 11 and 12 or via rear wall terminals (mounting rail rear wall terminals or PUSH IN connection terminals).

^b If option 2 = 0 or = 3 has been selected, connection of RS485 is only possible via rear wall terminals (mounting rail rear wall terminals or PUSH IN connection terminals).

Explanation on (2) version	
0	Standard with default settings means: everything that can be ordered in the order code shown
1	Customer-specifically modified hardware means: everything that cannot be ordered in the order code shown, e.g. customer-specific front film
2	Customer-specifically modified software means: device differs from the standard JUMO configuration (highlighted bold in the BTA). if the customer wants to have another measurement input configured, for example
3	Combination of 1 and 2

Type designation (1) (2) (3) (4) (5) (6)
 Example 702061 / 0 - 1 - 3 - 7 23

Scope of delivery

- 1 device in the ordered version
- 1 quick start guide

Accessories

Designation	Material number
Setup program (JUMO)	30071435
USB cable, A connector on Micro-B connector, 3 m	00616250
Mounting rail rear wall terminal (device)	00763134
PUSH IN connection terminal	00764414

You can find further information on our website: <http://www.jumo.de>