

Switch to Generation 3000

Variety that inspires



One Series for

- ▶ Pressure
- ▶ Temperature
- ▶ Level

Barksdale®
CONTROL PRODUCTS
CRANE Barksdale, Inc./Barksdale GmbH
A Subsidiary of Crane Co.

To set the benchmark

BPS3000 / BTS3000 / BLS3000

One Series for Pressure, Temperature, Level

Variety that inspires

Based on one system platform the switch offers a wide range of applications; the **BPS3000** operates from 0 ... 0.2 bar to 0 ... 600 bar, the **BTS3000** operates from 0 ... 100 °C to -30 ... 140 °C while the **BLS3000** offers total lengths (L0) from 250 ... 1000 mm.

Compact and modern design

The Series is characterised with panel height of 110 mm and diameter of nearly 41 mm which enables compact installation of many switches. Its angled top design is aesthetically pleasing and a real functional highlight.

Rotatable 320° display and electrical connection


It's as simple as that: due to rotatable 320° display and electrical connection, the mounting and installation will be a walk in the park. To turn into the required position and that's it.

Perfect readability


The 4-digit 14-segment LED display ensures a perfect readability independent of the positioning: even in case of mounting upside down the indication can be viewed correctly as the software allows inversion of the display.



kdsdale

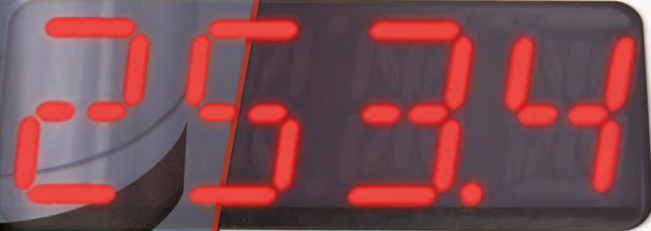

AL S2

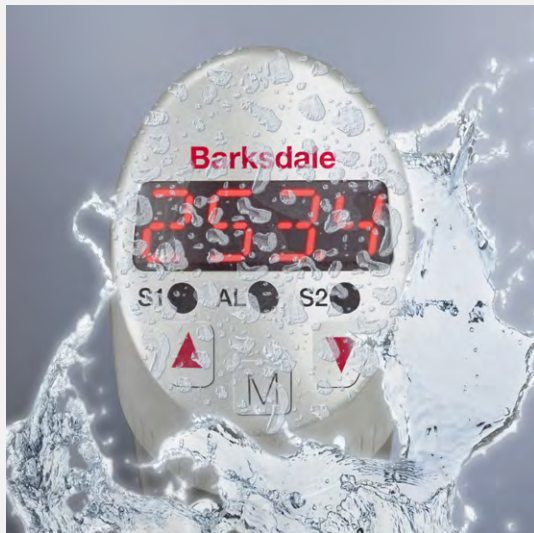

High protection with IP65/IP67 and EMI protection

Harsh environmental circumstances, with dust or water being present are not a problem for the Generation 3000. Continued functionality will be achieved by a sophisticated housing seal and a keypad integrated within the plastic housing. The high EMI protection of the Generation 3000 allows installation in environments where high power walkie-talkies are in use e.g. in the steel and power industries.

Easy operation

Menu and electrical connection refer to VDMA standard 24574-1, this guarantees an easy and quick operation.



The **Generation 3000** combines all features of a modern switch series. With its **flexibility**, its operational convenience, its **compact** and **elegant industrial design**, being the result of long experience and intensive market analysis. There are hardly any limits to pressure, temperature, level monitoring or applications the Generation 3000 is not able to address.



BPS3000

- ▶ Measuring ranges: 0 ... 0.2 bar to 0 ... 600 bar
- ▶ Ceramic or piezoresistive sensor
- ▶ Analogue output: 4 ... 20 mA or 0 ... 10 V DC



PRESSURE

Electr. Dual Pressure Switch

BPS3000

Features

- ▶ Measuring ranges: 0...0.2 bar to 0...600 bar gauge
- ▶ max. 2 switch points
- ▶ Analogue output 4 - 20 mA or 0 - 10 V
- ▶ Rotatable 320° display & electrical connection
- ▶ Menu navigation refers to VDMA standard

Applications

- ▶ Pressure control for:
 - Hydraulics & Pneumatics
 - Lubrication system
 - Cooling

Technical Data

Sensor element:	Ceramic sensor optional: piezoresistive sensor
Materials:	
Wetted parts:	Stainless steel, mat. no. 1.4301, brass MS58*
Electronics housing:	Stainless steel, mat. no. V2A, PA / PC
Seals:	FKM, EPDM
Operating elements:	3 easy-response pushbuttons
System of protection:	IP65, IP67
Protection class:	III
Electrical connection:	Plug M12 x 1, 4-pin / 5-pin / 8-pin (depending on output code)
Process connection:	see order code
Dimensions:	110 x 41 mm (without plug connector)
Weight:	approx. 300 g
A/D converter:	
Resolution:	12 bit (4096 steps per measuring span)
Scanning rate:	1000 / s
Linearity error:	< ± 0.5 % v. f. s. at +25 °C
Temperature influence:	TC zero < ±0.2 % FSO / 10K TC span < ±0.3 % FSO / 10K
Compensation range:	-10 °C... +70 °C
Repeatability:	±0.1 % FSO
Temperature range:	
Medium:	-25 °C... +100 °C
Electronics:	-10 °C... +70 °C ¹⁾
Storage:	-30 °C... +80 °C
Power supply:	15... 32 V DC, output code 6: 20... 32 V DC reversed polarity protected (SELV, PELV)
Digital display:	4-digit 14-segment LED display, red, digit height 9 mm
Error display:	LED red and alphanumeric display
Power consumption:	approx. 50 mA (without load) approx. 80 mA (Output Code 6)



Relay output:	Rel. 1 normally closed, Rel. 2 normally open Load: max. 1A, max 60 V, max. 30 W	
Analog output:		
Current output:	4...20 mA	
Load:	max. RI = (Ub-12V) / 20 mA RI = 600 Ohm at Ub = 24 V DC	
Scanning rate:	2 ms	
Voltage output:	0...10 V DC	
Rating:	max. 10 mA	
Adjustment range:	25 %... 100 % f. s.	
Transistor switching outputs PNP:		
Switching function:	Normally open/normally closed, standard / window mode and diagnosis function adjustable	
Adjustment range for switching point and hysteresis:	0 %... 125 % f. s.	
Switching frequency:	max. 100 Hz	
Load	max. 500 mA, short-circuit proof	
Delay	0.0 s ... 50 s adjustable	
Status display(s):	LED(s) red	
EMV	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5-Surge	1/2 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN EN 60028-2-27	50 g (11 ms)
Vibrations resistance	DIN EN 60028-2-26	20 g (10...2000 Hz)
Approvals:	cULus 1) - E42816	

* In the pressure inlet a damping screw made of brass is mounted. This screw can be removed if required, e.g. in case of soiled medium or material incompatibility, using a slotted screw driver (max. width 3 mm). The pressure switch is less resistant to pressure peaks when the damping screw has been removed.

¹⁾ Conditions of use with cULus: 60 °C max. ambient, power supply max. 28 V DC

BPS3000

Order Number	Description
907-0357	Plug connector M12 x 1, 4-pin, with screw terminals, angled (IP65)
907-0185	Plug connector M12 x 1, 5-pin, with screw terminals, angled (IP65)
908-0361	Plug connector M12 x 1, 5-pin, with moulded cable, (IP67), 2 m length
908-0544	Plug connector M12 x 1, 8-pin, with moulded cable (IP67), 2 m length

Technical drawing of the 730-0035-E spotlight, showing three views: front, side, and top. Dimensions are provided in inches [] and millimeters ().

- Front View:**
 - Total height: [3.38in] 85.8mm
 - Height from base to lens: [1.06in] 25.4mm
 - Base diameter: [0.47in] 12mm
 - Base thread: G1/4"
 - Mounting hole diameter: [1.06in] SW27
 - Height from base to mounting hole: [1.26in] 32mm
- Side View:**
 - Total height: [4.37in] 111mm
 - Height from base to lens: [3.90in] 99mm
 - Base thread: M12x1
- Top View:**
 - Height from base to lens: [1.60in] 41mm
 - Base diameter: Ø41mm

G	G1/4" Ceramic
N	1/4" NPT Ceramic
2	G1/2" flush diaphragm
3	1/2" NPT flush diaphragm
E	7/16-20 UNF (SAE)
P	7/16-20 UNF (JIC)

The diagram shows three bowling ball layouts. The top left is a 4-pin layout with pins numbered 1, 2, 3, and 4. The top right is a 5-pin layout with pins numbered 1, 2, 3, 4, and 5. The bottom is an 8-pin layout with pins numbered 1 through 8. A 45-degree angle is indicated between the vertical center line and the line connecting the center to pin 2.

Pin	Signal Output Code 1	Signal Output Code 2, 3	Signal Output Code 4, 5	Signal Output Code 6	
1	+Ub	+Ub	+Ub	+Ub	
2	SP2	Signal	Signal	SP1a	NC
3	0V	0V	0V	SP1b	
4	SP1	SP1	SP1	0V	
5	-	-	SP2	SP2a	NO
6	-	-	-	SP2b	
7	-	-	-	-	
8	-	-	-	Housing	

Order Code

BPS3000

BPS3

Base Model

Output

1	2 switch points
2	4...20mA - 1 switch point
3	0...10V - 1 switch point
4	4...20mA - 2 switch points
5	0...10V - 2 switch points
6	2 relais switch points (1 x NO SPST / 1 x NC SPST) (requires piezo. sensor / code P)*, no UL

Process Connection

G	G1/4" ext. threat
2	G1/2" flush diaphr. (requires piezoresistive sensor / code P* / 10-600 bar only)
N	1/4"NPT ext. threat
3	1/2"NPT flush diaphr. (requires piezoresistive sensor / code P* / 10-600 bar only)
1	40x40 Cetop/Manifold - on request
E	7/16-20 UNF (SAE4) ext. threat
P	7/16-20 UNF(37° JIC) ext. threat

Sealing

V	FKM
E	EPDM

Electrical Connection

M	M12
---	-----

Range

0 0 0 1 B A	0 - 1 bar absolute (requires piezoresistive sensor / code P)*
0 0 0 5 B A	0 - 5 bar absolute (requires piezoresistive sensor / code P)*
0 0 1 0 B A	0 - 10 bar absolute (requires piezoresistive sensor / code P)*
0 0 . 2 B	0 - 0.2 bar (requires piezoresistive sensor / code P)*
0 0 . 5 B	0 - 0.5 bar (requires piezoresistive sensor / code P)*
0 0 0 1 B	0 - 1 bar (requires piezoresistive sensor / code P)*
0 0 0 2 B	0 - 2 bar (requires piezoresistive sensor / code P)*
0 0 0 5 B	0 - 5 bar (requires piezoresistive sensor / code P)*
0 0 1 0 B	0 - 10 bar
0 0 5 0 B	0 - 50 bar
0 1 0 0 B	0 - 100 bar
0 2 0 0 B	0 - 200 bar
0 4 0 0 B	0 - 400 bar
0 6 0 0 B	0 - 600 bar (requires piezoresistive sensor / code P)*
	Others on request

Sensor

Blank	Standard ceramic sensor
P	*Piezoresistive sensor

Example:

BPS3 4 G V M 0 2 0 0 B

Special designs on request

BLS3000

- ▶ Resolution: 5 mm
- ▶ Direct measurement
- ▶ Total length (L0): 250 – 1000 mm



LEVEL

Electr. Dual Level Switch

BLS3000

Features

- ▶ Resolution: 5 mm
- ▶ Redundant measurement system
- ▶ Direct measurement
- ▶ Capable of measuring media of density > 0.6g/cm³ that is compatible with float material e.g. hydraulic oils, water, coolants even with foaming
- ▶ Total length (L0): 250 - 1000 mm
- ▶ Max. 2 switch points
- ▶ Analogue output 4 - 20 mA or 0 - 10 V
- ▶ Rotatable 320° display & electrical connection
- ▶ Menu navigation refers to VDMA standard

Applications

- ▶ Level control for
 - Hydraulics
 - Lubrication system
 - Cooling

Technical Data

Sensor element:	Reed switch
Materials:	
Wetted parts:	
Stem (Fitting, Tube):	Stainless steel, mat. no. 1.4571
Float:	NBR foam
Seals:	FKM, EPDM or NBR
Electronics housing:	Stainless steel (1.4571), polycarbonate, elastomer
Operating elements:	3 easy-response pushbuttons
System of protection:	IP65/IP67
Protection class:	III
Electrical connection:	Plug M12 x 1 mm, 4-pin / 5-pin / 8-pin (depending on output code)
Process connection:	see order code
Float BN17	
Density Medium:	min. 0.60 g/cm ³
Depth of immersion:	15 ± 2 mm (water), 19 ± 2 mm (oil 0.75) Ø17.8 mm, height 25 mm
Dimension:	110 x 41 mm (without plug connector and probe)
Weight:	approx. 350 g
Total length (L0):	250 mm, 370 mm, 410 mm, 1000 mm others on request
Accuracy	± 1 digit (without turbulence) including temperature influence and repeatability
Resolution:	5 mm
Max. pressure:	3 bar
Temperature range:	
Medium:	-25 °C... +80 °C
Ambient:	-20 °C... +70 °C ⁽¹⁾
Storage:	-30 °C... + 80 °C
Power supply:	15... 32 V DC, reversed polarity protected (SELV, PELV)
Digital display:	4-digit 14-segment LED display, red, digit height 9 mm
Error display:	LED red and alphanumeric display
Power consumption:	approx. 50 mA (without load) approx. 80 mA (Output Code 6)



Relay output:	Rel. 1 normally closed, Rel. 2 normally open Load: max. 1A, max. 60V, max. 30 W	
Analog output: Current output: Load: Scanning rate: Voltage output: Rating: Adjustment range:	4...20 mA max. RI = (Ub-12V) / 20 mA RI = 600 Ohm at Ub = 24 V DC 2 ms 0...10 V DC max. 10 mA 25 %... 100 % f. s.	
Units: Distance: Volume:	% , mm, cm, m, inch, feet, liter, m³, gallon	
Transistor switching outputs PNP:		
Switching function:	Normally open/normally closed, standard / window mode and diagnosis function adjustable	
Adjustment range for switching point and hysteresis:	0 %... 125 % f. s.	
Switching frequency:	max. 100 Hz	
Load	max. 500 mA, short-circuit proof	
Delay	0.0 s ... 50 s adjustable	
Status display(s):	LED(s) red	
EMV	EN 61000-4-2 ESD	4 kV CD/8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5-Surge	1/2 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance	DIN EN 60028-2-27	50 g (11 ms)
Vibrations resistance	DIN EN 60028-2-26	20 g (10...2000 Hz)
Approvals:	cULus ¹⁾ - E302981	

¹⁾ Conditions of use with cULus: 60 °C max. ambient,
power supply max. 28 V DC


Electr. Dual Level Switch

BLS3000

Accessories

Order Number	Description
907-0357	Plug connector M12 x 1, 4-pin, with screw terminals, angled (IP65)
907-0185	Plug connector M12 x 1, 5-pin, with screw terminals, angled (IP65)
908-0361	Plug connector M12 x 1, 5-pin, with moulded cable (IP67), 2 m length
908-0544	Plug connector M12 x 1, 8-pin, with moulded cable (IP67), 2 m length

Dimensions (mm / inch)

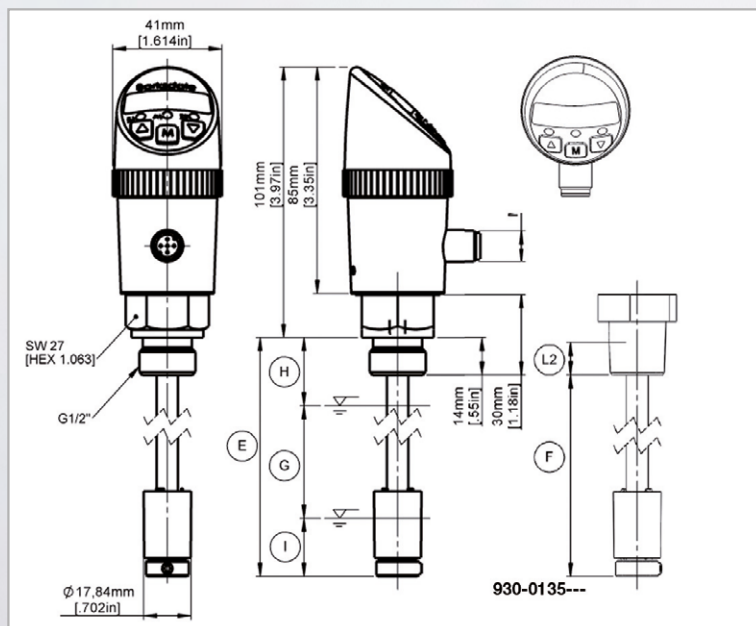


Fitting	Dead band	
	To (top)	Tu (bottom)
G1/2"	27 ±3 [1.06 ±0.12]	27 ±3 [1.06 ±0.12]
G3/4"	29 ±3 [1.14 ±0.12]	
G1"	31 ±3 [1.22 ±0.12]	
M20x1,5 mm	27 ±3 [1.06 ±0.12]	
1/2"NPT	13 ±3 [0.51 ±0.12]	
3/4"NPT		
1"NPT		
1¼"NPT		

Legend

E	L0 = total length for G&M threads
F	L0 = total length for NPT threads
L2	the effective length of 1/2" NPT, 3/4" NPT, 1"NPT and 1 1/4" NPT thread
G	LM = L0-(To+Tu)
H	To = dead band top
I	Tu = dead band bottom


Process connection

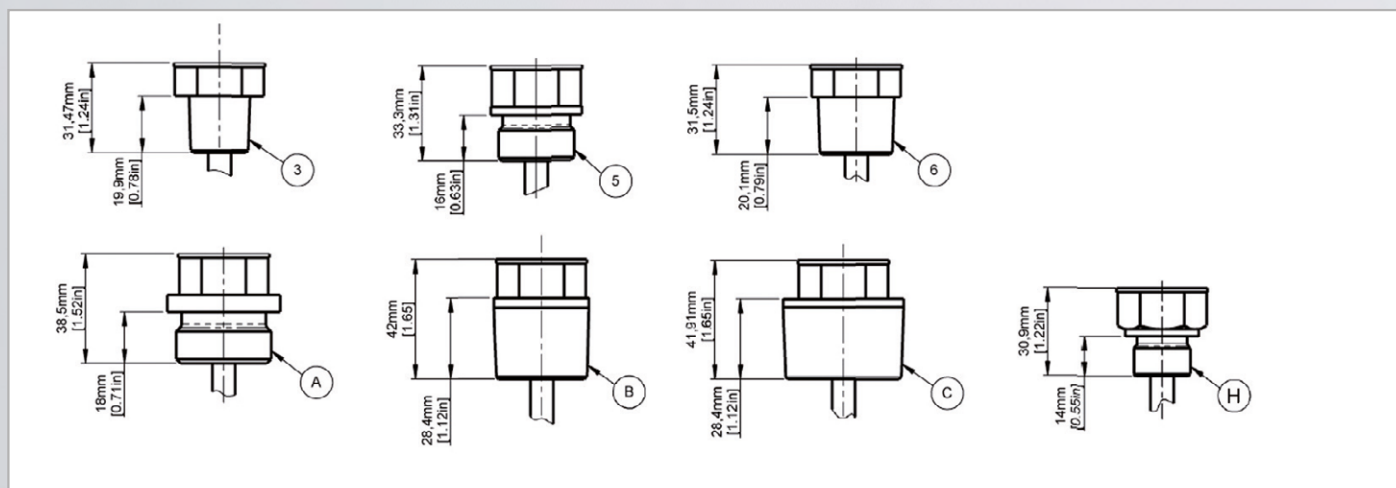

Electrical Connection

Pin	Signal Order Code 1	Signal Order Code 2, 3	Signal Order Code 4, 5	Signal Order Code 6	
1	+Ub	+Ub	+Ub	+Ub	
2	SP2	Signal	Signal	SP1a	NC
3	OV	0V	0V	SP1b	
4	SP1	SP1	SP1	0V	
5	-	-	SP2	SP2a	NO
6	-	-	-	SP2b	
7	-	-	-	-	
8	-	-	-	Housing	

Plug

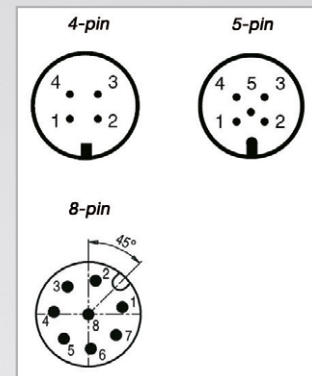

Order Code

BLS3000

BLS3	Base Model	
Output	1	2 switch points
	2	4...20 mA and 1 switch points
	3	0...10 V DC and 1 switch points
	4	4...20 mA and 2 switch points
	5	0...10 V DC and 2 switch points
	6	2 relais switch points (1x NO SPST/1x NC SPST), no UL
Process Connection	2	G1/2" male, with sealing (sealing code V, E or B)
	3	1/2"NPT male, without sealing (sealing code X)
	5	G3/4" male, with sealing (sealing code V, E or B)
	6	3/4"NPT male, without sealing (sealing code X)
	A	G1" male, with sealing (sealing code V, E or B)
	B	1"NPT male, without sealing (sealing code X)
	C	1 1/4"NPT male, without sealing (sealing code X)
	H	M20 x 1,5 mm male, with sealing (sealing code V, E or B)
Sealing	X	without sealing (NPT process connection only)
	V	FKM (DIN 3869)
	E	EPDM (DIN 3869)
	B	NBR (DIN 3869)
Electrical Connection	M12 x 1 mm (4,5 and 8 pin)	
	Total Length L0	
	0 2 5 0 M	250 mm (process con. code 2, 5, A and H)
	0 3 7 0 M	370 mm (process con. code 2, 5, A and H)
	0 4 1 0 M	410 mm (process con. code 2, 5, A and H)
	1 0 0 0 M	1000 mm (process con. code 2, 5, A and H)
	0 9 . 8 Z	9.8 inch (process con. code 3, 6, B and C)
	1 4 . 6 Z	14.6 inch (process con. code 3, 6, B and C)
	1 6 . 1 Z	16.1 inch (process con. code 3, 6, B and C)
	3 9 . 4 Z	39.4 inch (process con. code 3,6, B and C)

Example:

BLS3 1 2 B M 0 3 7 0 M

Special design on request

BTS3000

- ▶ Measuring ranges: 0 ... 100 °C to -30 ... 140 °C
- ▶ Sensor element: Pt100
- ▶ Probe length: 17 – 650 mm



TEMPERATURE

Electr. Dual Temperature Switch

BTS3000

Features

- ▶ Measuring ranges: 0 ...100 °C to -30 ... 140 °C
- ▶ max. 2 switch points
- ▶ Analogue output 4 - 20 mA or 0 - 10 V
- ▶ Rotatable 320° display & electrical connection
- ▶ Menu navigation refers to VDMA standard

Applications

- ▶ Temperature control for
 - Hydraulics & Pneumatics
 - Lubrication systems
 - Cooling

Technical Data

Sensor element:	PT100 Class A DIN/IEC 60751
Materials:	
Wetted parts:	Stainless steel, mat. no. 1.4301
Electronics housing:	Stainless steel, V2A, PC, PA6.6 GF30
Seals:	FKM
Operating elements:	3 easy-response pushbuttons
System of protection:	IP65/IP67
Protection class:	III
Electrical connection:	Plug M12 x 1, 4-pin / 5-pin / 8-pin
Process connection:	G1/4" M, 1/4" NPT M
Dimensions:	110 x 41 mm (without plug connector and probe)
Weight:	approx. 200 g
Measuring ranges:	0 ...100 °C / 32 ... 210 °F -30 ... 140 °C / -22 ... 280 °F
A/D converter:	
Resolution:	12 bit (4096 steps per measuring span)
Scanning rate:	1000 / s
Linearity error:	< ± 0.5 % v. f. s. at +25 °C
Temperature influence:	< ±0.2 % FSO / 10K
Compensation range:	-10 °C... +70 °C
Repeatability:	±0.1 % v. f. s.
Time constante T09:	40 sec
Max. pressure:	200 bar
Temperature range:	
Electronics:	-10 °C... +60 °C
Storage:	-30 °C... +80 °C
Power supply:	15... 28 V DC, reversed polarity protected (SELV, PELV)
Digital display:	4-digit 14-segment LED display, red, digit height 9 mm
Error display:	LED red and alphanumeric display

Accessories

Order Number	Description
907-0357	Plug connector M12 x 1, 4-pin, with screw terminals, angled (IP65)
907-0185	Plug connector M12 x 1, 5-pin, with screw terminals, angled (IP65)
908-0361	Plug connector M12 x 1, 5-pin, with moulded cable (IP67), 2 m length
908-0544	Plug connector M12 x 1, 8-pin, with moulded cable (IP67), 2 m length




Power consumption:	approx. 50 mA (without load) approx. 80 mA (Output Code 6)	
Relay output:	Rel. 1 normally closed, Rel. 2 normally open, Load: max. 1 A, max. 60 W, max. 30 W	
Analog output:		
Current output:	4...20 mA	
Load:	max. RI = (Ub-12V) / 20 mA RI = 600 Ohm at Ub = 24 V DC	
Scanning rate:	2 ms	
Voltage output:	0...10 V DC	
Rating:	max. 10 mA	
Adjustment range:	25 %... 100 % f. s.	
Transistor switchting outputs PNP:		
Switching function:	Normally open/normally closed, standard / window mode and diagnosis function adjustable	
Adjustment range for switching point and hysteresis:	0 %... 125 % f. s.	
Switching frequency:	max. 100 Hz	
Load:	max. 500 mA, short-circuit proof	
Delay:	0.0 s ... 50 s adjustable	
Status display(s):	LED(s) red	
EMV	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-5-Surge	1/2 kV
	EN 61000-4-6 HF conducted	10 V
Shock resistance:	DIN EN 60028-2-27	50 g (11 ms)
Vibrations resistance*	DIN EN 60028-2-26	20 g (10...2000 Hz)
Approvals	cULus - E302981	


Electr. Dual Temperature Switch

BTS3000

Dimensions (mm / inch)

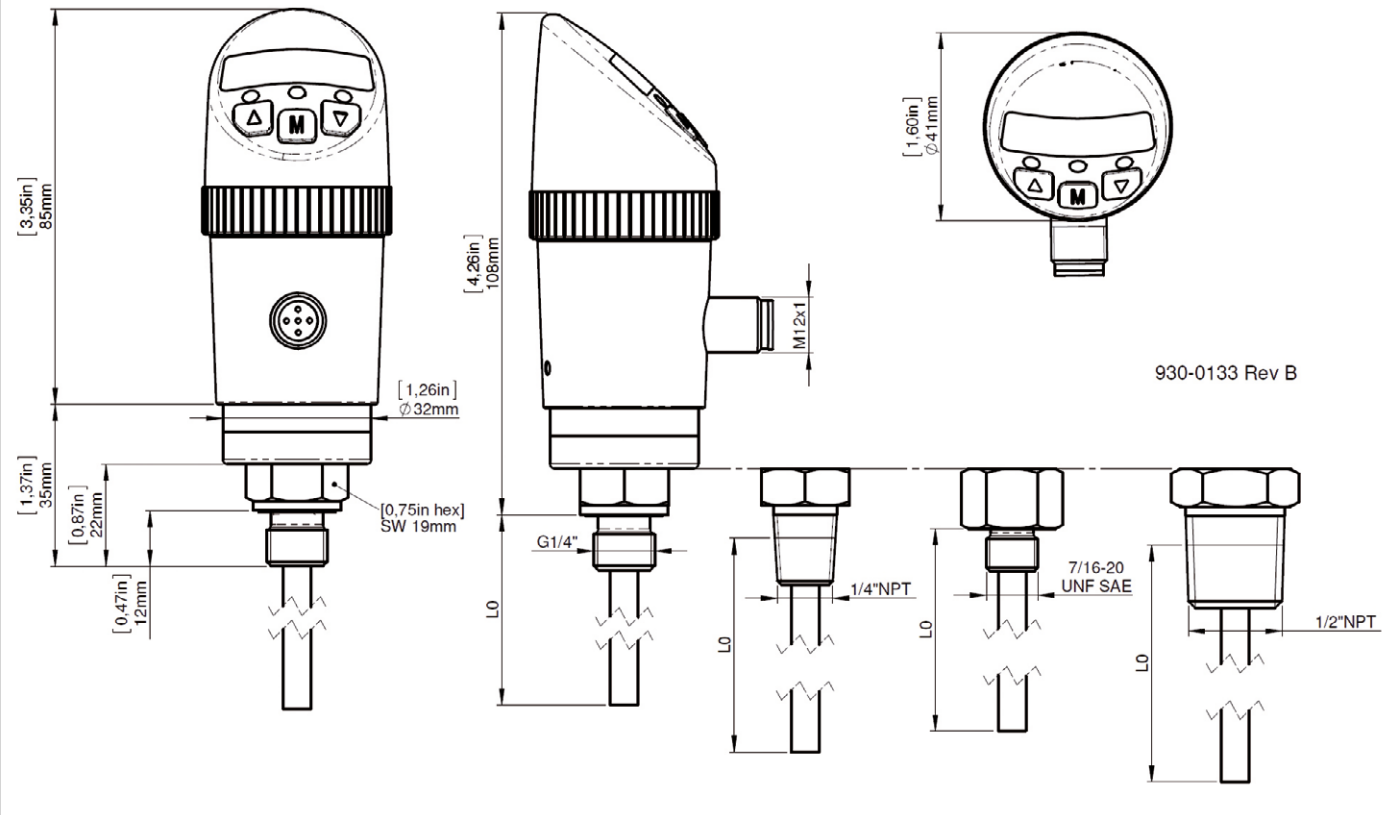

Plug

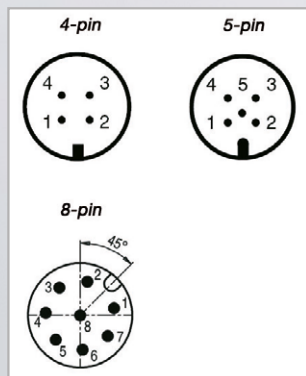

Electrical Connection

Pin	Signal Order Code 1	Signal Order Code 2, 3	Signal Order Code 4, 5	Signal Order Code 6	
1	+Ub	+Ub	+Ub	+Ub	
2	SP2	Signal	Signal	SP1a	NC
3	OV	0V	0V	SP1b	
4	SP1	SP1	SP1	0V	
5	-	-	SP2	SP2a	NO
6	-	-	-	SP2b	
7	-	-	-	-	
8	-	-	-	Housing	

Order Code

BTS3000

BTS3		Base Mode	
Output			
1		2 switch points	
2		4...20mA - 1 switch point	
3		0...10 V 1 - switch point	
4		4...20 mA - 2 switch points	
5		0...10 V 2 - switch points	
6		2 relais switch points (1x NO SPST / 1 x NC SPST), no UL	
Process Connection			
G		G1/4" ext. Threat, (Sealing Code V, E and F)	
2		G1/2" ext. Threat, on request, (Sealing Code V, E and F)	
N		1/4" NPT ext. Threat (Sealing Code X)	
3		1/2" NPT ext. Threat (Sealing Code X)	
E		7/16...20 UNF ext. Threat (Sealing Code X)	
Sealing			
V		FKM	
E		EPDM	
F		FFKM on request	
X		No sealing	
		other on request	
Electrical Connection			
M		M12	
Probe length*			
0 0 1 7 M		17 mm (Process Connection Code G and 2)	
0 0 2 5 M		25 mm (Process Connection Code G and 2)	
0 0 5 0 M		50 mm (Process Connection Code G and 2)	
0 1 0 0 M		100 mm (Process Connection Code G and 2)	
0 3 0 0 M		300 mm (Process Connection Code G and 2)	
0 6 5 0 M		650 mm (Process Connection Code G and 2)	
0 . 7 0 Z		0.7 in (Process Connection Code N, 3 and E)	
2 . 0 0 Z		2 in (Process Connection Code N, 3 and E)	
4 . 0 0 Z		4 in (Process Connection Code N, 3 and E)	
6 . 0 0 Z		6 in (Process Connection Code N, 3 and E)	
1 2 . 0 Z		12 in (Process Connection Code N, 3 and E)	
		other on request	
Temperature Range			
1		0...100°C	
2		-30...140°C	
3		32...210°F	
4		-22...280°F	
BTS3	X	X	X
	X	X	X
	X	X	X
	X	X	X
	X	X	X
	X	X	X
	X	X	X
	X	X	X
	X	X	X
	X	X	X

* If probe length >100 mm shock and vibration values can deviate - depending on application.

If probe length >300 mm keep away the flow from the probe.

If probe length < 25 mm linearity error and time constant values can deviate - depending on application.

Generation 3000

quality by design

The flexibility of the new Series is nearly unlimited – it may be used not only to monitor pressure but also to control temperature and level.



BPS3000
Electronic
Pressure Switch



BTS3000
Temperature
sensor Pt100



BLS3000
Float / reed system

Barksdale GmbH
(Production Center)
Dorn-Assenheimer Str. 27
61203 Reichelsheim
Germany
Tel.: +49 (0) 6035 949 - 0
Fax: +49 (0) 6035 949 - 111
info@barksdale.de
www.barksdale.de

Barksdale Inc.
(Production Center)
3211 Fruitland Avenue
Los Angeles, CA 90058-0843
USA
Tel.: +1 (323) 589 - 6181
Fax: +1 (323) 589 - 3463
sales@barksdale.com
www.barksdale.com

Barksdale China
(Sales Center)
33F Huaihai Plaza
1045 Central Huaihai Road
200031 Shanghai
China
Tel.: +86 2161 273 000
Fax: +86 2164 733 298
chinasales@barksdale.com
www.barksdalechina.com

Barksdale India
(Sales Center)
Crane Process Flow Technologies (India) Ltd
Solitaire, 6th Floor, S. No. 131/1 + 2, ITI Road
Aundh, Pune - 41107
India
Tel.: +91 2030 5678 00
Fax: +91 2030 5678 12
sales@barksdale.in
www.barksdale.in

Specifications are subject to change without notice.
Art.-Nr. 923-1980 Index: A

Barksdale®
CONTROL PRODUCTS
 Barksdale, Inc./Barksdale GmbH
A Subsidiary of Crane Co.