

## OVERVIEW OF BOGE BLUEKAT MODELS

BOGE model	Max. pressure**		Effective delivery rate*		Rated power				Dimensions <sup>1)</sup> silenced W x D x H mm	Dimensions <sup>2)</sup> super silenced W x D x H mm	Compressed air outlet	Weight silenced kg	Weight super-silenced kg
	bar	psig	m <sup>3</sup> /min	cfm	Main drive		Fan motor						
					kW	HP	kW	HP					
S 40-3 bluekat	7.5	110	5.33	188.2	30	40	0.75	1.0	2258x960x1955	–	G 1¼	1100	–
	8	115	5.31	187.5	30	40	0.75	1.0	2258x960x1955	–	G 1¼	1100	–
	10	150	4.77	168.5	30	40	0.75	1.0	2258x960x1955	–	G 1¼	1100	–
	13	190	3.86	136.3	30	40	0.75	1.0	2258x960x1955	–	G 1¼	1100	–
SLF 40-3 bluekat	7.5	110	1.32...5.48	46.6...193.5	30	40	0.75	1.0	2470x960x1955	–	G 1¼	1171	–
	8	115	1.3...5.31	45.9...187.5	30	40	0.75	1.0	2470x960x1955	–	G 1¼	1171	–
	10	150	1.3...4.75	45.9...167.7	30	40	0.75	1.0	2470x960x1955	–	G 1¼	1171	–
	13	190	1.26...4.21	44.5...148.7	30	40	0.75	1.0	2470x960x1955	–	G 1¼	1171	–
S 50-3 bluekat	7.5	110	6.34	223.9	37	50	1.5	2.0	–	2258x960x1955	G 1¼	–	1320
	8	115	6.32	223.2	37	50	1.5	2.0	–	2258x960x1955	G 1¼	–	1320
	10	150	5.61	198.1	37	50	1.5	2.0	–	2258x960x1955	G 1¼	–	1320
	13	190	4.72	166.7	37	50	1.5	2.0	–	2258x960x1955	G 1¼	–	1320
S 60-3 bluekat	7.5	110	7.32	258.5	45	60	1.5	2.0	–	2258x960x1955	G 1¼	–	1470
	8	115	7.3	257.8	45	60	1.5	2.0	–	2258x960x1955	G 1¼	–	1470
	10	150	6.53	230.6	45	60	1.5	2.0	–	2258x960x1955	G 1¼	–	1470
	13	190	5.33	188.2	45	60	1.5	2.0	–	2258x960x1955	G 1¼	–	1470
SF 60-3 bluekat	7.5	110	1.58...7.3	55.8...257.8	45	60	1.5	2.0	–	2258x960x1955	G 1¼	–	1535
	8	115	1.58...7.3	55.8...257.8	45	60	1.5	2.0	–	2258x960x1955	G 1¼	–	1535
	10	150	1.43...6.53	50.5...230.6	45	60	1.5	2.0	–	2258x960x1955	G 1¼	–	1535
	13	190	1.19...5.33	42.0...188.2	45	60	1.5	2.0	–	2258x960x1955	G 1¼	–	1535

\* Performance of the overall system in accordance with ISO 1217, Appendix C, at 20 °C ambient temperature and relevant pressure. Sound pressure emission level in accordance with DIN EN ISO 2151: 2009 from 68 dB(A).

\*\* Max. pressure of the compressor; the 7.5 bar indications are to be provided as reference values. The machines are shipped standard in 8 bar.

<sup>1)</sup> super-silenced on the intake side <sup>2)</sup> super-silenced on the intake and on the exhaust air side

**BOGE Compressed Air Systems GmbH & Co. KG**  
Otto-Boge-Straße 1–7 · 33739 Bielefeld  
Tel. +49 5206 601-0 · Fax +49 5206 601-200  
info@boge.com · boge.com



344-EN-BI-1-03-2019/d · Technical changes and errors reserved.



# BOGE bluekat


Delivery rate: 1.19 – 7.32 m<sup>3</sup>/min, 42 – 258,5 cfm  
Pressure range: 7.5 – 13 bar, 110 – 190 psig  
Power output: 30 – 45 kW, 40 – 60 HP




# BOGE bluekat: Yes, oil-free compressed air really can be this safe and economical!

**BOGE bluekat: In an oil-free class of its own.** BOGE bluekat series screw compressors enable you to produce Class 0 oil-free compressed air and also spare you the trouble of disposing of the condensate. Regardless of the quality of the intake air, the principle is absolutely safe and unbeatably economical compared with conventional oil-free screw compressors. It is ideal for sensitive industrial applications wanting to produce oil-free compressed air safely and smartly.


## ABSOLUTELY SAFE: THE BLUEKAT PRINCIPLE

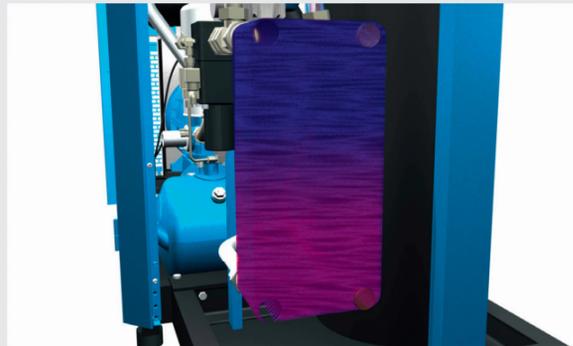

1. The compressed air is pre-heated to 200°C.

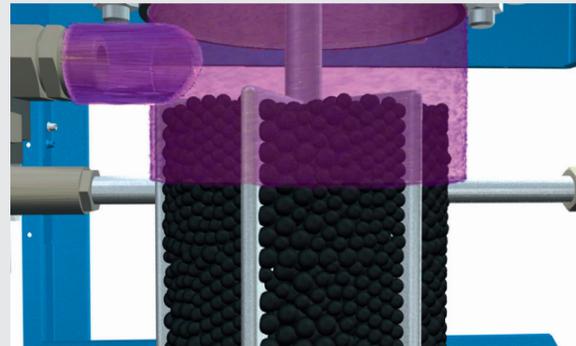

2. The pre-heated air flows into the integrated BOGE converter.

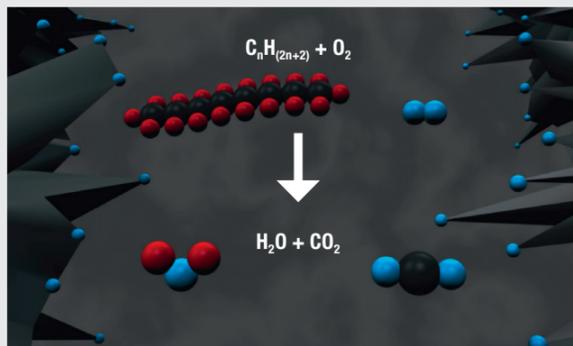

3. The catalytic material in the converter causes hydrocarbon to oxidise to carbon dioxide and water.




4. The produced BOGE air is oil-free to Class 0, the highest class.

### OIL-FREE COMPRESSED AIR, WATER-WHITE CONDENSATE: TESTED BY TÜV SÜD

The BOGE bluekat models operate with an integrated BOGE converter. It reliably oxidises hydrocarbon (oil) to water and carbon dioxide, leaving no residues to clean or maintain. Since the converter has an overload protective device, it cannot be overloaded. There is no chance of oil breakthrough, which is a possibility when incorrect filters are used. **The outcome is Class 0 oil-free compressed air and water-white condensate. Absolutely safe and tested by TÜV SÜD.**




You can find more information and a product animation at [www.boge.com/bluekat](http://www.boge.com/bluekat) – or simply scan the QR code!

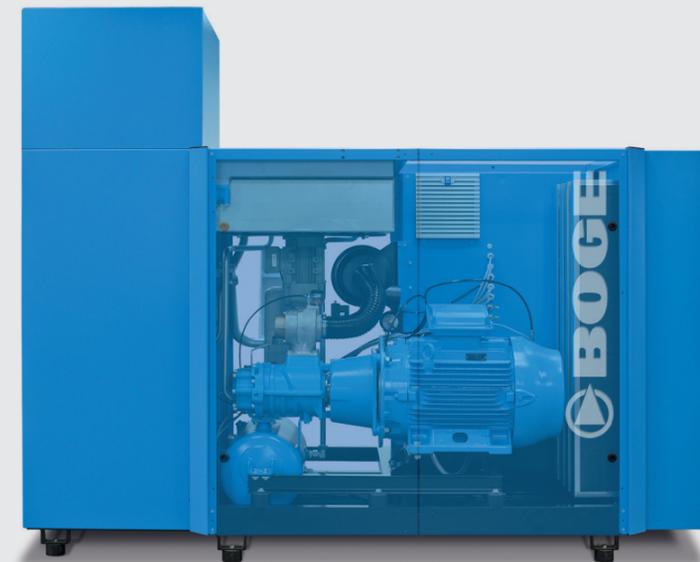

### ABSOLUTELY OIL-FREE

The BOGE bluekat models have an integrated converter that reliably oxidises the oil in the compressed air to carbon dioxide and water. The produced compressed air is oil-free to ISO 8573-1 Class 0 and this is tested and certified by TÜV SÜD. Nothing but oil-free condensate arises at all points in the process.

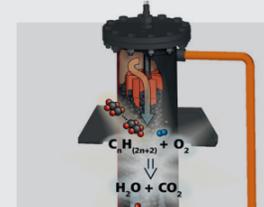

### ABSOLUTELY SAFE

The converter principle stands for absolutely safe oil-free compressed air. The converter has an overload protective device and cannot be overloaded. This is thus the safe option for users from the pharmaceutical, chemical, semi-conductor and food industries.



### ABSOLUTELY EFFICIENT

State-of-the-art BOGE IE3 motors ensure that all BOGE bluekat models are powered efficiently. Among the machines available is a variable-speed model, which flexibly adjusts the speed of the drive motor and compressor stage to match demands. It's hard to imagine a more efficient compressor!



### ABSOLUTELY ECONOMICAL

With the BOGE bluekat principle you save in multiple ways: You no longer need any expensive filter technology. There is no more costly condensate disposal. And when you add the energy savings of the IE3 motor to the considerable saving on procurement and maintenance, you will see how economical oil-free compressed air can be!