

StrainBook/616

Ethernet-Based Strain Gage Measurement System



Features

- 8-channels built-in, expandable up to 64 channels per StrainBook
- Multiple StrainBooks can be synchronized for applications >64 channels
- Expansion options for voltage, temperature, vibration, and sound measurements
- High-speed Ethernet interface for continuous measurement transfer to the PC
- 1 MHz scanning A/D converter, with simultaneous sample and hold on each channel, guaranteeing channel-to-channel match to within 100 nsec
- 100% programmable, no mechanical pots to adjust
- Full, half, and quarter arm support
- 60 to 1000 Ohm bridge
- Software-selected Shunt-Cal
- Independent filter per channel
- Programmable excitation source
- DC operable for in-vehicle applications

Software

- Includes WaveView for *Out-of-the-Box* setup, acquisition, & real-time display:
 - Scope mode for real-time waveform display
 - Logger mode for continuous streaming to disk
- Comprehensive drivers for DASyLab®, LabVIEW®, Visual C++®, Visual C#®, Visual Basic®, and Visual Basic® .NET
- Supported Operating Systems: Windows 7/Vista/XP SP2, 32-bit or 64-bit

StrainBook/616 is a compact and portable strain gage measurement system that connects to your PC's Ethernet port. Eight channels of strain measurement are built into the StrainBook, and up to 64 channels can be measured with one StrainBook using 8-channel WBK16 options. For applications with more than 64 channels, multiple StrainBook systems can be combined and synchronized for a virtually limitless number of strain measurement channels. The StrainBook is also capable of measuring voltage, temperature, vibration, and sound using other WBK signal conditioning options.



The Ethernet-based StrainBook/616 provides from 8 to 64 channels of automated bridge measurements

WaveView software is included with the StrainBook, providing all set-up, data acquisition, real-time display, and storage to disk without having to program. WaveView supports up to 64 channels of strain, voltage, or sound/vibration inputs. For applications beyond 64 channels, or for custom applications, comprehensive drivers are included for DASyLab, LabVIEW, Visual C++, Visual C#, Visual Basic, and Visual Basic .NET.

Built into the StrainBook is a 16-bit, 1 MHz A/D converter that scans all selected channels at 1 μ sec per channel and continuously transmits acquired data to the PC in real time. The only limit to the total amount of data acquired or the duration of a test is the storage capacity on the host PC. The StrainBook hardware includes simultaneous sample and hold (SSH) amplifiers on every channel. When the SSH option is turned on, all channels are measured within 100 ns of each other. In general, the maximum StrainBook sampling rate per channel is equal to 1 MHz divided by the number of configured analog input channels. However, this maximum sampling rate is reduced for applications that use the SSH option or multiple analog trigger channels.

The StrainBook supports a wide range of bridge values for full-, half-, and quarter-bridge configurations. Excitation voltage

with remote sensing is supplied from an internal supply, eliminating the need for an external voltage source. The StrainBook's wide gain ranges and filter selection (see specifications) also make it an excellent general purpose or high-gain amplifier for other transducer inputs.

All input signals are attached via eight DB9 connectors on the front of the unit. Each of the eight channels has an independent gain stage, software programmable in 86 steps from 1 to 20,000, providing optimal gain for any strain application. The excitation source is accurate to ± 5 mV with very low drift over time. The dual excitation sources are set through software for 0.5, 1, 2, 5, and 10 volt excitation, and can be used in either a standard or 6-wire Kelvin configuration. Each source is individually current limited to 85 mA to protect against accidental shorts.

Both high-pass AC coupling and low-pass noise rejection filtering can be enabled through software. Two 4-pole Butterworth filters factory-set to corner frequencies of 10 Hz or 1 kHz can be selected. The filters can be user-modified over a range of 2 Hz to 20 kHz simply by inserting a user-supplied resistor pack.

Unlike most strain instruments with a single fixed configuration, the WBK16 allows multiple bridge configurations to be established in advance on a user-installed header.

StrainBook/616

General Information

Once installed, each configuration can be selected through software at the time of operation. Each header supports two half bridge resistors, three quarter bridge values and three shunt cal values per channel. All configurations can be selected via software on a per-channel basis.

Three user-provided, software-selectable, shunt-calibration resistors can be installed on each channel, enabling each to be put into a known imbalance condition to set channel calibration. Shunt-Cal allows a full scale gain without physically loading the bridge to capacity.

Balancing the bridge is quick and convenient, since there are no pots to adjust. Simply select the channels to auto-balance and the StrainBook does the rest. Auto-balance removes the static portion of the strain load and auto zeros the input to compensate for any input drift.

WaveView Out-of-the-Box Software


WaveView is a Windows®-based setup and acquisition application that allows you to configure, display, and save data to disk within minutes of taking the StrainBook out of the box. WaveView provides a point-and-click interface to simplify StrainBook operations by allowing setup of all hardware, including the field added WBK expansion options, all without programming.

Unlike example programs that many suppliers provide with data acquisition hardware, WaveView is a full-featured acquisition and display package designed to quickly configure strain, load cell, pressure, and other sensors for your data-logging and display applications.

WaveView's intuitive approach to hardware control simplifies system setup by automatically querying the StrainBook upon connection to your PC. As WBK options are added for signal conditioning or increased system channel count, WaveView's channel configuration spreadsheet automatically expands to accommodate the additional channels. Specific channel characteristics, such as gain, unipolar/bipolar, and channel labels, are automatically updated, and any additional functionality (such as low-pass filtering, filter cutoff, or excitation output), automatically appear in the channel-configuration spreadsheet. WaveView is also designed for easy operation with other analysis packages, providing data in formats compatible with a variety of analysis packages.

Easy Strain Setup

Whether you are working with strain gages, pressure transducers, load cells or some other strain based gage, WaveView's point-and-click configuration makes the setup easy.

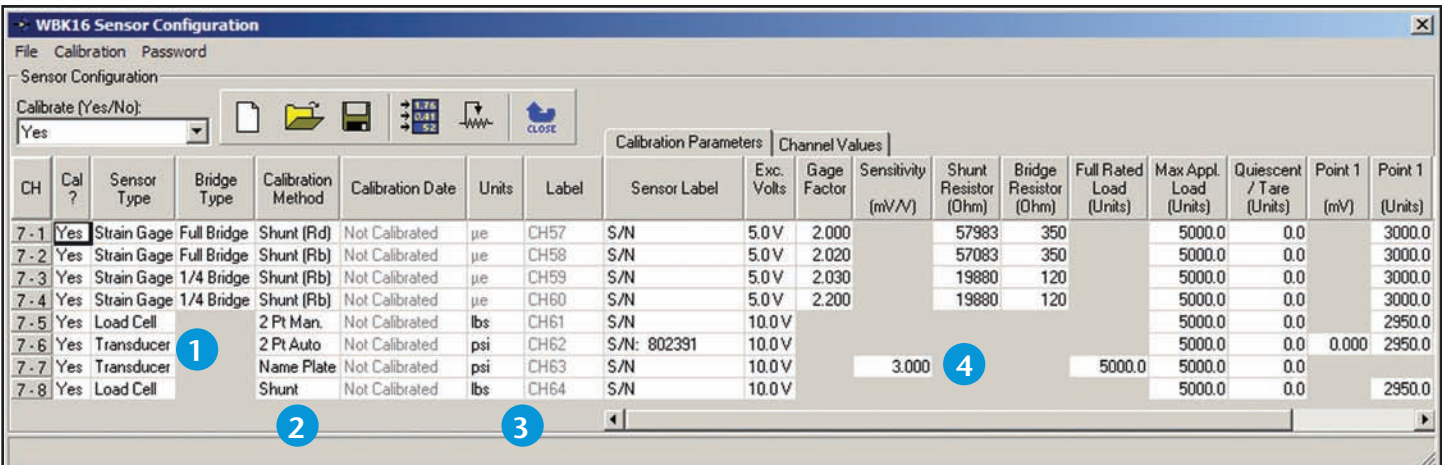

WBK16 Sensor Configuration																			
File Calibration Password																			
Sensor Configuration																			
Calibrate (Yes/No): Yes																			
Calibration Parameters										Channel Values									
CH	Cal ?	Sensor Type	Bridge Type	Calibration Method	Calibration Date	Units	Label	Sensor Label	Exc. Volts	Gage Factor	Sensitivity (mV/V)	Shunt Resistor (Ohm)	Bridge Resistor (Ohm)	Full Rated Load (Units)	Max Appl. Load (Units)	Quiescent / Tare (Units)	Point 1 (mV)	Point 1 (Units)	
7-1	Yes	Strain Gage	Full Bridge	Shunt (Rd)	Not Calibrated	µε	CH57	S/N	5.0 V	2.000		57983	350		5000.0	0.0		3000.0	
7-2	Yes	Strain Gage	Full Bridge	Shunt (Rb)	Not Calibrated	µε	CH58	S/N	5.0 V	2.020		57083	350		5000.0	0.0		3000.0	
7-3	Yes	Strain Gage	1/4 Bridge	Shunt (Rb)	Not Calibrated	µε	CH59	S/N	5.0 V	2.030		19880	120		5000.0	0.0		3000.0	
7-4	Yes	Strain Gage	1/4 Bridge	Shunt (Rb)	Not Calibrated	µε	CH60	S/N	5.0 V	2.200		19880	120		5000.0	0.0		3000.0	
7-5	Yes	Load Cell		2 Pt Man.	Not Calibrated	lbs	CH61	S/N	10.0 V						5000.0	0.0		2950.0	
7-6	Yes	Transducer		2 Pt Auto	Not Calibrated	psi	CH62	S/N: 802391	10.0 V						5000.0	0.0	0.000	2950.0	
7-7	Yes	Transducer		Name Plate	Not Calibrated	psi	CH63	S/N	10.0 V		3.000			5000.0	5000.0	0.0			
7-8	Yes	Load Cell		Shunt	Not Calibrated	lbs	CH64	S/N	10.0 V						5000.0	0.0		2950.0	

- WaveView supports various sensor types including strain gages, pressure transducers, load cells, and piezoresistive accelerometers.
- Easily calibrate various strain configurations using one of three user added shunt calibration resistors or the two point manual method. In addition, name plate and two point auto is available for load, pressure, and other transducers. The date is automatically recorded at the time of calibration.

- Type in your units of choice and user labels for quick signal identification.
- IOtech's smart cell approach to data entry takes the guess work out what data is needed. Only the cells that require your input are made visible based on your sensor type selection.

StrainBook/616

General Information & Specifications



Scan and Trigger Configuration

The StrainBook's powerful event-capture capability is made available through the simple, fill-in-the-blank style dialog boxes in WaveView. In addition to single-channel, manual, and external TTL triggering, advanced triggering for multichannel, digital pattern, and pulse trigger is also available. When using multichannel trigger all channels can be combined with Boolean "AND" & "OR" operators to begin the acquisition at the right time. In digital pattern mode, the StrainBook triggers on a user-defined bit pattern making it easy to associate analog data with digital sequences.

Scope Mode

Unlike a traditional scope with only two to four channels, WaveView's Scope Mode allows any eight channels within a system to be displayed. WaveView is not handicapped by the small memory limitations of DSOs, and dynamically and transparently allocates a PC's RAM prior to beginning an acquisition. A simple point-and-click is all that's necessary to initiate acquisitions. Because the data is already in the PC's RAM, a second point-and-click on the disk icon automatically saves data to disk for import into PostView, a post-acquisition waveform review package included with WaveView, or into analysis packages, such as DADiSP™, or Excel®.

Logger Mode

For applications where PC RAM is insufficient to record the entire test or where rapid back-to-back recordings need to be saved to disk, WaveView provides a Logger Mode. It complements WaveView's Scope Mode by allowing continuous data recording directly to disk. Logger Mode can auto-increment file names to provide the unattended capture of millions of back-to-back events, without user intervention. Acquired data can be stored in several data formats for direct import to packages such as Excel, or PostView.

LabVIEW® Support

Extensive LabVIEW support is provided for the StrainBook, including expansion and signal conditioning modules. IOtech data acquisition VIs for LabVIEW are more than just simple hardware access VIs; they are complete with engineering data conversion, data display, and logging capabilities.

DASYLab®

If your application requirements go beyond the scope of WaveView, DASYLab software offers a great degree of flexibility and customization. You can learn DASYLab in a matter of days, without the weeks of training required for some other icon-based application-development software.

Specifications

Channels: 8 built-in, expandable to 64
Input Connector: Standard female DB9 per channel
Input Type: Differential
Input Impedance: 100M Ohms
Coupling: AC and DC, software selectable

Accuracy

Offset Drift: 1 μ V RTI/°C
CMRR @ DC to 60 Hz: 100 dB at gains > 100
Cross-Talk Rejection: > 90 dB @ less than 1 kHz

Bandwidth

50 kHz @ gains < 1 to 100
10 kHz @ gains > 100 to 2000
1 kHz @ gains > 2000

Bridge Configuration

Full-bridge (4 and 6 wire)
Half-bridge
Quarter-bridge (2 and 3 wire)

Bridge Completion: User supplied resistors on removable headers (headers included)

Bridge Resistance: 60 to 1000 Ohms

Overall Gain: 1 to 20,000, software selectable in 86 steps

Shunt Calibration: Software selection of 3 user-supplied resistors

Auto-Balance: Selected per channel

Auto-Calibration: Either by actual measurement or by calculated load

Offset Adjustment

\pm 3 V RTI @ gains 1 to 10
 \pm 300 mV RTI @ gains 10 to 100
 \pm 30 mV RTI @ gains 100 to 2000
 \pm 3 mV RTI @ gains 2000 to 20000

Excitation Source: Two banks can be independently set to 0.5, 1.0, 2.0, 5.0, 10.0 VDC, or "off" Bank 1 is for channels 1 through 4; Bank 2 is for channels 5 through 8

Excitation Accuracy: \pm 5 mV

Excitation Capacity: 85 mA per channel with fold-back current limiting

Filtering: 4-pole Butterworth, software-selectable and factory-set to 10 Hz, 1 kHz, or bypass; field-changeable

Warm-up: 30 minutes to rated specifications

Environment: Operating: 0 to 50 °C, 0 to 95% RH, non-condensing

Storage Temperature: -20 to 70 °C

Power Consumption: 1.22A @ 15V (min); 1.84A @ 15V (max)

Input Power Voltage Range: 10 to 30 VDC

Vibration: MIL STD 810, Category 1 and 10

PC Communication: 10/100BaseT Ethernet

Dimensions: 285 mm W x 220 mm D x 70 mm H (11" x 8.5" x 2.70")

Weight: 1.32 kg (2.9 lb)

Triggering

Multi-Channel Analog Trigger (up to 64 channels)

Range: Selectable per channel to input range

Latency: 2 μ s/channel, plus 4 μ s max

TTL Trigger

Input Signal Range: 0 to 5V

Input Characteristics: TTL-compatible with 10k Ohm pull-up resistor

Latency: 300 ns

Software Trigger

Latency: 100 μ s typ

External Clock

Connector: Available on DB25 digital input

Input Signal Range: 5V TTL compatible

Input Characteristics: 50k Ohms pull up (to +5V) in parallel with 50 pF

Input Protection: Zener clamped -0.7 to +5V

Delay: 200 ns

Signal Slew Rate Requirement: 20V/ μ s min

Rate: Up to 1 MHz

Divisor Ratio: Divide by 1 through 255, selectable

Clock Counter Accuracy: <0.02%

Clock Counter Range: 0.01 Hz to 100 kHz

StrainBook/616

Specifications & Ordering Information



External Sync Ports

Number of External Sync Ports: 2, on rear panel
 Maximum Number of Units to be Synchronized: 4 units, scan synchronous (post trigger)
 Maximum Length of Sync Cables: 15 ft. (4.57 m), total for all cables

Sequencer

Operation: Programmable for channel, gain, and for unipolar/bipolar range in random order
 Depth: 128 location
 Channel-to-Channel Rate: 1 μ s to 1.1 μ s/channel, all channels equal
 Maximum Repeat Rate: 1 MHz
 Minimum Repeat Rate: 100 seconds per scan
 Expansion Channel Sample Rate: Same as on-board channels, 1 to 1.1 μ s, fixed

High-Speed Digital Inputs/General-Purpose Outputs

Connector: DB25 Female
 Configuration: 16 TTL-compatible pins, selectable for input or output
 Input Characteristics: TTL-compatible
 Output Characteristics: ALS TTL output in series with 33 Ohms
 Output Updates: Outputs may be changed via program control
 Input/Output Protection: Diode clamped to ground and +5V

Period Counter

Operation: Internal counter calculates and reports the external clock's period; counter can be read with each scan
 Clock Counter Accuracy: <0.02% error
 Clock Counter Range: 0.01 Hz to 100 kHz

Ordering Information

Description

8 channel Ethernet-based strain gage measurement system, including WaveView software; support for Visual Studio® and Visual Studio® .NET; and comprehensive drivers for DASyLab®, and LabVIEW®

Part No.

StrainBook/616

Expansion Options

8-channel voltage expansion option for the StrainBook
 Simultaneous sample and hold option for the WBK10A
 Programmable filter option for the WBK10A
 Simultaneous sample and hold plus filter option for the WBK10A
 8-channel isolated multifunction option for the StrainBook (5B signal conditioning options sold separately)
 8-channel strain gage expansion option for the StrainBook with simultaneous sample and hold
 8-channel strain gage expansion option for the StrainBook (without simultaneous sample and hold)
 8-channel counter/position encoder option for the StrainBook
 8-channel ICP accelerometer/microphone option for the StrainBook
 14-channel TC option for the StrainBook
 (Note: not supported in WaveView software – requires DASyLab or a user-developed application with LabVIEW or Windows® language)
 14-channel TC option, plus 4 counter inputs, for the StrainBook
 (Note: not supported in WaveView software – requires DASyLab or a user-developed application with LabVIEW or Windows language)

WBK10A

WBK11A

WBK12A

WBK13A

WBK15

WBK16/SSH

WBK16

WBK17

WBK18

WBK40

WBK41

Accessories

Header connector*
 Shunt and completion resistor header*
 Connector/adaptor DB9 to screw terminal

CN-115

CN-115-1

CN-189

Software

Icon-based data acquisition, graphics, control, and analysis software with StrainBook driver

DASyLab



The WBK10A adds eight differential analog inputs




The WBK15 provides up to 8 isolated analog input channels



The WBK16 provides eight channels of strain gage input



The WBK18 provides a full set of features for making dynamic signal measurements

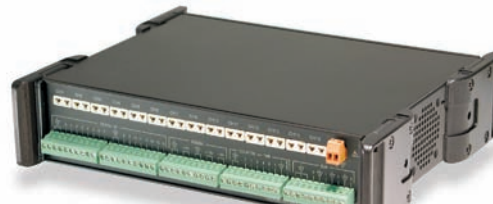

The WBK41 provides thermocouple and counter inputs (not supported in WaveView)

* The CN-115 header is used for axial leaded bridge completion resistors. The CN-115-1 can be used with both axial leaded and upright (square) precision resistors. See user's manual for assembly instructions.