

# WOUND COTTON FILTERS

Ultra-Wound




## Technical Data

- Cotton media with SS304 core
- 1 3 5 10 15 20 30 50 75
- 90%
- 120°C (65 and 400°C optional)
- 10" 20" 30" 40"
- DOE
- 

Ultra-Spun series is perfectly suited as a pre-filter to protect more expensive secondary or final filtration systems.

Cotton is mainly used where polypropylene is incompatible with the filtrate. The bleached cotton meet the FDA standards and is designed specifically for water and food applications. The core is made of stainless steel, and makes the filter useful in high temperature applications.

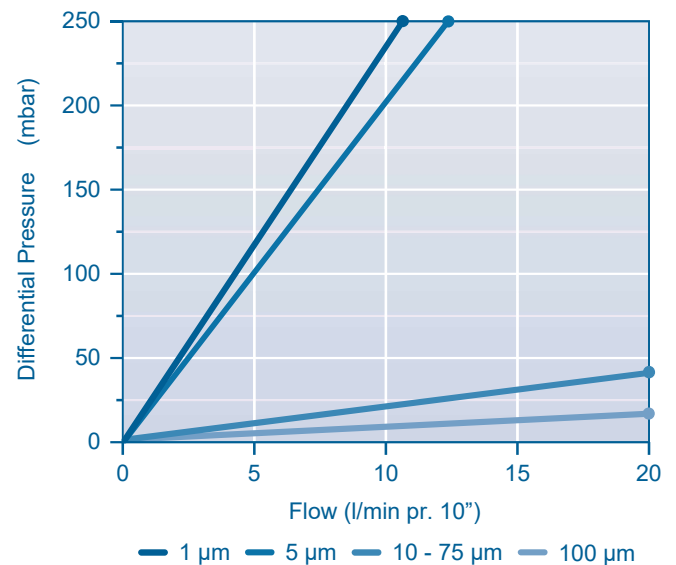

## RECOMMENDED FILTER HOUSINGS



FUC  
Single



DS  
Multi DOE



FWK  
Multi DOE



1N  
Plastic