
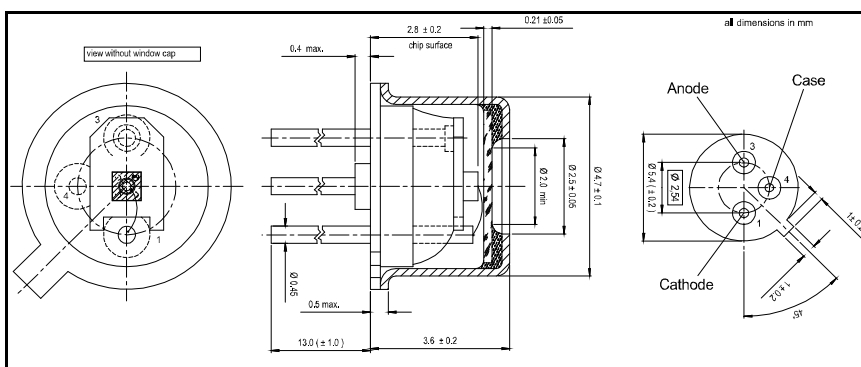


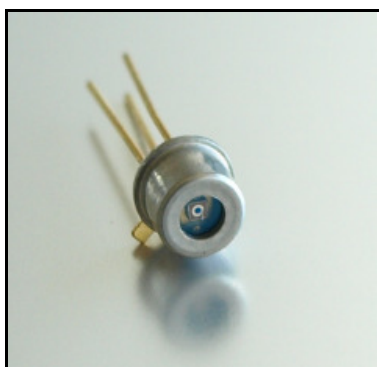

Features

- APD with 0.04 mm² active area
- 230 μm diameter active area
- Optimized for red light
- Fast rise time, low capacitance
- Slow gain curve

Description

Circular active area APD chip with 230 μm diameter. Metal can type isolated, hermetic TO52 package with clear glass window. AR coating for 650 nm.

Application

- Laser range finder
- High speed photometry
- High speed optical communications
- Medical equipment

RoHS


2002/95/EC




Absolute maximum ratings

Symbol	Parameter	Min	Max	Unit
T _{STG}	Storage temp	-55	125	°C
T _{OP}	Operating temp	-40	100	°C
M _{max}	Gain (I _{PO} = 1 nA)	200		
I _{PEAK}	Peak DC current		0.25	mA

Schematic

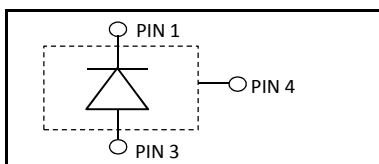


Spectral response ($M = 100$)

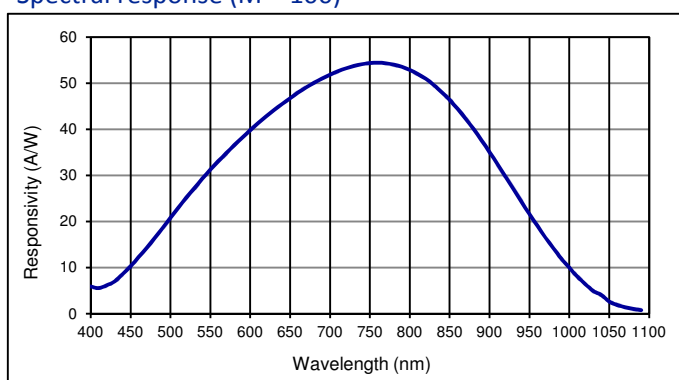


Electro-optical characteristics @ 23 °C

Symbol	Characteristic	Test Condition	Min	Typ	Max	Unit
	Active area		diameter 230			μm
	Active area		0.04			mm^2
I_D	Dark current	M = 100		0.2	0.5	nA
C	Capacitance	M = 100		0.6		pF
	Responsivity	M = 100; λ = 550 nm		31		A/W
		M = 100; λ = 635 nm		44		A/W
		M = 100; λ = 660 nm		47		A/W
t_R	Rise time	M = 100; λ = 660 nm; R_L = 50 Ω		0.18		ns
	Cut-off frequency	-3dB		2		GHz
V_{BR}	Breakdown voltage	I_R = 2 μA , other V_{BR} - binning available	80		160	V
	Temperature coefficient	Change of V_{BR} with temperature		0.45		V/K
	Excess noise factor	M = 100		2.2		
	Excess noise index	M = 100		0.2		


Quantum efficiency (23 °C)

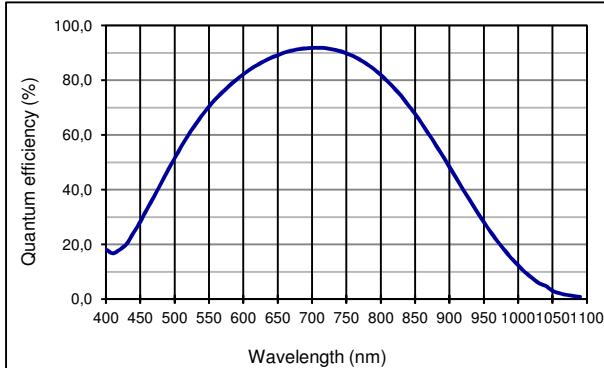


Capacitance as fct of reverse bias (23 °C)

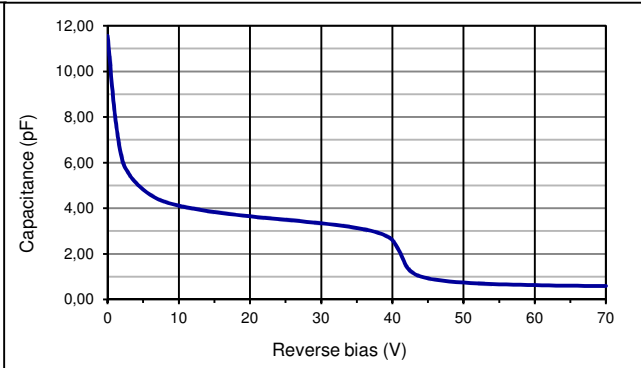


Multiplication as fct of bias and temperature

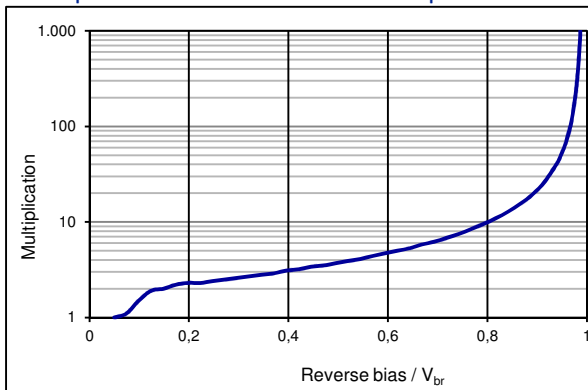

Dark current as fct of bias and temperature

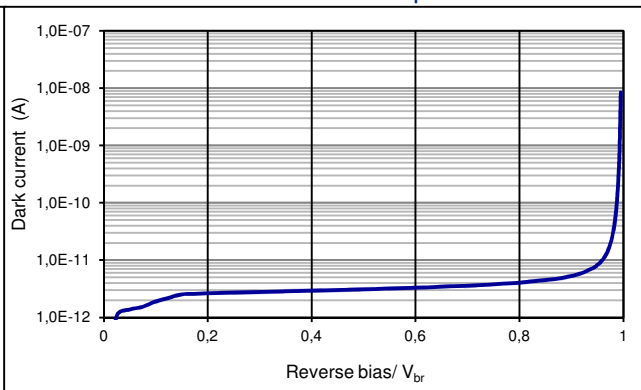

Application hints:

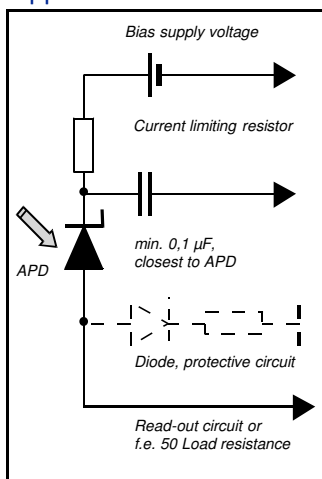

- Current should be limited by a protecting resistor or current limiting - IC inside the power supply
- For low light level applications blocking of ambient light should be used
- For high gain applications bias voltage should be temperature compensated
- Please consider basic ESD protection while handling
- Use low noise read-out - IC
- For further questions please refer to document "Instructions for handling and processing"
- Optimum gain: 50-60

European, international Sales:




First Sensor AG
 Peter-Behrens-Strasse 15
 12459 Berlin
 Germany
 T +49 30 6399 2399
 F +49 30 639923-752
 sales.opto@first-sensor.com

USA:



First Sensor Inc.
 5700 Corsa Avenue #105
 Westlake Village
 CA 91362 USA
 T +1 818 706 3400
 F +1 818 889 7053
 sales.us@first-sensor.com

Package: TO52S1.1

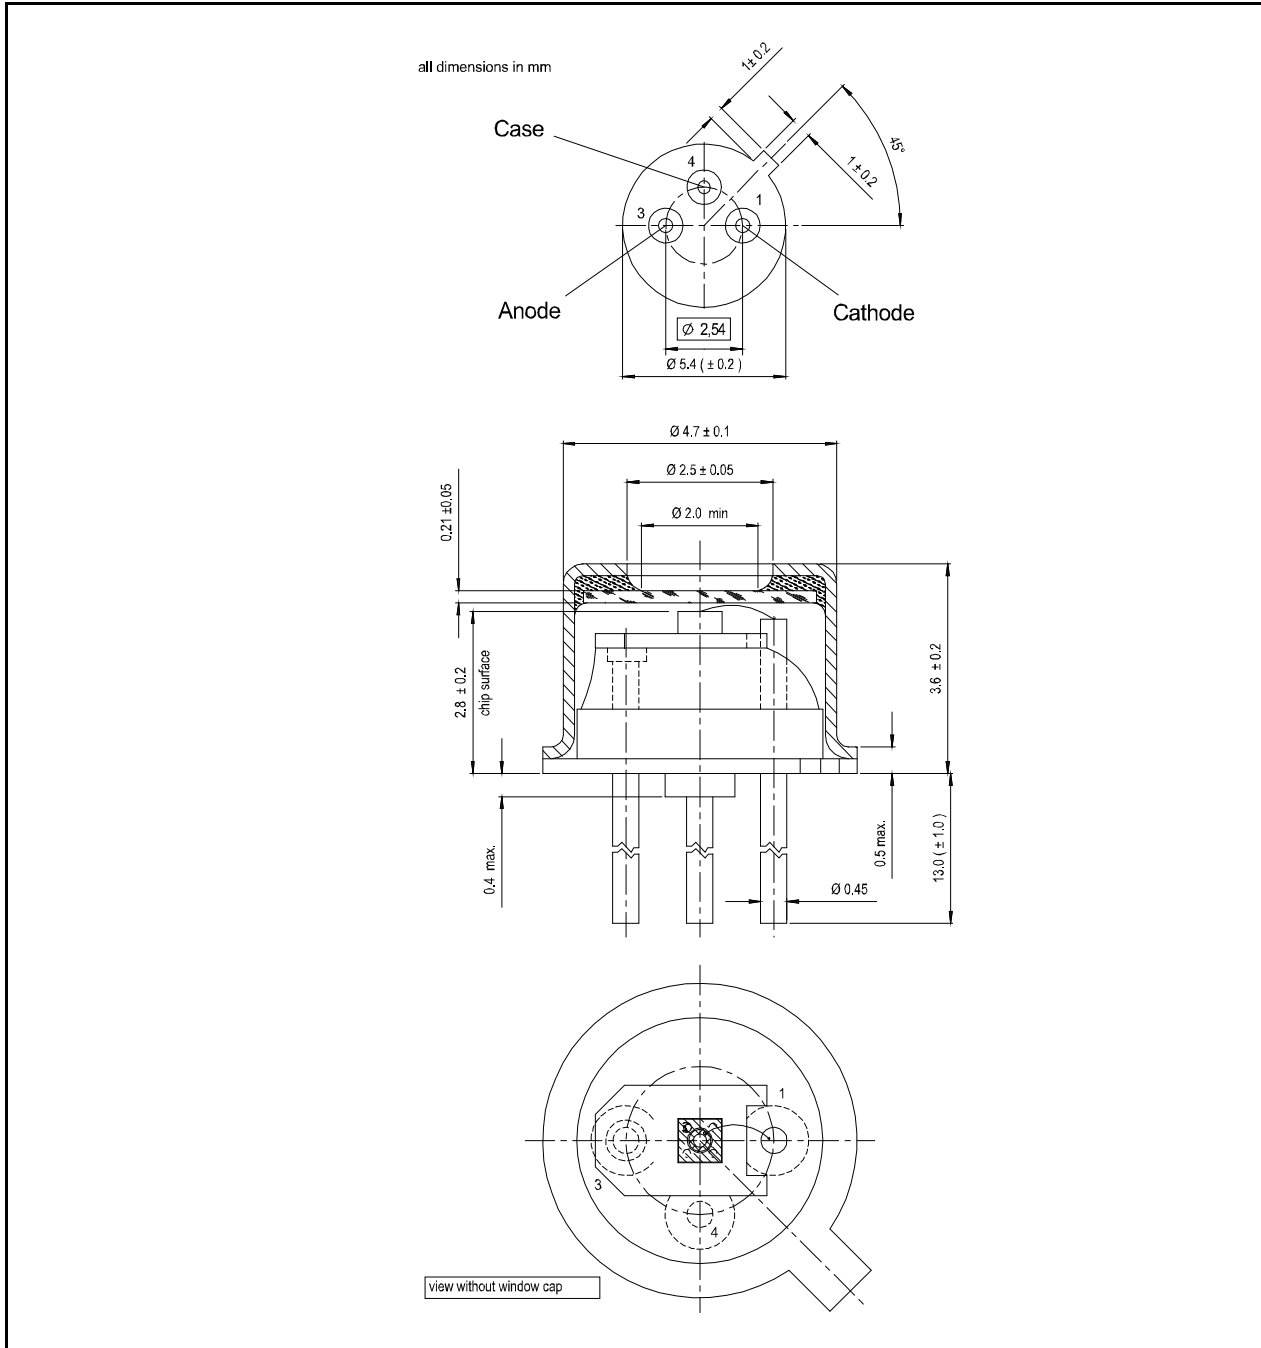

Package dimension:

Small quantities: Foam pad, boxed (12 cm x 16.5 cm)

Disclaimer: Due to our strive for continuous improvement, specifications are subject to change within our PCN policy according to JESD46C.

European, International Sales:



First Sensor AG
Peter-Behrens-Strasse 15
12459 Berlin
Germany
T +49 30 6399 2399
F +49 30 639923-752
sales.opto@first-sensor.com

USA:



First Sensor Inc.
5700 Corsa Avenue #105
Westlake Village
CA 91362 USA
T +1 818 706 3400
F +1 818 889 7053
sales.us@first-sensor.com