




TM Solid

Solid Carbide Thread Milling Tools

METRIC

TM Solid Carbide Program



Miniature Threads MilliPro

MilliPro &
MilliPro EL
From M1.6x0.35 (1-72UNF)

MilliPro HD
Up to 62 HRC

MilliPro Dental
From M1.0x0.25 (0-80UNF)

TMDR
From M3x0.5 (4-40UNC)



Long Thread Deep Threading

Full Profile



Partial Profile

Up to 3XDo

Normal Use Straight Flutes

Taper
For Bone Plate Applications
From Pitch 0.3-0.6mm



From M4.5x0.75 (No.8-36UNF)

Heavy Duty Helicool

HC

HCN

MultiFlute



From M3x0.5 (No.10-32UNF)

Radial Coolant Helicool-R (HCR)



From M6x1.0

Helicool and Chamfer Helicool-C (HCC)



From M6x1.0

Economical Tool Helical

Taper
For Bone Plate Applications
From Pitch 0.3-0.6mm



From M3x0.5 (No.8-36UNF)

Drill, Thread and Chamfer HTC



From M6x1.0



TM Solid Catalog

| | |
|---|----|
| Vardex Ordering Code System..... | 3 |
| Helicool | 5 |
| MultiFlute | 7 |
| HCN..... | 8 |
| Helicool-R (HCR)..... | 15 |
| Helicool-C (HCC)..... | 18 |
| HTC (Thriller) | 19 |
| Helical..... | 20 |
| Deep Threading | 24 |
| MilliPro D1T..... | 25 |
| MilliPro | 27 |
| MilliPro Dental..... | 30 |
| MilliPro EL..... | 31 |
| MilliPro HD..... | 32 |
| TMDR | 34 |
| Straight..... | 38 |
| Grades and their applications | 45 |
| Recommended Grades, Cutting Speeds and Feed | 46 |

Vardex Ordering Code System

■ TM Solid Carbide

| | | | | | | | | | | | |
|-----------|----------|-----------|------------|------------|----------|----------|-------------|------------|-----------|-----------|------------|
| HC | | 10 | 082 | L15 | - | I | 1.50 | ISO | TM | | VTH |
| 1 | 2 | 3 | 4 | 5 | | 6 | 7 | 8 | 9 | 10 | 11 |


| 1 - Line | 2 - No. of Teeth | 3 - Shank Dia. | 4 - Cutting Dia. | 5 - Tool Cutting Length | 6 - Type of Tool |
|---|--|---|------------------|-------------------------|--|
| HC - Helicool HCN - Helicool with relief neck HCR - Helicool R HCC - Helicool C H - Helical S - Straight Flutes D - Deep Threading or MilliPro DD - Dental TDC - TMDR with coolant TD - TMDR without coolant | 1T - 1 Tooth 3T - 3 Teeth (MilliPro) 2L - 2 Teeth LH (MilliPro HD) | 03 - 3.0 mm 04 - 4.0 06 - 6.0 08 - 8.0 10 - 10.0 12 - 12.0 14 - 14.0 16 - 16.0 18 - 18.0 20 - 20.0 | 0.7 - 19.9 mm | Up to 3Do | E - External I - Internal EI - External + Internal |

| 7 - Pitch | 8 - Standard | 9 - System | 11 - Carbide Grade | | | | | | | | | | | | | | | | | | | | | | |
|---|--------------|---|--------------------|----------|--|----|-----|----|---------|-------|----|---------|-------|----|----------|-------|----|----------|-------|----|----------|-------|---|------------------------|------------|
| Full Profile - Pitch Range <table border="1"> <tr> <td>mm</td> <td>TPI</td> </tr> <tr> <td>0.25-6.0</td> <td>80 - 4.5</td> </tr> </table> Partial Profile - Pitch Range <table border="1"> <tr> <td></td> <td>mm</td> <td>TPI</td> </tr> <tr> <td>TA</td> <td>0.5-0.8</td> <td>32-56</td> </tr> <tr> <td>TB</td> <td>0.5-1.0</td> <td>24-56</td> </tr> <tr> <td>TC</td> <td>1.0-1.50</td> <td>16-24</td> </tr> <tr> <td>TD</td> <td>1.0-1.75</td> <td>14-24</td> </tr> <tr> <td>TF</td> <td>0.5-1.25</td> <td>20-48</td> </tr> </table> | mm | TPI | 0.25-6.0 | 80 - 4.5 | | mm | TPI | TA | 0.5-0.8 | 32-56 | TB | 0.5-1.0 | 24-56 | TC | 1.0-1.50 | 16-24 | TD | 1.0-1.75 | 14-24 | TF | 0.5-1.25 | 20-48 | 60 - Partial Profile 60° ISO - ISO Metric UN - American UN UNC - UN Coarse UNF - UN Fine UNEF - UN Extra Fine UNJ - UNJ MJ - MJ BSW - Whitworth Coarse BSP - BSP BSF - Whitworth Fine BSPT - BSPT NPT - NPT ANPT - ANPT NPTF - NPTF NPS - NPS PG - PG TP60 - Taper 60° TP55 - Taper 55° | TM TML - Extra Long | VTS VTH |
| mm | TPI | | | | | | | | | | | | | | | | | | | | | | | | |
| 0.25-6.0 | 80 - 4.5 | | | | | | | | | | | | | | | | | | | | | | | | |
| | mm | TPI | | | | | | | | | | | | | | | | | | | | | | | |
| TA | 0.5-0.8 | 32-56 | | | | | | | | | | | | | | | | | | | | | | | |
| TB | 0.5-1.0 | 24-56 | | | | | | | | | | | | | | | | | | | | | | | |
| TC | 1.0-1.50 | 16-24 | | | | | | | | | | | | | | | | | | | | | | | |
| TD | 1.0-1.75 | 14-24 | | | | | | | | | | | | | | | | | | | | | | | |
| TF | 0.5-1.25 | 20-48 | | | | | | | | | | | | | | | | | | | | | | | |
| | | 10 - No. of Flutes 3-7 Flutes | | | | | | | | | | | | | | | | | | | | | | | |

■ HTC Thriller

| | | | | |
|------------|-----------|------------|-----------|------------|
| HTC | M6 | 1.0 | 2D | VTN |
| 1 | 2 | 3 | 4 | 5 |

| 1 - Line | 2 - Thread Diameter | 3 - Pitch | 4 - Thread Length | 5 - Carbide Grade |
|----------------|---------------------|------------|-------------------|-------------------|
| HTC - Thriller | M6 - M12 | 1 - 1.75mm | 2D 2.5D | VTN VTS |

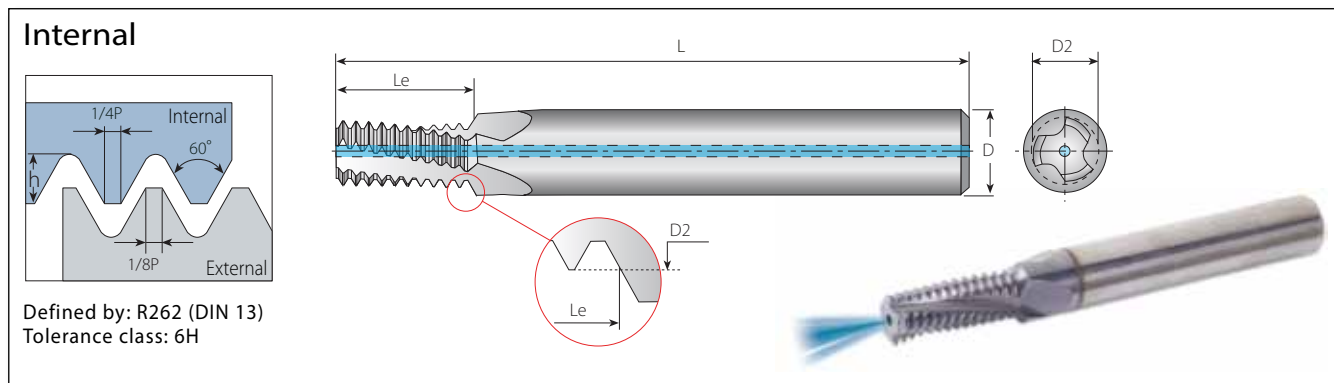

Helical Flutes with Thru-Hole Coolant

1.5 x Do (Le ≤ 1.5 x Thread Diameter)


| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|----------|--------------|-------|--------------------------|---------------|-------|----|---------------|-------|------------|------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | Le | Z | Zt | mm |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | HC04024L04-I0.50ISOTM... | 4 | 2.40 | 45 | 4.7 | 3 | 9 | 2.5 |
| M4x0.7 | | 0.7 | HC04031L06-I0.70ISOTM... | 4 | 3.15 | 45 | 6.6 | 3 | 9 | 3.3 |
| M5x0.8 | | 0.8 | HC04039L07-I0.80ISOTM... | 4 | 3.90 | 45 | 7.6 | 3 | 9 | 4.2 |
| M6x1.0 | M8-M40x1.0 | 1.0 | HC06048L09-I1.00ISOTM... | 6 | 4.80 | 57 | 9.5 | 3 | 9 | 5.0 |
| M8x1.25 | | 1.25 | HC08065L13-I1.25ISOTM... | 8 | 6.50 | 61 | 13.1 | 3 | 10 | 6.8 |
| M10x1.5 | M12-M48x1.5 | 1.5 | HC10082L15-I1.50ISOTM... | 10 | 8.20 | 73 | 15.7 | 3 | 10 | 8.5 |
| M12x1.75 | | 1.75 | HC10099L18-I1.75ISOTM... | 10 | 9.90 | 73 | 18.4 | 4 | 10 | 10.2 |
| M14x2.0 | M17-M80x2.0 | 2.0 | HC12116L21-I2.00ISOTM... | 12 | 11.60 | 73 | 21.0 | 4 | 10 | 12.0 |
| M16x2.0 | M17-M80x2.0 | 2.0 | HC14136L25-I2.00ISOTM... | 14 | 13.60 | 92 | 25.0 | 4 | 12 | 14.0 |

Helical Flutes with Thru-Hole Coolant

2 x Do (Le ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|----------|--------------|-------|--------------------------|---------------|-------|-----|---------------|-------|------------|------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | Le | Z | Zt | mm |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | HC04024L06-I0.50ISOTM... | 4 | 2.40 | 45 | 6.2 | 3 | 12 | 2.5 |
| | M4x0.5 | 0.5 | HC04032L08-I0.50ISOTM... | 4 | 3.20 | 45 | 8.2 | 3 | 16 | 3.5 |
| | M5x0.5 | 0.5 | HC06042L10-I0.50ISOTM... | 6 | 4.20 | 57 | 10.2 | 3 | 20 | 4.5 |
| M4x0.7 | | 0.7 | HC04031L08-I0.70ISOTM... | 4 | 3.15 | 45 | 8.7 | 3 | 12 | 3.3 |
| | M6x0.75 | 0.75 | HC06050L12-I0.75ISOTM... | 6 | 5.00 | 57 | 12.4 | 3 | 16 | 5.3 |
| M5x0.8 | | 0.8 | HC04039L10-I0.80ISOTM... | 4 | 3.90 | 45 | 10.8 | 3 | 13 | 4.2 |
| M6x1.0 | M8-M40x1.0 | 1.0 | HC06048L12-I1.00ISOTM... | 6 | 4.80 | 57 | 12.5 | 3 | 12 | 5.0 |
| | M8x1.0 | 1.0 | HC08067L16-I1.00ISOTM... | 8 | 6.70 | 61 | 16.5 | 3 | 16 | 7.0 |
| | M10x1.0 | 1.0 | HC10087L20-I1.00ISOTM... | 10 | 8.70 | 73 | 20.5 | 3 | 20 | 9.0 |
| | M12x1.0 | 1.0 | HC12107L24-I1.00ISOTM... | 12 | 10.70 | 73 | 24.5 | 4 | 24 | 11.0 |
| M8x1.25 | | 1.25 | HC08065L16-I1.25ISOTM... | 8 | 6.50 | 61 | 16.9 | 3 | 13 | 6.8 |
| | M10x1.25 | 1.25 | HC10085L20-I1.25ISOTM... | 10 | 8.50 | 73 | 20.6 | 3 | 16 | 8.8 |
| M10x1.5 | M12-M48x1.5 | 1.5 | HC10082L20-I1.50ISOTM... | 10 | 8.20 | 73 | 20.2 | 3 | 13 | 8.5 |
| | M12x1.5 | 1.5 | HC10099L24-I1.50ISOTM... | 10 | 9.90 | 73 | 24.7 | 4 | 16 | 10.5 |
| | M14x1.5 | 1.5 | HC12119L29-I1.50ISOTM... | 12 | 11.90 | 80 | 29.2 | 4 | 19 | 12.5 |
| | M16x1.5 | 1.5 | HC14139L32-I1.50ISOTM... | 14 | 13.90 | 92 | 32.2 | 4 | 21 | 14.5 |
| M12x1.75 | | 1.75 | HC10099L25-I1.75ISOTM... | 10 | 9.90 | 73 | 25.4 | 4 | 14 | 10.2 |
| M14x2.0 | M17-M80x2.0 | 2.0 | HC12116L29-I2.00ISOTM... | 12 | 11.60 | 80 | 29.0 | 4 | 14 | 12.0 |
| M16x2.0 | M17-M80x2.0 | 2.0 | HC14136L33-I2.00ISOTM... | 14 | 13.60 | 92 | 33.0 | 4 | 16 | 14.0 |
| M18x2.5 | | 2.5 | HC16148L36-I2.50ISOTM... | 16 | 14.80 | 92 | 36.2 | 4 | 14 | 15.5 |
| M20x2.5 | | 2.5 | HC18171L41-I2.50ISOTM... | 18 | 17.10 | 102 | 41.2 | 4 | 16 | 17.5 |
| M24x3.0 | | 3.0 | HC20199L49-I3.00ISOTM... | 20 | 19.90 | 102 | 49.5 | 4 | 16 | 21.0 |

* Bore diameter applies to smallest thread dia.

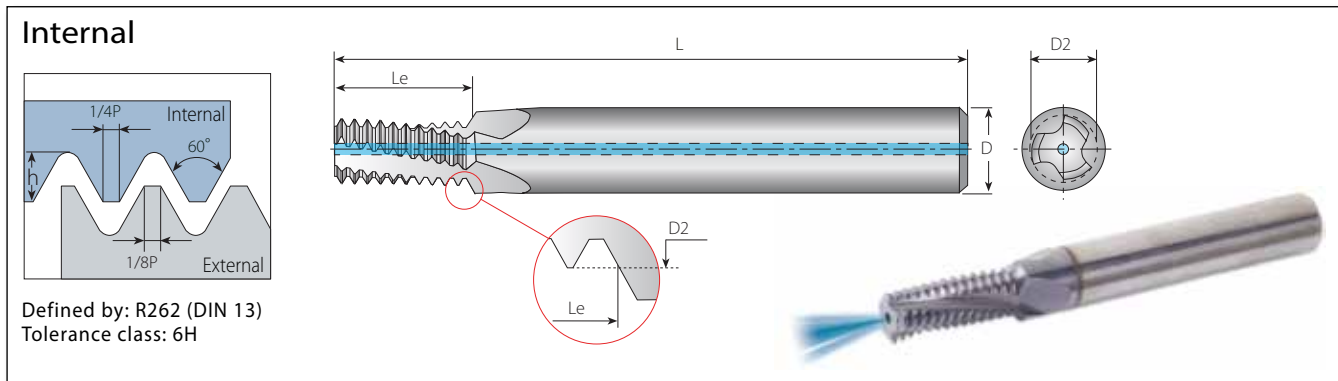


Helical Flutes with Thru-Hole Coolant

3 x Do (Le ≤ 3.0 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|----------|--------------|-------|--------------------------|---------------|-------|-----|---------------|-------|------------|------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | Le** | Z | Zt | mm |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | HC04024L09-I0.50ISOTM... | 4 | 2.40 | 45 | 9.25 | 3 | 18 | 2.5 |
| M4x0.7 | | 0.7 | HC04031L12-I0.70ISOTM... | 4 | 3.15 | 47 | 12.95 | 3 | 18 | 3.3 |
| M5x0.8 | | 0.8 | HC04039L15-I0.80ISOTM... | 4 | 3.90 | 50 | 15.60 | 3 | 19 | 4.2 |
| M6x1.0 | M8-M40x1.0 | 1.0 | HC06048L18-I1.00ISOTM... | 6 | 4.80 | 60 | 18.50 | 3 | 18 | 5.0 |
| M8x1.25 | | 1.25 | HC08065L25-I1.25ISOTM... | 8 | 6.50 | 66 | 25.63 | 3 | 20 | 6.8 |
| M10x1.5 | M12-M48x1.5 | 1.5 | HC10082L30-I1.50ISOTM... | 10 | 8.20 | 75 | 30.75 | 3 | 20 | 8.5 |
| M12x1.75 | | 1.75 | HC10099L36-I1.75ISOTM... | 10 | 9.90 | 86 | 37.63 | 4 | 21 | 10.2 |
| M16x2.0 | M17-M80x2.0 | 2.0 | HC14136L48-I2.00ISOTM... | 14 | 13.60 | 108 | 49.00 | 4 | 24 | 14.0 |

** Above solid carbide tools (Le=3xDo) are suitable for light machining only. Reduce feed by 30%.

* Bore diameter applies to smallest thread dia.

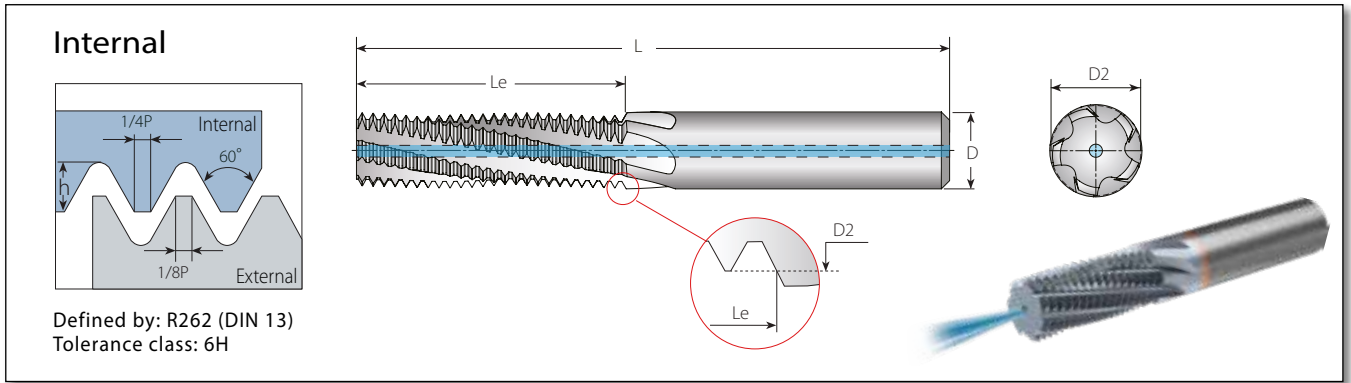

Helical Flutes with Thru-Hole Coolant


2 x Do (Le ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|----------|--------------|-------|---------------------------|---------------|-------|----|------|---------------|-------|------------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | Le | Z | Zt | mm |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | HC04024L06-I0.50ISOTM5... | 4 | 2.40 | 45 | 6.2 | 5 | 12 | 2.5 |
| | M4x0.5 | 0.5 | HC04032L08-I0.50ISOTM6... | 4 | 3.20 | 45 | 8.2 | 6 | 16 | 3.5 |
| M4x0.7 | | 0.7 | HC04031L08-I0.70ISOTM5... | 4 | 3.15 | 45 | 8.7 | 5 | 12 | 3.3 |
| | M6x0.75 | 0.75 | HC06050L12-I0.75ISOTM6... | 6 | 5.00 | 57 | 12.4 | 6 | 16 | 5.3 |
| M5x0.8 | | 0.8 | HC04039L10-I0.80ISOTM6... | 4 | 3.90 | 45 | 10.8 | 6 | 13 | 4.2 |
| M6x1.0 | M8-M40x1.0 | 1.0 | HC06048L12-I1.00ISOTM6... | 6 | 4.80 | 57 | 12.5 | 6 | 12 | 5.0 |
| M8x1.25 | | 1.25 | HC08065L16-I1.25ISOTM6... | 8 | 6.50 | 61 | 16.9 | 6 | 13 | 6.8 |
| M10x1.5 | M12-M48x1.5 | 1.5 | HC10082L20-I1.50ISOTM7... | 10 | 8.20 | 73 | 20.2 | 7 | 13 | 8.5 |
| M12x1.75 | | 1.75 | HC10099L25-I1.75ISOTM7... | 10 | 9.90 | 73 | 25.4 | 7 | 14 | 10.2 |
| M14x2.0 | M17-M80x2.0 | 2.0 | HC12116L29-I2.00ISOTM6... | 12 | 11.60 | 80 | 29.0 | 6 | 14 | 12.0 |
| M16x2.0 | M17-M80x2.0 | 2.0 | HC14136L33-I2.00ISOTM7... | 14 | 13.60 | 92 | 33.0 | 7 | 16 | 14.0 |

Helical Flutes with Thru-Hole Coolant

3x Do (Le ≤ 3 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|----------|--------------|-------|---------------------------|---------------|-------|-----|------|---------------|-------|------------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | Le | Z | Zt | mm |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | HC04024L09-I0.50ISOTM4... | 4 | 2.40 | 45 | 9.3 | 4 | 18 | 2.5 |
| | M4x0.5 | 0.5 | HC04032L12-I0.50ISOTM5... | 4 | 3.20 | 45 | 12.2 | 5 | 24 | 3.5 |
| M4x0.7 | | 0.7 | HC04031L12-I0.70ISOTM4... | 4 | 3.15 | 47 | 13.0 | 4 | 18 | 3.3 |
| | M6x0.75 | 0.75 | HC06050L18-I0.75ISOTM5... | 6 | 5.00 | 60 | 18.4 | 5 | 24 | 5.3 |
| M5x0.8 | | 0.8 | HC04039L15-I0.80ISOTM5... | 4 | 3.90 | 50 | 15.6 | 5 | 19 | 4.2 |
| M6x1.0 | M8-M40x1.0 | 1.0 | HC06048L18-I1.00ISOTM5... | 6 | 4.80 | 60 | 18.5 | 5 | 18 | 5.0 |
| M8x1.25 | | 1.25 | HC08065L25-I1.25ISOTM5... | 8 | 6.50 | 66 | 25.7 | 5 | 20 | 6.8 |
| M10x1.5 | M12-M48x1.5 | 1.5 | HC10082L30-I1.50ISOTM5... | 10 | 8.20 | 75 | 30.8 | 5 | 20 | 8.5 |
| M12x1.75 | | 1.75 | HC10099L36-I1.75ISOTM5... | 10 | 9.90 | 86 | 37.7 | 5 | 21 | 10.2 |
| M14x2.0 | M17-M80x2.0 | 2.0 | HC12116L42-I2.00ISOTM5... | 12 | 11.60 | 102 | 43.0 | 5 | 21 | 12.0 |
| M16x2.0 | M17-M80x2.0 | 2.0 | HC14136L48-I2.00ISOTM5... | 14 | 13.60 | 108 | 49.0 | 5 | 24 | 14.0 |

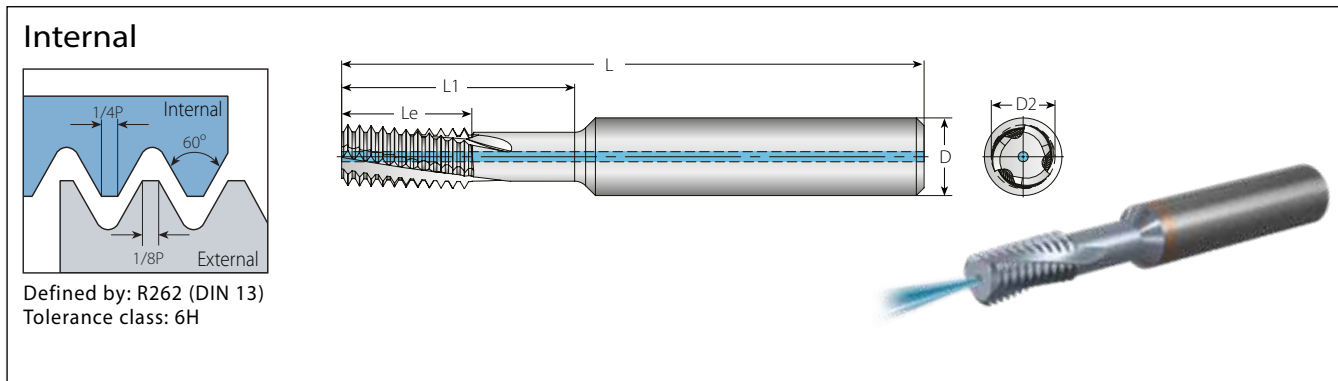


Helical Flutes with Relief Neck

3 x Do (L1 ≤ 3.0 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | | No. of Flutes | Teeth | Bore Dia.* |
|----------|--------------|-------|---------------------------|---------------|-------|-----|-------|----|---------------|-------|------------|
| Coarse | Fine | mm | Internal | D | D2 | L | Le | L1 | Z | Zt | mm |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | HCN04024L09-I0.50ISOTM... | 4 | 2.40 | 45 | 5.0 | 9 | 3 | 10 | 2.5 |
| M4x0.7 | | 0.7 | HCN04031L12-I0.70ISOTM... | 4 | 3.15 | 47 | 7.0 | 12 | 3 | 10 | 3.3 |
| M5x0.8 | | 0.8 | HCN04039L15-I0.80ISOTM... | 4 | 3.90 | 50 | 8.8 | 15 | 3 | 11 | 4.2 |
| M6x1.0 | M8-M40x1.0 | 1.0 | HCN06048L18-I1.00ISOTM... | 6 | 4.80 | 60 | 10.0 | 18 | 3 | 10 | 5.0 |
| | M8-M40x1.0 | 1.0 | HCN08067L24-I1.00ISOTM... | 8 | 6.70 | 66 | 13.0 | 24 | 4 | 13 | 7.0 |
| | M10-M40x1.0 | 1.0 | HCN10087L30-I1.00ISOTM... | 10 | 8.70 | 75 | 17.0 | 30 | 4 | 17 | 9.0 |
| M8x1.25 | | 1.25 | HCN08065L24-I1.25ISOTM... | 8 | 6.50 | 66 | 13.75 | 24 | 3 | 11 | 6.8 |
| M10x1.5 | M12-M48x1.5 | 1.5 | HCN10082L30-I1.50ISOTM... | 10 | 8.20 | 75 | 16.5 | 30 | 3 | 11 | 8.5 |
| | M12-M48x1.5 | 1.5 | HCN10099L36-I1.50ISOTM... | 10 | 9.90 | 86 | 19.5 | 36 | 4 | 13 | 10.5 |
| | M14-M48x1.5 | 1.5 | HCN12119L42-I1.50ISOTM... | 12 | 11.90 | 92 | 22.5 | 42 | 4 | 15 | 12.5 |
| M16x1.75 | M16-M48x1.5 | 1.5 | HCN14139L48-I1.50ISOTM... | 14 | 13.90 | 102 | 25.5 | 48 | 5 | 17 | 14.5 |
| | | 1.75 | HCN10099L36-I1.75ISOTM... | 10 | 9.90 | 86 | 19.25 | 36 | 4 | 11 | 10.2 |
| M14x2.0 | M17-M80x2.0 | 2.0 | HCN12116L42-I2.00ISOTM... | 12 | 11.60 | 92 | 24.0 | 42 | 4 | 12 | 12.0 |
| M16x2.0 | M17-M80x2.0 | 2.0 | HCN14136L48-I2.00ISOTM... | 14 | 13.60 | 102 | 26.0 | 48 | 4 | 13 | 14.0 |

American UN

Helicool

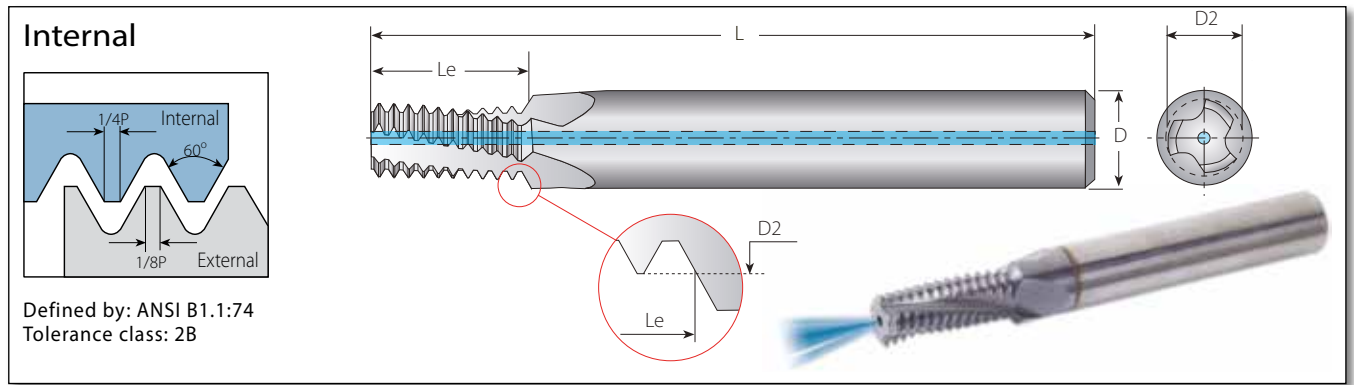

Helical Flutes with Thru-Hole Coolant

1.5 x Do (Le ≤ 1.5 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* | |
|----------|----------------|--------------------|---------------|------------------------|----|-------|----|---------------|-------|------------|------|
| UNC | UNF | UNEF | TPI | Internal | D | D2 | L | Le | Z | Zt | mm |
| No.10-24 | 5/16", 3/8"x24 | 9/16"-11/16"x24 | 24 | HC04035L07-I24UNCTM... | 4 | 3.58 | 45 | 7.9 | 3 | 7 | 3.8 |
| No.12-24 | 5/16", 3/8"x24 | 9/16"-11/16"x24 | 24 | HC06041L08-I24UNCTM... | 6 | 4.15 | 57 | 9.0 | 3 | 8 | 4.5 |
| 1/4"x20 | 7/16", 1/2"x20 | 3/4"-1"x20 | 20 | HC06048L09-I20UNCTM... | 6 | 4.88 | 57 | 9.5 | 3 | 7 | 5.2 |
| 5/16"x18 | 9/16", 5/8"x18 | 11/16"-1 1/16" x18 | 18 | HC08061L11-I18UNCTM... | 8 | 6.15 | 61 | 12.0 | 3 | 8 | 6.5 |
| 3/8"x16 | 3/4"x16 | | 16 | HC08076L15-I16UNCTM... | 8 | 7.65 | 61 | 15.1 | 3 | 9 | 8.0 |
| 7/16"x14 | 7/8"x14 | | 14 | HC10090L17-I14UNCTM... | 10 | 9.00 | 73 | 17.2 | 3 | 9 | 9.3 |
| 1/2"x13 | | | 13 | HC12104L20-I13UNCTM... | 12 | 10.35 | 73 | 20.5 | 4 | 10 | 10.8 |
| 9/16"x12 | 1"-1 1/2"x12 | | 12 | HC12118L22-I12UNCTM... | 12 | 11.80 | 73 | 22.2 | 4 | 10 | 12.3 |

Helical Flutes with Thru-Hole Coolant

2 x Do (Le ≤ 2 x Thread Diameter)


| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* | |
|----------|----------------|-------------------|---------------|-------------------------|----|-------|-----|---------------|-------|------------|------|
| UNC | UNF | UNEF | TPI | Internal | D | D2 | L | Le | Z | Zt | mm |
| | No.10-32 | No.12-3/8"x32 | 32 | HC04038L09-I32UNFTM... | 4 | 3.80 | 45 | 9.9 | 3 | 12 | 4.0 |
| | | No.12-3/8"x32 | 32 | HC06044L11-I32UNEFTM... | 6 | 4.40 | 57 | 11.5 | 3 | 14 | 4.7 |
| | No.12, 1/4"x28 | 7/16", 1/2"x28 | 28 | HC06043L11-I28UNFTM... | 6 | 4.30 | 57 | 11.3 | 3 | 12 | 4.6 |
| | 1/4"x28 | 7/16", 1/2"x28 | 28 | HC06052L13-I28UNFTM... | 6 | 5.15 | 57 | 13.1 | 3 | 14 | 5.5 |
| | | 7/16", 1/2"x28 | 28 | HC10099L22-I28UNEFTM... | 10 | 9.90 | 73 | 22.2 | 3 | 24 | 10.2 |
| No.10-24 | 5/16", 3/8"x24 | 9/16"-11/16"x24 | 24 | HC04035L10-I24UNCTM... | 4 | 3.58 | 45 | 10.0 | 3 | 9 | 3.8 |
| No.12-24 | 5/16", 3/8"x24 | 9/16"-11/16"x24 | 24 | HC06041L11-I24UNCTM... | 6 | 4.15 | 57 | 11.1 | 3 | 10 | 4.5 |
| | 5/16", 3/8"x24 | 9/16"-11/16"x24 | 24 | HC08066L16-I24UNFTM... | 8 | 6.68 | 61 | 16.4 | 3 | 15 | 6.8 |
| | 3/8"x24 | 9/16"-11/16"x24 | 24 | HC10082L19-I24UNFTM... | 10 | 8.20 | 73 | 19.6 | 3 | 18 | 8.5 |
| | | 9/16"-11/16"x24 | 24 | HC14129L29-I24UNEFTM... | 14 | 12.90 | 92 | 29.1 | 4 | 27 | 13.2 |
| 1/4"x20 | 7/16", 1/2"x20 | 3/4"-1"x20 | 20 | HC06048L13-I20UNCTM... | 6 | 4.88 | 57 | 13.3 | 3 | 10 | 5.2 |
| | 7/16", 1/2"x20 | 3/4"-1"x20 | 20 | HC10096L22-I20UNFTM... | 10 | 9.60 | 73 | 22.2 | 3 | 17 | 9.8 |
| | 1/2"x20 | 3/4"-1"x20 | 20 | HC12111L26-I20UNFTM... | 12 | 11.10 | 80 | 26.0 | 4 | 20 | 11.5 |
| | | 3/4"-1"x20 | 20 | HC18174L38-I20UNEFTM... | 18 | 17.40 | 102 | 38.7 | 4 | 30 | 17.8 |
| 5/16"x18 | 9/16", 5/8"x18 | 11/16"-1 1/16"x18 | 18 | HC08061L16-I18UNCTM... | 8 | 6.15 | 61 | 16.2 | 3 | 11 | 6.5 |
| | 9/16", 5/8"x18 | 11/16"-1 1/16"x18 | 18 | HC14125L28-I18UNFTM... | 14 | 12.50 | 92 | 28.9 | 4 | 20 | 12.8 |
| | 5/8"x18 | 11/16"-1 1/16"x18 | 18 | HC16141L31-I18UNFTM... | 16 | 14.10 | 92 | 31.7 | 4 | 22 | 14.5 |
| 3/8"x16 | 3/4"x16 | | 16 | HC08076L19-I16UNCTM... | 8 | 7.65 | 61 | 19.8 | 3 | 12 | 8.0 |
| | 3/4"x16 | | 16 | HC18170L38-I16UNFTM... | 18 | 17.00 | 102 | 38.8 | 4 | 24 | 17.5 |
| 7/16"x14 | 7/8"x14 | | 14 | HC10090L22-I14UNCTM... | 10 | 9.00 | 73 | 22.7 | 3 | 12 | 9.3 |
| | 7/8"x14 | | 14 | HC20199L44-I14UNFTM... | 20 | 19.90 | 102 | 44.4 | 4 | 24 | 20.5 |
| 1/2"x13 | | | 13 | HC12104L26-I13UNCTM... | 12 | 10.35 | 80 | 26.4 | 4 | 13 | 10.8 |
| 9/16"x12 | 1"-1 1/2"x12 | | 12 | HC12118L28-I12UNCTM... | 12 | 11.80 | 80 | 28.6 | 4 | 13 | 12.3 |
| | 1"-1 1/2"x12 | | 12 | HC20199L51-I12UNFTM... | 20 | 19.90 | 102 | 51.9 | 4 | 24 | 23.5 |
| 5/8"x11 | | | 11 | HC14131L33-I11UNCTM... | 14 | 13.10 | 92 | 33.5 | 4 | 14 | 13.5 |
| 3/4"x10 | | | 10 | HC16159L39-I10UNCTM... | 16 | 15.90 | 92 | 39.4 | 4 | 15 | 16.5 |
| 7/8"x9 | | | 9 | HC20190L46-I9UNCTM... | 20 | 19.00 | 102 | 46.6 | 4 | 16 | 19.5 |
| 1"x8 | | | 8 | HC20199L52-I8UNCTM... | 20 | 19.90 | 102 | 52.4 | 4 | 16 | 22.0 |

* Bore diameter applies to smallest thread dia.


Whitworth

Helicool

External / Internal



Defined by: B.S.84:1956,
DIN 259, ISO228/1:1982
Tolerance class: Medium class A

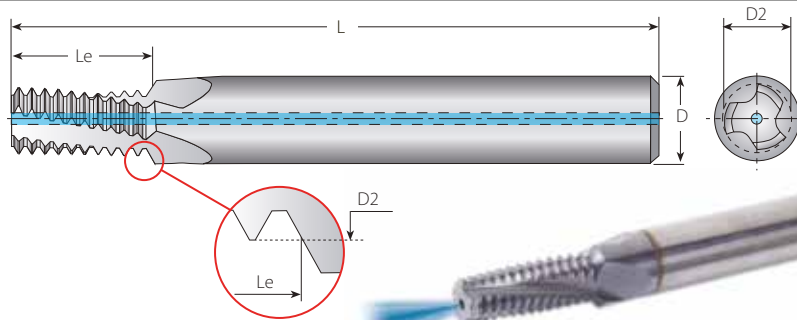

Helical Flutes with Thru-Hole Coolant


2 x Do (Le ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|-----------|-----------------|-------|-------------------------|---------------|-------|-----|------|---------------|-------|------------|
| BSW | BSF | TPI | External / Internal | D | D2 | L | Le | Z | Zt | mm |
| | 1/4"x26 | 26 | HC06050L13-EI26BSFTM... | 6 | 5.00 | 57 | 13.2 | 3 | 13 | 5.3 |
| | 5/16"x22 | 22 | HC08063L16-EI22BSFTM... | 8 | 6.35 | 61 | 16.7 | 3 | 14 | 6.7 |
| 1/4"x20 | 3/8"x20 | 20 | HC06044L13-EI20BSWTM... | 6 | 4.45 | 57 | 13.3 | 3 | 10 | 5.0 |
| | 3/8"x20 | 20 | HC08076L19-EI20BSFTM... | 8 | 7.65 | 61 | 19.7 | 3 | 15 | 8.2 |
| 5/16"x18 | 7/16"x18 | 18 | HC06058L16-EI18BSWTM... | 6 | 5.85 | 57 | 16.2 | 3 | 11 | 6.5 |
| | 7/16"x18 | 18 | HC10092L23-EI18BSFTM... | 10 | 9.20 | 73 | 23.3 | 3 | 16 | 9.7 |
| 3/8"x16 | 1/2", 9/16"x16 | 16 | HC08072L19-EI16BSWTM... | 8 | 7.20 | 61 | 19.8 | 3 | 12 | 7.9 |
| | 1/2", 9/16"x16 | 16 | HC12105L26-EI16BSFTM... | 12 | 10.50 | 80 | 26.2 | 4 | 16 | 11.1 |
| | 9/16"x16 | 16 | HC14122L29-EI16BSFTM... | 14 | 12.15 | 92 | 29.4 | 4 | 18 | 12.6 |
| 7/16"x14 | 5/8", 11/16"x14 | 14 | HC10085L22-EI14BSWTM... | 10 | 8.50 | 73 | 22.7 | 3 | 12 | 9.2 |
| | 5/8", 11/16"x14 | 14 | HC14134L31-EI14BSFTM... | 14 | 13.40 | 92 | 31.7 | 4 | 17 | 14.0 |
| | 11/16"x14 | 14 | HC16150L35-EI14BSFTM... | 16 | 15.00 | 92 | 35.4 | 4 | 19 | 15.6 |
| 1/2"x12 | 3/4"x12 | 12 | HC10096L26-EI12BSWTM... | 10 | 9.65 | 73 | 26.5 | 3 | 12 | 10.5 |
| 9/16"x12 | 3/4"x12 | 12 | HC12113L28-EI12BSWTM... | 12 | 11.25 | 80 | 28.6 | 4 | 13 | 12.1 |
| | 3/4"x12 | 12 | HC18162L39-EI12BSFTM... | 18 | 16.20 | 102 | 39.2 | 4 | 18 | 16.8 |
| 5/8"x11 | 7/8"x11 | 11 | HC14126L33-EI11BSWTM... | 14 | 12.60 | 92 | 33.5 | 4 | 14 | 13.4 |
| 11/16"x11 | | 11 | HC16142L35-EI11BSWTM... | 16 | 14.20 | 92 | 35.8 | 4 | 15 | 15.0 |

* Bore diameter applies to smallest thread dia.

BSP (G)

Helicool

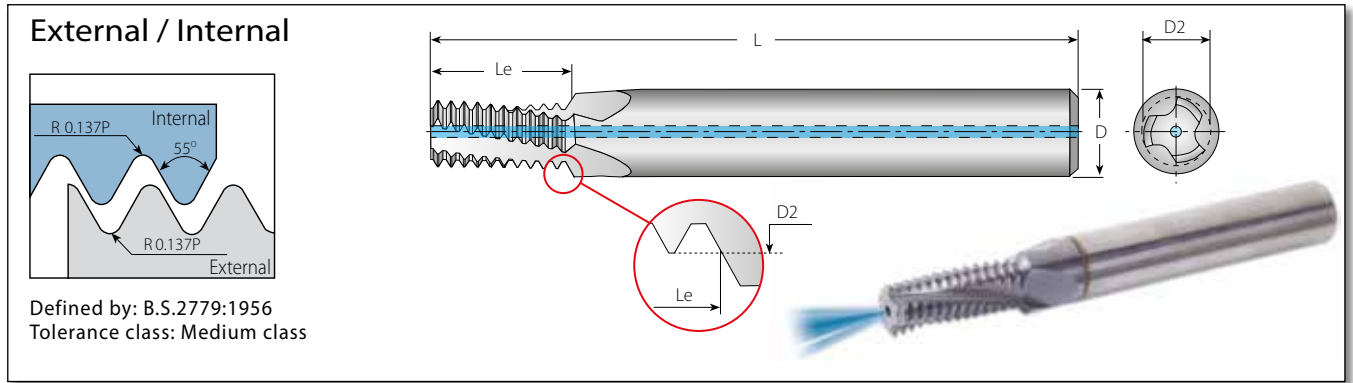

Helical Flutes with Thru-Hole Coolant

1.5 x Do (Le ≤ 1.5 x Thread Diameter)

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|----------------|-------|-------------------------|---------------|-------|-----|------|---------------|-------|------------|
| Standard | TPI | External / Internal | D | D2 | L | Le | Z | Zt | mm |
| 1/16", 1/8"x28 | 28 | HC08064L12-EI28BSPTM... | 8 | 6.40 | 61 | 12.2 | 3 | 13 | 6.7 |
| 1/8"x28 | 28 | HC10082L15-EI28BSPTM... | 10 | 8.20 | 73 | 15.0 | 3 | 16 | 8.7 |
| 1/4", 3/8"x19 | 19 | HC12110L20-EI19BSPTM... | 12 | 11.00 | 80 | 20.7 | 4 | 15 | 11.8 |
| 3/8"x19 | 19 | HC16145L26-EI19BSPTM... | 16 | 14.50 | 92 | 26.1 | 4 | 19 | 15.2 |
| 1"-4"x11 | 11 | HC20199L42-EI11BSPTM... | 20 | 19.90 | 102 | 42.7 | 4 | 18 | 30.7 |

Helical Flutes with Thru-Hole Coolant

2 x Do (Le ≤ 2 x Thread Diameter)


| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|----------------|-------|-------------------------|---------------|-------|-----|------|---------------|-------|------------|
| Standard | TPI | External / Internal | D | D2 | L | Le | Z | Zt | mm |
| 1/16", 1/8"x28 | 28 | HC08064L15-EI28BSPTM... | 8 | 6.40 | 61 | 15.9 | 3 | 17 | 6.7 |
| 1/8"x28 | 28 | HC10082L19-EI28BSPTM... | 10 | 8.20 | 73 | 19.5 | 3 | 21 | 8.7 |
| 1/4", 3/8"x19 | 19 | HC12110L27-EI19BSPTM... | 12 | 11.00 | 80 | 27.4 | 4 | 20 | 11.8 |
| 3/8"x19 | 19 | HC16145L34-EI19BSPTM... | 16 | 14.50 | 92 | 34.1 | 4 | 25 | 15.2 |
| 1/2"-7/8"x14 | 14 | HC18179L42-EI14BSPTM... | 18 | 17.90 | 102 | 42.6 | 4 | 23 | 19.0 |

* Bore diameter applies to smallest thread dia.


NPT

Helicool

External / Internal



Defined by: USAS B2.1:1968
Tolerance class: Standard NPT

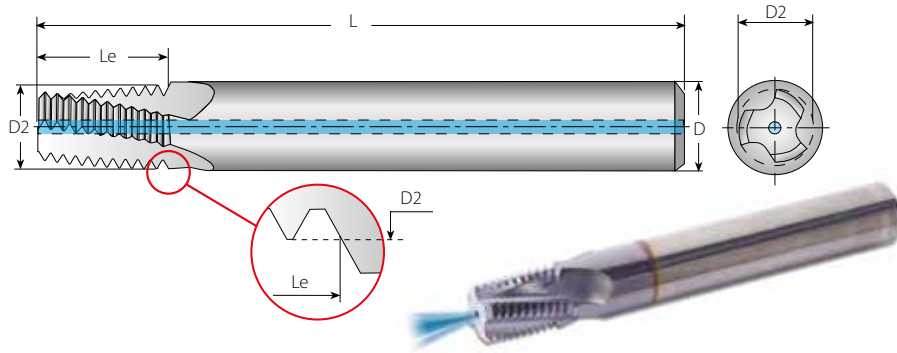


Helical Flutes with Thru-Hole Coolant

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|-----------------------------|-------|----------------------------|---------------|-------|-----|------|---------------|-------|------------------------|
| | | | D | D2 | L | Le | | | |
| Standard | TPI | External / Internal | | | | | Z | Zt | mm |
| 1/16"x27 | 27 | HC06059L09-EI27NPT-TM... | 6 | 5.90 | 57 | 9.9 | 3 | 10 | 6.3 |
| 1/8"x27 | 27 | HC08076L09-EI27NPT-TM... | 8 | 7.65 | 61 | 9.9 | 3 | 10 | 8.5 |
| 1/4"x18 | 18 | HC10099L14-EI18NPT-TM... | 10 | 9.90 | 73 | 14.8 | 3 | 10 | 11.1 |
| 3/8"x18 | 18 | HC12111L14-EI18NPT-TM... | 12 | 11.15 | 73 | 14.8 | 4 | 10 | 14.5 |
| 1/2", 3/4"x14 | 14 | HC16142L19-EI14NPT-TM... | 16 | 14.25 | 92 | 19.0 | 4 | 10 | 17.7, 23.0 |
| 1", 1 1/4", 1 1/2", 2"x11.5 | 11.5 | HC20196L23-EI11.5NPT-TM... | 20 | 19.60 | 102 | 23.2 | 4 | 10 | 29.0, 37.7, 44.0, 56.0 |
| 2 1/2", 3"x8 | 8 | HC20196L33-EI8NPT-TM... | 20 | 19.60 | 102 | 33.3 | 4 | 10 | 66.5, 82.1 |


ANPT

Helicool

External / Internal



Defined by: MIL-P-7105B
Tolerance class: Standard ANPT

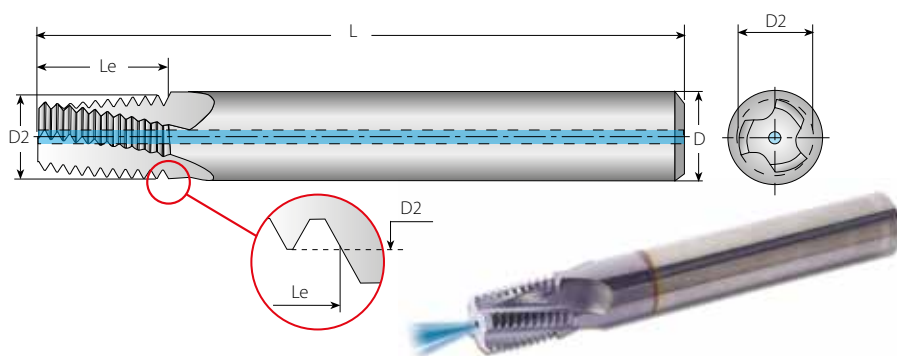

Helical Flutes with Thru-Hole Coolant

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|---------------|-------|---------------------------|---------------|-------|----|------|---------------|-------|-------------|
| | | | D | D2 | L | Le | | | |
| Standard | TPI | External / Internal | | | | | Z | Zt | mm |
| 1/4", 3/8"x18 | 18 | HC10099L14-EI18ANPT-TM... | 10 | 9.90 | 73 | 14.8 | 3 | 10 | 11.1 / 14.5 |
| 1/2", 3/4"x14 | 14 | HC14139L19-EI14ANPT-TM... | 14 | 13.90 | 92 | 19.0 | 4 | 10 | 17.7 / 23.0 |

* Bore diameter applies to smallest thread dia.

NPTF

Helicool

External / Internal

Defined by: ANSI 1.20.3-1976
Tolerance class: Standard NPTF

Helical Flutes with Thru-Hole Coolant

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|-----------------------------|-------|----------------------------|---------------|-------|-----|------|---------------|-------|------------------------|
| Standard | TPI | External / Internal | D | D2 | L | Le | Z | Zt | mm |
| 1/16"x27 | 27 | HC06059L09-EI27NPTFTM... | 6 | 5.90 | 57 | 9.9 | 3 | 10 | 6.3 |
| 1/8"x27 | 27 | HC08076L09-EI27NPTFTM... | 8 | 7.65 | 61 | 9.9 | 3 | 10 | 8.4 |
| 1/4"x18 | 18 | HC10099L14-EI18NPTFTM... | 10 | 9.90 | 73 | 14.8 | 3 | 10 | 11.1 |
| 3/8"x18 | 18 | HC12111L14-EI18NPTFTM... | 12 | 11.15 | 73 | 14.8 | 4 | 10 | 14.7 |
| 1/2", 3/4"x14 | 14 | HC16142L19-EI14NPTFTM... | 16 | 14.25 | 92 | 19.0 | 4 | 10 | 17.9, 23.4 |
| 1", 1 1/4", 1 1/2", 2"x11.5 | 11.5 | HC20196L23-EI11.5NPTFTM... | 20 | 19.60 | 102 | 23.2 | 4 | 10 | 29.0, 37.7, 43.7, 55.6 |
| 2 1/2", 3"x8 | 8 | HC20196L33-EI8NPTFTM... | 20 | 19.60 | 102 | 33.3 | 4 | 10 | 66.3, 82.1 |

BSPT

Helicool

External / Internal

Defined by: B.S.21:1985
Tolerance class: Standard BSPT

Helical Flutes with Thru-Hole Coolant

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|---------------------------|-------|---------------------------|---------------|-------|-----|------|---------------|-------|------------|
| Standard | TPI | External / Internal | D | D2 | L | Le | Z | Zt | mm |
| 1/16"x28 | 28 | HC06059L10-EI28BSPT-TM... | 6 | 5.90 | 57 | 10.2 | 3 | 11 | 6.7 |
| 1/8"x28 | 28 | HC08076L10-EI28BSPT-TM... | 8 | 7.65 | 61 | 10.2 | 3 | 11 | 8.7 |
| 1/4"x19 | 19 | HC10099L15-EI19BSPT-TM... | 10 | 9.90 | 73 | 15.4 | 4 | 11 | 11.8 |
| 3/8"x19 | 19 | HC12111L15-EI19BSPT-TM... | 12 | 11.15 | 73 | 15.4 | 4 | 11 | 15.2 |
| 1/2", 3/4"x14 | 14 | HC16142L22-EI14BSPT-TM... | 16 | 14.25 | 92 | 22.7 | 4 | 12 | 19.0 |
| 1", 1 1/2", 2", 2 1/2"x11 | 11 | HC20196L28-EI11BSPT-TM... | 20 | 19.60 | 102 | 28.9 | 4 | 12 | 30.7 |

* Bore diameter applies to smallest thread dia.

UNJ

Helicool

Internal

Defined by: MIL-S-8879C
Tolerance class: 3B

Helical Flutes with Thru-Hole Coolant

2 x Do (Le ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | | | |
|-----------------|-----------------|-------------------|-----------------|---------------|------------------------|----|---------------|-------|------------|---|----|------|
| UNJC | UNJF | UNJEF | UNJ | TPI | Internal | D | D2 | L | Le | Z | Zt | mm |
| 0.138" (#6) | 0.190" (#10) | 0.216" (#12) | 0.4375" (7/16") | 32 | HC04027L07-I32UNJTM... | 4 | 2.70 | 45 | 7.5 | 3 | 9 | 2.8 |
| - | 0.250" (1/4") | 0.4375" (7/16") | 0.5625" (9/16") | 28 | HC06054L13-I28UNJTM... | 6 | 5.40 | 57 | 13.1 | 3 | 14 | 5.6 |
| 0.190" (#10) | 0.3125" (5/16") | 0.5625" (9/16") | - | 24 | HC04037L09-I24UNJTM... | 4 | 3.70 | 45 | 10.0 | 3 | 9 | 4.0 |
| - | 0.3125" (5/16") | 0.5625" (9/16") | - | 24 | HC08067L15-I24UNJTM... | 8 | 6.70 | 61 | 16.4 | 3 | 15 | 7.0 |
| 0.250" (1/4") | 0.4375" (7/16") | 0.750" (3/4") | 0.3125" (5/16") | 20 | HC06050L12-I20UNJTM... | 6 | 5.00 | 57 | 13.3 | 3 | 10 | 5.3 |
| - | 0.4375" (7/16") | 0.750" (3/4") | 0.5625" (9/16") | 20 | HC10096L21-I20UNJTM... | 10 | 9.60 | 73 | 22.2 | 4 | 17 | 10.0 |
| 0.3125" (5/16") | 0.5625" (9/16") | 1.0625" (1 1/16") | - | 18 | HC08064L15-I18UNJTM... | 8 | 6.40 | 61 | 16.2 | 3 | 11 | 6.75 |
| 0.375" (3/8") | 0.750" (3/4") | - | 0.4375" (7/16") | 16 | HC08077L19-I16UNJTM... | 8 | 7.70 | 61 | 19.8 | 3 | 12 | 8.1 |
| 0.4375" (7/16") | 0.875" (7/8") | - | - | 14 | HC10092L21-I14UNJTM... | 10 | 9.20 | 73 | 22.7 | 4 | 12 | 9.5 |
| 0.500" (1/2") | - | - | - | 13 | HC10099L25-I13UNJTM... | 10 | 9.90 | 73 | 26.4 | 4 | 13 | 11.0 |

NPS

Helicool

External / Internal

Defined by: USA NBS H28 (1957)
Tolerance class: Standard NPS


Helical Flutes with Thru-Hole Coolant

| Thread | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* |
|------------|-------|---------------------------|---------------|-------|-----|---------------|-------|------------|
| Standard | TPI | External / Internal | D | D2 | L | Le | Zt | mm |
| 1/8" | 27 | HC08076L09-EI27NPSTM... | 8 | 7.65 | 61 | 9.9 | 10 | 8.5 |
| 1/4" | 18 | HC10099L14-EI18NPSTM... | 10 | 9.90 | 73 | 14.8 | 10 | 11.1 |
| 3/8" | 18 | HC12111L14-EI18NPSTM... | 12 | 11.15 | 73 | 14.8 | 10 | 14.5 |
| 1/2", 3/4" | 14 | HC16142L18-EI14NPSTM... | 16 | 14.25 | 92 | 19.0 | 10 | 17.7; 23.0 |
| 1", 2" | 11.5 | HC20196L22-EI11.5NPSTM... | 20 | 19.60 | 102 | 23.2 | 10 | 29.0; 56.0 |

* Bore diameter applies to smallest thread dia.

ISO Metric

Helicool-R (HCR)

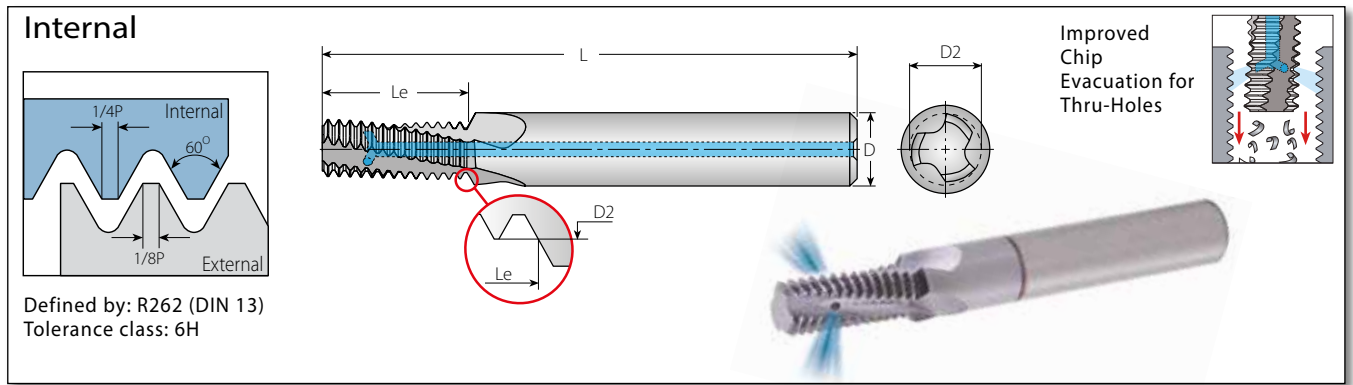

Helicool-R (HCR) Helical Flutes with Radial Cooling


$2 \times D_o$ ($Le \leq 2 \times \text{Thread Diameter}$)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | Flutes | Teeth | Bore Dia.* | |
|----------|-------------|-------|---------------------------|---------------|------|-----|--------|-------|------------|------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | Le | Z | Zt | mm |
| M6x1.0 | M8-M40x1.0 | 1.0 | HCR06048L12-I1.00ISOTM... | 6 | 4.8 | 57 | 12.5 | 3 | 12 | 5.0 |
| | M10x1.0 | 1.0 | HCR10087L20-I1.00ISOTM... | 10 | 8.7 | 73 | 20.5 | 3 | 20 | 9.0 |
| | M12x1.0 | 1.0 | HCR12107L24-I1.00ISOTM... | 12 | 10.7 | 73 | 24.5 | 4 | 24 | 11.0 |
| M8x1.25 | | 1.25 | HCR08065L16-I1.25ISOTM... | 8 | 6.5 | 64 | 16.9 | 3 | 13 | 6.8 |
| M10x1.5 | M12-M48x1.5 | 1.5 | HCR10082L20-I1.50ISOTM... | 10 | 8.2 | 73 | 20.3 | 3 | 13 | 8.5 |
| | M12x1.5 | 1.5 | HCR10099L24-I1.50ISOTM... | 10 | 9.9 | 73 | 24.8 | 4 | 16 | 10.5 |
| | M14x1.5 | 1.5 | HCR12119L29-I1.50ISOTM... | 12 | 11.9 | 84 | 29.3 | 4 | 19 | 12.5 |
| | M16x1.5 | 1.5 | HCR14139L32-I1.50ISOTM... | 14 | 13.9 | 84 | 32.3 | 4 | 21 | 14.5 |
| M12x1.75 | | 1.75 | HCR10099L25-I1.75ISOTM... | 10 | 9.9 | 73 | 25.4 | 4 | 14 | 10.2 |
| M14x2.0 | M17-M80x2.0 | 2.0 | HCR12116L29-I2.00ISOTM... | 12 | 11.6 | 80 | 29.0 | 4 | 14 | 12.0 |
| M16x2.0 | M17-M80x2.0 | 2.0 | HCR14136L33-I2.00ISOTM... | 14 | 13.6 | 92 | 33.0 | 4 | 16 | 14.0 |
| M20x2.5 | | 2.5 | HCR18171L41-I2.50ISOTM... | 18 | 17.1 | 102 | 41.2 | 4 | 16 | 17.5 |

* Bore diameter applies to smallest thread dia.

American UN

Helicool-R (HCR)

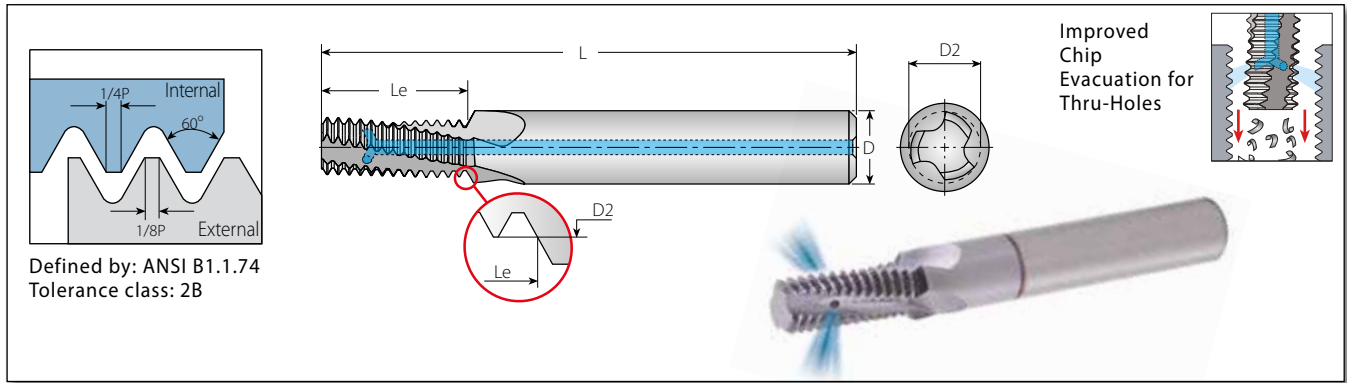


Helicool-R (HCR)

2 x Do (Le ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | | |
|----------|----------------|-------------------|---------------|-------------------------|----|-------|---------------|-------|------------|----|------|
| UNC | UNF | UNEF | TPI | Internal | D | D2 | L | Le | Z | Zt | mm |
| | 1/4"x28 | 7/16", 1/2"x28 | 28 | HCR06052L13-I28UNFTM... | 6 | 5.15 | 57 | 13.1 | 3 | 14 | 5.5 |
| | 5/16", 3/8"x24 | 9/16"-11/16"x24 | 24 | HCR08066L16-I24UNFTM... | 8 | 6.68 | 61 | 16.4 | 3 | 15 | 6.8 |
| | 3/8"x24 | 9/16"-11/16"x24 | 24 | HCR10082L19-I24UNFTM... | 10 | 8.20 | 73 | 19.6 | 3 | 18 | 8.5 |
| 1/4"x20 | 7/16", 1/2"x20 | 3/4"-1"x20 | 20 | HCR06048L13-I20UNCTM... | 6 | 4.88 | 57 | 13.3 | 3 | 10 | 5.2 |
| | 7/16", 1/2"x20 | 3/4"-1"x20 | 20 | HCR10096L22-I20UNFTM... | 10 | 9.60 | 73 | 22.2 | 3 | 17 | 9.8 |
| 5/16"x18 | 9/16", 5/8"x18 | 11/16"-1 1/16"x18 | 18 | HCR08061L16-I18UNCTM... | 8 | 6.15 | 61 | 16.2 | 3 | 11 | 6.5 |
| 3/8"x16 | 3/4"x16 | | 16 | HCR08076L19-I16UNCTM... | 8 | 7.65 | 61 | 19.8 | 3 | 12 | 8.0 |
| 7/16"x14 | 7/8"x14 | | 14 | HCR10090L22-I14UNCTM... | 10 | 9.00 | 73 | 22.7 | 3 | 12 | 9.3 |
| 1/2"x13 | | | 13 | HCR12104L26-I13UNCTM... | 12 | 10.35 | 80 | 26.4 | 4 | 13 | 10.8 |
| 9/16"x12 | 1"-1 1/2"x12 | | 12 | HCR12118L28-I12UNCTM... | 12 | 11.80 | 80 | 28.6 | 4 | 13 | 12.3 |
| 5/8"x11 | | | 11 | HCR14131L33-I11UNCTM... | 14 | 13.10 | 92 | 33.5 | 4 | 14 | 13.5 |
| 3/4"x10 | | | 10 | HCR16159L39-I10UNCTM... | 16 | 15.90 | 92 | 39.4 | 4 | 15 | 16.5 |
| 1"x8 | | | 8 | HCR20199L52-I8UNCTM... | 20 | 19.90 | 102 | 52.4 | 4 | 16 | 22.0 |

BSP (G)

Helicool-R (HCR)

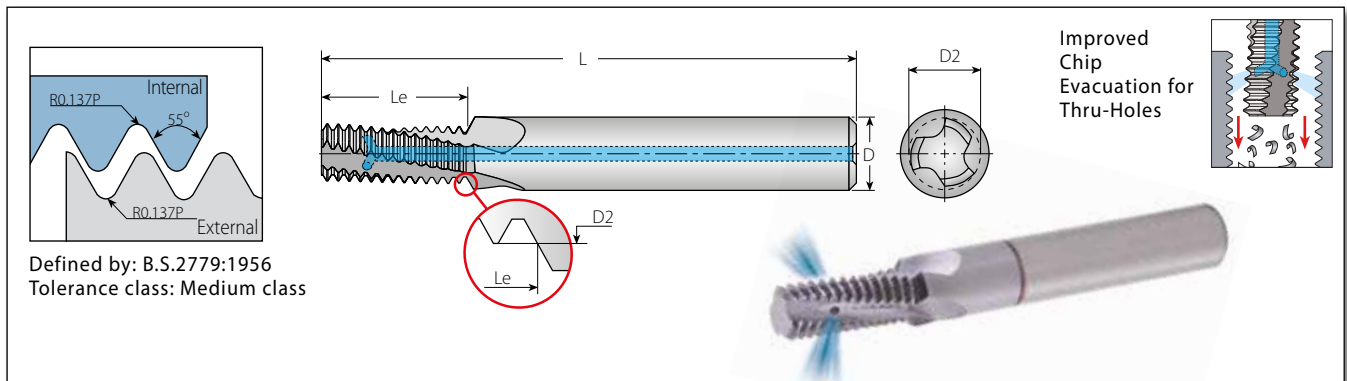

Helicool-R (HCR)


2 x Do (Le ≤ 2 x Thread Diameter)

| Thread | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|---------------|-------|--------------------------|---------------|-------|-----|---------------|-------|------------|------|
| Standard | TPI | Internal | D | D2 | L | Le | Z | Zt | mm |
| 1/8"x28 | 28 | HCR10082L19-EI28BSPTM... | 10 | 8.20 | 73 | 19.5 | 3 | 21 | 8.7 |
| 1/4", 3/8"x19 | 19 | HCR12110L27-EI19BSPTM... | 12 | 11.00 | 80 | 27.4 | 4 | 20 | 11.8 |
| 1/2"-7/8"x14 | 14 | HCR18179L42-EI14BSPTM... | 18 | 17.90 | 102 | 42.6 | 4 | 23 | 19.0 |

* Bore diameter applies to smallest thread dia.

NPT

Helicool-R (HCR)

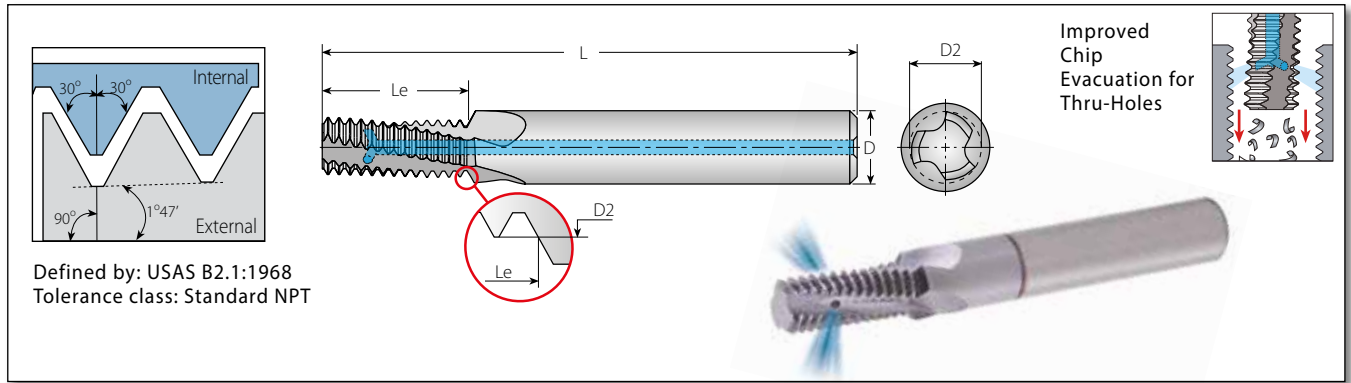


Helicool-R (HCR)

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|-----------------------------|-------|-----------------------------|---------------|-------|-----|------|---------------|-------|------------------------|
| Standard | TPI | Internal | D | D2 | L | Le | Z | Zt | mm |
| 1/16"x27 | 27 | HCR06059L09-EI27NPT-TM... | 6 | 5.90 | 57 | 9.9 | 3 | 10 | 6.3 |
| 1/8"x27 | 27 | HCR08076L09-EI27NPT-TM... | 8 | 7.65 | 61 | 9.9 | 3 | 10 | 8.5 |
| 1/4"x18 | 18 | HCR10099L14-EI18NPT-TM... | 10 | 9.90 | 73 | 14.8 | 3 | 10 | 11.1 |
| 3/8"x18 | 18 | HCR12111L14-EI18NPT-TM... | 12 | 11.15 | 73 | 14.8 | 4 | 10 | 14.5 |
| 1/2", 3/4"x14 | 14 | HCR16142L19-EI14NPT-TM... | 16 | 14.25 | 92 | 19.0 | 4 | 10 | 17.7, 23.0 |
| 1", 1 1/4", 1 1/2", 2"x11.5 | 11.5 | HCR20196L23-EI11.5NPT-TM... | 20 | 19.60 | 102 | 23.2 | 4 | 10 | 29.0, 37.7, 44.0, 56.0 |

BSPT

Helicool-R (HCR)

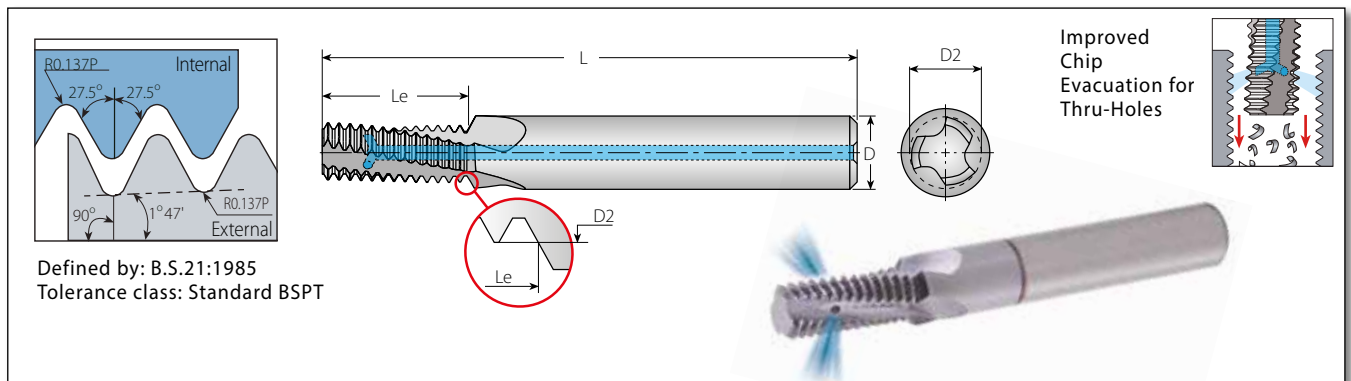

Helicool-R (HCR)

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|---------------|-------|----------------------------|---------------|-------|----|------|---------------|-------|------------|
| Standard | TPI | Internal | D | D2 | L | Le | Z | Zt | mm |
| 1/8"x28 | 28 | HCR08076L10-EI28BSPT-TM... | 8 | 7.65 | 61 | 10.2 | 3 | 11 | 8.7 |
| 1/4"x19 | 19 | HCR10099L15-EI19BSPT-TM... | 10 | 9.90 | 73 | 15.4 | 3 | 11 | 11.8 |
| 3/8"x19 | 19 | HCR12111L15-EI19BSPT-TM... | 12 | 11.15 | 73 | 15.4 | 4 | 11 | 15.2 |
| 1/2", 3/4"x14 | 14 | HCR16142L22-EI14BSPT-TM... | 16 | 14.25 | 92 | 22.7 | 4 | 12 | 19.0 |

UNJ

Helicool-R (HCR)

Defined by: MIL-S-8879C
Tolerance class: 3B

Improved Chip Evacuation for Thru-Holes

Helicool-R (HCR)

$2 \times Do$ ($Le \leq 2 \times \text{Thread Diameter}$)

| Thread | | Pitch | Ordering Code | Dimensions mm | | No. of Flutes | Teeth | Bore Dia.* | | | | |
|----------------|----------------|------------------|----------------|---------------|-------------------------|---------------|-------|------------|------|---|----|------|
| UNJC | UNJF | UNJEF | UNJ | TPI | Internal | D | D2 | L | Le | Z | Zt | mm |
| - | 0.250"(1/4") | 0.4375"(7/16") | 0.5625"(9/16") | 28 | HCR06054L13-I28UNJTM... | 6 | 5.40 | 57 | 13.1 | 3 | 14 | 5.6 |
| - | 0.3125"(5/16") | 0.5625"(9/16") | - | 24 | HCR08067L15-I24UNJTM... | 8 | 6.70 | 61 | 16.4 | 3 | 15 | 7.0 |
| - | 0.4375"(7/16") | 0.750"(3/4") | 0.5625"(9/16") | 20 | HCR10096L21-I20UNJTM... | 10 | 9.60 | 73 | 22.2 | 4 | 17 | 10.0 |
| 0.3125"(5/16") | 0.5625"(9/16") | 1.0625"(1 1/16") | - | 18 | HCR08064L15-I18UNJTM... | 8 | 6.40 | 61 | 16.2 | 3 | 11 | 6.75 |
| 0.375"(3/8") | 0.750"(3/4") | - | 0.4375"(7/16") | 16 | HCR08077L19-I16UNJTM... | 8 | 7.70 | 61 | 19.8 | 3 | 12 | 8.1 |

ISO Metric

Helicool-C (HCC)

Defined by: R262 (DIN 13)
Tolerance class: 6H

Dc = Minimum recommended chamfer diameter

Helicool-C (HCC)


Helical Flutes with Axial Coolant - Thru & Chamfer

$2 \times Do$ ($Le \leq 2 \times \text{Thread Diameter}$)

| Thread | | Pitch | Ordering Code | Dimensions mm | | No. of Flutes | Teeth | Bore Dia.* | | | | |
|----------|-------------|-------|---------------------------|---------------|------|---------------|-------|------------|------|---|----|------|
| M Coarse | M Fine | mm | Internal | D | D2 | Dc | L | Le | Lc | Z | Zt | mm |
| M6x1.0 | M8-M40x1.0 | 1.0 | HCC08048L12-I1.00ISOTM... | 8 | 4.8 | 6.3 | 61 | 12.5 | 13.3 | 3 | 12 | 5.0 |
| | M10x1.0 | 1.0 | HCC12087L20-I1.00ISOTM... | 12 | 8.7 | 10.3 | 73 | 20.5 | 21.3 | 3 | 20 | 9.0 |
| | M12x1.0 | 1.0 | HCC14107L24-I1.00ISOTM... | 14 | 10.7 | 12.3 | 80 | 24.5 | 25.3 | 4 | 24 | 11.0 |
| M8x1.25 | | 1.25 | HCC10065L16-I1.25ISOTM... | 10 | 6.5 | 8.3 | 73 | 16.9 | 17.8 | 3 | 13 | 6.8 |
| M10x1.5 | M12-M48x1.5 | 1.5 | HCC12082L20-I1.50ISOTM... | 12 | 8.2 | 10.3 | 80 | 20.3 | 21.3 | 3 | 13 | 8.5 |
| | M12x1.5 | 1.5 | HCC14099L24-I1.50ISOTM... | 14 | 9.9 | 12.3 | 80 | 24.8 | 26.0 | 4 | 16 | 10.5 |
| | M14x1.5 | 1.5 | HCC16119L29-I1.50ISOTM... | 16 | 11.9 | 14.3 | 92 | 29.3 | 30.5 | 4 | 19 | 12.5 |
| | M16x1.5 | 1.5 | HCC18139L32-I1.50ISOTM... | 18 | 13.9 | 16.3 | 92 | 32.3 | 33.5 | 4 | 21 | 14.5 |
| M12x1.75 | | 1.75 | HCC14099L25-I1.75ISOTM... | 14 | 9.9 | 12.3 | 80 | 25.4 | 26.6 | 4 | 14 | 10.2 |

ISO Metric

HTC (Thriller)

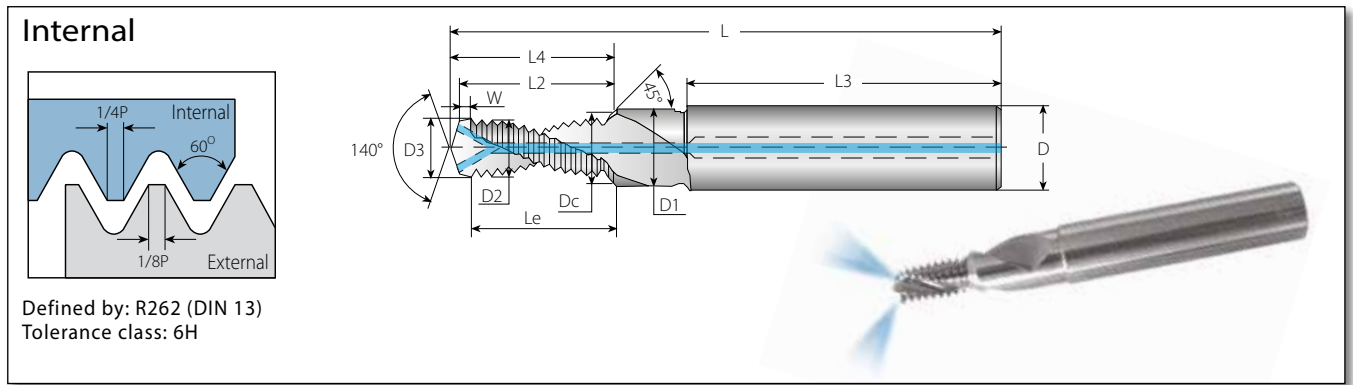


Defined by: R262 (DIN 13)
Tolerance class: 6H

HTC (Thriller) Drill, Chamfer & Thread with Coolant-Thru

| Thread | Ordering Code | Pitch | Dimensions mm | | | | | | | | | | | No. of Flutes | Teeth | | |
|--------------------------|--------------------|-------|---------------|------|------|----|-----|------|------|----|------|------|------|---------------|-------|--|--|
| | | | L | L4 | L2 | L3 | W | Le | D3 | D | D1 | Dc | D2 | | | | |
| ISO 2xDo Coarse | | | | | | | | | | | | | | | | | |
| M6x1.0 | HTCM6x1.0x2D... | 1.00 | 62.0 | 14.5 | 13.7 | 36 | 1.0 | 12.7 | 5.0 | 8 | 6.6 | 6.3 | 4.85 | 2 | 11 | | |
| M8x1.25 | HTCM8x1.25x2D... | 1.25 | 74.0 | 18.2 | 17.1 | 40 | 1.3 | 15.8 | 6.8 | 10 | 9.0 | 8.3 | 6.45 | 2 | 11 | | |
| M10x1.5 | HTCM10x1.5x2D... | 1.50 | 79.0 | 23.4 | 22.1 | 45 | 1.5 | 20.6 | 8.5 | 12 | 11.0 | 10.3 | 8.08 | 2 | 12 | | |
| M12x1.75 | HTCM12x1.75x2D... | 1.75 | 89.0 | 27.1 | 25.5 | 45 | 1.5 | 24.0 | 10.3 | 14 | 13.5 | 12.3 | 9.74 | 2 | 12 | | |
| ISO 2.5xDo Coarse | | | | | | | | | | | | | | | | | |
| M6x1.0 | HTCM6x1.0x2.5D... | 1.00 | 62.0 | 16.5 | 15.7 | 36 | 1.0 | 14.7 | 5.0 | 8 | 6.6 | 6.3 | 4.85 | 2 | 13 | | |
| M8x1.25 | HTCM8x1.25x2.5D... | 1.25 | 74.0 | 23.2 | 22.1 | 40 | 1.3 | 20.8 | 6.8 | 10 | 9.0 | 8.3 | 6.45 | 2 | 15 | | |
| M10x1.5 | HTCM10x1.5x2.5D... | 1.50 | 79.0 | 27.9 | 26.6 | 45 | 1.5 | 25.1 | 8.5 | 12 | 11.0 | 10.3 | 8.08 | 2 | 15 | | |

HTC - Thriller Operating Cycle

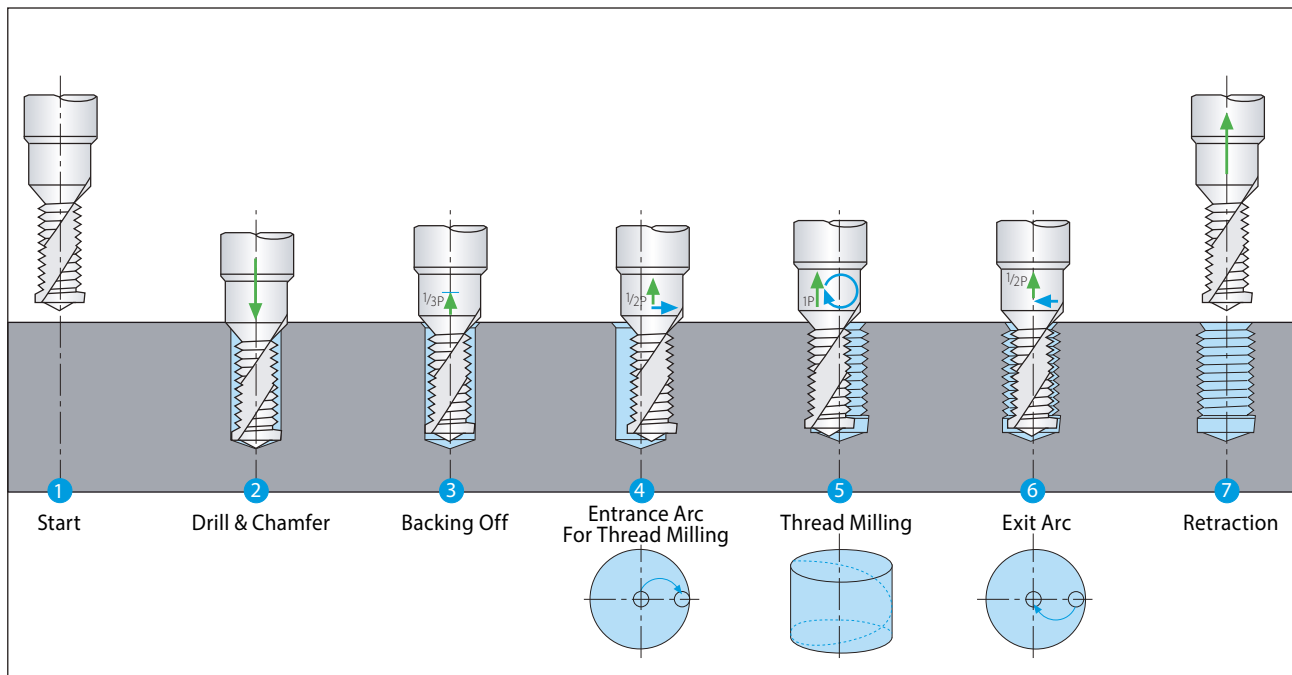


HTC line is suitable for Aluminium and Cast Iron machining only.

ISO Metric

Helical

External / Internal



Defined by: R262 (DIN 13)
Tolerance class: 6g/6H

Helical Flutes - External

2 x Do (Le ≤ 2 x Thread Diameter)


| Thread | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | |
|-----------|-------|-------------------------|---------------|-----|----|---------------|-------|----|
| M Coarse | mm | External | D | D2 | L | Le | Z | Zt |
| M3x0.5 | 0.5 | H04039L06-E0.5ISOTM... | 4 | 3.9 | 45 | 6.0 | 3 | 12 |
| M4.5x0.75 | 0.75 | H04039L09-E0.75ISOTM... | 4 | 3.9 | 45 | 9.0 | 3 | 12 |
| M6x1.0 | 1.0 | H04039L12-E1.0ISOTM... | 4 | 3.9 | 45 | 12.0 | 3 | 12 |
| M8x1.25 | 1.25 | H06059L16-E1.25ISOTM... | 6 | 5.9 | 57 | 16.25 | 3 | 13 |
| M10x1.5 | 1.5 | H08079L21-E1.5ISOTM... | 8 | 7.9 | 63 | 21.0 | 3 | 14 |
| M14x2.0 | 2.0 | H10099L28-E2.0ISOTM... | 10 | 9.9 | 73 | 28.0 | 4 | 14 |

Helical Flutes - Internal

2 x Do (Le ≤ 2 x Thread Diameter)

| Thread | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|-------------|--------------|-------------------------|---------------|------|----|---------------|-------|------------|------|
| M Coarse | M Fine | Internal | D | D2 | L | Le | Z | Zt | mm |
| M3x0.5 | M3.5-M16x0.5 | H04022L06-I0.5ISOTM... | 4 | 2.2 | 45 | 6.0 | 3 | 12 | 2.5 |
| | M4x0.5 | H04030L08-I0.5ISOTM... | 4 | 3.0 | 45 | 8.0 | 3 | 16 | 3.5 |
| | M5x0.5 | H04039L10-I0.5ISOTM... | 4 | 3.9 | 45 | 10.0 | 3 | 20 | 4.5 |
| M4x0.7 | | H04028L08-I0.7ISOTM... | 4 | 2.8 | 45 | 8.4 | 3 | 12 | 3.3 |
| | M6x0.75 | H04039L12-I0.75ISOTM... | 4 | 3.9 | 45 | 12.0 | 3 | 16 | 5.3 |
| M5x0.8 | | H04035L10-I0.8ISOTM... | 4 | 3.5 | 45 | 10.4 | 3 | 13 | 4.2 |
| M6x1.0 | M8-M40x1.0 | H04039L12-I1.0ISOTM... | 4 | 3.9 | 45 | 12.0 | 3 | 12 | 5.0 |
| | M8x1.0 | H06059L16-I1.0ISOTM... | 6 | 5.9 | 57 | 16.0 | 3 | 16 | 7.0 |
| | M10x1.0 | H08079L20-I1.0ISOTM... | 8 | 7.9 | 63 | 20.0 | 3 | 20 | 9.0 |
| | M12x1.0 | H10099L24-I1.0ISOTM... | 10 | 9.9 | 73 | 24.0 | 4 | 24 | 11.0 |
| M8x1.25 | | H06058L16-I1.25ISOTM... | 6 | 5.8 | 57 | 16.25 | 3 | 13 | 6.8 |
| | M10x1.25 | H08077L20-I1.25ISOTM... | 8 | 7.7 | 63 | 20.0 | 3 | 16 | 8.8 |
| M10x1.5 | M12-M48x1.5 | H08077L21-I1.5ISOTM... | 8 | 7.7 | 63 | 21.0 | 3 | 14 | 8.5 |
| | M12x1.5 | H10094L24-I1.5ISOTM... | 10 | 9.4 | 73 | 24.0 | 4 | 16 | 10.5 |
| | M14x1.5 | H12112L28-I1.5ISOTM... | 12 | 11.2 | 83 | 28.5 | 4 | 19 | 12.5 |
| | M16x1.5 | H12119L33-I1.5ISOTM... | 12 | 11.9 | 83 | 33.0 | 4 | 22 | 14.5 |
| M12x1.75 | | H10087L24-I1.75ISOTM... | 10 | 8.7 | 73 | 24.5 | 4 | 14 | 10.2 |
| M14x2.0 | M17-M80x2.0 | H10099L28-I2.0ISOTM... | 10 | 9.9 | 73 | 28.0 | 4 | 14 | 12.0 |
| | M16x2.0 | H12119L32-I2.0ISOTM... | 12 | 11.9 | 83 | 32.0 | 4 | 16 | 14.0 |
| M18-M22x2.5 | | H16139L40-I2.5ISOTM... | 16 | 13.9 | 92 | 40.0 | 5 | 16 | 15.5 |
| M24x3.0 | | H16159L42-I3.0ISOTM... | 16 | 15.9 | 92 | 42.0 | 4 | 14 | 21.0 |

* Bore diameter applies to smallest thread dia.

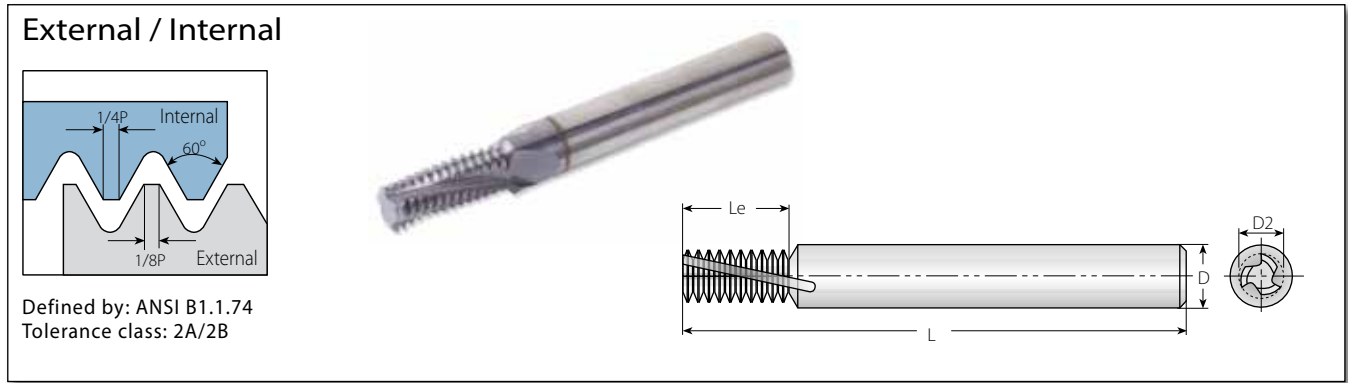

Helical Flutes - External

2 x Do (Le ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth |
|----------|----------|-------|-----------------------|---------------|------|----|------|---------------|-------|
| UNC | UNF | TPI | External | D | D2 | L | Le | Z | Zt |
| No.8-32 | | 32 | H04039L09-E32UNCTM... | 4 | 3.9 | 45 | 8.7 | 3 | 11 |
| | No.12-28 | 28 | H04039L12-E28UNFTM... | 4 | 3.9 | 45 | 11.8 | 3 | 13 |
| No.12-24 | | 24 | H04039L12-E24UNCTM... | 4 | 3.9 | 45 | 11.6 | 3 | 11 |
| 1/4"x20 | | 20 | H04039L13-E20UNCTM... | 4 | 3.9 | 45 | 12.7 | 3 | 10 |
| 5/16"x18 | | 18 | H06059L17-E18UNCTM... | 6 | 5.9 | 57 | 16.9 | 3 | 12 |
| 3/8"x16 | | 16 | H08079L19-E16UNCTM... | 8 | 7.9 | 63 | 19.1 | 3 | 12 |
| 9/16"x12 | | 12 | H12119L30-E12UNCTM... | 12 | 11.9 | 83 | 29.6 | 4 | 14 |

Helical Flutes - Internal

2 x Do (Le ≤ 2 x Thread Diameter)


| Thread | | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|-------------------|----------------|-------------------|-------|------------------------|---------------|------|-----|------|---------------|-------|------------|
| UNC | UNF | UNEF | TPI | Internal | D | D2 | L | Le | Z | Zt | mm |
| No.8-36 | | | 36 | H04030L09-I36UNFTM... | 4 | 3.0 | 45 | 8.5 | 3 | 12 | 3.5 |
| No.10-32 | No.12-3/8"x32 | | 32 | H04033L11-I32UNFTM... | 4 | 3.3 | 45 | 11.1 | 3 | 14 | 4.0 |
| No.12-28, 1/4"x28 | 7/16", 1/2"x28 | | 28 | H04038L12-I28UNFTM... | 4 | 3.8 | 45 | 11.8 | 3 | 13 | 4.6 |
| 1/4"x28 | 7/16", 1/2"x28 | | 28 | H06046L13-I28UNFTM... | 6 | 4.6 | 57 | 12.7 | 3 | 14 | 5.5 |
| | 7/16", 1/2"x28 | | 28 | H10092L23-I28UNEFTM... | 10 | 9.2 | 73 | 22.7 | 4 | 25 | 10.2 |
| No.10-24 | 5/16", 3/8"x24 | 9/16"-11/16"x24 | 24 | H04029L11-I24UNCTM... | 4 | 2.9 | 45 | 10.6 | 3 | 10 | 3.8 |
| No.12-24 | 5/16", 3/8"x24 | 9/16"-11/16"x24 | 24 | H04035L12-I24UNCTM... | 4 | 3.5 | 45 | 11.6 | 3 | 11 | 4.5 |
| | 5/16", 3/8"x24 | 9/16"-11/16"x24 | 24 | H06057L16-I24UNFTM... | 6 | 5.7 | 57 | 15.9 | 3 | 15 | 6.8 |
| | 3/8"x24 | 9/16"-11/16"x24 | 24 | H08074L19-I24UNFTM... | 8 | 7.4 | 63 | 19.1 | 3 | 18 | 8.5 |
| | | 9/16"-11/16"x24 | 24 | H12119L29-I24UNEFTM... | 12 | 11.9 | 83 | 28.6 | 4 | 27 | 13.2 |
| 1/4"x20 | 7/16", 1/2"x20 | 3/4"-1"x20 | 20 | H04039L13-I20UNCTM... | 4 | 3.9 | 45 | 12.7 | 3 | 10 | 5.2 |
| | 7/16", 1/2"x20 | 3/4"-1"x20 | 20 | H10085L23-I20UNFTM... | 10 | 8.5 | 73 | 22.9 | 4 | 18 | 9.8 |
| | 1/2"x20 | 3/4"-1"x20 | 20 | H10099L26-I20UNFTM... | 10 | 9.9 | 73 | 25.4 | 4 | 20 | 11.5 |
| | | 3/4"-1"x20 | 20 | H16159L38-I20UNEFTM... | 16 | 15.9 | 92 | 38.1 | 5 | 30 | 17.8 |
| 5/16"x18 | 9/16", 5/8"x18 | 11/16"-1 1/16"x18 | 18 | H06052L17-I18UNCTM... | 6 | 5.2 | 57 | 16.9 | 3 | 12 | 6.5 |
| | 9/16", 5/8"x18 | 11/16"-1 1/16"x18 | 18 | H12113L30-I18UNFTM... | 12 | 11.3 | 83 | 29.6 | 4 | 21 | 12.8 |
| | 5/8"x18 | 11/16"-1 1/16"x18 | 18 | H12119L33-I18UNFTM... | 12 | 11.9 | 83 | 32.5 | 4 | 23 | 14.5 |
| 3/8"x16 | 3/4"x16 | | 16 | H08067L19-I16UNCTM... | 8 | 6.7 | 63 | 19.1 | 3 | 12 | 8.0 |
| | 3/4"x16 | | 16 | H16159L38-I16UNFTM... | 16 | 15.9 | 92 | 38.1 | 4 | 24 | 17.5 |
| 7/16"x14 | 7/8"x14 | | 14 | H08076L24-I14UNCTM... | 8 | 7.6 | 63 | 23.6 | 4 | 13 | 9.3 |
| | 7/8"x14 | | 14 | H20187L44-I14UNFTM... | 20 | 18.7 | 104 | 44.4 | 4 | 24 | 20.5 |
| 1/2"x13 | | | 13 | H10089L26-I13UNCTM... | 10 | 8.9 | 73 | 25.4 | 4 | 13 | 10.8 |
| 9/16"x12 | 1"-1 1/2"x12 | | 12 | H12103L30-I12UNCTM... | 12 | 10.3 | 83 | 29.6 | 4 | 14 | 12.3 |
| | 1"-1 1/2"x12 | | 12 | H20199L51-I12UNFTM... | 20 | 19.9 | 104 | 50.8 | 5 | 24 | 23.5 |
| 5/8"x11 | | | 11 | H12110L32-I11UNCTM... | 12 | 11.0 | 83 | 32.3 | 4 | 14 | 13.5 |
| 3/4"x10 | | | 10 | H16135L38-I10UNCTM... | 16 | 13.5 | 92 | 38.1 | 5 | 15 | 16.5 |
| 7/8"x9 | | | 9 | H16152L45-I9UNCTM... | 16 | 15.2 | 92 | 45.2 | 4 | 16 | 19.5 |
| 1"x8 | | | 8 | H20170L51-I8UNCTM... | 20 | 17.0 | 104 | 50.8 | 4 | 16 | 22.0 |

* Bore diameter applies to smallest thread dia.


BSP (G)

Helical

External / Internal



Defined by: B.S.2779:1956
Tolerance class: Medium class

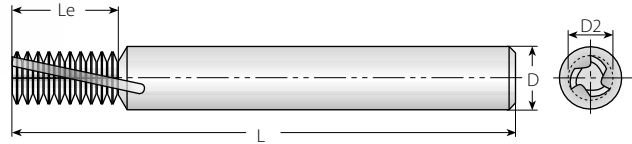

Helical Flutes


2 x Do (Le ≤ 2 x Thread Diameter)

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|---------------------------|-------|------------------------|---------------|------|-----|------|---------------|-------|------------|
| Standard | TPI | External / Internal | D | D2 | L | Le | Z | Zt | mm |
| 1/16"x28, 1/8"x28 | 28 | H06058L16-EI28BSPTM... | 6 | 5.8 | 57 | 16.3 | 3 | 18 | 6.7 |
| 1/8"x28 | 28 | H08077L20-EI28BSPTM... | 8 | 7.7 | 63 | 20.0 | 3 | 22 | 8.7 |
| 1/4"x19, 3/8"x19 | 19 | H10099L27-EI19BSPTM... | 10 | 9.9 | 73 | 26.7 | 4 | 20 | 11.8 |
| 3/8"x19 | 19 | H16134L33-EI19BSPTM... | 16 | 13.4 | 92 | 33.4 | 4 | 25 | 15.2 |
| 1/2", 3/4"x14 | 14 | H16157L44-EI14BSPTM... | 16 | 15.7 | 92 | 43.5 | 5 | 24 | 19.0 |
| 1", 1 1/2", 2", 2 1/2"x11 | 11 | H20199L42-EI11BSPTM... | 20 | 19.9 | 104 | 41.6 | 5 | 18 | 30.7 |

BSPT

Helical

External / Internal



Defined by: B.S.21:1985
Tolerance class: Standard BSPT



Helical Flutes


| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|---------------------------|-------|--------------------------|---------------|------|-----|------|---------------|-------|------------|
| Standard | TPI | External / Internal | D | D2 | L | Le | Z | Zt | mm |
| 1/16"x28 | 28 | H06058L16-EI28BSPT-TM... | 6 | 5.8 | 57 | 16.3 | 3 | 18 | 6.7 |
| 1/8"x28 | 28 | H08077L20-EI28BSPT-TM... | 8 | 7.7 | 63 | 20.0 | 3 | 22 | 8.7 |
| 1/4"x19 | 19 | H10099L27-EI19BSPT-TM... | 10 | 9.9 | 73 | 26.7 | 4 | 20 | 11.8 |
| 3/8"x19 | 19 | H16134L33-EI19BSPT-TM... | 16 | 13.4 | 92 | 33.4 | 4 | 25 | 15.2 |
| 1/2", 3/4"x14 | 14 | H16157L44-EI14BSPT-TM... | 16 | 15.7 | 92 | 43.5 | 5 | 24 | 19.0 |
| 1", 1 1/2", 2", 2 1/2"x11 | 11 | H20199L42-EI11BSPT-TM... | 20 | 19.9 | 104 | 41.6 | 5 | 18 | 30.7 |

* Bore diameter applies to smallest thread dia.

NPT

Helical

External / Internal



Defined by: USAS B2.1:1968
Tolerance class: Standard NPT



Helical Flutes

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|---------------|-------|---------------------------|---------------|------|-----|------|---------------|-------|------------|
| | | | D | D2 | L | Le | | | |
| Standard | TPI | External / Internal | | | | | Z | Zt | mm |
| 1/16"x27 | 27 | H06053L09-EI27NPT-TM... | 6 | 5.3 | 57 | 9.4 | 3 | 10 | 6.3 |
| 1/8"x27 | 27 | H08075L09-EI27NPT-TM... | 8 | 7.5 | 63 | 9.4 | 4 | 10 | 8.5 |
| 1/4"x18 | 18 | H10094L14-EI18NPT-TM... | 10 | 9.4 | 73 | 14.1 | 4 | 10 | 11.1 |
| 3/8"x18 | 18 | H12119L14-EI18NPT-TM... | 12 | 11.9 | 83 | 14.1 | 4 | 10 | 14.5 |
| 1/2", 3/4"x14 | 14 | H16155L25-EI14NPT-TM... | 16 | 15.5 | 92 | 25.4 | 5 | 14 | 17.7, 23.0 |
| 1"-2"x11.5 | 11.5 | H20199L33-EI11.5NPT-TM... | 20 | 19.9 | 104 | 33.1 | 5 | 15 | 29.0-56.0 |
| 2 1/2", 3"x8 | 8 | H20199L38-EI8NPT-TM... | 20 | 19.9 | 104 | 38.1 | 4 | 12 | 66.5 |

NPTF

Helical

External / Internal

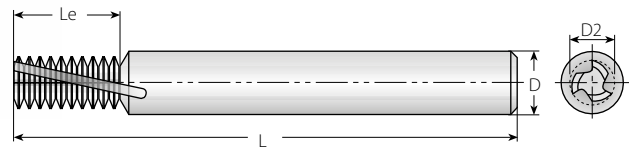

Defined by: ANSI 1.20.3-1976
Tolerance class: Standard NPTF


Helical Flutes

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|---------------|-------|---------------------------|---------------|------|-----|------|---------------|-------|------------|
| | | | D | D2 | L | Le | | | |
| Standard | TPI | External / Internal | | | | | Z | Zt | mm |
| 1/16"x27 | 27 | H06053L09-EI27NPTFTM... | 6 | 5.3 | 57 | 9.4 | 3 | 10 | 6.3 |
| 1/8"x27 | 27 | H08075L09-EI27NPTFTM... | 8 | 7.5 | 63 | 9.4 | 4 | 10 | 8.4 |
| 1/4"x18 | 18 | H10094L14-EI18NPTFTM... | 10 | 9.4 | 73 | 14.1 | 4 | 10 | 11.1 |
| 3/8"x18 | 18 | H12119L14-EI18NPTFTM... | 12 | 11.9 | 83 | 14.1 | 4 | 10 | 14.7 |
| 1/2", 3/4"x14 | 14 | H16155L25-EI14NPTFTM... | 16 | 15.5 | 92 | 25.4 | 5 | 14 | 17.9, 23.4 |
| 1"-2"x11.5 | 11.5 | H20199L33-EI11.5NPTFTM... | 20 | 19.9 | 104 | 33.1 | 5 | 15 | 29.4-56.2 |
| 2 1/2", 3"x8 | 8 | H20199L38-EI8NPTFTM... | 20 | 19.9 | 104 | 38.1 | 4 | 12 | 67.0 |

* Bore diameter applies to smallest thread dia.

Tap 60°, Tap 55°

Helical

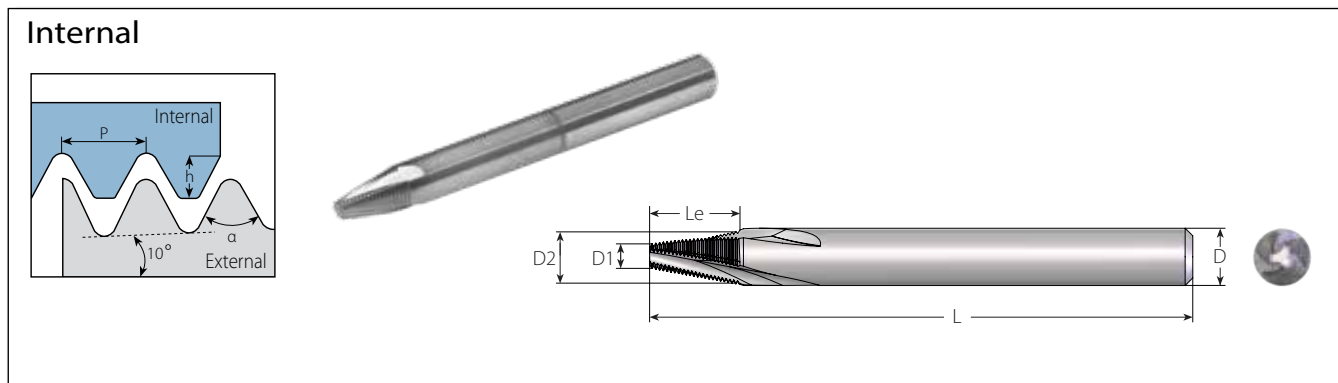

Helical Flutes - Taper 60° - TM Solid Helical Flutes for Bone Plate Applications


| Pitch | Ordering Code | Taper | Thread Angle | Profile Height | Dimensions mm | | | | | No. of Flutes | Teeth |
|-------|---------------------------|-------|--------------|----------------|---------------|-----|-----|----|-----|---------------|-------|
| mm | Internal | | α | h | D | D2 | D1 | L | Le | Z | Zt |
| 0.4 | H06059L080-I0.4TAP60TM... | 20° | 60° | 0.20 | 6 | 5.9 | 3.2 | 57 | 8.0 | 3 | 20 |
| 0.5 | H06059L090-I0.5TAP60TM... | 20° | 60° | 0.25 | 6 | 5.9 | 2.9 | 57 | 9.0 | 3 | 18 |

Helical Flutes - Taper 55° - TM Solid Helical Flutes for Bone Plate Applications

| Pitch | Ordering Code | Taper | Thread Angle | Profile Height | Dimensions mm | | | | | No. of Flutes | Teeth |
|-------|----------------------------|-------|--------------|----------------|---------------|-----|-----|----|------|---------------|-------|
| mm | Internal | | α | h | D | D2 | D1 | L | Le | Z | Zt |
| 0.3 | H03028L039-I0.3TAP55TM... | 20° | 55° | 0.18 | 3 | 2.8 | 1.5 | 38 | 3.9 | 3 | 13 |
| 0.35 | H04039L063-I0.35TAP55TM... | 20° | 55° | 0.20 | 4 | 3.9 | 1.8 | 45 | 6.3 | 3 | 18 |
| 0.4 | H06059L100-I0.4TAP55TM... | 20° | 55° | 0.29 | 6 | 5.9 | 2.5 | 57 | 10.0 | 3 | 25 |
| 0.5 | H06059L090-I0.5TAP55TM... | 20° | 55° | 0.33 | 6 | 5.9 | 2.9 | 57 | 9.0 | 3 | 18 |
| 0.6 | H06059L066-I0.6TAP55TM... | 20° | 55° | 0.47 | 6 | 5.9 | 3.8 | 57 | 6.6 | 3 | 11 |

ISO Metric

Deep Threading

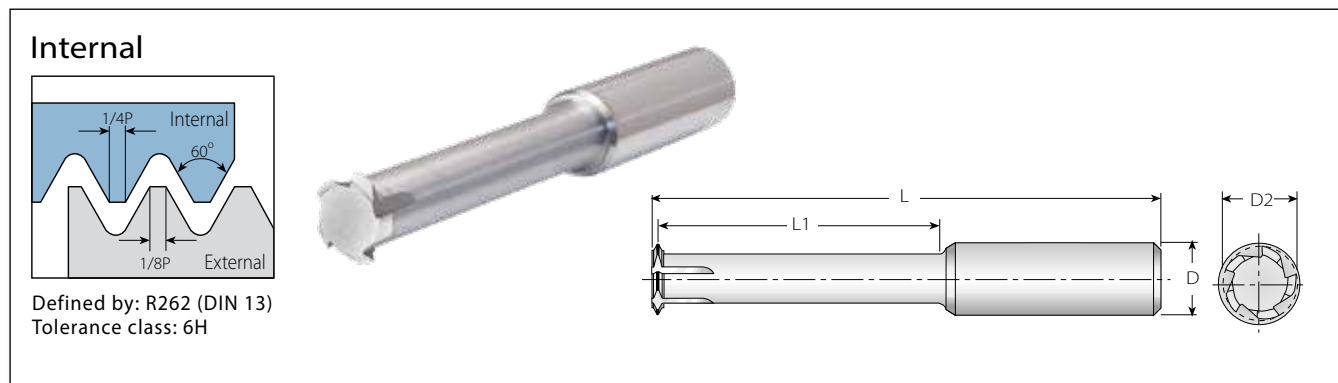


Deep Threading - Long Tools for Deep Holes

3 x Do (L1 ≤ 3 x Thread Diameter)

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia. |
|----------|-------|------------------------|---------------|------|-----|----|---------------|-------|-----------|
| M Coarse | mm | Internal | D | D2 | L | L1 | Z | Zt | mm |
| M6x1 | 1.0 | D1T08041-I1.0ISOTM... | 8 | 4.1 | 63 | 19 | 3 | 1 | 5.0 |
| M8x1.25 | 1.25 | D1T10058-I1.25ISOTM... | 10 | 5.8 | 73 | 26 | 3 | 1 | 6.8 |
| M10x1.5 | 1.50 | D1T10077-I1.50ISOTM... | 10 | 7.7 | 73 | 32 | 3 | 1 | 8.5 |
| M12x1.5 | 1.50 | D1T12094-I1.50ISOTM... | 12 | 9.4 | 83 | 38 | 4 | 1 | 10.5 |
| M12x1.75 | 1.75 | D1T12087-I1.75ISOTM... | 12 | 8.7 | 83 | 38 | 4 | 1 | 10.2 |
| M14x2 | 2.0 | D1T16102-I2.0ISOTM... | 16 | 10.2 | 92 | 44 | 4 | 1 | 12.0 |
| M16x2 | 2.0 | D1T16122-I2.0ISOTM... | 16 | 12.2 | 100 | 50 | 4 | 1 | 14.0 |
| M18x2.5 | 2.50 | D1T16129-I2.5ISOTM... | 16 | 12.9 | 108 | 57 | 5 | 1 | 15.5 |
| M20x2.5 | 2.50 | D1T16148-I2.5ISOTM... | 16 | 14.8 | 114 | 63 | 5 | 1 | 17.5 |

Partial Profile 60°

Deep Threading

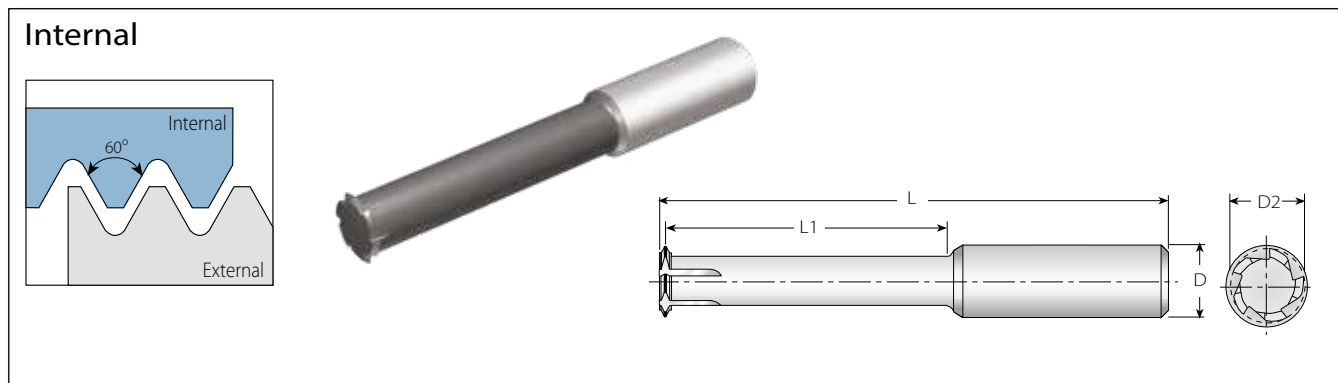


Deep Threading - Long Tools for Deep Holes

| Min. Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth |
|-------------|------------------------------|---|-------------------------|---------------|-------|----|----|---------------|-------|
| M Coarse | M Fine | UN, UNS, UNF, UNEF | Internal | D | D2 | L | L1 | Z | Zt |
| M5x0.8 | M5x0.5, M5x0.75 | No.10-56UNS, No.10-48UNS, No.10-40UNS, No.10-36UNS, No.10-32UNF | D1T04390L160-ITA60TM... | 4 | 3.90 | 45 | 16 | 4 | 1 |
| M6x1.0 | M6x0.5, M6x0.75 | No.12-56UNS, No.12-48UNS, 1/4-40UNS, 1/4-36UNS, 1/4-32UNEF, 1/4-28UNF, 1/4-27UNS, 1/4-24UNS | D1T06485L200-ITB60TM... | 6 | 4.85 | 51 | 20 | 5 | 1 |
| M8x1.25 | M7x0.5, M7x0.75, M7.5x1.0 | 5/16-48UNS, 5/16-40UNS, 5/16-36UNS, 5/16-32UNEF, 5/16-28UN, 5/16-27UNS, 5/16-24UNS, 5/16-20UN | D1T06590L250-ITF60TM... | 6 | 5.90 | 64 | 25 | 5 | 1 |
| - | M10.5x0.5, M11x0.75, M11x1.0 | 7/16-32UN, 7/16-28UNEF, 7/16-27UNS, 7/16-24UNS | D1T10990L350-ITB60TM... | 10 | 9.90 | 73 | 35 | 6 | 1 |
| M10x1.5 | M10x1.0, M10x1.25 | 3/8-24UNF, 3/8-20UN, 7/16-18UNS, 7/16-16UN | D1T08790L320-ITC60TM... | 8 | 7.90 | 63 | 32 | 6 | 1 |
| M12x1.75 | M12x1.0, M12x1.25, M12x1.5 | 1/2-24UNS, 1/2-20UNS, 1/2-18UNS, 1/2-16UNS, 1/2-14UNS | D1T10990L380-ITD60TM... | 10 | 9.90 | 73 | 38 | 6 | 1 |
| - | M13.5x1.0, M14x1.25, M14x1.5 | 9/16-24UNEF | D1T12119L450-ITD60TM... | 12 | 11.90 | 83 | 45 | 6 | 1 |

ISO Metric

MilliPro D1T

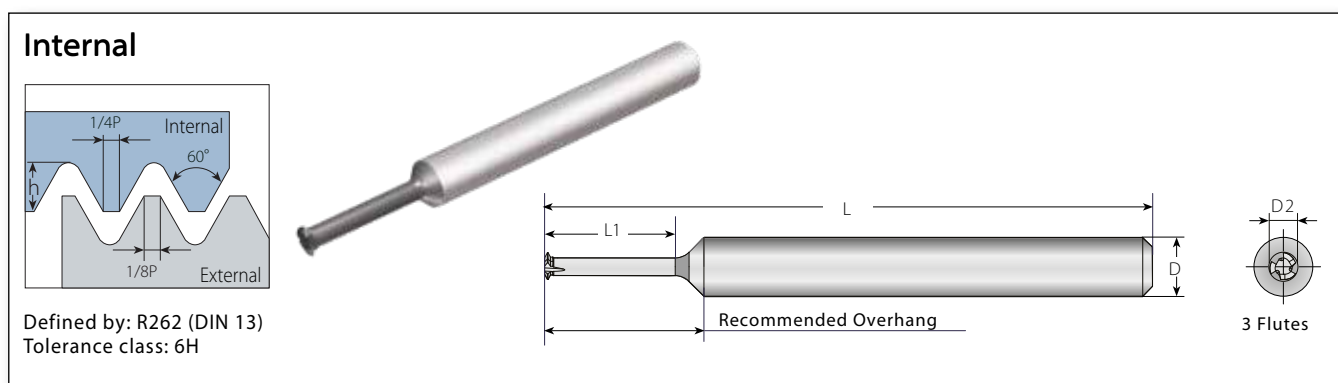


MilliPro D1T - Miniature Thread Mills

3xDo (L1 ≤ 3 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia. |
|-----------|-----------|-------|----------------------------|---------------|------|----|-----|---------------|-------|-----------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | L1 | Z | Zt | mm |
| M1.0x0.25 | M1.4x0.25 | 0.25 | D1T03007L031-I0.25ISOTM... | 3 | 0.70 | 31 | 3.1 | 3 | 1 | 0.75 |
| M1.2x0.25 | M1.4x0.25 | 0.25 | D1T03009L038-I0.25ISOTM... | 3 | 0.90 | 31 | 3.8 | 3 | 1 | 0.95 |
| M1.4x0.3 | - | 0.30 | D1T03011L044-I0.30ISOTM... | 3 | 1.05 | 31 | 4.4 | 3 | 1 | 1.15 |
| M1.6x0.35 | - | 0.35 | D1T03012L050-I0.35ISOTM... | 3 | 1.20 | 31 | 5.0 | 3 | 1 | 1.30 |
| M1.8x0.35 | M2.0x0.35 | 0.35 | D1T03014L056-I0.35ISOTM... | 3 | 1.40 | 31 | 5.6 | 3 | 1 | 1.50 |
| M2.0x0.4 | - | 0.40 | D1T03015L062-I0.40ISOTM... | 3 | 1.50 | 31 | 6.2 | 3 | 1 | 1.65 |
| M2.5x0.45 | - | 0.45 | D1T03019L077-I0.45ISOTM... | 3 | 1.95 | 31 | 7.7 | 3 | 1 | 2.10 |

American UN


MilliPro D1T

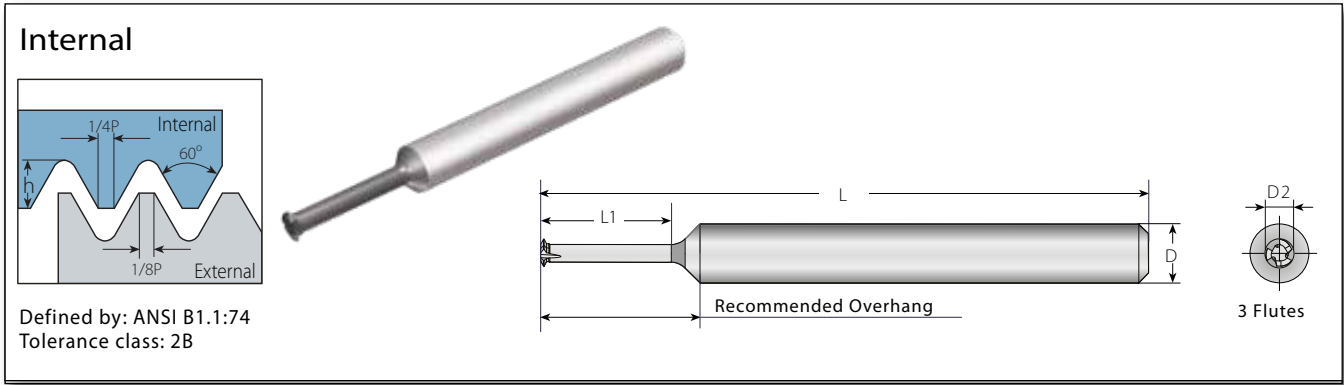

MilliPro D1T - Miniature Thread Mills

3xDo (L1 ≤ 3 x Thread Diameter)

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia. |
|--------|-------|-------------------------|---------------|------|----|-----|---------------|-------|-----------|
| UNF | TPI | Internal | D | D2 | L | L1 | Z | Zt | mm |
| 0-80 | 80 | D1T03011L046-I80UNTM... | 3 | 1.15 | 31 | 4.6 | 3 | 1 | 1.30 |
| 1-72 | 72 | D1T03014L065-I72UNTM... | 3 | 1.45 | 31 | 6.5 | 3 | 1 | 1.60 |

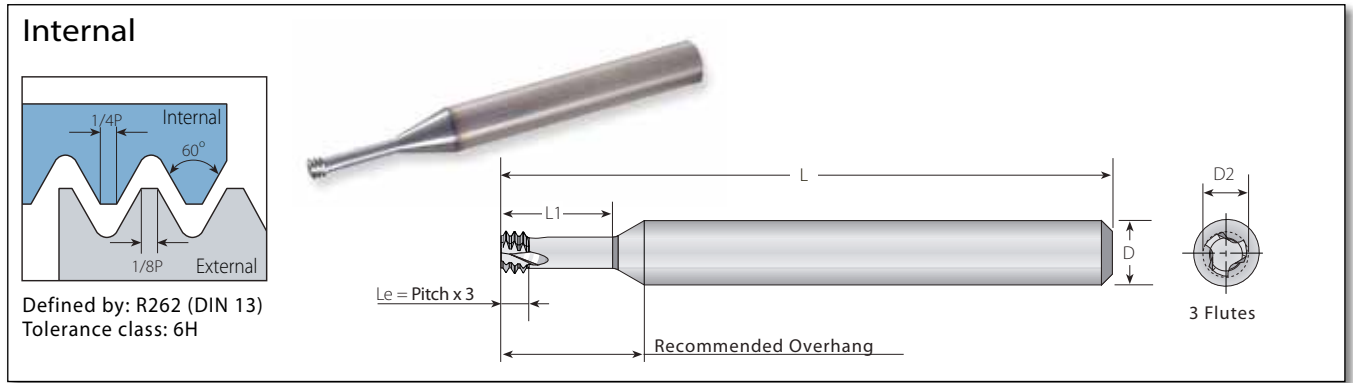

MilliPro - Miniature Thread Mills

2 x Do (L1 ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|-----------|--------------|-------|----------------------------|---------------|-------|----|---------------|-------|------------|------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | L1 | Z | Zt | mm |
| M1.6x0.35 | | 0.35 | D3T03012L034-I0.35ISOTM... | 3 | 1.20 | 30 | 3.4 | 3 | 3 | 1.25 |
| M2x0.4 | | 0.4 | D3T06015L042-I0.4ISOTM... | 6 | 1.55 | 57 | 4.2 | 3 | 3 | 1.6 |
| M2.2x0.45 | | 0.45 | D3T06016L046-I0.45ISOTM... | 6 | 1.65 | 57 | 4.6 | 3 | 3 | 1.75 |
| M2.5x0.45 | | 0.45 | D3T06019L052-I0.45ISOTM... | 6 | 1.95 | 57 | 5.2 | 3 | 3 | 2.05 |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | D3T06024L062-I0.5ISOTM... | 6 | 2.40 | 57 | 6.2 | 3 | 3 | 2.5 |
| M3.5x0.6 | | 0.6 | D3T06027L073-I0.6ISOTM... | 6 | 2.75 | 57 | 7.3 | 3 | 3 | 2.9 |
| M4x0.7 | | 0.7 | D3T06031L083-I0.7ISOTM... | 6 | 3.15 | 57 | 8.3 | 3 | 3 | 3.3 |
| M5x0.8 | | 0.8 | D3T06040L104-I0.8ISOTM... | 6 | 4.05 | 57 | 10.4 | 3 | 3 | 4.2 |
| M6x1.0 | M8-M40x1.0 | 1.0 | D3T06048L125-I1.0ISOTM... | 6 | 4.80 | 57 | 12.5 | 3 | 3 | 5.0 |
| M8x1.25 | | 1.25 | D3T08065L166-I1.25ISOTM... | 8 | 6.50 | 63 | 16.6 | 3 | 3 | 6.8 |
| M10x1.5 | M12-M48x1.50 | 1.50 | D3T10082L208-I1.50ISOTM... | 10 | 8.20 | 73 | 20.8 | 3 | 3 | 8.5 |
| M12x1.75 | | 1.75 | D3T10099L250-I1.75ISOTM... | 10 | 9.90 | 73 | 25.0 | 3 | 3 | 10.3 |
| M16x2.0 | | 2.0 | D3T12119L330-I2.0ISOTM... | 12 | 11.90 | 83 | 33.0 | 3 | 3 | 14.0 |
| M20x2.5 | | 2.50 | D3T16159L413-I2.5ISOTM... | 16 | 15.90 | 92 | 41.3 | 3 | 3 | 17.5 |


MilliPro - Miniature Thread Mills

3 x Do (L1 ≤ 3 x Thread Diameter)


| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|-----------|--------------|-------|----------------------------|---------------|------|----|---------------|-------|------------|------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | L1 | Z | Zt | mm |
| M1.6x0.35 | | 0.35 | D3T03012L050-I0.35ISOTM... | 3 | 1.20 | 30 | 5.0 | 3 | 3 | 1.25 |
| M2x0.4 | | 0.4 | D3T03015L062-I0.4ISOTM... | 3 | 1.55 | 30 | 6.2 | 3 | 3 | 1.6 |
| M2x0.4 | | 0.4 | D3T06015L062-I0.4ISOTM... | 6 | 1.55 | 57 | 6.2 | 3 | 3 | 1.6 |
| M2.5x0.45 | | 0.45 | D3T03019L077-I0.45ISOTM... | 3 | 1.95 | 30 | 7.7 | 3 | 3 | 2.05 |
| M2.5x0.45 | | 0.45 | D3T06019L077-I0.45ISOTM... | 6 | 1.95 | 57 | 7.7 | 3 | 3 | 2.05 |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | D3T03024L092-I0.5ISOTM... | 3 | 2.40 | 30 | 9.2 | 3 | 3 | 2.5 |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | D3T06024L092-I0.5ISOTM... | 6 | 2.40 | 57 | 9.2 | 3 | 3 | 2.5 |
| M4x0.7 | | 0.7 | D3T06031L123-I0.7ISOTM... | 6 | 3.15 | 57 | 12.3 | 3 | 3 | 3.3 |
| M5x0.8 | | 0.8 | D3T06040L154-I0.8ISOTM... | 6 | 4.05 | 57 | 15.4 | 3 | 3 | 4.2 |
| M6x1.0 | M8-M40x1.0 | 1.00 | D3T06048L185-I1.0ISOTM... | 6 | 4.80 | 57 | 18.5 | 3 | 3 | 5.0 |
| M8x1.25 | | 1.25 | D3T08065L246-I1.25ISOTM... | 8 | 6.50 | 63 | 24.6 | 3 | 3 | 6.8 |

* Bore diameter applies to smallest thread dia.

Internal



Defined by: ANSI B1.1:74
Tolerance class: 2B

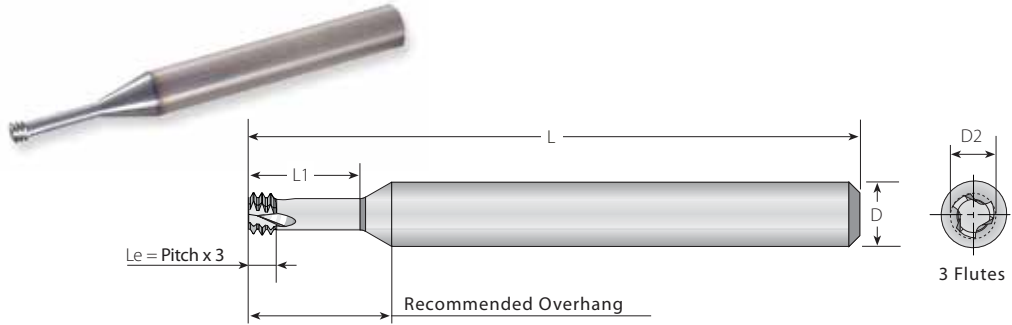

MilliPro - Miniature Thread Mills

2 x Do (L1 ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|---------------|----------|-------|-------------------------|---------------|------|----|---------------|-------|------------|-----|
| UNC | UNF | TPI | Internal | D | D2 | L | L1 | Z | Zt | mm |
| | No.1-72 | 72 | D3T06014L039-I72UNTM... | 6 | 1.45 | 57 | 3.9 | 3 | 3 | 1.6 |
| No.1-64 | No.2-64 | 64 | D3T06014L042-I64UNTM... | 6 | 1.40 | 57 | 4.2 | 3 | 3 | 1.5 |
| No.2-56 | No.3-56 | 56 | D3T06016L050-I56UNTM... | 6 | 1.65 | 57 | 5.0 | 3 | 3 | 1.8 |
| No.3-48 | No.4-48 | 48 | D3T06019L060-I48UNTM... | 6 | 1.90 | 57 | 6.0 | 3 | 3 | 2.1 |
| No.4, No.5-40 | No.6-40 | 40 | D3T06021L060-I40UNTM... | 6 | 2.10 | 57 | 6.0 | 3 | 3 | 2.3 |
| No.5-40 | No.6-40 | 40 | D3T06024L072-I40UNTM... | 6 | 2.45 | 57 | 7.2 | 3 | 3 | 2.6 |
| | No.8-36 | 36 | D3T06033L087-I36UNTM... | 6 | 3.30 | 57 | 8.7 | 3 | 3 | 3.5 |
| No.6, No.8-32 | No.10-32 | 32 | D3T06025L074-I32UNTM... | 6 | 2.55 | 57 | 7.4 | 3 | 3 | 2.8 |
| No.8-32 | No.10-32 | 32 | D3T06032L100-I32UNTM... | 6 | 3.20 | 57 | 10.0 | 3 | 3 | 3.5 |
| | No.10-32 | 32 | D3T06038L103-I32UNTM... | 6 | 3.80 | 57 | 10.3 | 3 | 3 | 4.0 |
| | 1/4"x28 | 28 | D3T06052L132-I28UNTM... | 6 | 5.25 | 57 | 13.2 | 3 | 3 | 5.5 |
| No.10-24 | 5/16"x24 | 24 | D3T06035L102-I24UNTM... | 6 | 3.58 | 57 | 10.2 | 3 | 3 | 3.9 |
| | 5/16"x24 | 24 | D3T08066L165-I24UNTM... | 8 | 6.68 | 63 | 16.5 | 3 | 3 | 6.9 |
| 1/4"x20 | 7/16"x20 | 20 | D3T06048L134-I20UNTM... | 6 | 4.88 | 57 | 13.4 | 3 | 3 | 5.2 |
| | 7/16"x20 | 20 | D3T10095L230-I20UNTM... | 10 | 9.55 | 73 | 23.0 | 3 | 3 | 9.9 |
| 5/16"x18 | | 18 | D3T08061L169-I18UNTM... | 8 | 6.15 | 63 | 16.9 | 3 | 3 | 6.6 |
| 3/8"x16 | | 16 | D3T08067L191-I16UNTM... | 8 | 6.70 | 63 | 19.1 | 3 | 3 | 8.0 |
| 7/16"x14 | | 14 | D3T10090L233-I14UNTM... | 10 | 9.00 | 73 | 23.3 | 3 | 3 | 9.4 |

MilliPro - Miniature Thread Mills

3 x Do (L1 ≤ 3 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|---------------|----------|-------|-------------------------|---------------|------|----|---------------|-------|------------|-----|
| UNC | UNF | TPI | Internal | D | D2 | L | L1 | Z | Zt | mm |
| | No.1-72 | 72 | D3T03014L057-I72UNTM... | 3 | 1.45 | 30 | 5.75 | 3 | 3 | 1.6 |
| | No.1-72 | 72 | D3T06014L057-I72UNTM... | 6 | 1.45 | 57 | 5.75 | 3 | 3 | 1.6 |
| No.2-56 | No.3-56 | 56 | D3T03016L070-I56UNTM... | 3 | 1.65 | 30 | 7.0 | 3 | 3 | 1.8 |
| No.4, No.5-40 | No.6-40 | 40 | D3T03021L090-I40UNTM... | 3 | 2.10 | 30 | 9.0 | 3 | 3 | 2.3 |
| No.4, No.5-40 | No.6-40 | 40 | D3T06021L090-I40UNTM... | 6 | 2.10 | 57 | 9.0 | 3 | 3 | 2.3 |
| No.5-40 | No.6-40 | 40 | D3T06024L100-I40UNTM... | 6 | 2.45 | 57 | 10.0 | 3 | 3 | 2.6 |
| No.6, No.8-32 | No.10-32 | 32 | D3T03025L110-I32UNTM... | 3 | 2.55 | 30 | 11.0 | 3 | 3 | 2.8 |
| No.6, No.8-32 | No.10-32 | 32 | D3T06025L110-I32UNTM... | 6 | 2.55 | 57 | 11.0 | 3 | 3 | 2.8 |
| No.8-32 | No.10-32 | 32 | D3T06032L130-I32UNTM... | 6 | 3.20 | 57 | 13.0 | 3 | 3 | 3.4 |
| | No.10-32 | 32 | D3T06038L150-I32UNTM... | 6 | 3.80 | 57 | 15.1 | 3 | 3 | 4.0 |
| No.12-28 | 1/4"x28 | 28 | D3T06044L170-I28UNTM... | 6 | 4.40 | 57 | 17.0 | 3 | 3 | 4.7 |
| | 1/4"x28 | 28 | D3T06052L196-I28UNTM... | 6 | 5.25 | 57 | 19.6 | 3 | 3 | 5.5 |
| | 5/16"x24 | 24 | D3T08066L245-I24UNTM... | 8 | 6.68 | 63 | 24.5 | 3 | 3 | 6.9 |
| 1/4"x20 | 7/16"x20 | 20 | D3T06048L198-I20UNTM... | 6 | 4.88 | 57 | 19.8 | 3 | 3 | 5.1 |
| 5/16"x18 | | 18 | D3T08061L239-I18UNTM... | 8 | 6.15 | 63 | 24.0 | 3 | 3 | 6.6 |

* Bore diameter applies to smallest thread dia.

Internal

Defined by: MIL-S-8879C
Tolerance class: 3B

MilliPro - Miniature Thread Mills

3 x Do (L1 ≤ 3 x Thread Diameter)

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|-----------------|-----------------|--------------------------|---------------|------|----|------|---------------|-------|------------|
| UNJC | UNJF | Internal | D | D2 | L | L1 | Z | Zt | mm |
| 0.138" (#6) | 0.190" (#10) | D3T06027L110-I32UNJTM... | 6 | 2.70 | 57 | 11.0 | 3 | 3 | 2.8 |
| | 0.250" (1/4") | D3T06054L195-I28UNJTM... | 6 | 5.40 | 57 | 19.5 | 3 | 3 | 5.6 |
| 0.190" (#10) | | D3T06037L149-I24UNJTM... | 6 | 3.70 | 57 | 14.9 | 3 | 3 | 4.0 |
| | 0.3125" (5/16") | D3T08067L241-I24UNJTM... | 8 | 6.70 | 63 | 24.1 | 3 | 3 | 7.0 |
| 0.250" (1/4") | | D3T06050L195-I20UNJTM... | 6 | 5.00 | 57 | 19.5 | 3 | 3 | 5.3 |
| | 0.4375" (7/16") | D3T10096L335-I20UNJTM... | 10 | 9.60 | 73 | 33.5 | 3 | 3 | 10.0 |
| 0.3125" (5/16") | 0.5625" (9/16") | D3T08064L241-I18UNJTM... | 8 | 6.40 | 63 | 24.1 | 3 | 3 | 6.75 |
| 0.375" (3/8") | 0.750" (3/4") | D3T08077L290-I16UNJTM... | 8 | 7.70 | 63 | 29.0 | 3 | 3 | 8.1 |
| 0.4375" (7/16") | 0.875" (7/8") | D3T10092L335-I14UNJTM... | 10 | 9.20 | 73 | 33.5 | 3 | 3 | 9.5 |
| 0.500" (1/2") | | D3T10099L385-I13UNJTM... | 10 | 9.90 | 73 | 38.5 | 3 | 3 | 11.0 |

Internal

Defined by: ISO 5855
Tolerance class: 4h/6h-4H/5H

MilliPro - Miniature Thread Mills


3 x Do (L1 ≤ 3 x Thread Diameter)

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia. |
|-----------|-------|---------------------------|---------------|-------|----|------|---------------|-------|-----------|
| Standard | mm | Internal | D | D2 | L | L1 | Z | Zt | mm |
| MJ3x0.5 | 0.5 | D3T06024L092-I0.5MJTM... | 6 | 2.40 | 57 | 9.2 | 3 | 3 | 2.6 |
| MJ3.5x0.6 | 0.6 | D3T06028L110-I0.6MJTM... | 6 | 2.85 | 57 | 11.0 | 3 | 3 | 3.0 |
| MJ4x0.7 | 0.7 | D3T06031L123-I0.7MJTM... | 6 | 3.15 | 57 | 12.3 | 3 | 3 | 3.4 |
| MJ5x0.8 | 0.8 | D3T06040L154-I0.8MJTM... | 6 | 4.05 | 57 | 15.4 | 3 | 3 | 4.3 |
| MJ6x1.0 | 1.0 | D3T06048L185-I1.0MJTM... | 6 | 4.80 | 57 | 18.5 | 3 | 3 | 5.1 |
| MJ8x1.25 | 1.25 | D3T08065L246-I1.25MJTM... | 8 | 6.50 | 63 | 24.6 | 3 | 3 | 6.9 |
| MJ10x1.5 | 1.50 | D3T10082L308-I1.50MJTM... | 10 | 8.20 | 73 | 30.8 | 3 | 3 | 8.7 |
| MJ12x1.75 | 1.75 | D3T10099L370-I1.75MJTM... | 10 | 9.90 | 73 | 37.0 | 3 | 3 | 10.4 |
| MJ14x2 | 2.0 | D3T12119L425-I2.0MJTM... | 12 | 11.90 | 83 | 42.5 | 3 | 3 | 12.25 |

* Bore diameter applies to smallest thread dia.

ISO Metric

MilliPro Dental

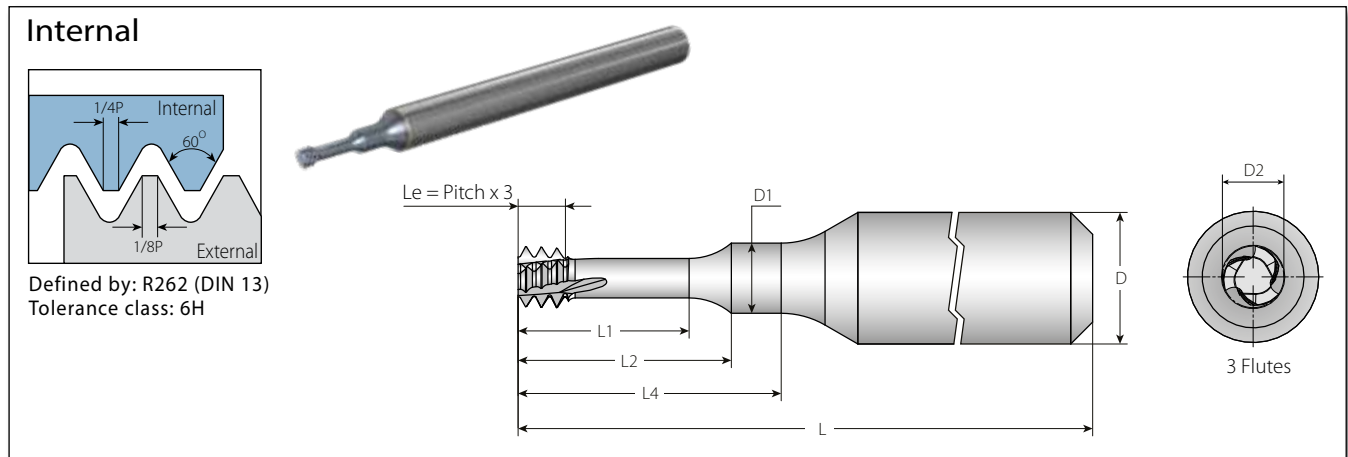


MilliPro Dental - Miniature Thread Mills for Dental Implants

3 x Do (L4 ≥ 3 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | | | | No. of Flutes | Teeth | Bore Dia. |
|-----------|-----------|-------|-----------------------------|---------------|------|----|-----|-----|-----|------|---------------|-------|-----------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | L1 | L2 | L4 | D1 | Z | Zt | mm |
| M1.2x0.25 | M1.4x0.25 | 0.25 | DD3T03009L043-I0.25ISOTM... | 3 | 0.90 | 39 | 2.5 | 3.3 | 4.3 | 0.95 | 3 | 3 | 0.97 |
| M1.4x0.30 | | 0.3 | DD3T03011L050-I0.30ISOTM... | | 1.05 | | 2.8 | 3.5 | 5.0 | 1.05 | | | 1.12 |
| M1.6x0.35 | M1.8x0.35 | 0.35 | DD3T03012L058-I0.35ISOTM... | | 1.20 | | 3.3 | 4.2 | 5.9 | 1.25 | | | 1.27 |
| M1.8x0.35 | M2.0x0.35 | 0.35 | DD3T03014L065-I0.35ISOTM... | | 1.40 | | 3.8 | 4.7 | 6.6 | 1.45 | | | 1.47 |
| M2.0x0.4 | | 0.4 | DD3T03015L067-I0.40ISOTM... | | 1.54 | | 3.9 | 4.9 | 6.7 | 1.70 | | | 1.63 |
| M2.5x0.45 | | 0.45 | DD3T03019L082-I0.45ISOTM... | | 1.96 | | 4.8 | 5.8 | 8.2 | 2.00 | | | 2.08 |

American UN

MilliPro Dental

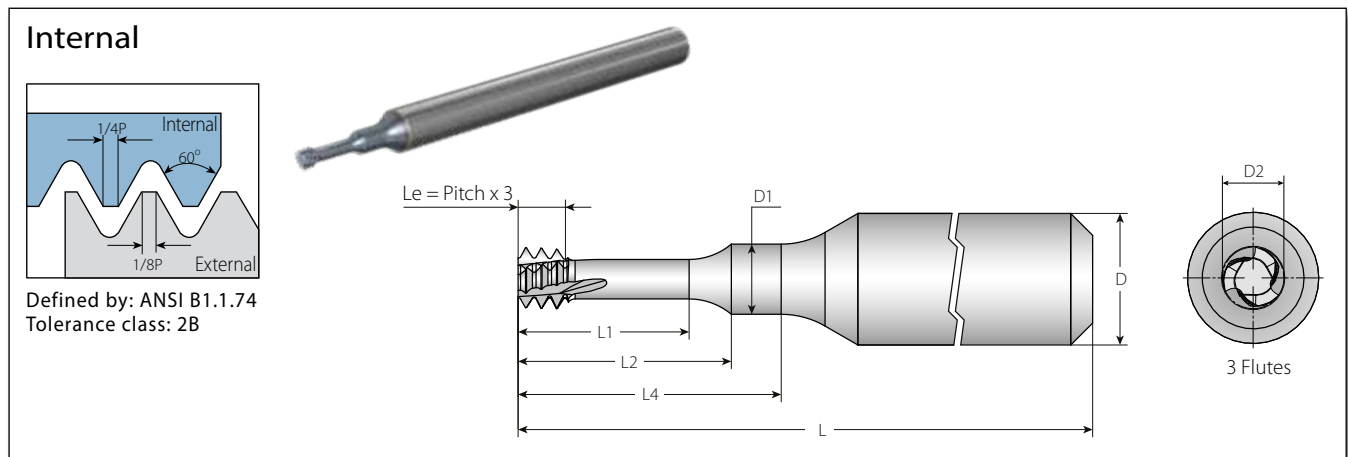

MilliPro Dental - Miniature Thread Mills for Dental Implants


3xDo (L4 ≥ 3 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | | | | No. of Flutes | Teeth | Bore Dia. |
|--------|-----|-------|--------------------------|---------------|------|----|-----|-----|-----|------|---------------|-------|-----------|
| UNF | TPI | | Internal | D | D2 | L | L1 | L2 | L4 | D1 | Z | Zt | mm |
| 0-80UN | 80 | | DD3T03011L052-I80UNTM... | 3 | 1.16 | 39 | 2.8 | 3.6 | 5.0 | 1.15 | 3 | 3 | 1.27 |
| 1-72UN | 72 | | DD3T03014L065-I72UNTM... | | 1.44 | | 3.9 | 4.9 | 6.5 | 1.60 | | | 1.56 |

* The MilliPro DD3T Dental was specially designed for machining Titanium and Stainless Steel in high RPM.

ISO Metric

MilliPro EL

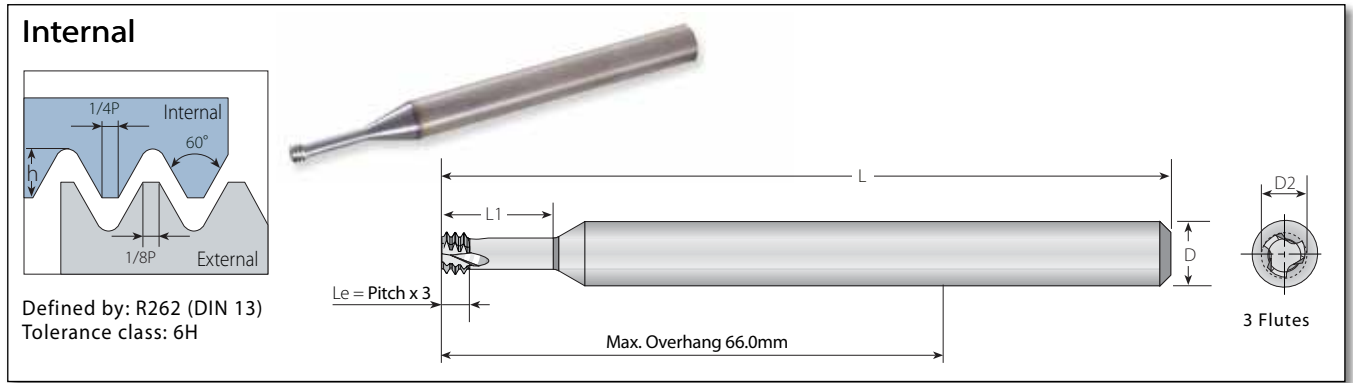


MilliPro EL Miniature Thread Mills , Extra Long Tools

2 x Do (L1 ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|-----------|--------------|-------|-----------------------------|---------------|------|-----|-----|---------------|-------|------------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | L1 | Z | Zt | mm |
| M2x0.4 | | 0.4 | D3T06015L042-I0.4ISOTML... | 6 | 1.55 | 100 | 4.2 | 3 | 3 | 1.6 |
| M2.5x0.45 | | 0.45 | D3T06019L052-I0.45ISOTML... | 6 | 1.95 | 100 | 5.2 | 3 | 3 | 2.05 |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | D3T06024L062-I0.5ISOTML... | 6 | 2.40 | 100 | 6.2 | 3 | 3 | 2.5 |

American UN

MilliPro EL

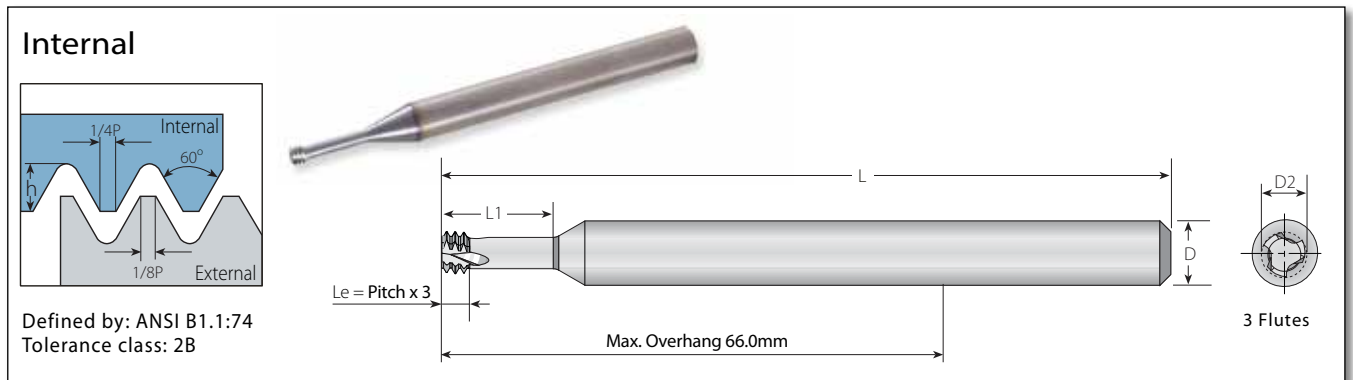


MilliPro EL Miniature Thread Mills, Extra Long Tools

2 x Do (L1 ≤ 2 x Thread Diameter)



| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|---------------|----------|-------|--------------------------|---------------|------|-----|------|---------------|-------|------------|
| UNC | UNF | TPI | Internal | D | D2 | L | L1 | Z | Zt | mm |
| No.2-56 | No.3-56 | 56 | D3T06016L050-I56UNTML... | 6 | 1.65 | 100 | 5.0 | 3 | 3 | 1.8 |
| No.4, No.5-40 | No.6-40 | 40 | D3T06021L060-I40UNTML... | 6 | 2.10 | 100 | 6.0 | 3 | 3 | 2.3 |
| No.6, No.8-32 | No.10-32 | 32 | D3T06025L074-I32UNTML... | 6 | 2.55 | 100 | 7.4 | 3 | 3 | 2.8 |
| No.8-32 | No.10-32 | 32 | D3T06032L100-I32UNTML... | 6 | 3.20 | 100 | 10.0 | 3 | 3 | 3.4 |

* Bore diameter applies to smallest thread dia.

Internal



Defined by: R262 (DIN 13)
Tolerance class: 6H

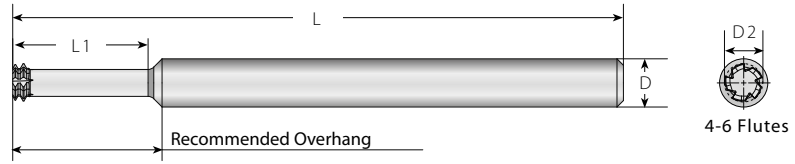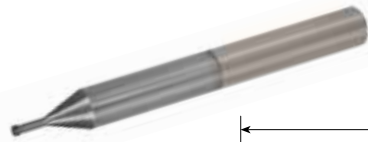

Left Hand Tool

MilliPro HD
Miniature Thread Mills for Hard Materials Up to 62HRc

2 x Do (L1 ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|-----------|--------------|-------|----------------------------|---------------|------|-----|-------|---------------|-------|------------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | L1 | Z | Zt | mm |
| M2x0.4 | | 0.4 | S2L06015L042-I0.4ISOTM... | 6 | 1.55 | 76 | 4.60 | 4 | 2 | 1.6 |
| M2.2x0.45 | | 0.45 | S2L06016L046-I0.45ISOTM... | 6 | 1.65 | 76 | 5.05 | 4 | 2 | 1.8 |
| M2.5x0.45 | | 0.45 | S2L06019L052-I0.45ISOTM... | 6 | 1.95 | 76 | 5.65 | 4 | 2 | 2.05 |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | S2L06024L062-I0.5ISOTM... | 6 | 2.40 | 76 | 6.75 | 4 | 2 | 2.55 |
| M3.5x0.6 | | 0.6 | S2L06027L073-I0.6ISOTM... | 6 | 2.75 | 76 | 7.90 | 4 | 2 | 2.95 |
| M4x0.7 | | 0.7 | S2L06031L083-I0.7ISOTM... | 6 | 3.15 | 76 | 9.05 | 4 | 2 | 3.35 |
| M5x0.8 | | 0.8 | S2L06040L104-I0.8ISOTM... | 6 | 4.05 | 76 | 11.20 | 4 | 2 | 4.3 |
| M6x1.0 | M8-M40x1.0 | 1.0 | S2L06048L125-I1.0ISOTM... | 6 | 4.80 | 76 | 13.50 | 5 | 2 | 5.1 |
| M8x1.25 | | 1.25 | S2L08065L166-I1.25ISOTM... | 8 | 6.50 | 80 | 17.85 | 5 | 2 | 6.8 |
| M10x1.5 | M12-M48x1.50 | 1.50 | S2L08079L208-I1.50ISOTM... | 8 | 7.90 | 80 | 22.30 | 6 | 2 | 8.6 |
| M12x1.75 | | 1.75 | S2L10099L250-I1.75ISOTM... | 10 | 9.90 | 101 | 26.75 | 6 | 2 | 10.4 |

MilliPro HD
Miniature Thread Mills for Hard Materials Up to 62HRc

3 x Do (L1 ≤ 3 x Thread Diameter)



| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | Bore Dia.* |
|-----------|--------------|-------|----------------------------|---------------|------|----|-------|---------------|-------|------------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | L1 | Z | Zt | mm |
| M2x0.4 | | 0.4 | S2L06015L062-I0.4ISOTM... | 6 | 1.55 | 76 | 6.60 | 4 | 2 | 1.6 |
| M2.5x0.45 | | 0.45 | S2L06019L077-I0.45ISOTM... | 6 | 1.95 | 76 | 8.15 | 4 | 2 | 2.05 |
| M3x0.5 | M3.5-M16x0.5 | 0.5 | S2L06024L092-I0.5ISOTM... | 6 | 2.40 | 76 | 9.75 | 4 | 2 | 2.55 |
| M4x0.7 | | 0.7 | S2L06031L123-I0.7ISOTM... | 6 | 3.15 | 76 | 13.05 | 4 | 2 | 3.35 |
| M5x0.8 | | 0.8 | S2L06040L154-I0.8ISOTM... | 6 | 4.05 | 76 | 16.20 | 4 | 2 | 4.3 |
| M6x1.0 | M8-M40x1.0 | 1.0 | S2L06048L185-I1.0ISOTM... | 6 | 4.80 | 76 | 19.50 | 5 | 2 | 5.1 |
| M8x1.25 | | 1.25 | S2L08065L246-I1.25ISOTM... | 8 | 6.50 | 80 | 25.85 | 5 | 2 | 6.8 |

Roughing (Partial Profile)

Finish (Full Profile)


Two cutting teeth: Partial Profile for leading tooth followed by Full Profile for finishing.

The work direction should be from the top to the bottom (Climb Milling).



MilliPro HD Tools are left handed. For CNC use M04 code.

* Bore diameter applies to smallest thread dia.

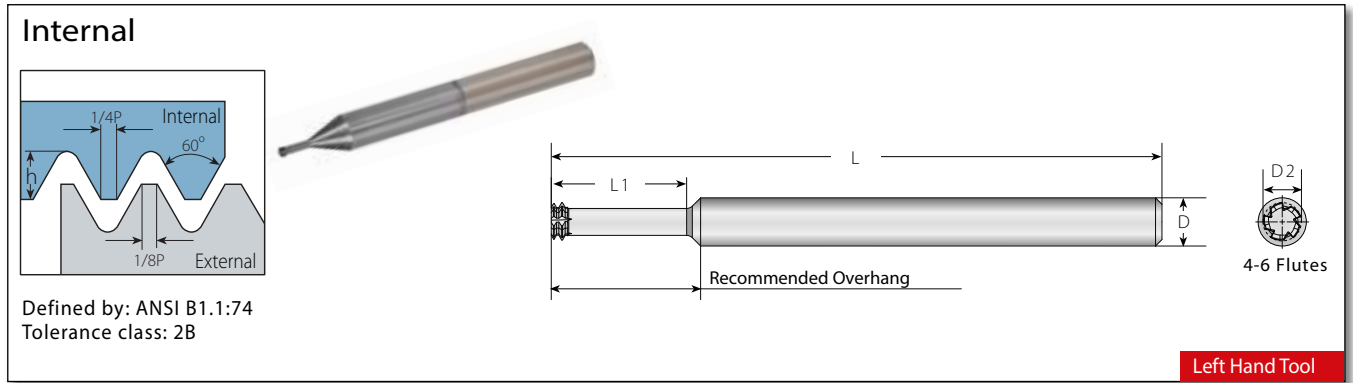


MilliPro HD
 Miniature Thread Mills for Hard Materials Up to 62HRc 2 x Do (L1 ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|------------------|----------|-------|-------------------------|---------------|------|-----|---------------|-------|------------|-------|
| UNC | UNF | TPI | Internal | D | D2 | L | L1 | Z | Zt | mm |
| No.2-56 | No.3-56 | 56 | S2L06016L050-I56UNTM... | 6 | 1.65 | 76 | 5.45 | 4 | 2 | 1.80 |
| No.3-48 | No.4-48 | 48 | S2L06019L060-I48UNTM... | 6 | 1.90 | 76 | 6.53 | 4 | 2 | 2.10 |
| No.4-40, No.5-40 | No.6-40 | 40 | S2L06021L060-I40UNTM... | 6 | 2.10 | 76 | 6.64 | 4 | 2 | 2.35 |
| No.5-40 | No.6-40 | 40 | S2L06024L072-I40UNTM... | 6 | 2.45 | 76 | 7.84 | 4 | 2 | 2.65 |
| | No.8-36 | 36 | S2L06033L087-I36UNTM... | 6 | 3.30 | 76 | 9.41 | 4 | 2 | 3.55 |
| No.6-32, No.8-32 | No.10-32 | 32 | S2L06025L074-I32UNTM... | 6 | 2.55 | 76 | 8.20 | 4 | 2 | 2.85 |
| No.8-32 | No.10-32 | 32 | S2L06032L100-I32UNTM... | 6 | 3.20 | 76 | 10.79 | 4 | 2 | 3.50 |
| | No.10-32 | 32 | S2L06037L100-I32UNTM... | 6 | 3.70 | 76 | 10.80 | 4 | 2 | 4.17 |
| | 1/4"x28 | 28 | S2L06052L132-I28UNTM... | 6 | 5.25 | 76 | 14.11 | 5 | 2 | 5.55 |
| No.10-24 | 5/16"x24 | 24 | S2L06035L102-I24UNTM... | 6 | 3.58 | 76 | 11.26 | 4 | 2 | 3.90 |
| | 5/16"x24 | 24 | S2L08066L165-I24UNTM... | 8 | 6.68 | 80 | 17.56 | 5 | 2 | 7.00 |
| 1/4"-20 | 7/16"x20 | 20 | S2L06048L134-I20UNTM... | 6 | 4.88 | 76 | 14.67 | 5 | 2 | 5.20 |
| | 7/16"x20 | 20 | S2L10095L230-I20UNTM... | 10 | 9.55 | 101 | 24.27 | 6 | 2 | 9.90 |
| 5/16"x18 | | 18 | S2L08061L160-I18UNTM... | 8 | 6.15 | 80 | 18.17 | 4 | 2 | 6.50 |
| 3/8"x16 | | 16 | S2L08076L197-I16UNTM... | 8 | 7.65 | 80 | 21.29 | 5 | 2 | 8.00 |
| 7/16"x14 | | 14 | S2L10090L233-I14UNTM... | 10 | 9.00 | 101 | 25.11 | 6 | 2 | 9.50 |
| 1/2"x13 | | 13 | S2L10099L256-I13UNTM... | 10 | 9.90 | 101 | 27.55 | 6 | 2 | 10.90 |


MilliPro HD
 Miniature Thread Mills for Hard Materials Up to 62HRc 3 x Do (L1 ≤ 3 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | Bore Dia.* | |
|------------------|----------|-------|-------------------------|---------------|------|-----|---------------|-------|------------|------|
| UNC | UNF | TPI | Internal | D | D2 | L | L1 | Z | Zt | mm |
| No.4-40, No.5-40 | No.6-40 | 40 | S2L06021L090-I40UNTM... | 6 | 2.10 | 76 | 9.64 | 4 | 2 | 2.35 |
| No.5-40 | No.6-40 | 40 | S2L06024L100-I40UNTM... | 6 | 2.45 | 76 | 10.64 | 4 | 2 | 2.65 |
| No.6-32, No.8-32 | No.10-32 | 32 | S2L06025L110-I32UNTM... | 6 | 2.55 | 76 | 11.79 | 4 | 2 | 2.85 |
| No.8-32 | No.10-32 | 32 | S2L06032L130-I32UNTM... | 6 | 3.20 | 76 | 13.79 | 4 | 2 | 3.50 |
| | 1/4"x28 | 28 | S2L06052L196-I28UNTM... | 6 | 5.25 | 76 | 20.51 | 5 | 2 | 5.55 |
| | 5/16"x24 | 24 | S2L08066L245-I24UNTM... | 8 | 6.68 | 80 | 25.56 | 5 | 2 | 7.00 |
| 1/4"x20 | 7/16"x20 | 20 | S2L06048L198-I20UNTM... | 6 | 4.88 | 76 | 21.07 | 5 | 2 | 5.20 |
| 5/16"x18 | | 18 | S2L08061L240-I18UNTM... | 8 | 6.15 | 80 | 26.17 | 4 | 2 | 6.50 |
| 7/16"x14 | | 14 | S2L10090L335-I14UNTM... | 10 | 9.00 | 101 | 35.31 | 6 | 2 | 9.50 |

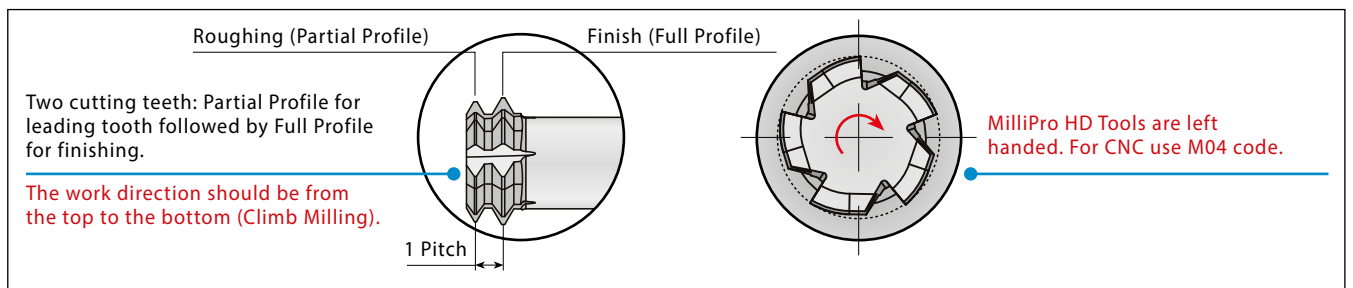



* Bore diameter applies to smallest thread dia.

Internal



Defined by: R262 (DIN 13)
Tolerance class: 6H

Coolant available only when specified

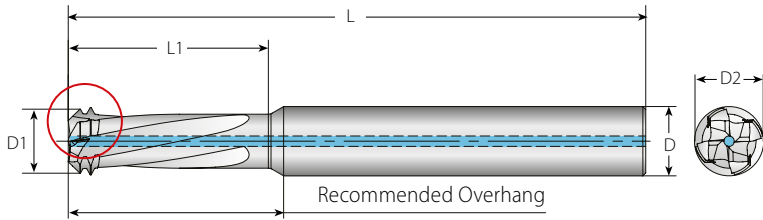

Left Hand Tool

TMDR - Drilling, Thread Milling & Chamfering

2 x Do (L1 ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | | |
|------------------------|-------------|-------|----------------------------|---------------|-------|-----|------|---------------|-------|------|-------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | L1 | Z | Zt | L4* | D1 |
| Without coolant | | | | | | | | | | | |
| M3x0.5 | M4x0.5 | 0.50 | TD-2L06024L070-I0.50ISO... | 6 | 2.40 | 58 | 7.0 | 3 | 2 | 0.40 | 2.08 |
| M4x0.7 | | 0.70 | TD-2L06032L092-I0.70ISO... | 6 | 3.20 | 58 | 9.2 | 3 | 2 | 0.57 | 2.88 |
| M5x0.8 | | 0.80 | TD-2L06039L115-I0.80ISO... | 6 | 3.90 | 58 | 11.5 | 3 | 2 | 0.70 | 3.51 |
| M6-M7x1.0 | M8-M9x1.0 | 1.00 | TD-2L06047L140-I1.00ISO... | 6 | 4.70 | 58 | 14.0 | 3 | 2 | 0.79 | 4.16 |
| With coolant | | | | | | | | | | | |
| M6-M7x1.0 | M8-M9x1.0 | 1.00 | TDC2L08047L140-I1.00ISO... | 8 | 4.70 | 64 | 14.0 | 3 | 2 | 0.79 | 4.16 |
| M8x1.25 | M9-M11x1.25 | 1.25 | TDC2L08061L180-I1.25ISO... | 8 | 6.10 | 64 | 18.0 | 4 | 2 | 0.90 | 5.57 |
| M10x1.5 | M11-M14x1.5 | 1.50 | TDC2L08078L230-I1.50ISO... | 8 | 7.80 | 64 | 23.0 | 4 | 2 | 1.12 | 7.24 |
| M12x1.75 | | 1.75 | TDC2L10090L260-I1.75ISO... | 10 | 9.00 | 80 | 26.0 | 4 | 2 | 1.20 | 8.35 |
| M16x2.0 | M17-M23x2.0 | 2.00 | TDC2L12118L350-I2.00ISO... | 12 | 11.80 | 100 | 35.0 | 4 | 2 | 2.00 | 11.13 |
| M18-M22x2.50 | | 2.50 | TDC2L16150L446-I2.5ISO... | 16 | 15.00 | 135 | 44.6 | 4 | 2 | 2.25 | 14.08 |

TMDR - Drilling, Thread Milling & Chamfering



2.5 x Do (L1 ≤ 2.5 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | | |
|------------------------|-------------|-------|----------------------------|---------------|-------|-----|------|---------------|-------|------|-------|
| M Coarse | M Fine | mm | Internal | D | D2 | L | L1 | Z | Zt | L4* | D1 |
| Without coolant | | | | | | | | | | | |
| M3x0.5 | M4x0.5 | 0.50 | TD-2L06024L085-I0.50ISO... | 6 | 2.40 | 58 | 8.5 | 3 | 2 | 0.40 | 2.08 |
| M4x0.7 | | 0.70 | TD-2L06032L112-I0.70ISO... | 6 | 3.20 | 58 | 11.2 | 3 | 2 | 0.57 | 2.88 |
| M5x0.8 | | 0.80 | TD-2L06039L144-I0.80ISO... | 6 | 3.90 | 58 | 14.4 | 3 | 2 | 0.70 | 3.51 |
| M6-M7x1.0 | M8-M9x1.0 | 1.00 | TD-2L06047L170-I1.00ISO... | 6 | 4.70 | 58 | 17.0 | 3 | 2 | 0.79 | 4.16 |
| With coolant | | | | | | | | | | | |
| M6-M7x1.0 | M8-M9x1.0 | 1.00 | TDC2L08047L170-I1.00ISO... | 8 | 4.70 | 64 | 17.0 | 3 | 2 | 0.79 | 4.16 |
| M8x1.25 | M9-M11x1.25 | 1.25 | TDC2L08061L220-I1.25ISO... | 8 | 6.10 | 64 | 22.0 | 4 | 2 | 0.90 | 5.57 |
| M10x1.5 | M11-M14x1.5 | 1.50 | TDC2L08078L280-I1.50ISO... | 8 | 7.80 | 64 | 28.0 | 4 | 2 | 1.12 | 7.24 |
| M12x1.75 | | 1.75 | TDC2L10090L320-I1.75ISO... | 10 | 9.00 | 80 | 32.0 | 4 | 2 | 1.20 | 8.35 |
| M16x2.0 | M17-M23x2.0 | 2.00 | TDC2L12118L430-I2.00ISO... | 12 | 11.80 | 100 | 43.0 | 4 | 2 | 2.00 | 11.13 |
| M18-M22x2.50 | | 2.50 | TDC2L16150L546-I2.5ISO... | 16 | 15.00 | 135 | 54.6 | 4 | 2 | 2.25 | 14.08 |
| M24x3.0 | | 3.00 | TDC2L18178L650-I3.0ISO... | 18 | 17.8 | 135 | 65.0 | 4 | 2 | 2.50 | 16.90 |

1st Tooth: Partial Profile (Roughing) 2nd Tooth: Full Profile (Finish)

Two cutting teeth: Partial Profile for leading tooth followed by Full Profile for finishing.

The work direction should be from the outside inwards (Climb Milling).



TMDR Tools are left handed. For CNC use M04 code.

* Please use the VARGUS GENius™ for Chamfer recommendations

Internal

Defined by: ANSI B1.1:74
Tolerance class: 2B
Coolant available only when specified

Left Hand Tool

TMDR - Drilling, Thread Milling & Chamfering

2 x Do (L1 ≤ 2 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | | | | | |
|------------------------|----------|-------------------|---------------|--------------------------|--------------------------|------|---------------|-------|------|----|------|------|------|
| UNC | UNF | UN | TPI | Internal | D | D2 | L | L1 | Z | Zt | L4* | D1 | |
| Without coolant | | | | | | | | | | | | | |
| No.4-40, No.5-40 | No.6-40 | | 40 | TD-2L06021L072-I40UNC... | 6 | 2.10 | 58 | 7.2 | 3 | 2 | 0.38 | 1.76 | |
| | | | 32 | TD-2L06026L086-I32UNC... | 6 | 2.60 | 58 | 8.6 | 3 | 2 | 0.45 | 2.21 | |
| No.8-32 | No.10-32 | | 32 | TD-2L06030L100-I32UNC... | 6 | 3.00 | 58 | 10.0 | 3 | 2 | 0.60 | 2.62 | |
| | | 1/4"x28 | 5/16"x28 | 28 | TD-2L06050L144-I28UNF... | 6 | 5.00 | 58 | 14.4 | 3 | 2 | 0.69 | 4.58 |
| No.10-24, No.12-24 | | | 24 | TD-2L06035L114-I24UNC... | 6 | 3.50 | 58 | 11.4 | 3 | 2 | 0.80 | 3.18 | |
| | | 1/4"x20 | 5/16"x20 | 20 | TD-2L06048L145-I20UNC... | 6 | 4.80 | 58 | 14.5 | 3 | 2 | 0.80 | 4.29 |
| With coolant | | | | | | | | | | | | | |
| | | 1/4"x28 | 5/16"x28 | 28 | TDC2L08050L144-I28UNF... | 8 | 5.00 | 64 | 14.4 | 3 | 2 | 0.69 | 4.58 |
| | | 5/16"x24, 3/8"x24 | | 24 | TDC2L08065L176-I24UNF... | 8 | 6.50 | 64 | 17.6 | 3 | 2 | 0.85 | 6.02 |
| | | 1/4"x20 | 5/16"x20 | 20 | TDC2L08048L145-I20UNC... | 8 | 4.80 | 64 | 14.5 | 3 | 2 | 0.80 | 4.29 |

TMDR - Drilling, Thread Milling & Chamfering

2.5 x Do (L1 ≤ 2.5 x Thread Diameter)

| Thread | | Pitch | Ordering Code | Dimensions mm | | | No. of Flutes | Teeth | | | | | |
|------------------------|----------|-------------------|---------------|--------------------------|--------------------------|------|---------------|-------|------|----|------|------|------|
| UNC | UNF | UN | TPI | Internal | D | D2 | L | L1 | Z | Zt | L4* | D1 | |
| Without coolant | | | | | | | | | | | | | |
| No.4-40, No.5-40 | No.6-40 | | 40 | TD-2L06021L088-I40UNC... | 6 | 2.10 | 58 | 8.8 | 3 | 2 | 0.38 | 1.76 | |
| | | | 32 | TD-2L06026L105-I32UNC... | 6 | 2.60 | 58 | 10.5 | 3 | 2 | 0.45 | 2.21 | |
| No.8-32 | No.10-32 | | 32 | TD-2L06030L122-I32UNC... | 6 | 3.00 | 58 | 12.2 | 3 | 2 | 0.60 | 2.62 | |
| | | 1/4"x28 | 5/16"x28 | 28 | TD-2L06050L178-I28UNF... | 6 | 5.00 | 58 | 17.8 | 3 | 2 | 0.69 | 4.58 |
| | | 1/4"x20 | 5/16"x20 | 20 | TD-2L06048L180-I20UNC... | 6 | 4.80 | 58 | 18.0 | 3 | 2 | 0.80 | 4.29 |
| With coolant | | | | | | | | | | | | | |
| | | 1/4"x28 | 5/16"x28 | 28 | TDC2L08050L178-I28UNF... | 8 | 5.00 | 64 | 17.8 | 3 | 2 | 0.69 | 4.58 |
| | | 5/16"x24, 3/8"x24 | | 24 | TDC2L08065L218-I24UNF... | 8 | 6.50 | 64 | 21.8 | 3 | 2 | 0.85 | 6.02 |
| | | 1/4"x20 | 5/16"x20 | 20 | TDC2L08048L180-I20UNC... | 8 | 4.80 | 64 | 18.0 | 3 | 2 | 0.80 | 4.29 |
| | | 3/8"x16 | 7/16"x16 | 16 | TDC2L08067L260-I16UNC... | 8 | 6.70 | 64 | 26.0 | 4 | 2 | 1.10 | 6.18 |

1st Tooth: Partial Profile (Roughing) 2nd Tooth: Full Profile (Finish)

Two cutting teeth: Partial Profile for leading tooth followed by Full Profile for finishing.

The work direction should be from the outside inwards (Climb Milling).


TMDR Tools are left handed. For CNC use M04 code.

* Please use the VARGUS GENius™ for Chamfer recommendations


BSP (G)

TMDR

Internal



Defined by: B.S.2779:1956
Tolerance class: Medium class

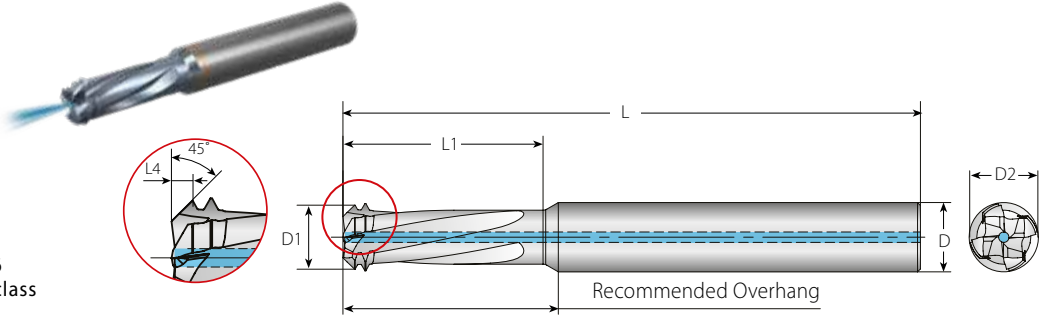

Left Hand Tool

TMDR - Drilling, Thread Milling & Chamfering


2 x Do (L1 ≤ 2 x Thread Diameter)

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | | |
|---------------------|-------|--------------------------|---------------|------|-----|------|---------------|-------|------|-------|
| Standard | TPI | Internal | D | D2 | L | L1 | Z | Zt | L4* | D1 |
| With Coolant | | | | | | | | | | |
| 1/16"x28 | 28 | TDC2L08059L175-I28BSP... | 8 | 5.9 | 64 | 17.5 | 4 | 2 | 0.60 | 5.50 |
| 1/8"x28 | 28 | TDC2L08078L230-I28BSP... | 8 | 7.8 | 64 | 23.0 | 4 | 2 | 0.60 | 7.28 |
| 1/4"x19 | 19 | TDC2L12105L320-I19BSP... | 12 | 10.5 | 80 | 32.0 | 4 | 2 | 0.80 | 10.00 |
| 3/8"x19 | 19 | TDC2L14126L380-I19BSP... | 14 | 12.6 | 100 | 38.0 | 4 | 2 | 0.80 | 12.04 |
| 1/2"x14 | 14 | TDC2L16158L456-I14BSP... | 16 | 15.8 | 135 | 45.6 | 4 | 2 | 1.27 | 15.16 |


NPT

TMDR

Internal



Defined by: USAS B2.1:1968
Tolerance class: Standard
NPT

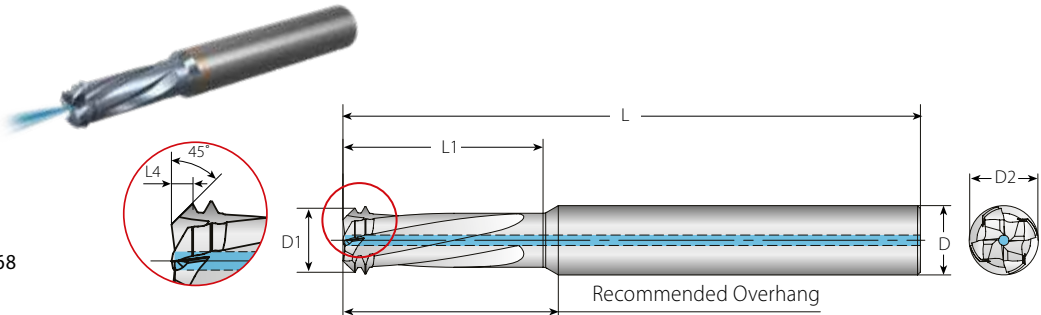


Left Hand Tool


TMDR - Drilling, Thread Milling & Chamfering

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | | |
|---------------------|-------|--------------------------|---------------|------|-----|------|---------------|-------|------|-------|
| Standard | TPI | Internal | D | D2 | L | L1 | Z | Zt | L4* | D1 |
| With Coolant | | | | | | | | | | |
| 1/16"x27 | 27 | TDC2L08056L112-I27NPT... | 8 | 5.6 | 64 | 11.2 | 4 | 2 | 0.60 | 5.07 |
| 1/8"x27 | 27 | TDC2L08075L112-I27NPT... | 8 | 7.5 | 64 | 11.2 | 4 | 2 | 0.60 | 6.97 |
| 1/4"x18 | 18 | TDC2L10094L164-I18NPT... | 10 | 9.4 | 80 | 16.4 | 4 | 2 | 1.00 | 8.67 |
| 3/8"x18 | 18 | TDC2L12119L164-I18NPT... | 12 | 11.9 | 100 | 16.4 | 4 | 2 | 1.00 | 11.19 |
| 1/2"x14 | 14 | TDC2L16153L286-I14NPT... | 16 | 15.3 | 100 | 28.6 | 6 | 2 | 1.50 | 14.41 |

* Please use the VARGUS GENIUS™ for Chamfer recommendations

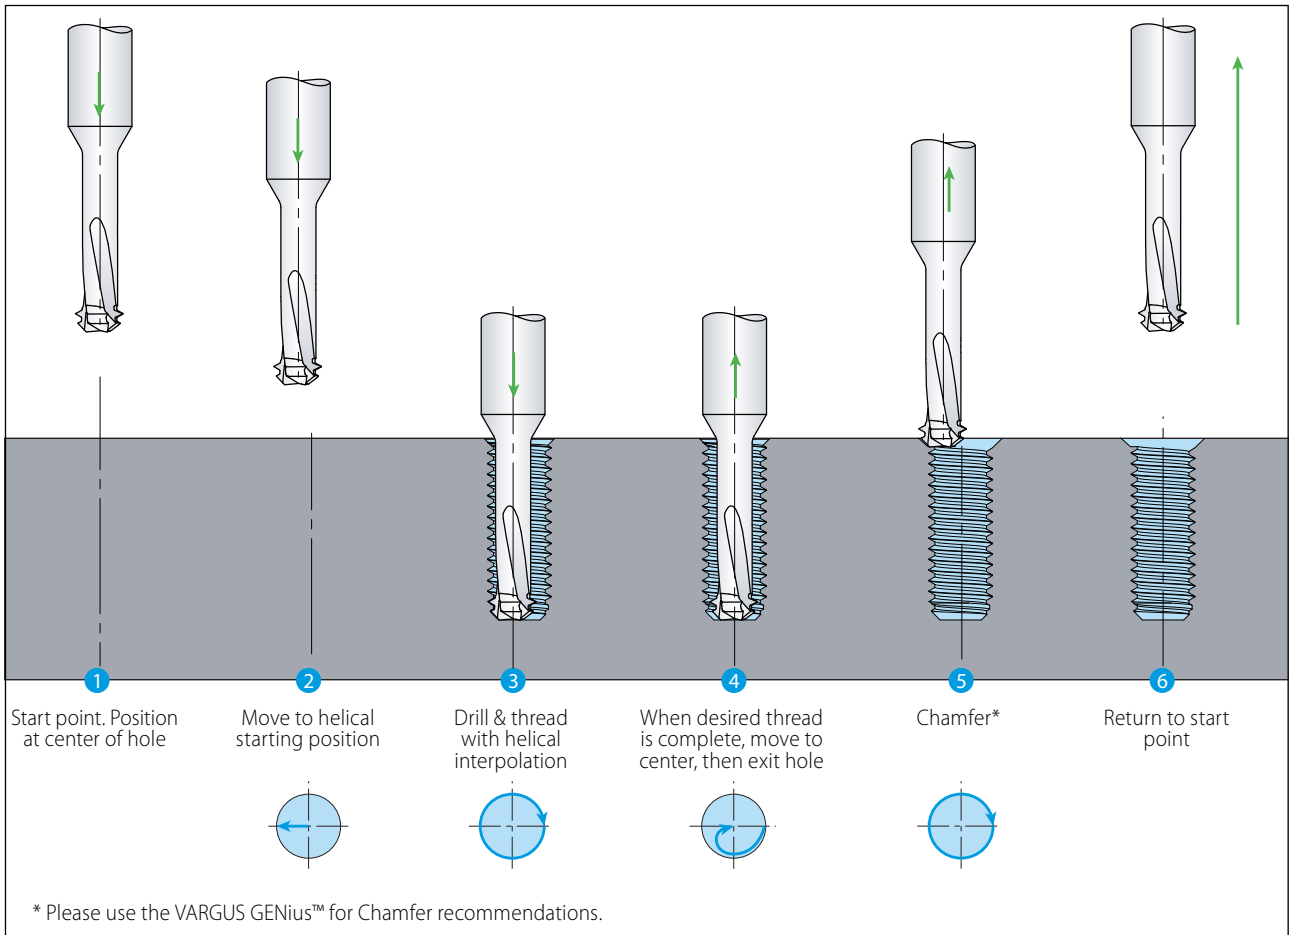


TMDR - Coolant Use for Best Chip Evacuation

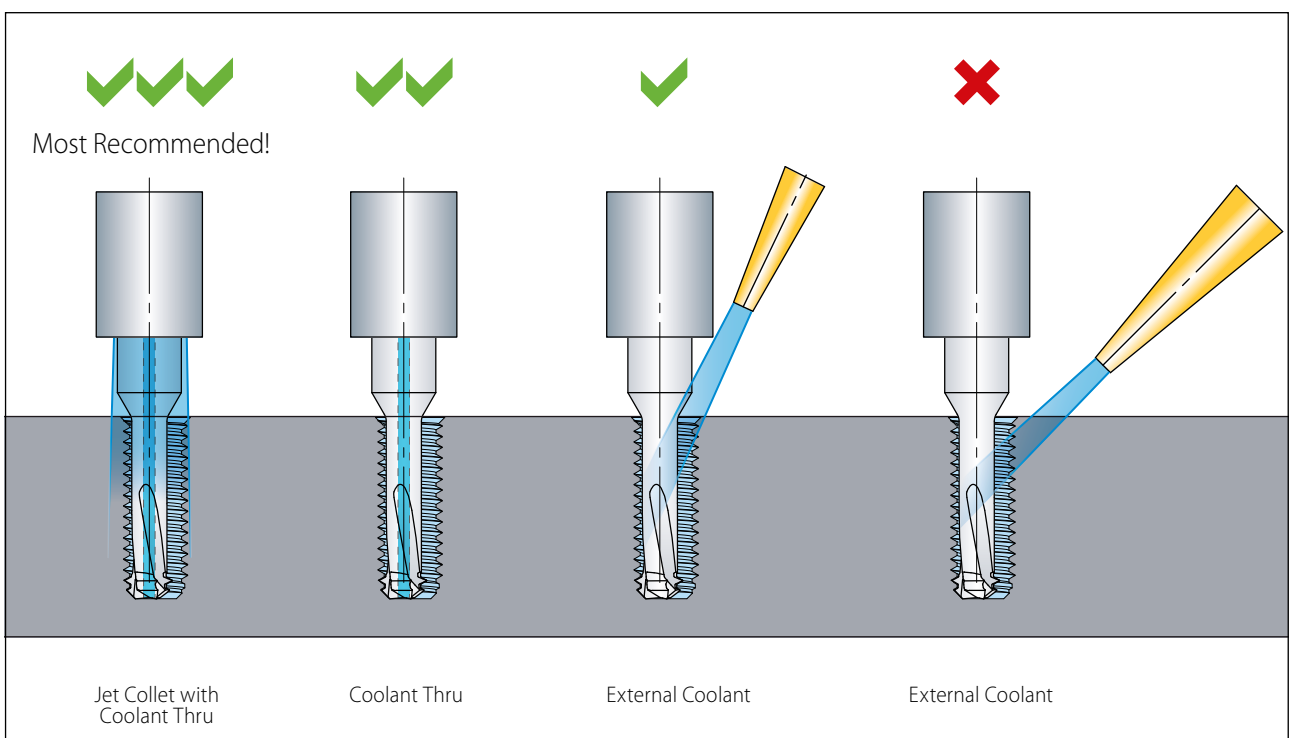

Tap 60°, Tap 55°

Straight

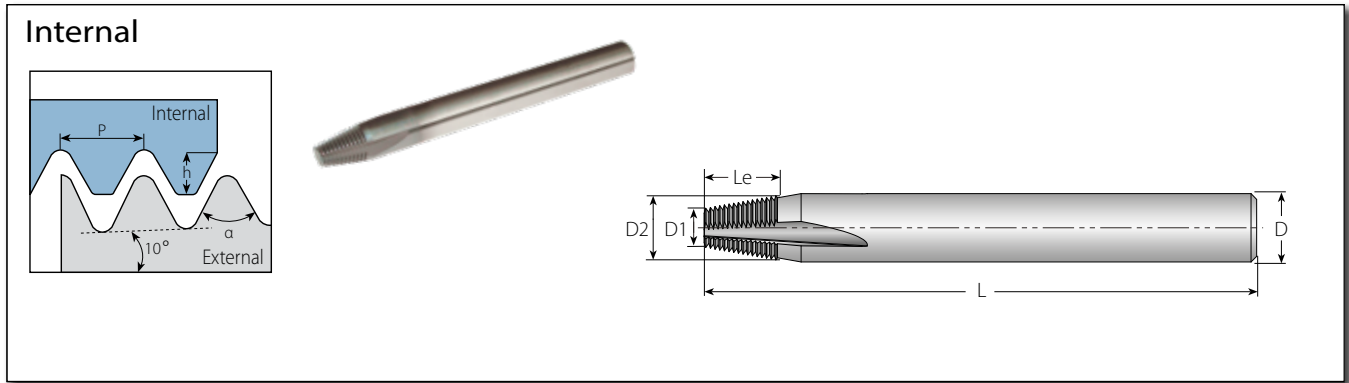

Straight Flutes - Taper 60° TM Solid Straight Flutes for Bone Plate Applications

| Pitch | Ordering Code | Taper | Thread Angle | Profile Height | Dimensions mm | | | | | No. of Flutes | Teeth |
|-------|---------------------------|-------|--------------|----------------|---------------|-----|-----|----|-----|---------------|-------|
| mm | Internal | | α | h | D | D2 | D1 | L | Le | Z | Zt |
| 0.4 | S06059L080-I0.4TAP60TM... | 20° | 60° | 0.20 | 6 | 5.9 | 3.2 | 57 | 8.0 | 3 | 20 |
| 0.5 | S06059L090-I0.5TAP60TM... | 20° | 60° | 0.25 | 6 | 5.9 | 2.9 | 57 | 9.0 | 3 | 18 |

Straight Flutes - Taper 55° TM Solid Straight Flutes for Bone Plate Applications

| Pitch | Ordering Code | Taper | Thread Angle | Profile Height | Dimensions mm | | | | | No. of Flutes | Teeth |
|-------|----------------------------|-------|--------------|----------------|---------------|-----|-----|----|------|---------------|-------|
| mm | Internal | | α | h | D | D2 | D1 | L | Le | Z | Zt |
| 0.3 | S03028L039-I0.3TAP55TM... | 20° | 55° | 0.18 | 3 | 2.8 | 1.5 | 38 | 3.9 | 3 | 13 |
| 0.35 | S04039L063-I0.35TAP55TM... | 20° | 55° | 0.20 | 4 | 3.9 | 1.8 | 45 | 6.3 | 3 | 18 |
| 0.4 | S06059L100-I0.4TAP55TM... | 20° | 55° | 0.29 | 6 | 5.9 | 2.5 | 57 | 10.0 | 3 | 25 |
| 0.5 | S06059L090-I0.5TAP55TM... | 20° | 55° | 0.33 | 6 | 5.9 | 2.9 | 57 | 9.0 | 3 | 18 |
| 0.6 | S06059L066-I0.6TAP55TM... | 20° | 55° | 0.47 | 6 | 5.9 | 3.8 | 57 | 6.6 | 3 | 11 |

External / Internal

Defined by: R262 (DIN 13)
Tolerance class: 6g/6H

Straight Flutes - External



| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|-----------|-------|----------------------|---------------|-------|-----|------|---------------|-------|------|
| Min. Dia. | mm | External | D | D2 | L | Le | Z | Zt | h mm |
| M3 | 0.50 | S06059-E0.5ISOTM... | 6 | 5.90 | 57 | 15.0 | 3 | 30 | 0.31 |
| M4.5 | 0.75 | S08079-E0.75ISOTM... | 8 | 7.90 | 63 | 19.5 | 3, 5 * | 26 | 0.46 |
| M6 | 1.00 | S10099-E1.0ISOTM... | 10 | 9.90 | 72 | 24.0 | 5 | 24 | 0.61 |
| M10 | 1.50 | S12119-E1.5ISOTM... | 12 | 11.90 | 83 | 30.0 | 5 | 20 | 0.92 |
| M14 | 2.00 | S12119-E2.0ISOTM... | 12 | 11.90 | 83 | 30.0 | 5 | 15 | 1.23 |
| M24 | 3.00 | S16159-E3.0ISOTM... | 16 | 15.90 | 92 | 36.0 | 5 | 12 | 1.84 |
| M36 | 4.00 | S16159-E4.0ISOTM... | 16 | 15.90 | 92 | 40.0 | 5 | 10 | 2.45 |
| M64 | 6.00 | S20199-E6.0ISOTM... | 20 | 19.90 | 104 | 36.0 | 5 | 6 | 3.68 |

Straight Flutes - Internal

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|-----------|-------|----------------------|---------------|-------|-----|------|---------------|-------|------|
| Min. Dia. | mm | Internal | D | D2 | L | Le | Z | Zt | h mm |
| M4.5 | 0.75 | S04030-I0.75ISOTM... | 4 | 3.00 | 42 | 6.7 | 3 | 9 | 0.43 |
| M8 | 0.75 | S06059-I0.75ISOTM... | 6 | 5.90 | 57 | 15.0 | 3 | 20 | 0.43 |
| M5 | 0.80 | S04036-I0.8ISOTM... | 4 | 3.60 | 42 | 8.0 | 3 | 10 | 0.46 |
| M6 | 1.00 | S06040-I1.0ISOTM... | 6 | 4.00 | 57 | 9.0 | 3 | 9 | 0.58 |
| M12 | 1.00 | S08079-I1.0ISOTM... | 8 | 7.90 | 63 | 20.0 | 3, 5 * | 20 | 0.58 |
| M8 | 1.25 | S06050-I1.25ISOTM... | 6 | 5.00 | 57 | 12.5 | 3 | 10 | 0.72 |
| M10 | 1.50 | S06059-I1.5ISOTM... | 6 | 5.90 | 57 | 15.0 | 3 | 10 | 0.87 |
| M14 | 1.50 | S10099-I1.5ISOTM... | 10 | 9.90 | 72 | 24.0 | 5 | 16 | 0.87 |
| M18 | 1.50 | S12119-I1.5ISOTM... | 12 | 11.90 | 83 | 30.0 | 5 | 20 | 0.87 |
| M12 | 1.75 | S08079-I1.75ISOTM... | 8 | 7.90 | 63 | 19.2 | 3, 5 * | 11 | 1.01 |
| M16 | 2.00 | S10099-I2.0ISOTM... | 10 | 9.90 | 72 | 24.0 | 5 | 12 | 1.15 |
| M18 | 2.00 | S12119-I2.0ISOTM... | 12 | 11.90 | 83 | 30.0 | 5 | 15 | 1.15 |
| M20 | 2.50 | S12119-I2.5ISOTM... | 12 | 11.90 | 83 | 30.0 | 5 | 12 | 1.44 |
| M24 | 3.00 | S16159-I3.0ISOTM... | 16 | 15.90 | 92 | 36.0 | 5 | 12 | 1.73 |
| M30 | 3.50 | S16159-I3.5ISOTM... | 16 | 15.90 | 92 | 38.5 | 5 | 11 | 2.02 |
| M36 | 4.00 | S16159-I4.0ISOTM... | 16 | 15.90 | 92 | 40.0 | 5 | 10 | 2.31 |
| M48 | 5.00 | S20199-I5.0ISOTM... | 20 | 19.90 | 104 | 40.0 | 5 | 8 | 2.89 |
| M64 | 6.00 | S20199-I6.0ISOTM... | 20 | 19.90 | 104 | 36.0 | 5 | 6 | 3.46 |

* Available in 3 and 5 flutes. Add 3 or 5 to the ordering code (TM3.../TM5...).

External / Internal

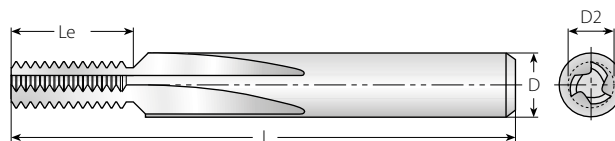

Defined by: ANSI B1.1:74
Tolerance class: 2A/2B

Straight Flutes - External

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|-----------|-------|-------------------|---------------|-------|-----|------|---------------|-------|------|
| Min. Dia. | TPI | External | D | D2 | L | Le | Z | Zt | h mm |
| No.6 | 32 | S06059-E32UNTM... | 6 | 5.90 | 57 | 14.3 | 3 | 18 | 0.49 |
| No.12 | 28 | S08079-E28UNTM... | 8 | 7.90 | 63 | 19.9 | 3, 5* | 22 | 0.56 |
| 1/4" | 20 | S10099-E20UNTM... | 10 | 9.90 | 72 | 22.9 | 5 | 18 | 0.78 |
| 5/16" | 18 | S10099-E18UNTM... | 10 | 9.90 | 72 | 24.0 | 5 | 17 | 0.87 |
| 3/8" | 16 | S12119-E16UNTM... | 12 | 11.90 | 83 | 28.6 | 5 | 18 | 0.97 |
| 9/16" | 12 | S12119-E12UNTM... | 12 | 11.90 | 83 | 29.6 | 5 | 14 | 1.30 |
| 1" | 8 | S16159-E8UNTM... | 16 | 15.90 | 92 | 38.1 | 5 | 12 | 1.95 |
| 1 3/8" | 6 | S20199-E6UNTM... | 20 | 19.90 | 104 | 38.1 | 5 | 9 | 2.60 |

Straight Flutes - Internal



| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|-----------|-------|--------------------|---------------|-------|-----|------|---------------|-------|------|
| Min. Dia. | TPI | Internal | D | D2 | L | Le | Z | Zt | h mm |
| No.8 | 36 | S04030-I36UNTM... | 4 | 3.00 | 42 | 6.3 | 3 | 9 | 0.41 |
| No.8 | 32 | S04030-I32UNTM... | 4 | 3.00 | 42 | 6.3 | 3 | 8 | 0.46 |
| 5/16" | 32 | S06059-I32UNTM... | 6 | 5.90 | 57 | 14.3 | 3 | 18 | 0.46 |
| No.12 | 28 | S04036-I28UNTM... | 4 | 3.60 | 42 | 8.2 | 3 | 9 | 0.52 |
| 7/16" | 28 | S08079-I28UNTM... | 8 | 7.90 | 63 | 19.9 | 3, 5* | 22 | 0.52 |
| No.12 | 24 | S06040-I24UNTM... | 6 | 4.00 | 57 | 8.5 | 3 | 8 | 0.61 |
| 1/4" | 20 | S06040-I20UNTM... | 6 | 4.00 | 57 | 10.2 | 3 | 8 | 0.73 |
| 9/16" | 20 | S10099-I20UNTM... | 10 | 9.90 | 72 | 22.9 | 5 | 18 | 0.73 |
| 5/16" | 18 | S06050-I18UNTM... | 6 | 5.00 | 57 | 12.7 | 3 | 9 | 0.81 |
| 9/16" | 18 | S10099-I18UNTM... | 10 | 9.90 | 72 | 24.0 | 5 | 17 | 0.81 |
| 3/8" | 16 | S06059-I16UNTM... | 6 | 5.90 | 57 | 14.3 | 3 | 9 | 0.92 |
| 3/4" | 16 | S12119-I16UNTM... | 12 | 11.90 | 83 | 28.6 | 5 | 18 | 0.92 |
| 7/16" | 14 | S08079-I14UNTM... | 8 | 7.90 | 63 | 18.1 | 3, 5* | 10 | 1.05 |
| 1/2" | 13 | S08079-I13UNTM... | 8 | 7.90 | 63 | 19.5 | 3, 5* | 10 | 1.13 |
| 9/16" | 12 | S10099-I12UNTM... | 10 | 9.90 | 72 | 23.3 | 5 | 11 | 1.22 |
| 1" | 12 | S12119-I12UNTM... | 12 | 11.90 | 83 | 29.6 | 5 | 14 | 1.22 |
| 5/8" | 11 | S10099-I11UNTM... | 10 | 9.90 | 72 | 23.1 | 5 | 10 | 1.33 |
| 3/4" | 10 | S12119-I10UNTM... | 12 | 11.90 | 83 | 27.9 | 5 | 11 | 1.47 |
| 7/8" | 9 | S16159-I9UNTM... | 16 | 15.90 | 92 | 33.3 | 5 | 12 | 1.63 |
| 1" | 8 | S16159-I8UNTM... | 16 | 15.90 | 92 | 38.1 | 5 | 12 | 1.83 |
| 1 1/8" | 7 | S16159-I7UNTM... | 16 | 15.90 | 92 | 36.3 | 5 | 10 | 2.09 |
| 1 3/8" | 6 | S20199-I6UNTM... | 20 | 19.90 | 104 | 38.1 | 5 | 9 | 2.44 |
| 1 3/4" | 5 | S20199-I5UNTM... | 20 | 19.90 | 104 | 40.6 | 5 | 8 | 2.93 |
| 2" | 4.5 | S20199-I4.5UNTM... | 20 | 19.90 | 104 | 39.5 | 5 | 7 | 3.26 |

* Available in 3 and 5 flutes. Add 3 or 5 to the ordering code (TM3.../TM5...).

BSW

Straight

External / Internal

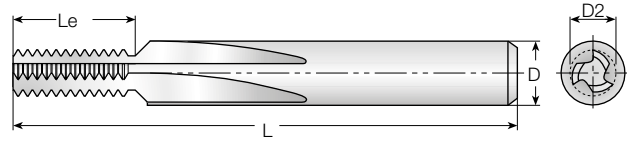

Defined by: B.S.84:1956, DIN 259, ISO228/1:1982
Tolerance class: Medium class A



Straight Flutes

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|-----------|-------|----------------------|---------------|-------|-----|-------|---------------|-------|------|
| Min. Dia. | TPI | External / Internal | D | D2 | L | Le | Z | Zt | h mm |
| 1/4" | 20 | S06040-EI20BSWTM... | 6 | 4.00 | 57 | 10.16 | 3 | 8 | 0.81 |
| 5/16" | 18 | S06050-EI18BSWTM... | 6 | 5.00 | 57 | 11.29 | 3 | 8 | 0.90 |
| 3/8" | 16 | S06059-EI16BSWTM... | 6 | 5.90 | 57 | 14.29 | 3 | 9 | 1.02 |
| 7/16" | 14 | S08079-EI14BSWTM... | 8 | 7.90 | 63 | 18.14 | 3,5* | 10 | 1.16 |
| 1/2" | 12 | S08079-EI12BSWTM... | 8 | 7.90 | 63 | 19.05 | 3,5* | 9 | 1.36 |
| 5/8" | 11 | S10099-EI11BSWTM... | 10 | 9.90 | 72 | 23.09 | 5 | 10 | 1.48 |
| 3/4" | 10 | S12119-EI10BSWTM... | 12 | 11.90 | 83 | 27.94 | 5 | 11 | 1.63 |
| 7/8" | 9 | S12119-EI9BSWTM... | 12 | 11.90 | 83 | 28.22 | 5 | 10 | 1.81 |
| 1" | 8 | S16159-EI8BSWTM... | 16 | 15.90 | 92 | 38.10 | 5 | 12 | 2.03 |
| 1 1/8" | 7 | S16159-EI7BSWTM... | 16 | 15.90 | 92 | 36.29 | 5 | 10 | 2.32 |
| 1 3/8" | 6 | S16159-EI6BSWTM... | 16 | 15.90 | 92 | 38.10 | 5 | 9 | 2.71 |
| 1 5/8" | 5 | S20199-EI5BSWTM... | 20 | 19.90 | 104 | 40.64 | 5 | 8 | 3.25 |
| 1 7/8" | 4.5 | S20199-EI4.5BSWTM... | 20 | 19.90 | 104 | 39.51 | 5 | 7 | 3.61 |

BSP

Straight

External / Internal

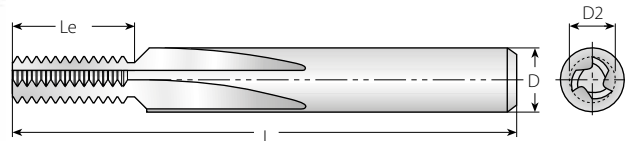

Defined by: B.S.2779:1956
Tolerance class: Medium class

Straight Flutes



| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|-----------|-------|---------------------|---------------|-------|----|-------|---------------|-------|------|
| Min. Dia. | TPI | External / Internal | D | D2 | L | Le | Z | Zt | h mm |
| 1/16" | 28 | S06059-EI28BSPTM... | 6 | 5.90 | 57 | 14.51 | 3 | 16 | 0.58 |
| 1/4" | 19 | S08079-EI19BSPTM... | 8 | 7.90 | 63 | 18.72 | 3,5* | 14 | 0.86 |
| 1/2" | 14 | S12119-EI14BSPTM... | 12 | 11.90 | 83 | 29.03 | 5 | 16 | 1.16 |
| 1" | 11 | S16159-EI11BSPTM... | 16 | 15.90 | 92 | 34.64 | 5 | 15 | 1.48 |

* Available in 3 and 5 flutes. Add 3 or 5 to the ordering code (TM3.../TM5...).

BSPT

Straight

External / Internal

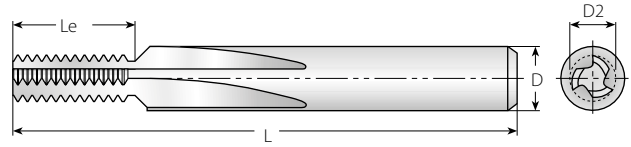

Defined by: B.S.21:1985
Tolerance class: Standard BSPT



Straight Flutes

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|-----------|-------|-----------------------|---------------|-------|----|-------|---------------|-------|------|
| Min. Dia. | TPI | External / Internal | D | D2 | L | Le | Z | Zt | h mm |
| 1/16" | 28 | S06059-EI28BSPT-TM... | 6 | 5.90 | 57 | 9.98 | 3 | 11 | 0.58 |
| 1/4" | 19 | S08079-EI19BSPT-TM... | 8 | 7.90 | 63 | 14.71 | 3, 5* | 11 | 0.86 |
| 1/2" | 14 | S12119-EI14BSPT-TM... | 12 | 11.90 | 83 | 19.96 | 5 | 11 | 1.16 |
| 1" | 11 | S16159-EI11BSPT-TM... | 16 | 15.90 | 92 | 39.25 | 5 | 17 | 1.48 |

NPT

Straight

External / Internal

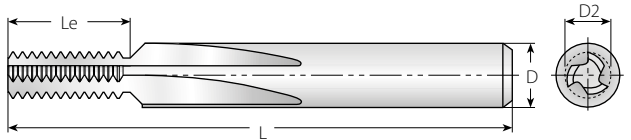

Defined by: USAS B2.1:1968
Tolerance class: Standard NPT

Straight Flutes

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|-----------|-------|------------------------|---------------|-------|----|-------|---------------|-------|------|
| Min. Dia. | TPI | External / Internal | D | D2 | L | Le | Z | Zt | h mm |
| 1/16" | 27 | S06059-EI27NPT-TM... | 6 | 5.90 | 57 | 9.41 | 3 | 10 | 0.66 |
| 1/4" | 18 | S08079-EI18NPT-TM... | 8 | 7.90 | 63 | 14.11 | 3, 5* | 10 | 1.01 |
| 1/2" | 14 | S12119-EI14NPT-TM... | 12 | 11.90 | 83 | 19.96 | 5 | 11 | 1.33 |
| 1" | 11.5 | S16159-EI11.5NPT-TM... | 16 | 15.90 | 92 | 26.51 | 5 | 12 | 1.64 |
| 2 1/2" | 8 | S16159-EI8NPT-TM... | 16 | 15.90 | 92 | 38.10 | 5 | 12 | 2.42 |

* Available in 3 and 5 flutes. Add 3 or 5 to the ordering code (TM3.../TM5...).

ANPT

Straight

External / Internal

Defined by: MIL-P-7105B
Tolerance class: Standard ANPT

Straight Flutes

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|-----------|-------|-----------------------|---------------|-------|----|-------|---------------|-------|------|
| Min. Dia. | TPI | External / Internal | D | D2 | L | Le | Z | Zt | h mm |
| 1/4" | 18 | S08079-EI18ANPT-TM... | 8 | 7.90 | 63 | 14.11 | 5 | 10 | 1.10 |
| 1/2" | 14 | S12119-EI14ANPT-TM... | 12 | 11.90 | 83 | 19.96 | 5 | 11 | 1.42 |

NPTF

Straight



External / Internal

Defined by: ANSI 1.20.3-1976
Tolerance class: Standard NPTF

Straight Flutes

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|-----------|-------|------------------------|---------------|-------|----|-------|---------------|-------|------|
| Min. Dia. | TPI | External / Internal | D | D2 | L | Le | Z | Zt | h mm |
| 1/16" | 27 | S06059-EI27NPTFTM... | 6 | 5.90 | 57 | 9.41 | 3 | 10 | 0.64 |
| 1/4" | 18 | S08079-EI18NPTFTM... | 8 | 7.90 | 63 | 14.11 | 3, 5* | 10 | 1.0 |
| 1/2" | 14 | S12119-EI14NPTFTM... | 12 | 11.90 | 83 | 19.96 | 5 | 11 | 1.35 |
| 1" | 11.5 | S16159-EI11.5NPTFTM... | 16 | 15.90 | 92 | 26.51 | 5 | 12 | 1.63 |
| 2 1/2" | 8 | S16159-EI8NPTFTM... | 16 | 15.90 | 92 | 38.10 | 5 | 12 | 2.38 |

External / Internal

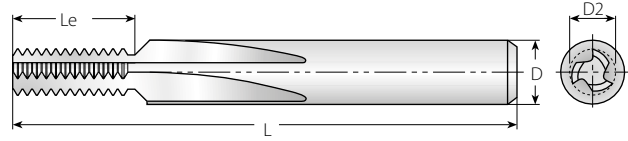

Defined by: DIN 40430
Tolerance class: Standard

Straight Flutes

| Thread | Pitch | Ordering Code | Dimensions mm | | | | No. of Flutes | Teeth | |
|----------------------|-------|--------------------|---------------|-------|----|-------|---------------|-------|------|
| | | | D | D2 | L | Le | | Zt | h mm |
| Pg7 | 20 | S08079-EI20PGTM... | 8 | 7.90 | 63 | 19.05 | 3, 5* | 15 | 0.61 |
| Pg9, 11, 13.5, 16 | 18 | S10099-EI18PGTM... | 10 | 9.90 | 72 | 23.99 | 5 | 17 | 0.67 |
| Pg21, 29, 36, 42, 48 | 16 | S12119-EI16PGTM... | 12 | 11.90 | 83 | 28.58 | 5 | 18 | 0.76 |

* Available in 3 and 5 flutes. Add 3 or 5 to the ordering code (TM3../TM5..).

Grades and Their Applications



VTH



- A general-purpose, heavy duty thread milling grade
- TiCN coated for high resistance to wear

VTS



VTS



VTN



VTS



Recommended Cutting Speeds Vc [m/min] and Feed f [mm/tooth]

| Material Group | Vargus No. | Material | | Hardness Brinell HB | Vc [m/min] | | | Feed [mm/tooth] | | | | |
|-------------------------------------|------------|--|------------------------------------|---------------------|--|---------|----------|-----------------|-----------|----------------|------------------|---------------------------|
| | | | | | Helicoil, HCR, HCC, Helical, Sraight, Deep Threading | | MilliPro | Helical | Straight | Deep Threading | Helicoil HCC HCR | MilliPro, MilliPro Dental |
| | | | | | VTH | VTS | VTH | | | | | |
| P Steel | 1 | Unalloyed Steel | Low Carbon (C=0.1-0.25%) | 125 | 80-250 | 50-180 | 60-120 | 0.03-0.08 | 0.03-0.08 | 0.10-0.35 | 0.03-0.08 | 0.02-0.16 |
| | 2 | | Medium Carbon (C=0.25-0.55%) | 150 | 80-230 | 50-140 | 60-120 | 0.03-0.08 | 0.03-0.08 | 0.08-0.30 | 0.03-0.08 | 0.02-0.16 |
| | 3 | | High Carbon (C=0.55-0.85%) | 170 | 80-200 | 50-120 | 60-90 | 0.03-0.08 | 0.03-0.06 | 0.08-0.30 | 0.03-0.08 | 0.02-0.16 |
| | 4 | Low Alloy Steel (alloying elements ≤5%) | Non Hardened | 180 | 60-180 | 60-170 | 60-90 | 0.03-0.08 | 0.03-0.07 | 0.08-0.30 | 0.03-0.08 | 0.02-0.16 |
| | 5 | | Hardened | 275 | 60-170 | 60-160 | 50-80 | 0.03-0.07 | 0.03-0.07 | 0.08-0.30 | 0.03-0.07 | 0.02-0.07 |
| | 6 | | Hardened | 350 | 60-160 | 60-150 | 50-80 | 0.02-0.05 | 0.02-0.04 | 0.05-0.15 | 0.02-0.06 | 0.02-0.03 |
| | 7 | High Alloy Steel (alloying elements >5%) | Annealed | 200 | 40-100 | 40-90 | 50-80 | 0.03-0.07 | 0.03-0.07 | 0.10-0.24 | 0.03-0.07 | 0.02-0.09 |
| | 8 | | Hardened | 325 | 30-80 | 30-70 | 50-80 | 0.02-0.04 | 0.02-0.05 | 0.05-0.15 | 0.03-0.06 | 0.02-0.03 |
| | 9 | Cast Steel | Low Alloy (alloying elements <5%) | 200 | 80-250 | 70-200 | 70-90 | 0.03-0.08 | 0.03-0.06 | 0.08-0.30 | 0.03-0.07 | 0.02-0.16 |
| | 10 | | High Alloy (alloying elements >5%) | 225 | 60-170 | 60-150 | 60-80 | 0.03-0.05 | 0.03-0.06 | 0.05-0.15 | 0.03-0.07 | 0.02-0.03 |
| M Stainless Steel | 11 | Stainless Steel Ferritic | Non Hardened | 200 | 60-150 | 50-140 | 60-90 | 0.04-0.07 | 0.02-0.05 | 0.11-0.35 | 0.03-0.08 | 0.02-0.16 |
| | 12 | | Hardened | 330 | 60-120 | 50-110 | 50-80 | 0.02-0.06 | 0.01-0.03 | 0.05-0.24 | 0.03-0.06 | 0.02-0.03 |
| | 13 | Stainless Steel Austenitic | Austenitic | 180 | 60-140 | 60-130 | 60-90 | 0.03-0.08 | 0.02-0.05 | 0.11-0.35 | 0.03-0.08 | 0.02-0.16 |
| | 14 | | Super Austenitic | 200 | 60-130 | 50-120 | 50-80 | 0.03-0.08 | 0.02-0.05 | 0.11-0.35 | 0.03-0.06 | 0.02-0.16 |
| | 15 | Stainless Steel Cast Ferritic | Non Hardened | 200 | 60-160 | 50-150 | 60-90 | 0.03-0.08 | 0.02-0.05 | 0.11-0.35 | 0.03-0.06 | 0.02-0.16 |
| | 16 | | Hardened | 330 | 60-110 | 50-100 | 50-80 | 0.02-0.05 | 0.02-0.03 | 0.10-0.24 | 0.02-0.05 | 0.02-0.03 |
| | 17 | Stainless Steel Cast Austenitic | Austenitic | 200 | 60-150 | 50-140 | 60-90 | 0.03-0.08 | 0.02-0.06 | 0.11-0.35 | 0.02-0.05 | 0.02-0.16 |
| | 18 | | Hardened | 330 | 60-100 | 50-90 | 50-80 | 0.02-0.05 | 0.01-0.03 | 0.10-0.24 | 0.02-0.04 | 0.02-0.03 |
| K Cast Iron | 28 | Malleable Cast Iron | Ferritic (short chips) | 130 | 60-70 | 60-150 | 50-80 | 0.03-0.08 | 0.03-0.08 | 0.05-0.15 | 0.03-0.08 | 0.02-0.03 |
| | 29 | | Pearlitic (long chips) | 230 | 60-150 | 80-100 | 60-90 | 0.03-0.08 | 0.03-0.06 | 0.10-0.24 | 0.03-0.07 | 0.02-0.12 |
| | 30 | Grey Cast Iron | Low Tensile Strength | 180 | 70-160 | 50-140 | 70-100 | 0.03-0.08 | 0.03-0.06 | 0.09-0.25 | 0.03-0.07 | 0.02-0.16 |
| | 31 | | High Tensile Strength | 260 | 40-120 | 40-110 | 60-90 | 0.02-0.06 | 0.02-0.05 | 0.10-0.24 | 0.03-0.07 | 0.02-0.12 |
| | 32 | Nodular Sg Iron | Ferritic | 160 | 40-110 | 40-100 | 70-100 | 0.03-0.08 | 0.03-0.07 | 0.09-0.25 | 0.03-0.08 | 0.02-0.16 |
| | 33 | | Pearlitic | 260 | 40-100 | 40-90 | 60-90 | 0.02-0.06 | 0.02-0.05 | 0.10-0.24 | 0.03-0.07 | 0.02-0.12 |
| N Non-Ferrous Metals | 34 | Aluminium Alloys Wrought | Non Aging | 60 | 200-300 | 150-250 | 60-250 | 0.05-0.12 | 0.05-0.15 | 0.12-0.40 | 0.04-0.1 | 0.03-0.15 |
| | 35 | | Aged | 100 | 150-250 | 100-220 | 60-150 | 0.05-0.12 | 0.03-0.1 | 0.10-0.32 | 0.03-0.1 | 0.03-0.16 |
| | 36 | Aluminium Alloys | Cast | 75 | 100-200 | 80-150 | 60-250 | 0.05-0.12 | 0.05-0.15 | 0.10-0.32 | 0.03-0.1 | 0.03-0.16 |
| | 37 | | Cast & Aged | 90 | 120-220 | 90-160 | 60-150 | 0.05-0.12 | 0.03-0.1 | 0.10-0.30 | 0.06-0.12 | 0.02-0.16 |
| | 38 | Aluminium Alloys | Cast Si 13-22% | 130 | 200-300 | 150-250 | 250 | 0.05-0.12 | 0.05-0.15 | 0.10-0.32 | 0.05-0.12 | 0.03-0.15 |
| | 39 | Copper and Copper Alloys | Brass | 90 | 200-300 | 150-250 | 60-250 | 0.06-0.13 | 0.05-0.15 | 0.12-0.40 | 0.05-0.12 | 0.03-0.16 |
| | 40 | | Bronze And Non Leded Copper | 100 | 150-250 | 100-220 | 60-150 | 0.05-0.12 | 0.03-0.1 | 0.10-0.32 | 0.05-0.12 | 0.03-0.15 |
| S Heat Resistant Material | 19 | High Temperature Alloys | Annealed (iron based) | 200 | 30-60 | 30-50 | 60 | 0.03-0.07 | 0.02-0.04 | 0.11-0.35 | 0.03-0.7 | 0.02-0.16 |
| | 20 | | Aged (iron based) | 280 | 20-50 | 20-40 | 50 | 0.02-0.04 | 0.01-0.03 | 0.05-0.15 | 0.03-0.06 | 0.02-0.03 |
| | 21 | | Annealed (nickel or cobalt based) | 250 | 15-35 | 15-30 | 35 | 0.02-0.04 | 0.01-0.03 | 0.05-0.15 | 0.03-0.06 | 0.02-0.03 |
| | 22 | | Aged (nickel or cobalt based) | 350 | 15-30 | 15-25 | 30 | 0.02-0.04 | 0.01-0.03 | 0.05-0.15 | 0.02-0.05 | 0.02-0.03 |
| | 23 | Titanium Alloys | Pure 99.5 Ti | 400Rm | 40-80 | 30-70 | 30-50 | 0.02-0.04 | 0.01-0.03 | 0.10-0.24 | 0.02-0.05 | 0.02-0.07 |
| | 24 | | α+β Alloys | 1050Rm | 20-50 | 20-45 | 25-35 | 0.02-0.04 | 0.01-0.02 | 0.10-0.24 | 0.02-0.04 | 0.02-0.07 |
| H Hardened Material | 25 | Extra Hard Steel | Hardened & Tempered | 45-50HRC | 15-45 | 15-35 | 45 | 0.02-0.03 | 0.02 | 0.03-0.06 | 0.02-0.03 | - |
| | 26 | | | 51-55HRC | 15-40 | 15-30 | 30 | 0.02-0.03 | 0.01 | 0.03-0.06 | 0.02-0.03 | - |


Recommendation:

At tool entry, set the Feed f [mm/tooth] to 70% lower than the threading Feed.

Example:

Threading Feed: 0.3[mm/tooth]


Tool entry Feed: 0.09[mm/tooth]

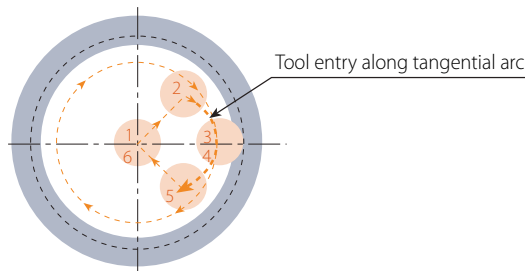

Efficient Multi-passes Machining Method

Due to the high volume of chips, thinner chips are required. This is achieved by radial multi-pass machining, which reduces the accumulation of chips, and thereby enables high speeds and feed rates.

MultiFlute

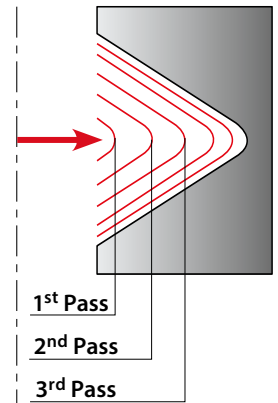

Recommended No. of Passes According to Pitch

| | | | | | | | | | |
|---------------|------|------|------|------|------|------|------|------|------|
| Pitch TPI | 48 | 32 | 24 | 20 | 16 | 14 | 12 | 10 | 8 |
| Pitch mm | 0.50 | 0.75 | 1.00 | 1.25 | 1.50 | 1.75 | 2.00 | 2.50 | 3.00 |
| No. of Passes | 2-3 | 2-3 | 3-4 | 4-5 | 5-6 | 5-6 | 6-7 | 7-8 | 7-9 |

Conventional milling with multiple passes is required.
For machining recommendations, use the Vargus GENius.

Recommended Cutting Speeds V_c [m/min] and Feed f [mm/tooth]

| Material Group | Vargus No. | Material | Hardness Brinell HB | 2xDo Tools | | | | 3xDo Tools | | | | |
|--------------------------------|------------|--|------------------------------------|---------------|---|-----------|-----------|---------------|---|-----------|-----------|-----------|
| | | | | V_c [m/min] | Feed f [mm/tooth] by Cutter Dia. = D2 | | | V_c [m/min] | Feed f [mm/tooth] by Cutter Dia. = D2 | | | |
| | | | | | VTH | 2.4-4.0 | 4.0-9.0 | | >9.0 | VTH | 2.4-4.0 | 4.0-9.0 |
| P Steel | 1 | Unalloyed Steel | Low Carbon (C=0.1-0.25%) | 125 | 145-185 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 70-110 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 2 | | Medium Carbon (C=0.25-0.55%) | 150 | 135-175 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 70-110 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 3 | | High Carbon (C=0.55-0.85%) | 170 | 120-160 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 65-105 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 4 | Low Alloy Steel (alloying elements ≤5%) | Non Hardened | 180 | 100-140 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 65-105 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 5 | | Hardened | 275 | 95-135 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 65-105 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 6 | | Hardened | 350 | 90-130 | 0.04-0.06 | 0.06-0.10 | 0.08-0.11 | 60-100 | 0.03-0.05 | 0.05-0.08 | 0.07-0.10 |
| | 7 | High Alloy Steel (alloying elements >5%) | Annealed | 200 | 50-90 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 50-90 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 8 | | Hardened | 325 | 40-80 | 0.04-0.06 | 0.06-0.10 | 0.08-0.11 | 40-80 | 0.03-0.05 | 0.05-0.08 | 0.07-0.10 |
| | 9 | Cast Steel | Low Alloy (alloying elements <5%) | 200 | 145-185 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 70-110 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 10 | | High Alloy (alloying elements >5%) | 225 | 95-135 | 0.04-0.06 | 0.06-0.10 | 0.08-0.11 | 65-105 | 0.03-0.05 | 0.05-0.08 | 0.07-0.10 |
| M Stainless Steel | 11 | Stainless Steel Ferritic | Non Hardened | 200 | 85-125 | 0.04-0.06 | 0.06-0.10 | 0.08-0.11 | 60-100 | 0.03-0.05 | 0.05-0.08 | 0.07-0.10 |
| | 12 | | Hardened | 330 | 70-110 | 0.04-0.06 | 0.06-0.10 | 0.08-0.11 | 60-100 | 0.03-0.05 | 0.05-0.08 | 0.07-0.10 |
| | 13 | Stainless Steel Austenitic | Austenitic | 180 | 80-120 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 60-100 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 14 | | Super Austenitic | 200 | 75-115 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 60-100 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 15 | Stainless Steel Cast Ferritic | Non Hardened | 200 | 90-130 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 60-100 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 16 | | Hardened | 330 | 65-105 | 0.04-0.06 | 0.06-0.10 | 0.08-0.11 | 60-100 | 0.03-0.05 | 0.05-0.08 | 0.07-0.10 |
| | 17 | Stainless Steel Cast Austenitic | Austenitic | 200 | 85-125 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 60-100 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 18 | | Hardened | 330 | 60-100 | 0.04-0.06 | 0.06-0.10 | 0.08-0.11 | 60-100 | 0.03-0.05 | 0.05-0.08 | 0.07-0.10 |
| K Cast Iron | 28 | Malleable Cast Iron | Ferritic (short chips) | 130 | 60-70 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 60-100 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 29 | | Pearlitic (long chips) | 230 | 85-125 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 60-100 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 30 | Grey Cast Iron | Low Tensile Strength | 180 | 95-135 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 65-105 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 31 | | High Tensile Strength | 260 | 60-100 | 0.04-0.06 | 0.06-0.10 | 0.08-0.11 | 70-110 | 0.03-0.05 | 0.05-0.08 | 0.07-0.10 |
| | 32 | Nodular Sg Iron | Ferritic | 160 | 55-95 | 0.05-0.08 | 0.09-0.14 | 0.11-0.17 | 40-80 | 0.03-0.05 | 0.07-0.10 | 0.08-0.13 |
| | 33 | | Pearlitic | 260 | 50-90 | 0.04-0.06 | 0.06-0.10 | 0.08-0.11 | 40-80 | 0.03-0.05 | 0.05-0.08 | 0.07-0.10 |
| N Non-Ferrous Metals | 34 | Aluminum Alloys Wrought | Non Aging | 60 | 200-300 | 0.06-0.10 | 0.11-0.17 | 0.16-0.19 | 70-110 | 0.06-0.09 | 0.11-0.16 | 0.13-0.20 |
| | 35 | | Aged | 100 | 150-250 | 0.06-0.10 | 0.11-0.17 | 0.16-0.19 | 70-110 | 0.06-0.09 | 0.11-0.16 | 0.13-0.20 |
| | 36 | Aluminum Alloys | Cast | 75 | 100-200 | 0.06-0.10 | 0.11-0.17 | 0.16-0.19 | 70-110 | 0.06-0.09 | 0.11-0.16 | 0.13-0.20 |
| | 37 | | Cast & Aged | 90 | 120-220 | 0.06-0.10 | 0.11-0.17 | 0.16-0.19 | 70-110 | 0.06-0.09 | 0.11-0.16 | 0.13-0.20 |
| | 38 | | Cast Si 13-22% | 130 | 200-300 | 0.06-0.10 | 0.11-0.17 | 0.16-0.19 | 70-110 | 0.06-0.09 | 0.11-0.16 | 0.13-0.20 |
| | 39 | Copper and Copper Alloys | Brass | 90 | 200-300 | 0.06-0.10 | 0.11-0.17 | 0.16-0.19 | 70-110 | 0.06-0.09 | 0.11-0.16 | 0.13-0.20 |
| | 40 | | Bronze And Non Leaded Copper | 100 | 150-250 | 0.06-0.10 | 0.11-0.17 | 0.16-0.19 | 70-110 | 0.06-0.09 | 0.11-0.16 | 0.13-0.20 |

Recommended Cutting Speeds Vc [m/min] and Feed f [mm/tooth]

HCN

| Material Group | Vargus No. | Material | | Hardness Brinell HB | Vc(m/min) | | Feed [mm/tooth] |
|--------------------------------|-------------------------------------|--|------------------------------------|-----------------------|-----------|-------|-----------------|
| | | | | | HCN | | |
| | | | | | VTH | | |
| P Steel | 1 | Unalloyed Steel | Low Carbon (C=0.1-0.25%) | 125 | 50-180 | | 0.03-0.08 |
| | 2 | | Medium Carbon (C=0.25-0.55%) | 150 | 50-140 | | 0.03-0.08 |
| | 3 | | High Carbon (C=0.55-0.85%) | 170 | 50-120 | | 0.03-0.06 |
| | 4 | Low Alloy Steel (alloying elements ≤5%) | Non Hardened | 180 | 60-170 | | 0.03-0.07 |
| | 5 | | Hardened | 275 | 60-160 | | 0.03-0.07 |
| | 6 | | Hardened | 350 | 60-150 | | 0.02-0.04 |
| | 7 | High Alloy Steel (alloying elements >5%) | Annealed | 200 | 40-90 | | 0.03-0.07 |
| | 8 | | Hardened | 325 | 30-70 | | 0.02-0.05 |
| | 9 | Cast Steel | Low Alloy (alloying elements <5%) | 200 | 70-200 | | 0.03-0.06 |
| | 10 | | High Alloy (alloying elements >5%) | 225 | 60-150 | | 0.03-0.06 |
| M Stainless Steel | 11 | Stainless Steel Ferritic | Non Hardened | 200 | 50-140 | | 0.02-0.05 |
| | 12 | | Hardened | 330 | 50-110 | | 0.01-0.03 |
| | 13 | Stainless Steel Austenitic | Austenitic | 180 | 60-130 | | 0.02-0.05 |
| | 14 | | Super Austenitic | 200 | 50-120 | | 0.02-0.05 |
| | 15 | Stainless Steel Cast Ferritic | Non Hardened | 200 | 50-150 | | 0.02-0.05 |
| | 16 | | Hardened | 330 | 50-100 | | 0.02-0.03 |
| | 17 | Stainless Steel Cast Austenitic | Austenitic | 200 | 50-140 | | 0.02-0.06 |
| | 18 | | Hardened | 330 | 50-90 | | 0.01-0.03 |
| K Cast Iron | 28 | Malleable Cast Iron | Ferritic (short chips) | 130 | 60-150 | | 0.03-0.08 |
| | 29 | | Pearlitic (long chips) | 230 | 80-100 | | 0.03-0.06 |
| | 30 | Grey Cast Iron | Low Tensile Strength | 180 | 50-140 | | 0.03-0.06 |
| | 31 | | High Tensile Strength | 260 | 40-110 | | 0.02-0.05 |
| | 32 | Nodular Sg Iron | Ferritic | 160 | 40-100 | | 0.03-0.07 |
| | 33 | | Pearlitic | 260 | 40-90 | | 0.02-0.05 |
| N Non-Ferrous Metals | 34 | Aluminum Alloys Wrought | Non Aging | 60 | 150-250 | | 0.05-0.15 |
| | 35 | | Aged | 100 | 100-220 | | 0.03-0.1 |
| | 36 | Aluminum Alloys | Cast | 75 | 80-150 | | 0.05-0.15 |
| | 37 | | Cast & Aged | 90 | 90-160 | | 0.03-0.1 |
| | 38 | Aluminum Alloys | Cast Si 13-22% | 130 | 150-250 | | 0.05-0.15 |
| | 39 | Copper and Copper Alloys | Brass | 90 | 150-250 | | 0.05-0.15 |
| | 40 | | Bronze And Non Leaded Copper | 100 | 100-220 | | 0.03-0.1 |
| | S Heat Resistant Material | 19 | High Temperature Alloys | Annealed (iron based) | 200 | 30-50 | |
| 20 | | Aged (iron based) | | 280 | 20-40 | | 0.01-0.03 |
| 21 | | Annealed (nickel or cobalt based) | | 250 | 15-30 | | 0.01-0.03 |
| 22 | | Aged (nickel or cobalt based) | | 350 | 15-25 | | 0.01-0.03 |
| 23 | | Titanium Alloys | Pure 99.5 Ti | 400Rm | 30-70 | | 0.01-0.03 |
| 24 | | | α+β Alloys | 1050Rm | 20-45 | | 0.01-0.02 |
| H Hardened Material | 25 | Extra Hard Steel | Hardened & Tempered | 45-50HRC | - | - | |
| | 26 | | | 51-55HRC | - | - | |

Recommended Cutting Speeds Vc [m/min] and Feed f [mm/tooth]

TMDR

| Material Group | Vargus No. | Material | | Hardness Brinell HB | Vc(m/min) | | Feed [mm/tooth] |
|--------------------------------|-------------------------------------|--|------------------------------------|-----------------------|-----------|----|-----------------|
| | | | | | TMDR | | |
| | | | | | VTS | | |
| P Steel | 1 | Unalloyed Steel | Low Carbon (C=0.1-0.25%) | 125 | 60-120 | | 0.02-0.12 |
| | 2 | | Medium Carbon (C=0.25-0.55%) | 150 | 60-120 | | 0.02-0.12 |
| | 3 | | High Carbon (C=0.55-0.85%) | 170 | 60-90 | | 0.02-0.12 |
| | 4 | Low Alloy Steel (alloying elements ≤5%) | Non Hardened | 180 | 60-90 | | 0.02-0.12 |
| | 5 | | Hardened | 275 | 50-80 | | 0.02-0.05 |
| | 6 | | Hardened | 350 | 50-80 | | 0.02-0.03 |
| | 7 | High Alloy Steel (alloying elements >5%) | Annealed | 200 | 50-80 | | 0.02-0.07 |
| | 8 | | Hardened | 325 | 50-80 | | 0.02-0.03 |
| | 9 | Cast Steel | Low Alloy (alloying elements <5%) | 200 | 70-90 | | 0.02-0.12 |
| | 10 | | High Alloy (alloying elements >5%) | 225 | 60-80 | | 0.02-0.03 |
| M Stainless Steel | 11 | Stainless Steel Ferritic | Non Hardened | 200 | 60-90 | | 0.02-0.12 |
| | 12 | | Hardened | 330 | 50-80 | | 0.02-0.03 |
| | 13 | Stainless Steel Austenitic | Austenitic | 180 | 60-90 | | 0.02-0.12 |
| | 14 | | Super Austenitic | 200 | 50-80 | | 0.02-0.12 |
| | 15 | Stainless Steel Cast Ferritic | Non Hardened | 200 | 60-90 | | 0.02-0.12 |
| | 16 | | Hardened | 330 | 50-80 | | 0.02-0.03 |
| | 17 | Stainless Steel Cast Austenitic | Austenitic | 200 | 60-90 | | 0.02-0.12 |
| | 18 | | Hardened | 330 | 50-80 | | 0.02-0.03 |
| K Cast Iron | 28 | Malleable Cast Iron | Ferritic (short chips) | 130 | 50-80 | | 0.02-0.03 |
| | 29 | | Pearlitic (long chips) | 230 | 60-90 | | 0.02-0.09 |
| | 30 | Grey Cast Iron | Low Tensile Strength | 180 | 70-100 | | 0.02-0.12 |
| | 31 | | High Tensile Strength | 260 | 60-90 | | 0.02-0.09 |
| | 32 | Nodular Sg Iron | Ferritic | 160 | 70-100 | | 0.02-0.12 |
| | 33 | | Pearlitic | 260 | 60-90 | | 0.02-0.09 |
| N Non-Ferrous Metals | 34 | Aluminum Alloys Wrought | Non Aging | 60 | 60-250 | | 0.03-0.11 |
| | 35 | | Aged | 100 | 60-150 | | 0.03-0.12 |
| | 36 | Aluminum Alloys | Cast | 75 | 60-250 | | 0.03-0.12 |
| | 37 | | Cast & Aged | 90 | 60-150 | | 0.02-0.12 |
| | 38 | Aluminum Alloys | Cast Si 13-22% | 130 | 250 | | 0.03-0.11 |
| | 39 | Copper and Copper Alloys | Brass | 90 | 60-250 | | 0.03-0.12 |
| | 40 | | Bronze And Non Leaded Copper | 100 | 60-150 | | 0.03-0.11 |
| | S Heat Resistant Material | 19 | High Temperature Alloys | Annealed (iron based) | 200 | 60 | |
| 20 | | Aged (iron based) | | 280 | 50 | | 0.02-0.03 |
| 21 | | Annealed (nickel or cobalt based) | | 250 | 35 | | 0.02-0.03 |
| 22 | | Aged (nickel or cobalt based) | | 350 | 30 | | 0.02-0.03 |
| 23 | | Titanium Alloys | Pure 99.5 Ti | 400Rm | 30-50 | | 0.02-0.05 |
| 24 | | | α+β Alloys | 1050Rm | 25-35 | | 0.02-0.05 |
| H Hardened Material | 25 | Extra Hard Steel | Hardened & Tempered | 45-50HRc | - | | - |
| | 26 | | | 51-55HRc | - | | - |

MilliPro HD Cutting Speeds Vc [m/min] and Feed f [mm/tooth]

| Material Group | Vargus No. | Material | Hardness Brinell HB | Feed f [mm/tooth] by Cutting Dia.=D2 | | | | | | |
|-------------------------------------|------------|---|-----------------------------------|--------------------------------------|---------|-------|------|------|------|------|
| | | | | Vc [m/min] | 1.5-2.5 | 2.5-5 | 5-7 | 7-9 | 9-11 | |
| P Steel | 6 | Low Alloy Steel (alloying elements≤5%) Hardened | 350 | 25-160 | 0.04 | 0.05 | 0.06 | 0.07 | 0.08 | |
| | 8 | High Alloy Steel (alloying elements>5%) Hardened | 325 | 25-180 | | | | | | |
| M Stainless Steel | 12 | Stainless Steel Ferritic Hardened | 330 | 25-120 | 0.04 | 0.05 | 0.06 | 0.07 | 0.08 | |
| | 16 | Stainless Steel Cast Ferritic Hardened | 330 | 25-110 | | | | | | |
| | 18 | Stainless Steel Cast Austenitic Hardened | 330 | 25-100 | | | | | | |
| K Cast Iron | 28 | Malleable Cast Iron | Ferritic (short chips) | 130 | 25-160 | 0.05 | 0.06 | 0.07 | 0.08 | 0.1 |
| | 29 | | Pearlitic (long chips) | 230 | 25-150 | 0.04 | 0.05 | 0.06 | 0.07 | 0.08 |
| | 30 | Grey Cast Iron | Low Tensile Strength | 180 | 25-130 | 0.05 | 0.06 | 0.07 | 0.08 | 0.1 |
| | 31 | | High Tensile Strength | 260 | 25-100 | 0.04 | 0.05 | 0.06 | 0.07 | 0.08 |
| | 32 | Nodular Sg Iron | Ferritic | 160 | 25-125 | 0.04 | 0.05 | 0.06 | 0.07 | 0.09 |
| | 33 | | Pearlitic | 260 | 25-90 | 0.03 | 0.04 | 0.05 | 0.06 | 0.07 |
| S Heat Resistant Material | 21 | High Temperature Alloys | Annealed (nickel or cobalt based) | 250 | 15-35 | 0.03 | 0.04 | 0.05 | 0.06 | 0.07 |
| | 22 | | Aged (nickel or cobalt based) | 350 | 15-30 | | | | | |
| | 23 | Titanium Alloys | Pure 99.5 Ti | 400Rm | 25-70 | | | | | |
| | 24 | | α+β alloys | 1050Rm | 25-50 | | | | | |
| H Hardened Material | 25 | Extra Hard Steel | Hardened & Tempered | 45-50HRc | 25-70 | 0.04 | 0.05 | 0.06 | 0.07 | 0.08 |
| | 26 | | | 51-55HRc | 25-60 | 0.03 | 0.04 | 0.05 | 0.06 | 0.07 |
| | 27 | | | 56-62HRc | 25-50 | 0.02 | 0.03 | 0.04 | 0.05 | 0.06 |

HTC Recommended Grades, Cutting Speed and Feed

| Material Group | Material | Hardness Brinell HB | Strength (N-mm ²) | Vc[m/min] | | fb[mm/rev] | | fz[mm/tooth] | | |
|--------------------------------|---------------------|--|-------------------------------|-----------|---------|------------|-----------|--------------|-----------|-----------|
| | | | | VTN | VTS | ≤6mm | ≤12mm | ≤6mm | ≤12mm | |
| K Cast Iron | Cast Iron | Grey Cast Iron | ≤150 | ≤500 | 50-80 | 80-120 | 0.10-0.15 | 0.15-0.22 | 0.02-0.05 | 0.05-0.10 |
| | | Grey Cast Iron, Heat Treated | 150-300 | 500-1000 | 50-80 | 80-120 | 0.10-0.15 | 0.15-0.22 | 0.02-0.05 | 0.05-0.10 |
| | | Spher. Graph. Cast Iron | ≤200 | ≤700 | 50-80 | 80-120 | 0.10-0.15 | 0.15-0.22 | 0.02-0.05 | 0.05-0.10 |
| N Non-Ferrous Metals | Aluminium/Magnesium | Aluminium, Magnesium Non-Alloy | ≤100 | ≤350 | 100-400 | 100-400 | 0.10-0.25 | 0.25-0.30 | 0.03-0.06 | 0.06-0.10 |
| | | Aluminium, Wrought Alloy, Breaking Strain (A5) < 14% | ≤180 | ≤600 | 100-400 | 100-400 | 0.10-0.25 | 0.25-0.30 | 0.03-0.06 | 0.06-0.10 |
| | | Aluminium, Wrought Alloy, Breaking Strain (A5) ≥ 14% | ≤180 | ≤600 | 100-400 | 100-400 | 0.03-0.06 | 0.06-0.12 | 0.03-0.06 | 0.06-0.10 |
| | | Aluminium, Cast Alloy, Si<10% | ≤180 | ≤600 | 100-300 | 100-400 | 0.10-0.25 | 0.25-0.30 | 0.03-0.06 | 0.06-0.10 |
| | | Aluminium, Cast Alloy, Si≥10% | ≤180 | ≤600 | — | 100-300 | 0.10-0.25 | 0.25-0.30 | 0.03-0.06 | 0.06-0.10 |
| K Plastic | Plastic | Thermo Plastics | — | — | 60-120 | 60-120 | 0.10-0.25 | 0.25-0.30 | 0.03-0.06 | 0.06-0.10 |
| | | Thermosetting Plastic | — | — | 60-100 | 60-100 | 0.10-0.25 | 0.25-0.30 | 0.03-0.06 | 0.06-0.10 |
| | | Fibre Reinforced Plastic | — | — | 40-60 | 60-80 | 0.10-0.15 | 0.15-0.22 | 0.02-0.05 | 0.05-0.10 |

Vc - Cutting Speed [m/min]

fb (Drilling) - Feed per Revolution [mm/rev]

fz (Threading) - Feed per Tooth [mm/tooth]

VARGUS GENius™ – The most powerful tool selector, cutting data and CNC program generating software for the metal cutting tools industry.

Thread Turning: The Vargus GENius™ guides the user to the right tool and the best cutting conditions for the application.

Thread Milling: In a few simple steps, the Vargus GENius™ provides the user with the best tool and optimal machining data, as well as the G-Code for all popular CNC machines.

The VARGUS GENius™ is free and available in 16 languages in iOS and Android Apps, Online, Desktop, and SETUP versions.

VARGUS GENius™ | Tool Selector and CNC Program Generator

A NEW GENius on Hand

The most popular and advanced thread turning and thread milling software on the market today.



Available in 4 versions at www.vargus.com



- Revamped responsive design now compatible for all devices (computers, tablets & smartphones)
- Online interactive software
- Always on, always updated!



- Stand-alone software application
- MS Windows OS-based program
- Automatic updates




- Stand-alone software package for USB memory devices
- MS Windows operating system-based program
- Just open ZIP & click VargusGen.application



- Available for iOS and Android devices
- New responsive design!
- Use on any device, anywhere in the world!

■ VARGUS GENius™ DESKTOP and SETUP versions can be used when internet access is not available.

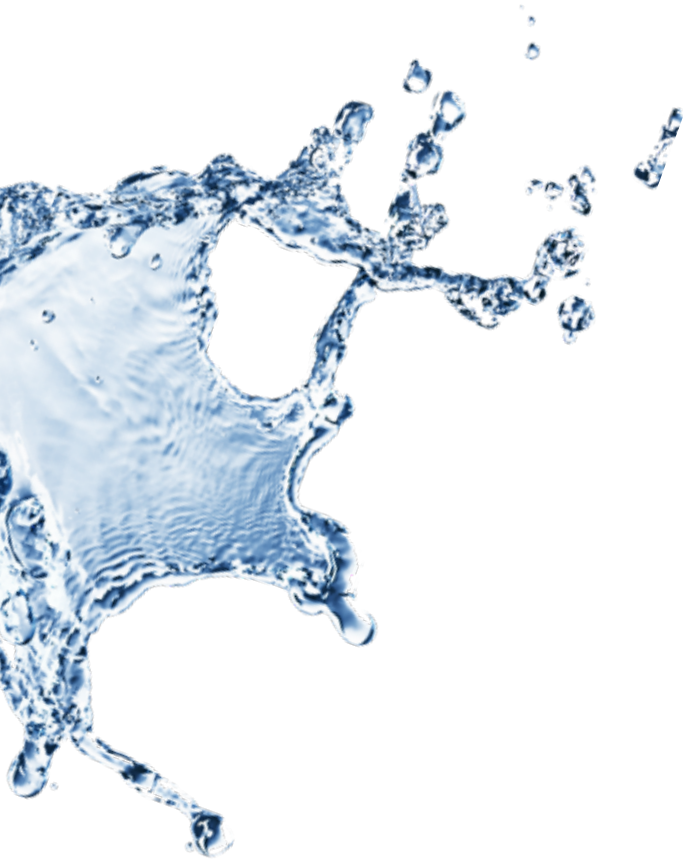

TM Solid
Solid Carbide Thread Milling Tools

VARDEX
Advanced Threading Solutions