

GENERAL PURPOSE MEMBRANE



Ultra-Mem PF-PES



Technical Data

	Polyethersulphone
	0,04 0,1 0,2 0,45 0,65 1,2
	99,999999%
	60°C
	5" 10" 20" 30" 40"
	Code 7 (others available)
	EPDM (others available)

Ultra-Mem PF-PES is our standard membrane for critical liquid filtration. Careful media selection ensures that PF-PES cartridges are also very suited to critical particle control down to 0.04 micron ratings. PF-PES cartridges offer high flux rates and low differential pressures, a feature common to polyethersulphone membranes. PF-PES cartridges are validated for bacterial removal according to HIMA guidelines and ASTM F838-05, with a log reduction value >7. They are therefore suitable for applications requiring sterilising grade filtration.

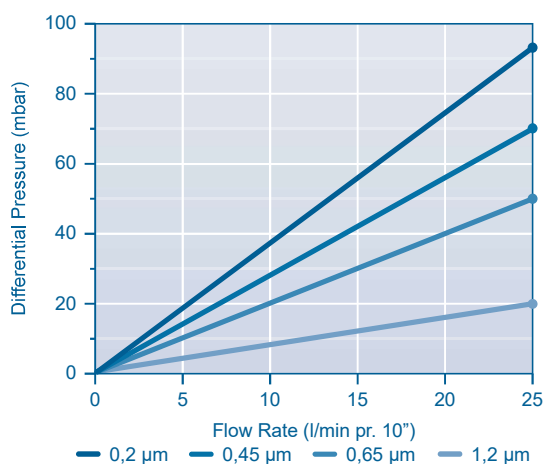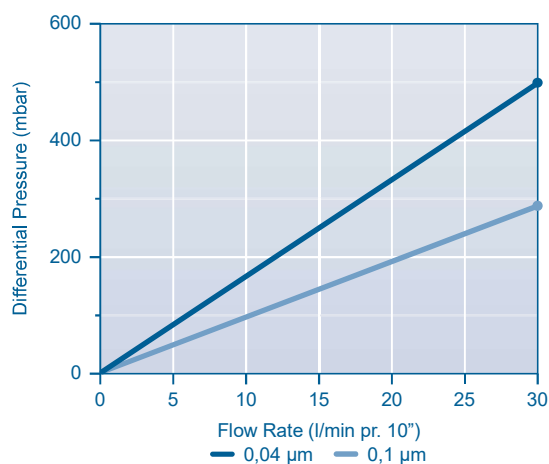


RECOMMENDED FILTER HOUSINGS




FUCB
Single



PF-EG Tri-clamp
Single / Multi



PF-EG Dairy
Single / Multi

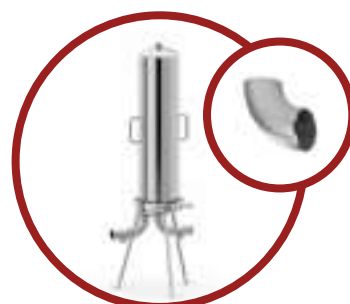

PF-EG Weld
Single / Multi