

Wall lighting

LEDSECTION ISU

The perfect match for CFL light sources

Advantages


- Modern compact brushed aluminum design
- Long lifetime guaranteed 50.000 hours
- Energy savings up to 60 %
- Reduced heat generation

Product details

- The solution for down and up lighting
- Easy installation with included driver
- Highly energy efficient LEDs
- No mercury or other harmful substances involved



Datasheet

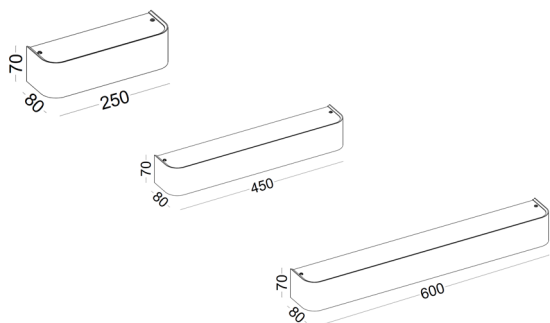

EQUAL TO	CONSUMPTION	EFFICIENCY
CFL tube 1x36W	16W	100 lm/W
AC-NET	IP-CODE	DIMMABLE
230V	IP20	No

	CW	WW	NW	R	G	B	A
Lumens	N/A	1600	N/A	N/A	N/A	N/A	N/A
Lumens pr. watt	N/A	100	N/A	N/A	N/A	N/A	N/A
Color Temp	N/A	3000	N/A	N/A	N/A	N/A	N/A
CRI	N/A	85	N/A	N/A	N/A	N/A	N/A

Cool White			Warm White			Natural White		
Ft	Lux	fc	Ft	Lux	fc	Ft	Lux	fc
2	N/A	N/A	2	N/A	N/A	2	N/A	N/A
4	N/A	N/A	4	N/A	N/A	4	N/A	N/A
6	N/A	N/A	6	N/A	N/A	6	N/A	N/A
8	N/A	N/A	8	N/A	N/A	8	N/A	N/A

Wall fixture

Type: Isu
Itemnr.: 6025300020

The Isu series is a potential candidate in future environmentally sound lighting. The series is developed for general up and down lighting in a range of locations, including restaurants, hotels, homes and of-office buildings. The fittings are equipped with a diffuser that ensure that glare are kept at a minimum. The driver is delivered along with Casso, enabling immediate installation into the mains.

Technical Data

Lumen	800lm, 1200lm or 1600lm
Beam Angle	Wide 115°
Colors Available	Warm white, cold white
Color Temperature	Warm white 3000K, cold white 5000K
Color Rendering	Warm white: CRI85, Cold white CRI75
Consumption	8W, 12W, 16W
Voltage Range	AC90 ~ 120V or AC200 ~ 240V
Efficiency	Warm white: 100 lm/W
Lifetime	50.000 hours at Ta = 25°C
Dimmable	No
IP Code	IP20
Class	1, Insulated
Size	L250 x W80 x H70 mm L450 x W80 x H70 mm L600 x W80 x H70 mm
IES File	No
Weight	0,5 KG
Housing	White, silver or black

Shipping

The products are to be delivered in package of 8 pcs.

Energysavings up to 60%

CFL tube 36W ➡ ISU 16W CRI85

