




- Extensive standard equipment
- Max. spindle speed 2000 1/min

- hardened and ground headstock gears
- gap bridge
- adjustable headstock bearing
- cast-iron bed, double v-guide, hardened and ground
- interlocking feature prevents simultaneous advance of leadscrew and feed shaft

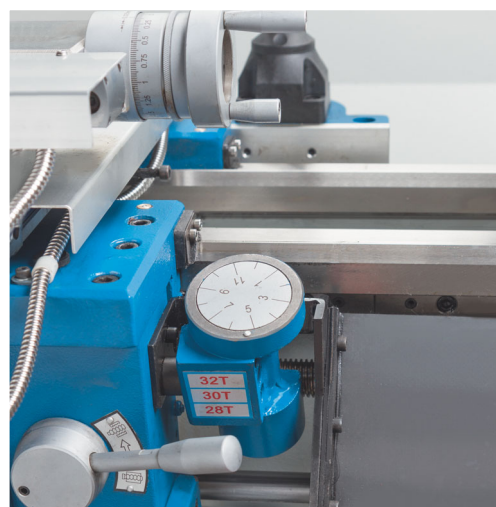

The thread gauge allows for resuming the thread after the apron nut for retrograde motion has been opened