




GRABO
LVT

Luxury Vinyl Tile Flooring



GRABO LVT CONSTRUCTION

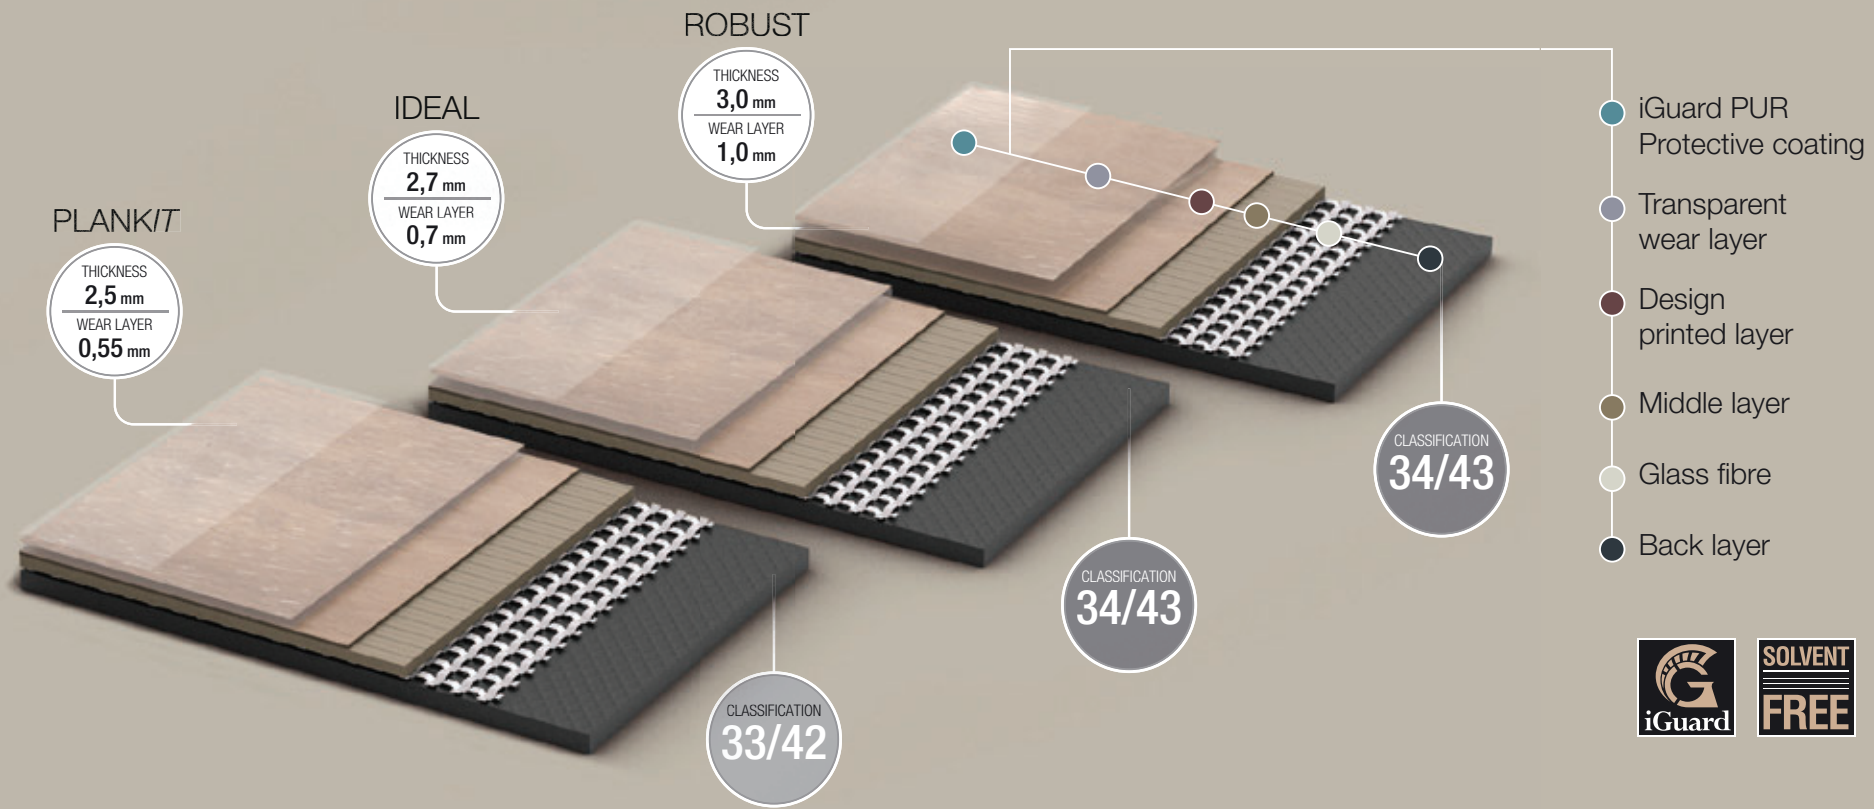

- EASY TO INSTALL THANKS TO IT'S TILE FORMAT
- EXTRA DIMENSIONAL STABILITY DUE TO GLASS FIBRE REINFORCEMENT
- RESISTS TO WATER SO IT IS SUITABLE TO WET ROOMS AS WELL
- OPTIMAL SOLUTION FOR RESIDENTIAL AND COMMERCIAL APPLICATIONS

GRABO LVT
PRODUCTS ARE:

- > PLANK/IT
- > IDEAL
- > ROBUST



GRABO
LVT

GRABO LVT



Grabo LVT is a long lasting flooring solution due to its durability against impacts, stains and scratches thus it is a perfect choice for both residential and commercial applications.



Due to its glass fibre reinforcement Grabo LVT is a **dimensionally stable LVT flooring** with sound insulating properties and warm underfoot feeling.



Our product has iGuard surface coating with low maintenance requirement.



Its flexibility provides economic, easy and quick installation.

ECOLOGICAL FORMULA

The Grabo LVT floorings are inspired by nature, manufactured with **phthalate free** technology and provides an environmentally friendly flooring solution for the users.





WOOD DESIGNS

PLANK SIZE
185×1220
mm

QTTY/BOX
~2.7 m²
12 PIECES

PLANK SIZE
158×950
mm*

QTTY/BOX
~1.8 m²
12 PIECES

*
MINIMUM
ORDER QUANTITY
2 PALETTS



OLENA



TYRION



MALISTER



TULLY



STARK



LANNISTER



GENDRY



REED



TARGARYEN



WESTERLING



BRONN



ARYA



OBERYN



DAVOS



BRANDON



TORMUND



GREYJOY



SANSA



DOREAH



ELERIA



BARATHEON



MORMONT



DROGO



JOFFREY



MARTELL



WALDER



MARGAERY



ROSLIN




BOLTON



STONE DESIGNS

PLANK SIZE
305×610
mm

QTTY/BOX
~2.2 m²
12 PIECES

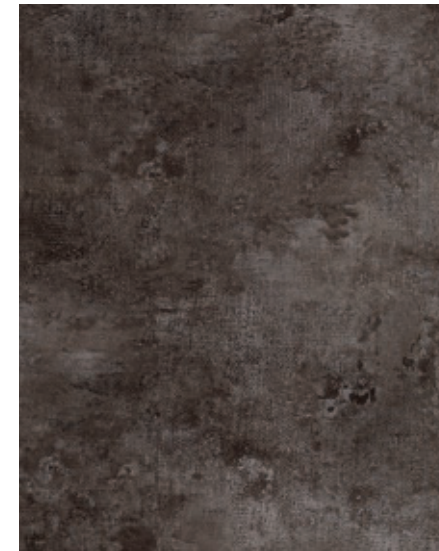

EURON



CASSEL



ROYCE



LUWIN



HODOR



PODRICK



MYRCELLA



NYMERIA

Grabo LVT specifications

Robust and Ideal are available in all Plank/t designs with the minimum quantity of 2 paletts/design.

DESCRIPTION		PLANK/T	IDEAL	ROBUST
Construction		Luxury Vinyl Tile with iGuard Surface		
Plank size wood	EN ISO 24342	185×1220 mm	185×1220 mm*	185×1220 mm*
	EN ISO 24342	158×950 mm*	158×950 mm*	158×950 mm*
Tile size stone	EN ISO 24342	305×610 mm	305×610 mm*	305×610 mm*
Total thickness	EN ISO 24346	2,5 mm	2,7 mm	3,0 mm
Wear layer thickness	EN ISO 24340	0,55 mm	0,7 mm	1,0 mm
Total weight	EN ISO 23997	3,8 kg/m ²	3,9 kg/m ²	4,6 kg/m ²

*min. order quantity 2 paletts

CLASSIFICATION

European classification	EN 685	class: 33/42	class: 34/43	class: 34/43
Binder content	EN ISO 10582	Type I.	Type I.	Type I.

PERFORMANCE

Abrasion group	EN 660-1	T	T	T
Residual indentation	EN ISO 24343	max. 0,1 mm	max. 0,1 mm	max. 0,1 mm
Dimensional stability Requirement	EN ISO 23999	≤ 0,15%	≤ 0,15%	≤ 0,15%
	EN ISO 23999	max. 0,25%	max. 0,25%	max. 0,25%
Curling	EN ISO 23999	max. 2,0 mm	max. 2,0 mm	max. 2,0 mm
Fire resistance	EN 13501-1	class: Bfl-s1	class: Bfl-s1	class: Bfl-s1
Slip resistance	EN 13893	class: DS	class: DS	class: DS
	DIN 51130	class: R10	class: R10	class: R10
Electrical properties	EN 1815	max. 2kV / Antistatic		
Chemical resistance	EN ISO 26987	✓	✓	✓
	ASTM F925	✓	✓	✓
Light fastness	EN 20105 B02	grade 6	grade 6	grade 6
Castor chair resistance	EN ISO 4918	✓	✓	✓
Surface treatment		iGuard PUR Surface / Easy cleaning		
Content of PCP	EN 12673	does not contain		
Formaldehyde emission	ENV 717-1	E1 (no emission)		
VOC		pass	pass	pass
4 sides bevelling		Available	Available	Available
Warranty	Commercial	10 year	12 year	15 year
	Residential	15 year	17 year	20 year



GRABOPLAST
FLOOR COVERING MANUFACTURERS LTD.
H-9023 Győr, Fehérvári út. 16/b. Telefon: (+36) 96 506-100
www.graboplast.com



www.facebook.com/graboplast

GRABO
LVT