

Teknisk specifikation :

MLA 4-50 H



Capacities		Metrisk	Britiske mål
Static tipping load with bucket (straight)		1839 kg	4054 lbs
Static tipping load with bucket (full turn)		1205 kg	2657 lbs
Static tipping load with forks (straight)		1480 kg	3263 lbs
Static tipping load with forks (full turn)		971 kg	2141 lbs
Max. height of bucket pivot point	h35	3.01 m	9 ft 11 in
Max. lifting height (below forks)	h3	2.77 m	9 ft 1 in
Brydekraft med skovl		2412 daN	2412 daN
Weight and dimensions			
Unladen weight (with forks) with 2-post canopy		2740 kg	6041 lbs
Unladen weight (with forks) with 4-post canopy		2790 kg	6151 lbs
Maskinens frihøjde	m4	0.25 m	10 in
Samlet længde til slæde (med hitch)	l11	3.55 m	11 ft 8 in
Samlet længde til slæde (uden hitch)	l3	3.55 m	11 ft 8 in
Akselafstand	y	1.62 m	0.064 in
Overall width of 2 posts canopy	b21	1.01 m	3 ft 4 in
Overall width of 4 posts canopy	b22	1.02 m	3 ft 4 in
Overall width (over tyres)	b1	1.33 m	4 ft 4 in
Overall height with FOPS removed and ROPS folded	h36	1.84 m	6 ft
Overall height with 2 posts canopy	h37	2.54 m	8 ft 4 in
Overall height with 4 posts canopy	h38	2.32 m	7 ft 7 in
Overall height with cab	h17	2.32 m	7 ft 7 in
Hældningsvinkel op	a4	45 °	45 °
Hældningsvinkel ned	a5	53 °	53 °
Articulation angle		45 °	45 °
Engine			
Mærke		Yanmar	Yanmar
Miljøstandard		Stage 3A	Stage 3A
Type		4TNV88	4TNV88
Number of cylinders / Capacity of cylinders		4 - 2200 cm³	4 - 134.25 in³
I.C. Engine power rating / Power (kW)		47 Hp / 35 kW	47 Hp / 35 kW
Max. torque / Engine rotation		1680 Nm/m / 137 tr/min	1680 Nm/m / 137 tr/min
Engine cooling system		2 radiators water + hydraulic oil	2 radiators water + hydraulic oil
Transmission			
Transmission type		Hydrostatic	Hydrostatic
Number of gears (forward / reverse)		2 / 2	2 / 2
Maks. kørehastighed (kan variere i henhold til gældende regler)		20 km/h	12.4 mph
Differential lock		Machine Lock Rear & front	Machine Lock Rear & front
Parkeringsbremse		Manual	Manual
Hydraulics			
Pumpetype		Gear pump	Gear pump
Hydraulikflow - Hydrauliktryk		57 l/min / 207 Bar	57 l/min / 14 PSI
Drive hydraulic system pressure		410 Bar	28 PSI
Tank capacities			
Hydraulic oil		42 l	9.24 gal
Brændstoftankens kapacitet		68 l	14.96 gal
Noise and vibration			
Vibration til hele hånden og armen		< 2.5 m/s²	< 2.5 m/s²
Miscellaneous			
Safety cab homologation		Cab ROPS - FOPS Level 1	Cab ROPS - FOPS Level 1

Ekstraudstyr / Finish




S : Standard / O : Ekstraudstyr / - : Fås ikke


Essential

Lifting function
Easy Connect System (E.C.S.)
Hydraulic attachment locking
Operator station
Adjustable and telescopic steering column
Air suspension seat
Suspension Seat - Mechanical
Tag
Motorization/Power
Self cleaning air prefilter
Continuous flow hydraulics
Hand throttle
Hydraulikledning til redskab
Lighting
Front and rear work lights on cab (x4: 2 front + 2 rear)
Complete road lighting
Flat LED rotating beacon (-71 mm)

Essential
S
O
S
O
S
S
S
S
S
S
O
O

Måltegning

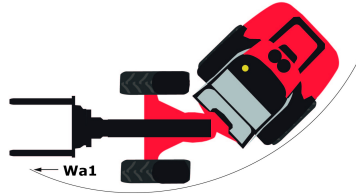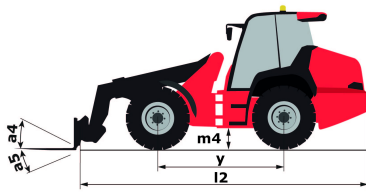

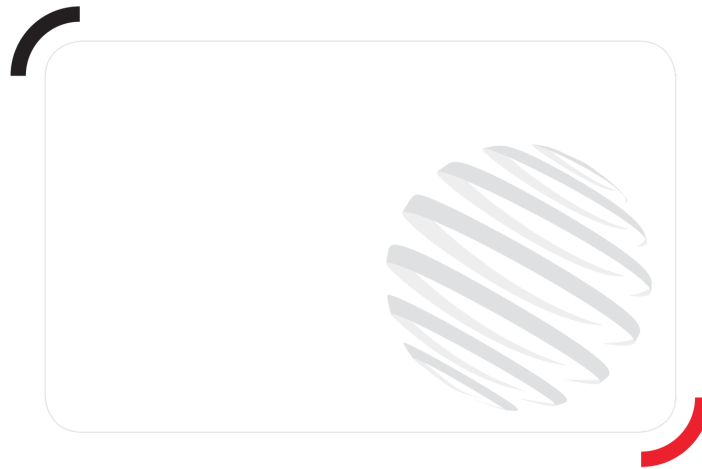

Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



Denne brochure beskriver versioner og konfigurationsmuligheder for Manitou-produkter, som kan monteres med forskelligt udstyr. Det udstyr, der er beskrevet i denne brochure, kan være standard, ekstraudstyr eller utilgængeligt afhængigt af version. Manitou forbeholder sig ret til når som helst at ændre de viste og beskrevne specifikationer uden forudgående varsel. Producenten er ikke ansvarlig for de angivne specifikationer. Kontakt din Manitou-forhandler, hvis du har brug for yderligere oplysninger. Dette dokument er ikke en del af kontrakten. Produktbeskrivelser kan afvige fra de faktiske produkter. Listen over specifikationer er ikke udtømmende. Virksomhedens logoer og visuelle identitet tilhører Manitou og må ikke anvendes uden autorisation. Alle rettigheder forbeholdt. Fotografier og diagrammer indeholdt i denne brochure er kun til information.

MANITOU BF SA - Aktieselskab med bestyrelse - Aktiekapital: 39,668,399 euro - 857 802 508 RCS Nantes