


Acoustic Louvres

A complete range of certified, high performance acoustic louvres to solve a wide range of environmental noise pollution problems

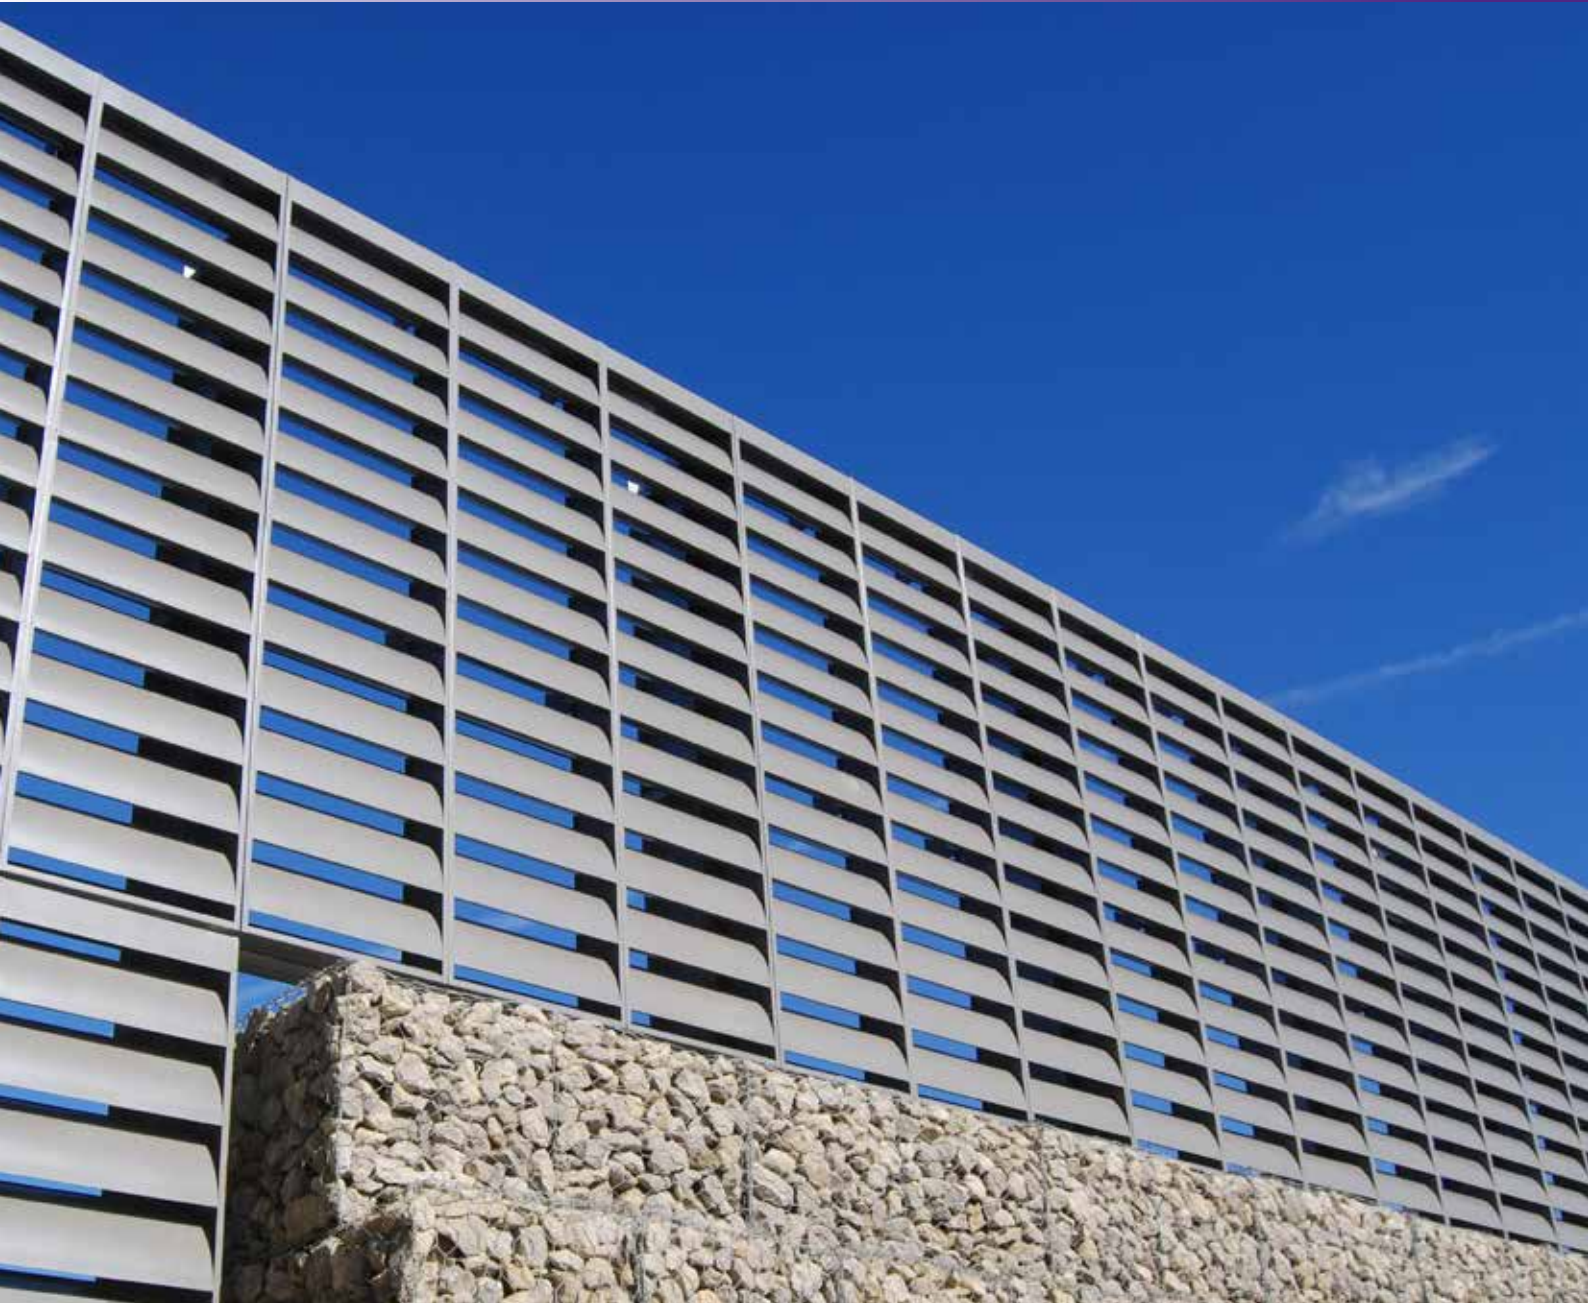

IAC Acoustics

Making the World a Quieter Place

Founded on an unrivalled history of engineering with some of the most pioneering discoveries in the industry, the IAC Acoustics brand is synonymous with technological innovation.

From controlling noise at a power station to tuning the sound in a TV or radio studio, IAC Acoustics has had a positive impact on society and helped to shape what can be achieved to make speech more intelligible, music more enjoyable, reduce the impact of industrial noise and protect people’s sense of hearing.

The continual success of our products and services over the decades has brought the brand a reputation for quality and reliability among customers, whether they are multinational corporations or independent family businesses. This is supported by the expertise and passion of our workforce, the people behind the products, including designers, engineers and industry specialists.

To face the ever increasing noise reduction demands of the future, we will strive to further enhance our ability to reduce excessive noise. We aim to focus on developing tomorrow’s solution today, innovating faster and delivering solutions that meet the requirements of the next generation. In doing so, we will stay true to our key values and founding philosophy to make the world a quieter place.



Page

4	Acoustic Louvres Overview
6	Acoustic Louvre Range
8	Product Features
10	Acoustic Louvre Installation
12	Acoustic Louvre Specifications
14	- Noishield™ Acoustic Louvre Model R
15	- Noishield™ Acoustic Louvre Model 2R
16	- Noishield™ Acoustic Louvre Model LP
17	- Noishield™ Acoustic Louvre Model 2LP
18	- Slimshield™ Acoustic Louvre SL-100
19	- Slimshield™ Acoustic Louvre SL-150
20	- Slimshield™ Acoustic Louvre SL-300
21	- Slimshield™ Acoustic Louvre SL-600
22	- Slimshield™ Acoustic Louvre SL-V300L
23	- Slimshield™ Acoustic Louvre SL-V300S
24	Acoustic Louvred Doors
26	Acoustic Louvres in Harsh Environments
27	Office Contacts

Acoustic Louvres Overview

IAC Acoustics is a leading global manufacturer of rugged, high performance acoustic louvres and has completed thousands of installations worldwide. Applications include:

- Fresh air intakes for ventilation systems
- Mechanical equipment screens and penthouses
- Noise barriers
- Process air intakes
- Cooling tower inlets / exhausts and screens

IAC can provide acoustic louvre solutions to combat environmental noise problems in mixed commercial / residential areas, carrying out all relevant noise surveys and acoustic analysis.

IAC Acoustics' curved (Noishield™) or linear (Slimshield™) blade louvre styles can be used to match the overall scale and aesthetics of a new building.

Form & Function Together

Our acoustic louvred screens result in a high performance solution to unwanted levels of noise, without the need for additional architectural cladding.

Acoustic Louvre Range

Noishield™ - Aerofoil blade

Model R & Model LP: 305mm deep
Model 2R & Model 2LP: 610mm deep

Slimshield™ - Linear Blade

SL-100: 100mm deep
SL-150: 152mm deep
SL-300: 300mm deep
SL-600 (double banked): 600mm deep
SL-V300L: 300mm deep
SL-V300S: 300mm deep

Noishield™ Louvres - Sound Transmission Loss (dB)

Octave Band Centre Frequency, Hz	Louvre Depth (mm)	63	125	250	500	1k	2k	4k	8k
Model R	305	5	7	11	12	13	14	12	9
Model 2R	610	6	12	15	21	24	27	25	20
Model LP	305	4	5	8	9	12	9	7	6
Model 2LP	610	5	8	12	16	22	18	15	14

Slimshield™ Louvres - Sound Transmission Loss (dB)

Octave Band Centre Frequency, Hz	Louvre Depth (mm)	63	125	250	500	1k	2k	4k	8k
SL-100	100	5	4	5	6	9	13	14	13
SL-150	150	6	6	8	10	14	18	16	15
SL-300	300	6	7	10	12	18	18	14	13
SL-600	600	7	9	12	24	31	33	29	30
SL-V300L	300	-	5	10	12	17	22	21	21
SL-V300S	300	-	7	13	13	18	21	20	21

Integrated or Standalone

Our acoustic louvres can be used as standalone screens around mechanical plant, or integrated into walls and building façades.

Product Features

Our acoustic louvres are multi-purpose, permitting air to flow, whilst shielding the environment from unwanted noise.

Both IAC Acoustics Noishield™ and Slimshield™ louvres are available in an array of standard modular sizes, meaning that a wide range of performance requirements can be met. By using our range of acoustic louvres, it overcomes architectural consistency issues, especially where space is limited.

Where access is required, both Noishield™ and Slimshield™ acoustic louvres can be supplied as doorsets, either for inclusion in louvred screens, or as standalone units.

Noishield™ Special Features

- Suitable for use behind architectural louvres (100mm air space is required between faces)
- Bold, curved blade appearance
- A highly economical acoustic louvre system


Finishes Available

- Galvanised mild steel
- Aluminium
- Stainless steel
- Polyester Power Coated (PPC)
- Vinyl coated steel
- Syntha Pulvin

Other non-standard finishes are available upon request.

Slimshield™ Special Features







- Linear appearance
- Superior high frequency performance

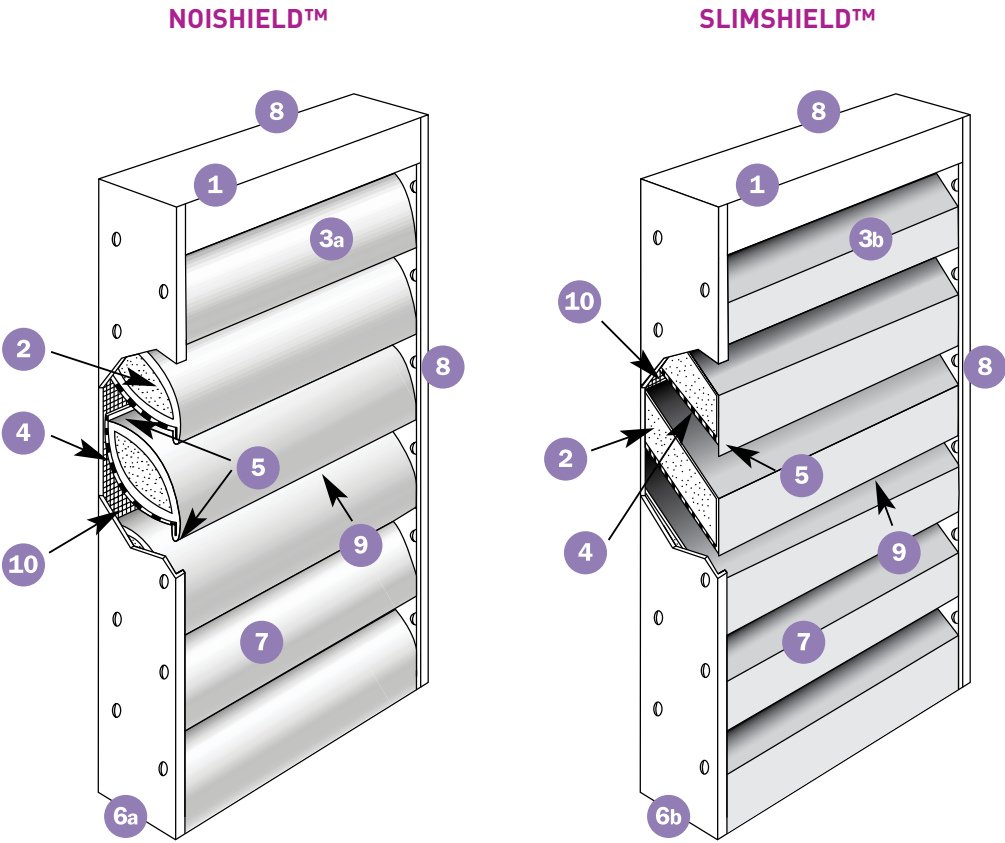

- 1 Rugged all-steel galvanised construction. Stainless steel, aluminium and other materials are also available
- 2 Inert, vermin-proof, weather-rated non combustible acoustic fill
- 3a **FOR NOISHIELD™** Aerofoil shaped splitter blade for maximum noise reduction with minimum pressure drop
- 3b **FOR SLIMSHIELD™** Linear blade appearance for superior high frequency performance
- 4 Perforated splitter underside for maximum sound absorption
- 5 Weather stop inhibits rain/snow entry
- 6a **FOR NOISHIELD™** 305mm for the single banked system or 610mm deep for the double banked system
- 6b **FOR SLIMSHIELD™** 100, 152, 300mm deep single banked systems and 600mm deep for the double banked system
- 7 Available in a variety of durable, attractive finishes, e.g. vinyl coated steel, polyester powder paint, mill finish aluminium, anodised aluminium, Syntha Pulvin, galvanised and stainless steel
- 8 Modular sizes enable assembly of rectilinear louvre ‘walls’ of almost any size
- 9 Louvre blade orientation blocks horizontal line of site, enhancing both aesthetics and acoustic performance
- 10 Bird guards are available in galvanised or stainless steel, insect screens can also be supplied

Acoustic Louvre Installation

Typical details are shown below and certified dimension drawings are provided with each acoustic louvre. IAC Acoustics will supply all supporting steelwork if necessary. For large louvre banks, IAC Acoustics will provide installation drawings and a full installation service if required.

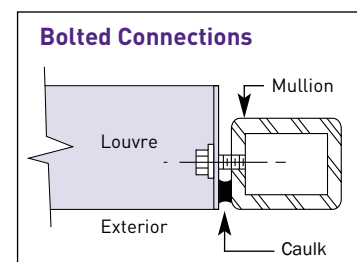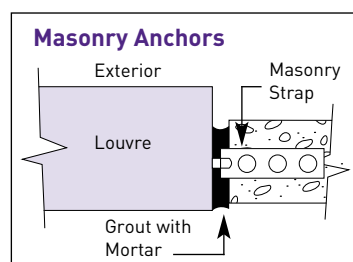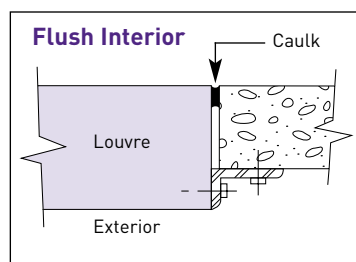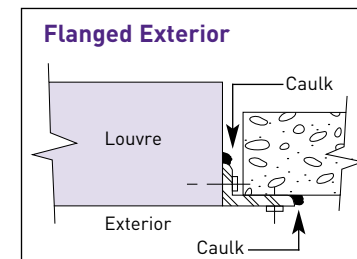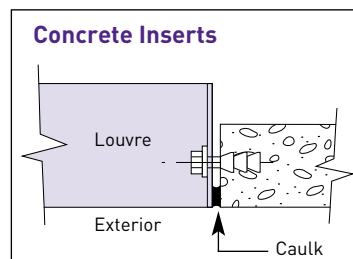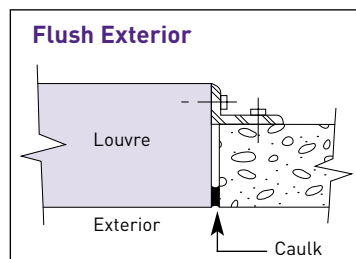

Engineered for Performance

Despite primarily being engineered as a high performance solution to attenuating unwanted noise, our acoustic louvres are a modular design, resulting in screens that are scalable to suit individual projects.

Acoustic Louvre Specifications

Page


14	Noishield™ Acoustic Louvre Type R
15	Noishield™ Acoustic Louvre Type 2R
16	Noishield™ Acoustic Louvre Type LP
17	Noishield™ Acoustic Louvre Type 2LP
18	Slimshield™ Acoustic Louvre SL-100
19	Slimshield™ Acoustic Louvre SL-150
20	Slimshield™ Acoustic Louvre SL-300
21	Slimshield™ Acoustic Louvre SL-600
22	Slimshield™ Acoustic Louvre SL-V300L
23	Slimshield™ Acoustic Louvre SL-V300S

Noishield™ Acoustic Louvres

Model R

Noishield™ Acoustic Louvres



Model 2R

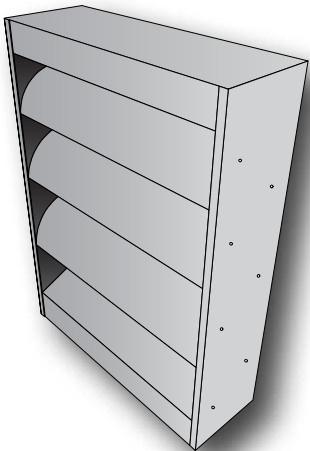

Weight
40kg/m²

Module Width
300 - 1800mm


Standard Module Height
305 - 3660mm (in 305mm increments)
Intermediate heights are available

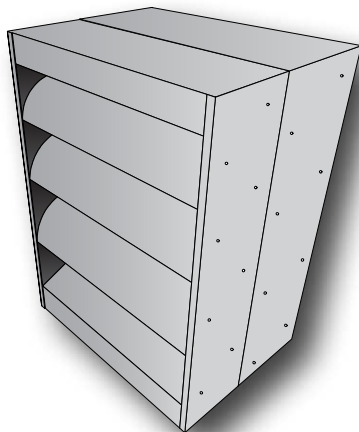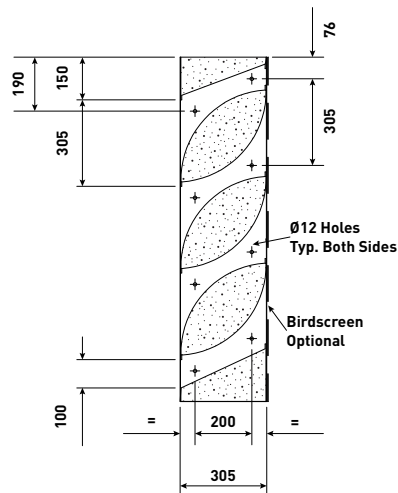

Weight
80kg/m²


Module Width
300 - 1800mm

Standard Module Height
305 - 3660mm (in 305mm increments)
Intermediate heights are available

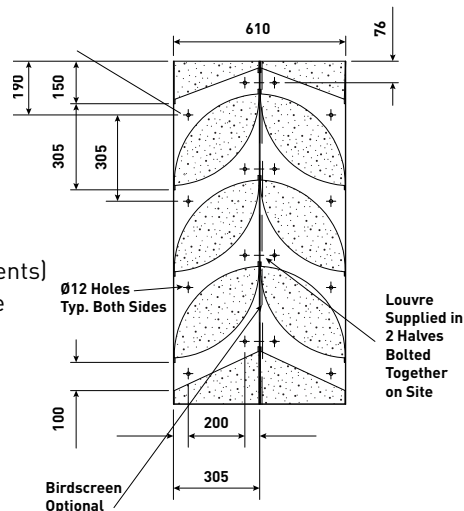


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	5	7	11	12	13	14	12	9
Acoustic Rating	R _w 14dB / D _{new} 21dB							
For noise reduction, add 6dB to the above values								

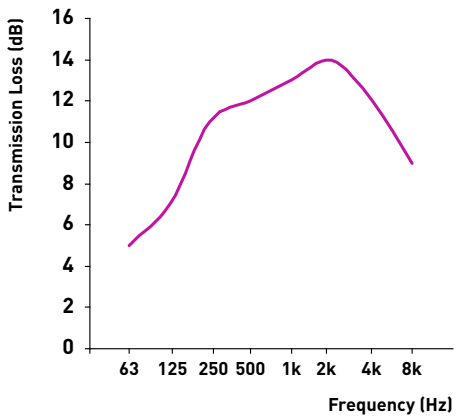


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	6	12	15	21	24	27	25	20
Acoustic Rating	R _w 24dB / D _{new} 31dB							
For noise reduction, add 6dB to the above values								

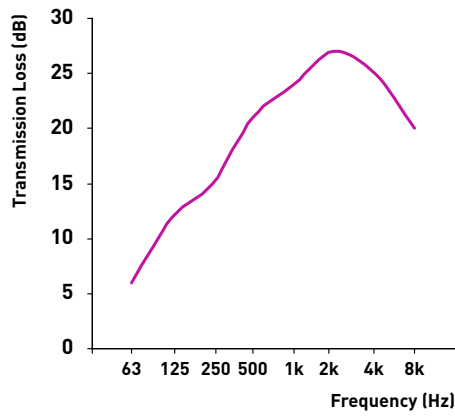


Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	0.98	1.39	1.71	1.95	2.18	2.39	2.60	2.75	2.93	3.10
Nominal Free Area	43%* * Average over louvre depth									
Aerodynamic Coefficient	(K) 17.53									

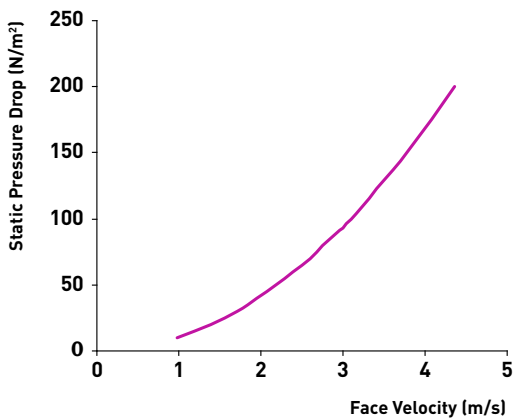

Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	0.70	1.07	1.21	1.39	1.55	1.68	1.79	1.89	2.01	2.13
Nominal Free Area	43%* * Average over louvre depth									
Aerodynamic Coefficient	(K) 34.68									

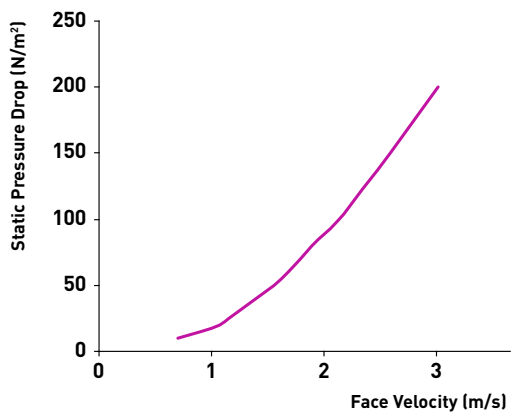

Acoustic Louvred Doors

- Single and double doors are available in the R louvre range
- See page 24 for further details

Errors and Omissions Excepted (E&OE).


Errors and Omissions Excepted (E&OE).

Noishield™ Acoustic Louvres

Model LP

Noishield™ Acoustic Louvres



Model 2LP

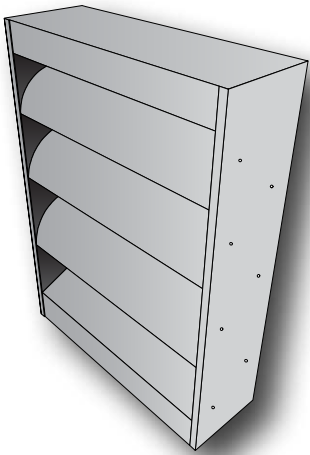

Weight
35kg/m²

Module Width
300 - 1800mm


Standard Module Height
356 - 3560mm (in 356mm increments)
Intermediate heights are available

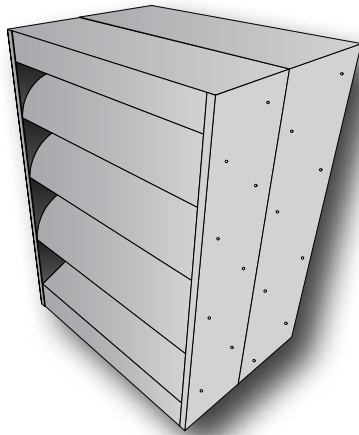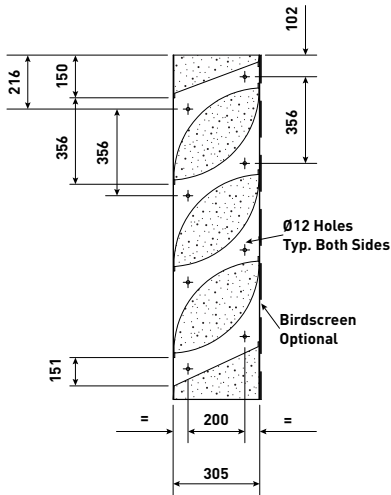

Weight
70kg/m²


Module Width
300 - 1800mm

Standard Module Height
356 - 3560mm (in 356mm increments)
Intermediate heights are available

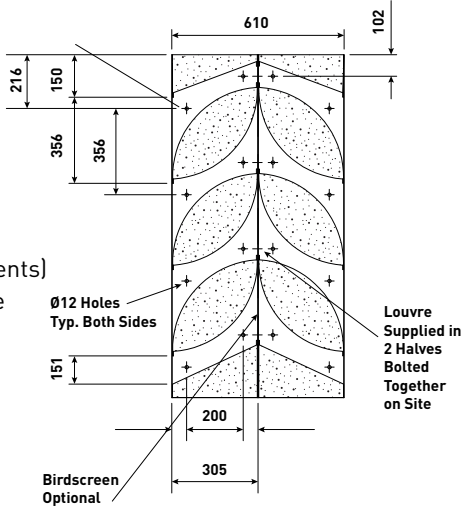


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	4	5	8	9	12	9	7	6
Acoustic Rating	R _w 11dB / D _{new} 18dB							
For noise reduction, add 6dB to the above values								

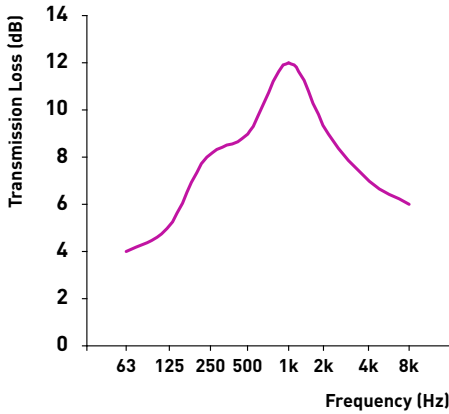


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	5	8	12	16	22	18	15	14
Acoustic Rating	R _w 19dB / D _{new} 25dB							
For noise reduction, add 6dB to the above values								

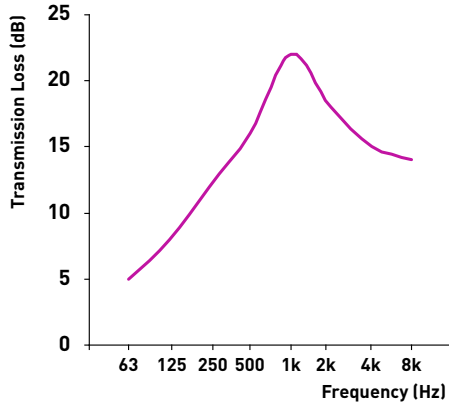


Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	1.23	1.73	2.11	2.46	2.74	3.00	3.24	3.46	3.65	3.86
Nominal Free Area	52%* * Average over louvre depth									
Aerodynamic Coefficient	(K) 11.10									

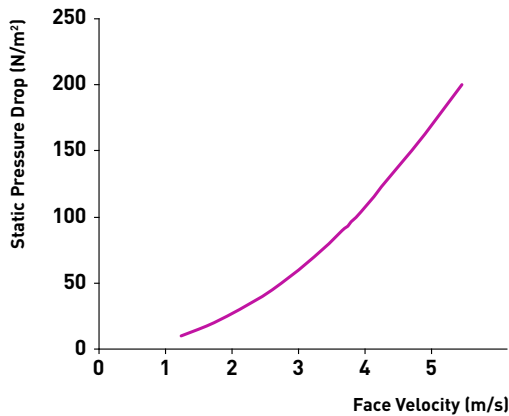

Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	1.07	1.41	1.73	1.98	2.21	2.46	2.62	2.77	2.99	3.12
Nominal Free Area	52%* * Average over louvre depth									
Aerodynamic Coefficient	(K) 17.06									

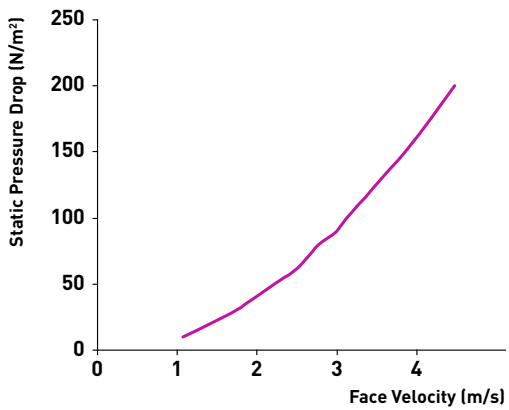

Acoustic Louvred Doors

- Single and double doors are available in the LP louvre range
- See page 24 for further details

Errors and Omissions Excepted (E&OE).


Errors and Omissions Excepted (E&OE).

Slimshield™ Acoustic Louvres

SL-100

Slimshield™ Acoustic Louvres


SL-150

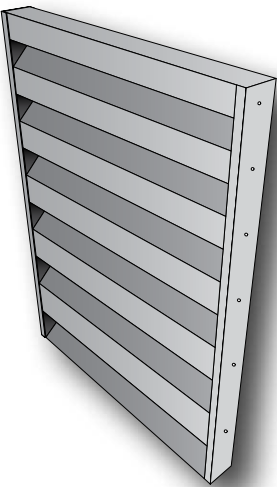

Weight
20kg/m²


Module Width
300 - 1800mm

Standard Module Height
400mm minimum,
(increasing increments of 203mm)
Intermediate heights are available

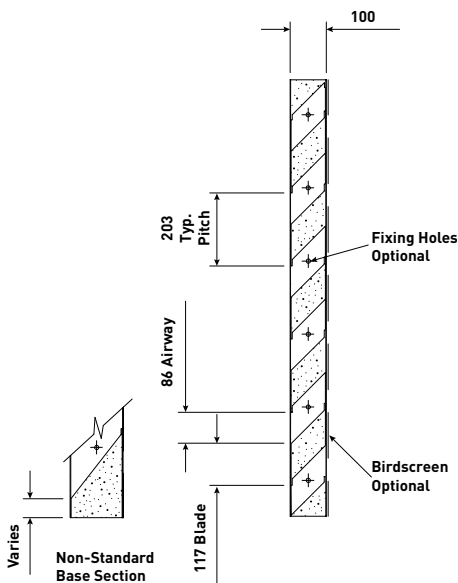


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	5	4	5	6	9	13	14	13
Acoustic Rating	R _w 10dB / D _{new} 16dB							
For noise reduction, add 6dB to the above values								

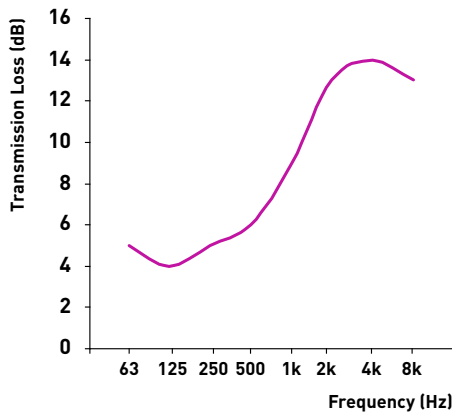


Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	0.92	1.30	1.59	1.84	2.05	2.25	2.43	2.61	2.76	2.90
Nominal Free Area	42%* * Average over louvre depth									
Aerodynamic Coefficient	(K) 19.83									

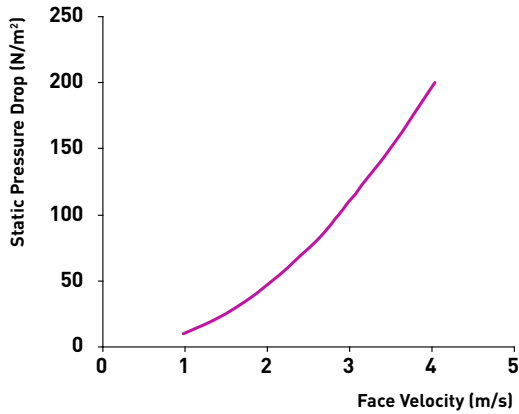

Acoustic Louvred Doors


- Single and double doors are available in the SL-100 louvre range
- See page 24 for further details

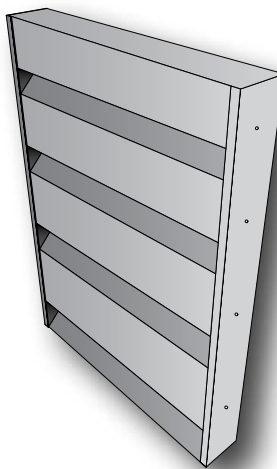

Weight
30kg/m²


Module Width
300 - 1800mm

Standard Module Height
305mm minimum,
(increasing increments of 305mm)
Intermediate heights are available

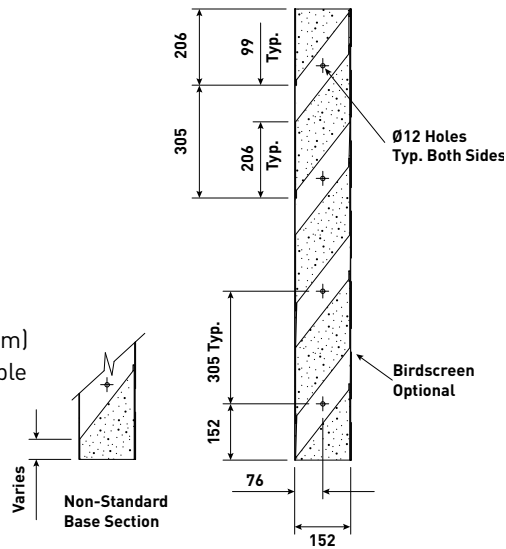


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	6	6	8	10	14	18	16	15
Acoustic Rating	R _w 15dB / D _{new} 21dB							
For noise reduction, add 6dB to the above values								

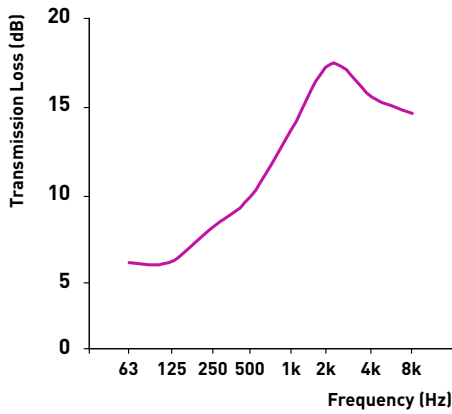

Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	0.53	0.73	0.90	1.04	1.16	1.28	1.37	1.47	1.56	1.64
Nominal Free Area	32%* * Average over louvre depth									
Aerodynamic Coefficient	(K) 61.93									

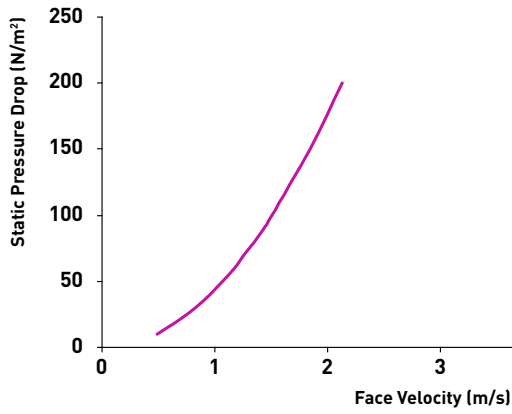

Acoustic Louvred Doors

- Single and double doors are available in the SL-150 louvre range
- See page 24 for further details

Errors and Omissions Excepted (E&OE).


Errors and Omissions Excepted (E&OE).

Slimshield™ Acoustic Louvres

SL-300

Slimshield™ Acoustic Louvres



SL-600

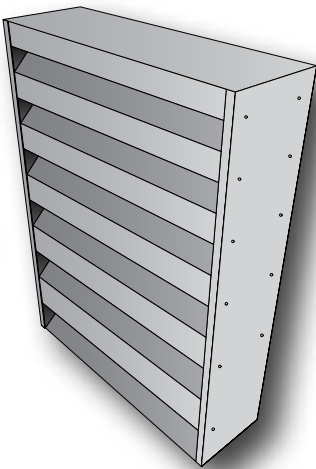

Weight
50kg/m²

Module Width
300 - 1800mm


Standard Module Height
600mm minimum,
(increasing increments of
200mm)
Intermediate heights are
available

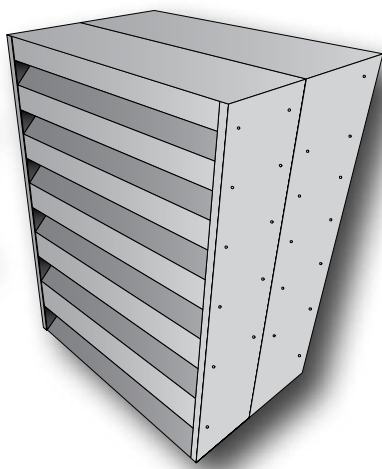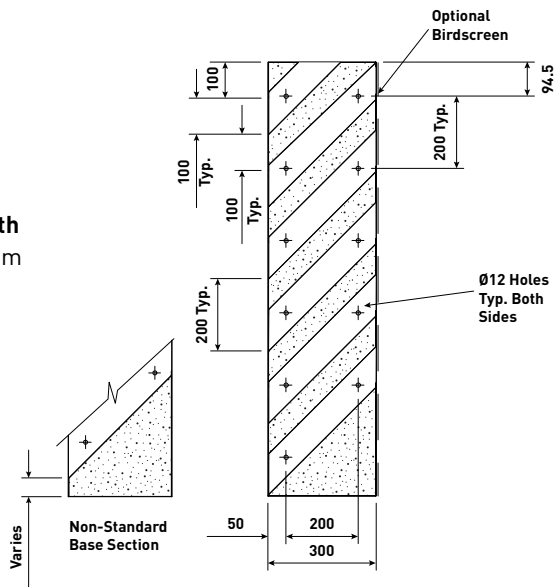

Weight
100kg/m²


Module Width
300 - 1800mm

Standard Module Height
600mm minimum,
(increasing increments of
200mm)
Intermediate heights are
available

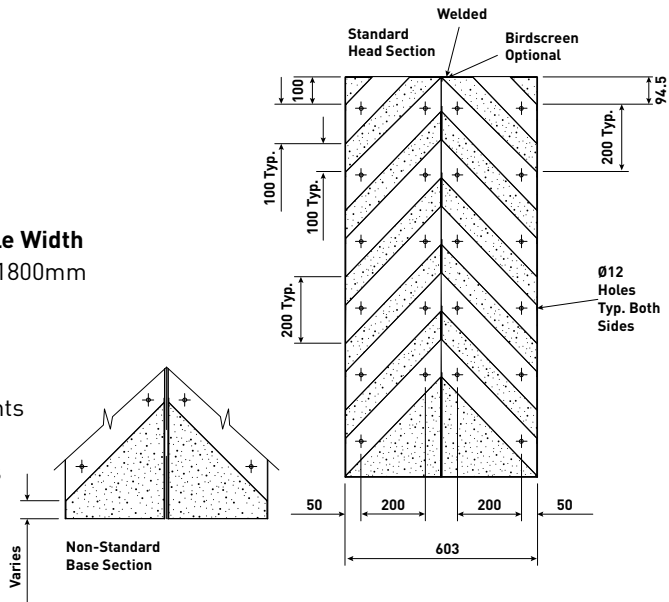


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	6	7	10	12	18	18	14	13
Acoustic Rating	R _w 17dB / D _{new} 23dB							
For noise reduction, add 6dB to the above values								

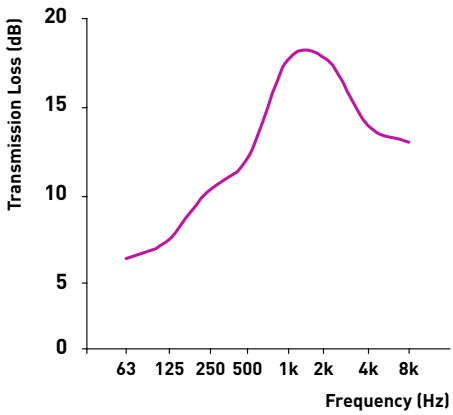


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	7	9	12	24	31	33	29	30
Acoustic Rating	R _w 26dB / D _{new} 31dB							
For noise reduction, add 6dB to the above values								

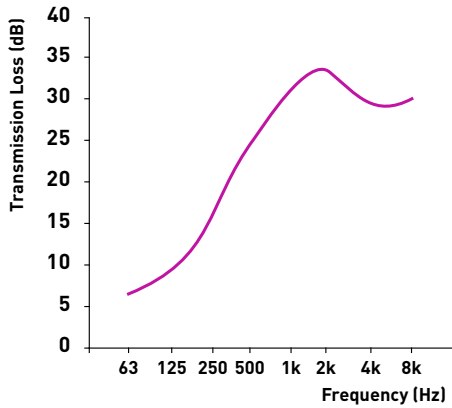


Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	0.94	1.31	1.61	1.83	2.13	2.27	2.46	2.63	2.84	2.99
Nominal Free Area	45%* * Average over louvre depth									
Aerodynamic Coefficient	(K) 18.38									

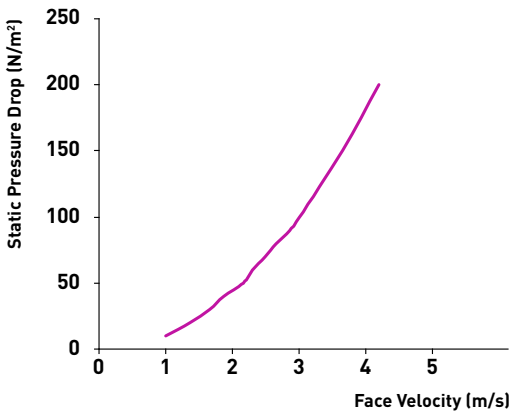

Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	0.68	0.94	1.15	1.30	1.47	1.61	1.77	1.89	2.02	2.13
Nominal Free Area	45%* * Average over louvre depth									
Aerodynamic Coefficient	(K) 38.56									

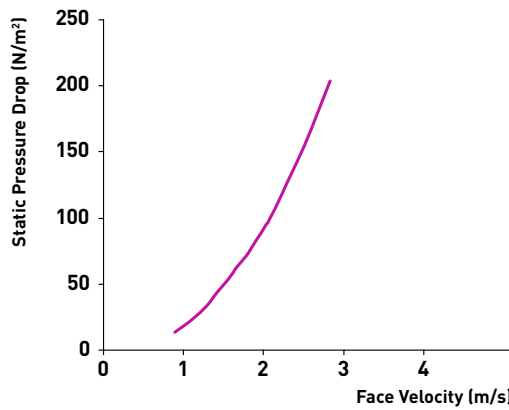

Acoustic Louvred Doors

- Single and double doors are available in the SL-300 louvre range
- See page 24 for further details

Errors and Omissions Excepted (E&OE).


Errors and Omissions Excepted (E&OE).

Slimshield™ Acoustic Louvres

SL-V300L

Slimshield™ Acoustic Louvres



SL-V300S

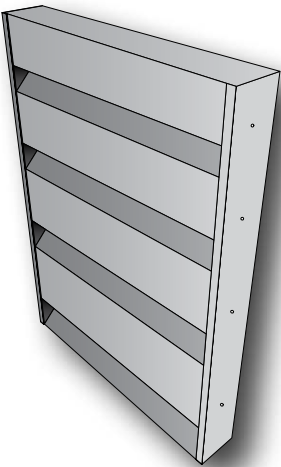

Weight
50kg/m²

Module Width
300 - 1800mm


Standard Module Height
600mm minimum,
(increasing increments of
203mm)
Intermediate heights are
available

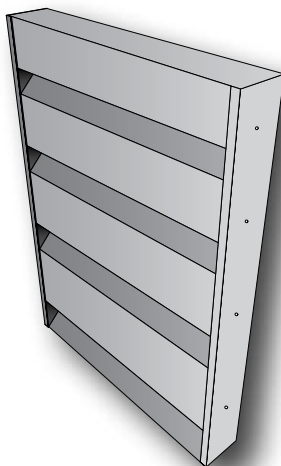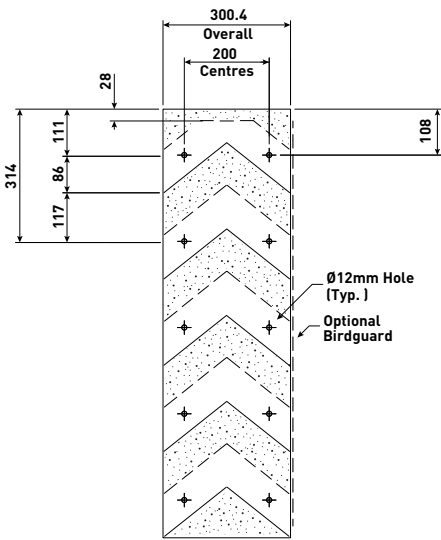

Weight
55kg/m²


Module Width
300 - 1800mm

Standard Module Height
600mm minimum,
(increasing increments
of 305mm)
Intermediate heights
are available

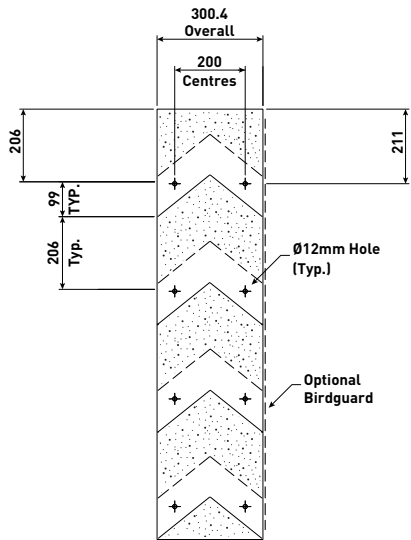


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	-	5	10	12	17	22	21	21
Acoustic Rating	R _w 18dB / D _{new} 26dB							
For noise reduction, add 6dB to the above values								

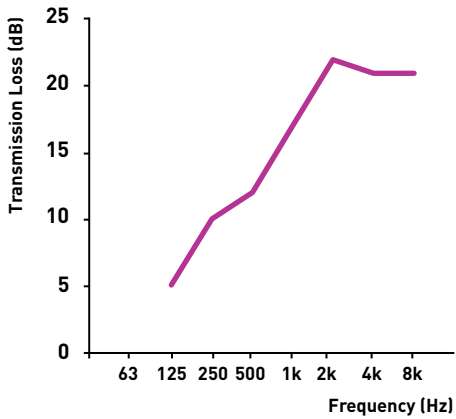


Acoustic Performance

Octave Band Centre Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Transmission Loss (dB)	-	7	13	13	18	21	20	21
Acoustic Rating	R _w 18dB / D _{new} 29dB							
For noise reduction, add 6dB to the above values								

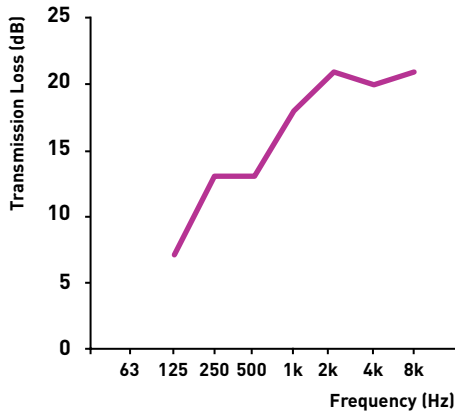


Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	-	1.95	2.39	2.76	3.09	3.39	3.66	3.91	4.15	-
Nominal Free Area	42%* * Average over louvre depth									
Aerodynamic Coefficient	(K) 8.7									

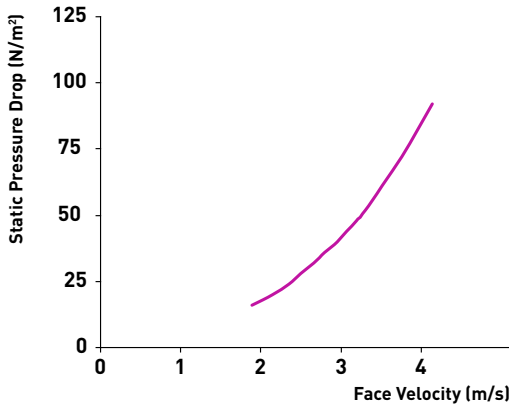

Aerodynamic Performance

Static Pressure Drop (N/m ²)	10	20	30	40	50	60	70	80	90	100
Face Velocity (m/s)	-	1.45	1.78	2.06	2.30	2.52	2.72	2.91	3.09	-
Nominal Free Area	48%* * Average over louvre depth									
Aerodynamic Coefficient	(K) 15.8									

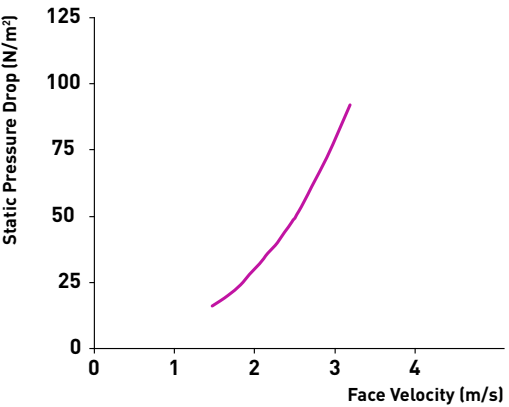

Pressure Drop = 1/2 ρv²k
ρ = Density of Air (1.25kg/m³)
v = Face Velocity of Air
k = Aerodynamic Coefficient

Errors and Omissions Excepted (E&OE).

Errors and Omissions Excepted (E&OE).

Acoustic Louvred Doors

- Single and double doors are available in the entire IAC Acoustics louvre range
- The structural minimum is 850mm and is available up to 1250 x 2950mm high as standard for a single door and 2500 x 2950mm high for a double door. Other widths and heights are available on request
- All doors are supplied with a union oval lock, latch and pull handle
- Acoustic louvred doors can be fitted with bird guards and insect meshes on request
- Doors can be polyester powder coated to match adjoining louvres
- Materials for the door and door frame include galvanised steel, stainless steel and aluminium



A Quality Solution

All IAC products are designed to stand the test of time and manufactured to suit the application. From offshore environments to extremes in weather and ambient temperature, IAC Acoustics can produce a highly engineered solution to your noise control issue.

Harsh Environments

In addition to providing acoustic louvres located in everyday environments, IAC also has the ability to modify products to suit more demanding applications.

Contacts



Head Office - Winchester, UK

T: +44 (0) 1962 873 000

E: info@iac-uk.com



Australia

T: +61 (0) 2 8781 0400

F: +61 (0) 2 9725 2939

E: info@iac-australia.com.au



China (Dongguan Office)

T: +86 (0) 769 89899966 802

F: +86 (0) 769 89899966 810

E: china.sales@iac-china.com



China (SH Office)

T: +86 (0) 21 68825328

E: test@iac-china.com



Denmark

T: +45 36 77 88 00

F: +45 36 78 12 30

E: mail@iac-nordic.dk



Germany

T: +49 (0) 2163 9991 0

F: +49 (0) 2163 9991 23

E: deutschland@iac-gmbh.de



Ireland

T: +353 (0) 21 4354 340

F: +353 (0) 21 4354 316

E: info@holden.ie



Italy

T: +39 0445 575 669

F: +39 0445 575 002

E: info@marvinacustica.it

