

82M AND TCC SERIES

Pneumatic Power Clamps | Product Overview

82M Series Enclosed Power Clamp

Shown with optional U-Arms and Cylinders with Internal Hold Open Device



80mm	63mm	50mm	40mm
Max Holding Torque 3000 Nm	Max Holding Torque 1800 Nm	Max Holding Torque 1300 Nm	Max Holding Torque 380 Nm
Max Clamping Torque 850 Nm at 5bar	Max Clamping Torque 420 Nm at 5bar	Max Clamping Torque 270 Nm at 5bar	Max Clamping Torque 120 Nm at 5bar

Ordering Information

Dimensional Drawings



“B” Front Mount available for 82M and TCC size 40mm
Same mounting pattern as size 50 and 63mm



NAAMS Lateral Mounting available on 82M and TCC in addition to narrow, wide and NAAMS Clamp Arm Shafts

TCC Tolerance Compensating Power Clamp


Shown with optional U-Arms and Cylinders with Internal Hold Open Device



63mm	50mm	40mm
Max Holding Torque 295 Nm	Max Holding Torque 175 Nm	Max Holding Torque 85 Nm
Max Clamping Torque 295 Nm at 5bar	Max Clamping Torque 175 Nm at 5bar	Max Clamping Torque 85 Nm at 5bar

Ordering Information

Dimensional Drawings

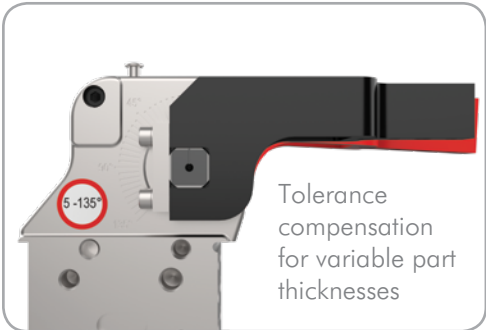


- Tolerance compensation for variable sheet metal thicknesses within three degrees of arm movement
- There is no need for shimming

82M AND TCC SERIES

Pneumatic Power Clamps | Product Overview

Adjusting the Arm Opening Angle

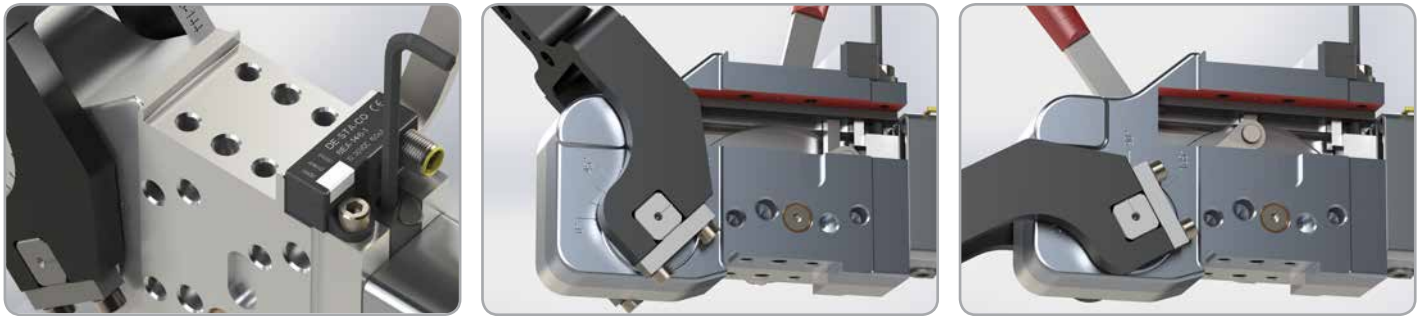


Easily adjust arm opening angle with an M5 Allen wrench.

- Move clamp arm to full open position.
- Using Allen wrench, release mechanism (leave Allen wrench in place).
- Move clamp arm to desired opening.
- Tighten to 20 Nm.


Enclosed Power Clamp Hand Lever (82M-3E Models Only)

Standard Adjustable Hand Lever

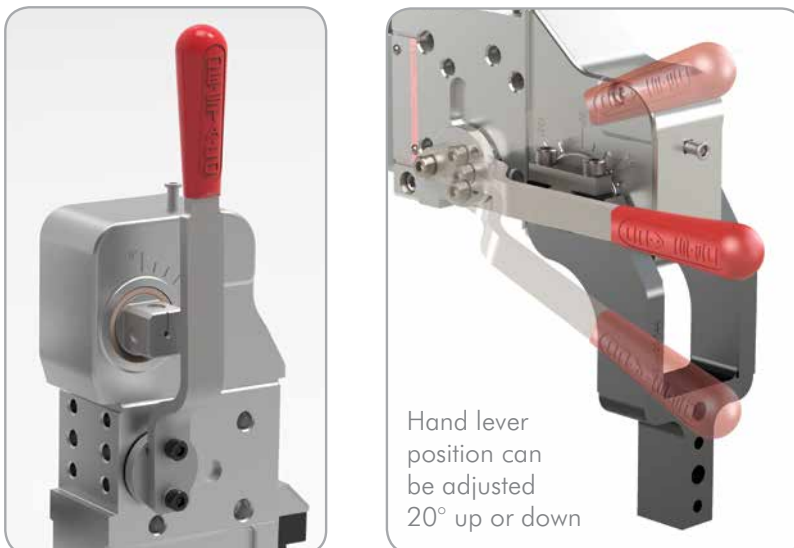

- Hand lever position is adjustable for improved ergonomics
- Handle can be mounted on the left or right side

Weldable Hand Lever

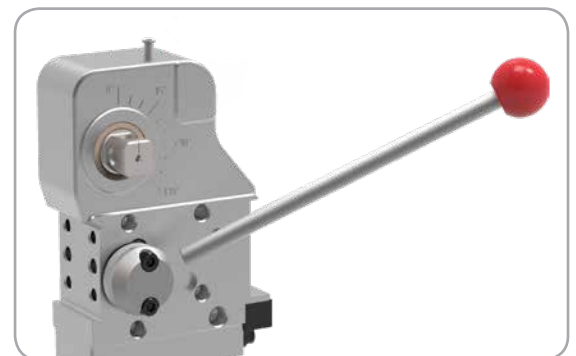

- Hand lever can be welded into a permanent position.
- Handle can be mounted on the left or right side

Dimensional Drawings

TCC-2 SERIES


Pneumatic Power Clamps with Tolerance Compensation | Ordering Information

TCC-2		E	03	00	6A	L8	
Base Model	Mounting	Description		Clamp Arm Shaft	Description	Handle	Description
	E	Standard Mounting		03	for U-Arms	00	No Hand lever
	B	Common Front Mount for Size 40 only (same mount pattern as size 50 & 63)		23	for Lateral Arms		
	N	NAAMS Side Mounting for Size 63 only		See below for further details			

Mounting




Size 40



Size 50




Size 63




Size 40 Only



Size 63 Only

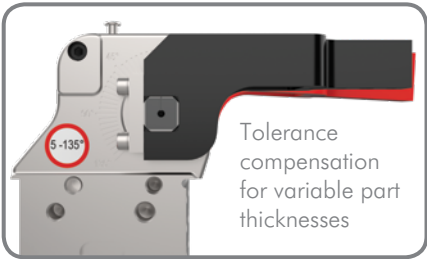

- Tolerance compensation for variable sheet metal thicknesses within three degrees of arm movement
- There is no need for shimming

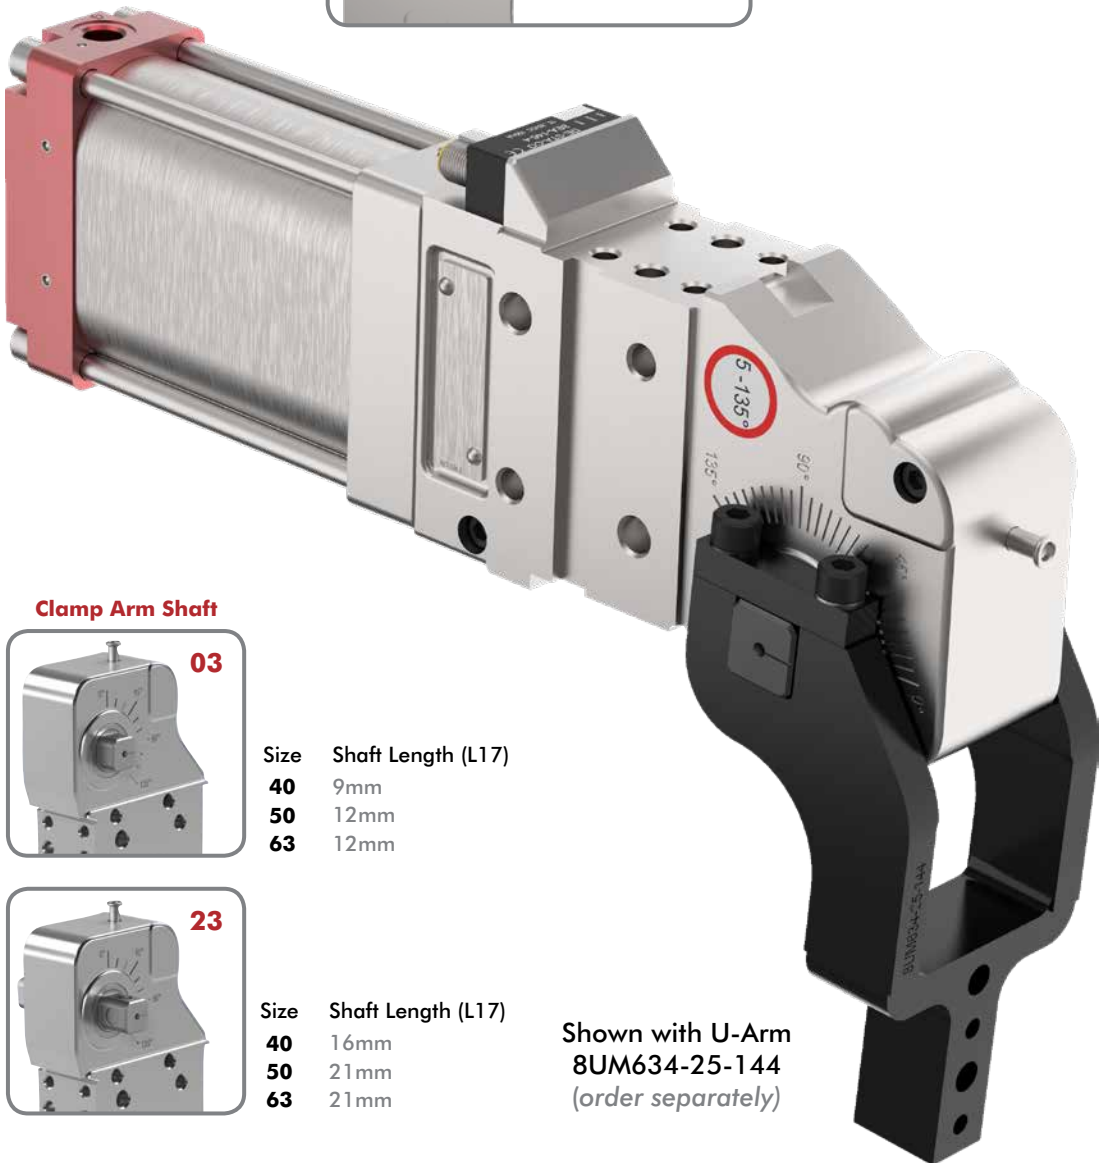

Clamp Arm Shaft



03

Size	Shaft Length (L17)
40	9mm
50	12mm
63	12mm



23

Size	Shaft Length (L17)
40	16mm
50	21mm
63	21mm

Shown with U-Arm
8UM634-25-144
(order separately)

TCC-2 SERIES

Pneumatic Power Clamps with Tolerance Compensation | Ordering Information

Sensor	Description
00	No sensor
L8*	PNP with In-line Connector (Replacement No.: 8EA-146-4)
N8*	NPN with In-line Connector (Replacement No.: 8EA-154-4)
L9	PNP with 90 deg Connection (Replacement No.: 8EA-147-4)
N9	NPN with 90 deg Connection (Replacement No.: 8EA-155-4)
K8	PNP with Cable Connection (Replacement No.: 8EA-158-4)
K9	NPN with Cable Connection (Replacement No.: 8EA-167-4)

*Not available for use with **4V**, **5V**, **6V** cylinder option.



L8/N8



L9/N9



K8/K9



Cylinder - Standard

- 40** 40mm Cylinder - G1/8 Port
- 50** 50mm Cylinder - G1/4 Port
- 5N** 50mm Cylinder - 1/4-18 NPT Port
- 63** 63mm Cylinder - G1/4 Port
- 6N** 63mm Cylinder - 1/4-18 NPT Port



Cylinder with Unlockable Return Valve

- 4C** 40mm Cylinder - G1/8 Port
- 5C** 50mm Cylinder - G1/4 Port
- 5D** 50mm Cylinder - 1/4-18 NPT Port
- 6C** 63mm Cylinder - G1/4 Port
- 6D** 63mm Cylinder - 1/4-18 NPT Port



Cylinder with Internal Hold Open Device

- 4A** 40mm Cylinder - G1/8 Port
- 5A** 50mm Cylinder - G1/4 Port
- 5B** 50mm Cylinder - 1/4-18 NPT Port
- 6A** 63mm Cylinder - G1/4 Port
- 6B** 63mm Cylinder - 1/4-18 NPT Port



Cylinder with Piston Rod Locking Device

- 4V** 40mm Cylinder - G1/8 Port
- 5V** 50mm Cylinder - G1/4 Port
- 6V** 63mm Cylinder - G1/4 Port



40

Max Holding Torque
85 Nm
Max Clamping Torque
85 Nm at 5bar



50

Max Holding Torque
175 Nm
Max Clamping Torque
175 Nm at 5bar




63

Max Holding Torque
295 Nm
Max Clamping Torque
295 Nm at 5bar

TCC-2 SERIES


Pneumatic Power Clamps with Tolerance Compensation | Technical Specifications

Model	Max. Holding Torque (Nm)	Clamping Torque at 5 bar (Nm)	Cylinder Ø (mm)	Weight (kg)	Air Consumption per double stroke at 5 bar (liter)
TCC-2.....40..	85	85	40	1,6	0,9
TCC-2.....4A..				1,7	
TCC-2.....4B..				1,6	
TCC-2.....4V..				1,6	

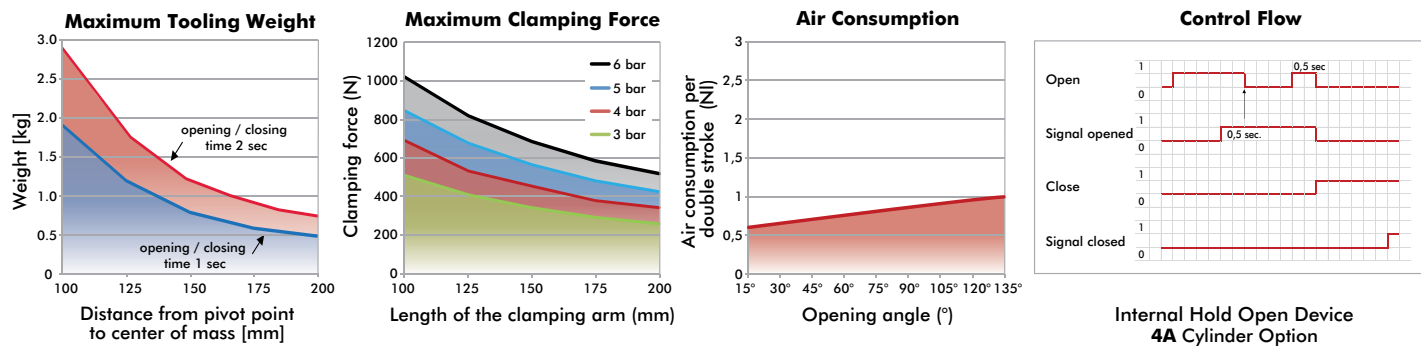





ATTENTION: Calculation tool available. Please consult factory.

Model	Max. Holding Torque (Nm)	Clamping Torque at 5 bar (Nm)	Cylinder Ø (mm)	Weight (kg)	Air Consumption per double stroke at 5 bar (liter)
TCC-2E....50..	175	175	50	2,8	1,6
TCC-2E....5N..				2,8	
TCC-2E....5A..				2,8	
TCC-2E....5B..				2,8	
TCC-2E....5C..				3,0	
TCC-2E....5D..				3,0	
TCC-2E....5V..				2,9	

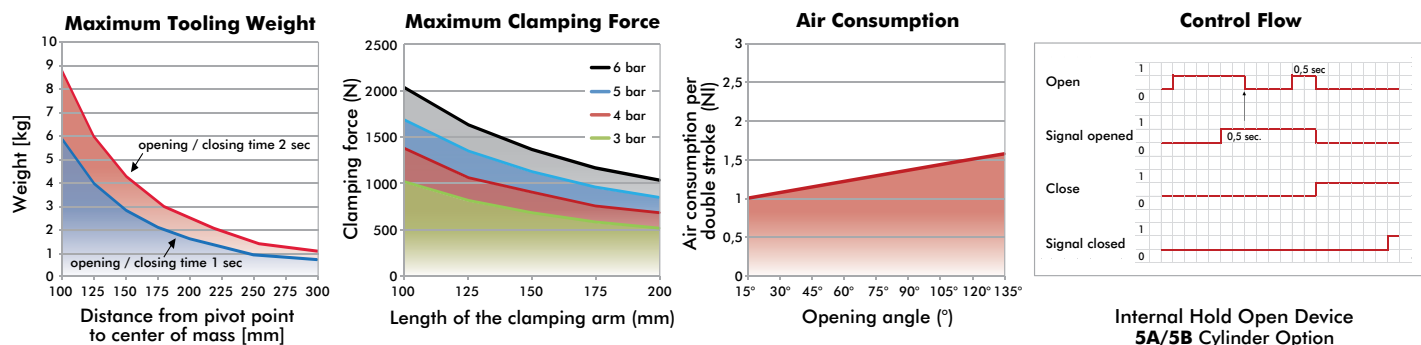


ATTENTION: Calculation tool available. Please consult factory.

Model	Max. Holding Torque (Nm)	Clamping Torque at 5 bar (Nm)	Cylinder Ø (mm)	Weight (kg)	Air Consumption per double stroke at 5 bar (liter)
TCC-2.....63..	295	295	63	3,8	2,6
TCC-2.....6N..				4,0	
TCC-2.....6A..				4,6	
TCC-2.....6B..				4,2	
TCC-2.....6C..					
TCC-2.....6D..					
TCC-2.....6V..					

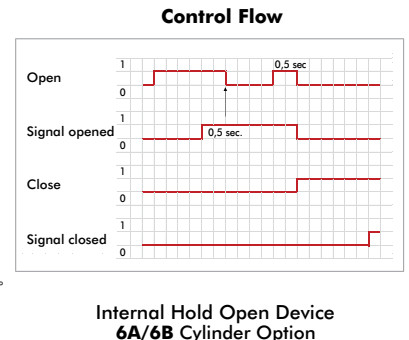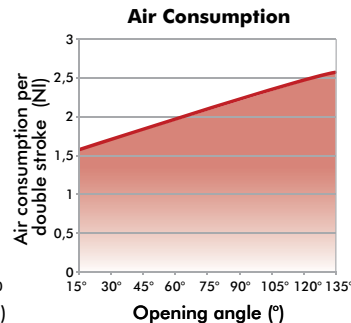

ATTENTION: Calculation tool available. Please consult factory.

Center of Mass

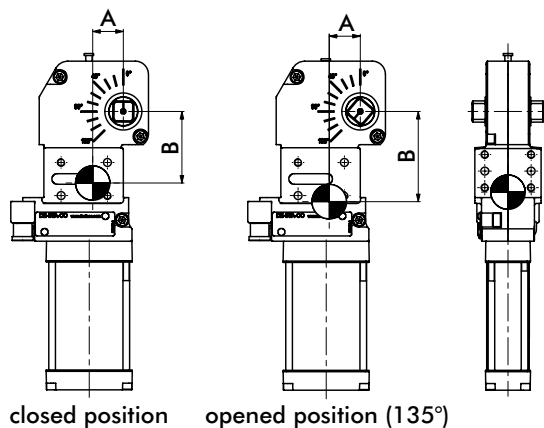

Model	A		B		Weight
	Closed	Open	Closed	Open	
TCC-2E....40..	23	24	55	69	1,5
TCC-2B....40..	24		54	68	
TCC-2E....4A..	22	23	72	86	1,6
TCC-2B....4A..	23		72	85	
TCC-2E....4C..	25	26	77	89	1,7
TCC-2B....4C..	26		76	88	
TCC-2E....4V..	24	24	66	80	1,6
TCC-2B....4V..			66	79	
TCC-2E....50..			70	87	2,6
TCC-2E....5N..	24	25			
TCC-2E....5A..			83	99	2,8
TCC-2E....5B..					
TCC-2E....5C..	27	27	96	110	3,0
TCC-2E....5D..					
TCC-2E....5V..	25	26	84	99	2,9
TCC-2.....63..			89	105	3,7
TCC-2.....6N..	27	28			
TCC-2.....6A..			98	114	3,9
TCC-2.....6B..					
TCC-2.....6C..	30	30	116	130	4,4
TCC-2.....6D..					
TCC-2.....6V..	28	28	103	119	3,9


82M-3 SERIES

Pneumatic Power Clamps | Ordering Information


82M-3 **E** **23** **H0** **50** **L8** - **1** — North America Only

Base Model	Mounting	Description	Clamp Arm Shaft	Description	Handle	Description
	E	Standard Mounting	03	for U-Arms	00	No Hand lever
	B	Common Front Mount for Size 40 only (same mount pattern as size 50 & 63)	23	for Lateral Arms	H0	Hand Lever
	N	NAAMS Side Mounting for Size 63 only	D0	for Lateral Arms (size 63 NAAMS only)	HS	Weldable

See below for further details




Size	Shaft Length (L17)
40	9mm
50	12mm
63	12mm



Size	Shaft Length (L17)
40	16mm
50	21mm
63	21mm
80	32mm

Size	Shaft Length (L17)
D0	
63	26mm

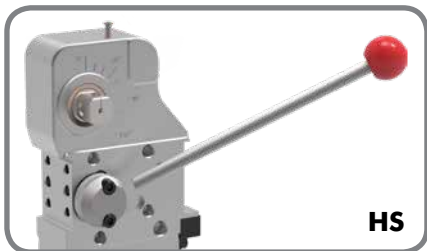

Hand Lever	Description
00	No Hand Lever
H0	Standard Hand Lever (not compatible with cylinder options *A and *B)
HS	Weldable Hand Lever (not compatible with cylinder options *A and *B)

Shown with U-Arm
8UM504-25-144
(order separately)

82M-3 SERIES

Pneumatic Power Clamps | Ordering Information

Sensor	Description
00	No sensor
L8	PNP with In-line Connector (Replacement No.: 8EA-146-4)
N8	NPN with In-line Connector (Replacement No.: 8EA-154-4)
L9	PNP with 90 deg Connection (Replacement No.: 8EA-147-4)
N9	NPN with 90 deg Connection (Replacement No.: 8EA-155-4)
K8	PNP with Cable Connection (Replacement No.: 8EA-158-4)
K9	NPN with Cable Connection (Replacement No.: 8EA-167-4)



L8/N8



L9/N9



K8/K9



Cylinder - Standard

40	40mm Cylinder - G1/8 Port
50	50mm Cylinder - G1/4 Port
5N	50mm Cylinder - 1/4-18 NPT Port
63	63mm Cylinder - G1/4 Port
6N	63mm Cylinder - 1/4-18 NPT Port
80	80mm Cylinder - G1/4 Port
8N	80mm Cylinder - 1/4-18 NPT Port



Cylinder with Internal Hold Open Device

4A	40mm Cylinder - G1/8 Port
5A	50mm Cylinder - G1/4 Port
5B	50mm Cylinder - 1/4-18 NPT Port
6A	63mm Cylinder - G1/4 Port
6B	63mm Cylinder - 1/4-18 NPT Port
8A	80mm Cylinder - G1/4 Port
8B	80mm Cylinder - 1/4-18 NPT Port



40

Max Holding Torque
380 Nm
Max Clamping Torque
120 Nm at 5bar

50

Max Holding Torque
1300 Nm
Max Clamping Torque
270 Nm at 5bar

63

Max Holding Torque
1800 Nm
Max Clamping Torque
420 Nm at 5bar





80

Max Holding Torque
3000 Nm
Max Clamping Torque
850 Nm at 5bar

82M-3 SERIES





Pneumatic Power Clamps | Technical Specifications

Model	Max. Holding Torque (Nm)	Clamping Torque at 5 bar (Nm)	Cylinder Ø (mm)	Weight (kg)	Air Consumption per double stroke at 5 bar (liter)
82M-3E...4...	380	120	40	1,5	0,9
82M-3B...4...					

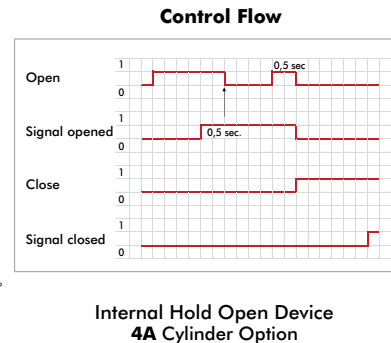





ATTENTION: Calculation tool available. Please consult factory.

Model	Max. Holding Torque (Nm)	Clamping Torque at 5 bar (Nm)	Cylinder Ø (mm)	Weight (kg)	Air Consumption per double stroke at 5 bar (liter)
82M-3E...5...	1300	270	50	2,8	1,6

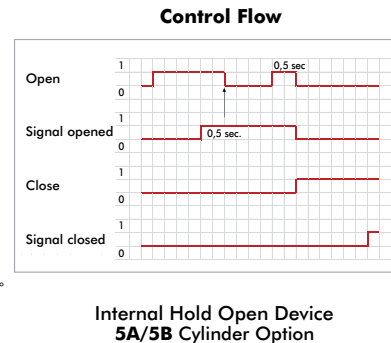

ATTENTION: Calculation tool available. Please consult factory.

Model	Max. Holding Torque (Nm)	Clamping Torque at 5 bar (Nm)	Cylinder Ø (mm)	Weight (kg)	Air Consumption per double stroke at 5 bar (liter)
82M-3E...6...	1800	420	63	3,8	2,6
82M-3N...6...					

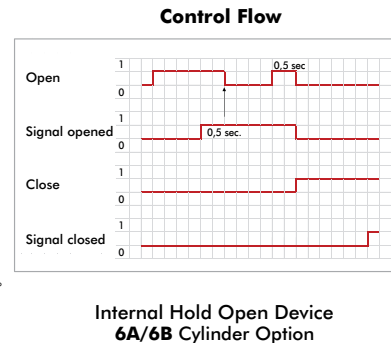


ATTENTION: Calculation tool available. Please consult factory.

82M-3 SERIES



Pneumatic Power Clamps | Technical Specifications

Model	Max. Holding Torque (Nm)	Clamping Torque at 5 bar (Nm)	Cylinder Ø (mm)	Weight (kg)	Air Consumption per double stroke at 5 bar (liter)
82M-3E...80..	3000	850	80	8,7	6,3
82M-3E...8N..				8,8	
82M-3E...8A..					
82M-3E...8B..					

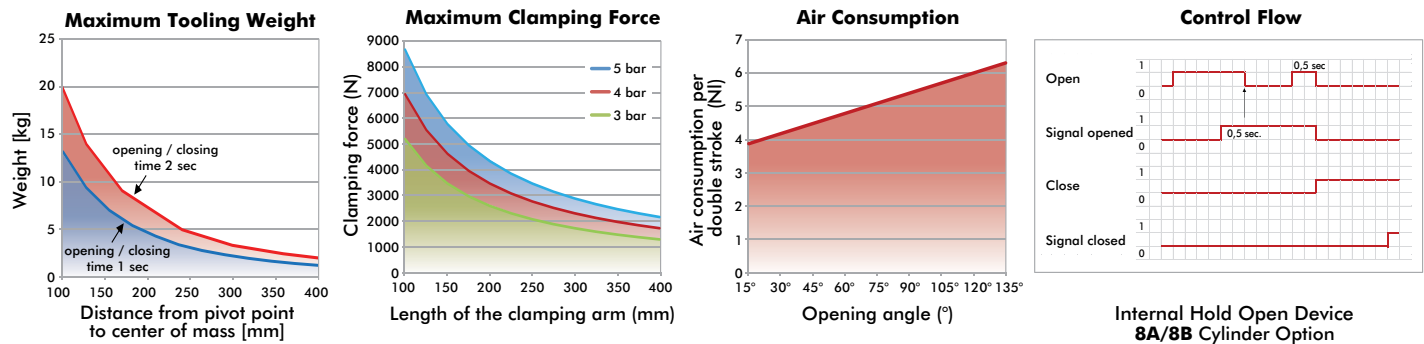

ATTENTION: Calculation tool available. Please consult factory.

Center of Mass

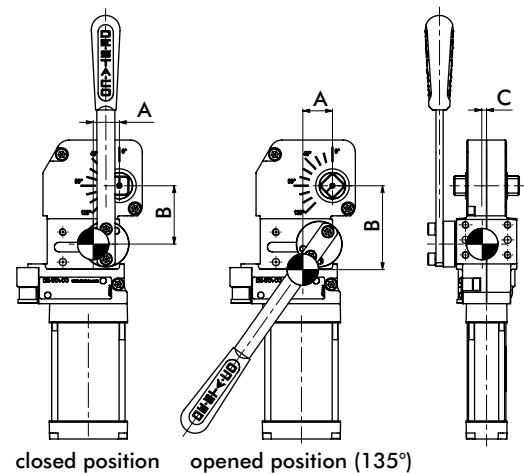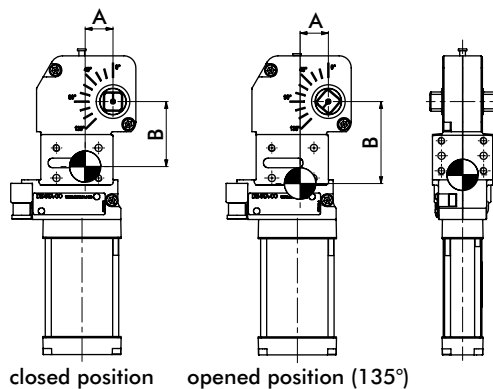

Model	Without Handle				Weight
	A Closed	A Open	B Closed	B Open	
82M-3E...40..	23		55	69	1,5
82M-3B...40..	24	24	54	68	
82M-3E...4A..	22		72	86	1,6
82M-3B...4A..	23	23		85	
82M-3E...50..			70	87	2,8
82M-3E...5N..	24	25			
82M-3E...5A..			83	99	
82M-3E...5B..					
82M-3...63..			88	103	3,8
82M-3...6N..	27	28			
82M-3...6A..			98	114	3,9
82M-3...6B..					
82M-3E...80..			98	123	8,7
82M-3E...8N..	36	37			
82M-3E...8A..					8,9
82M-3E...8B..			104	129	


Model	With Handle				C	Weight
	A Closed	A Open	B Closed	B Open		
82M-3E...40..	22	25	49	70	4	1,6
82M-3B...40..	24	27	46	67		
82M-3E...50..	23	30	62	85		3,1
82M-3E...5N..						
82M-3...63..	26	30	80	102	3	4,2
82M-3...6N..						
82M-3E...80..	35	38	93	122	2	9,2
82M-3E...8N..						

82M-3/TCC-2 SERIES 40MM

Pneumatic Power Clamps | Cylinder Options Dimension and Technical Specifications

82M-3/TCC-2.....40


Standard Cylinder

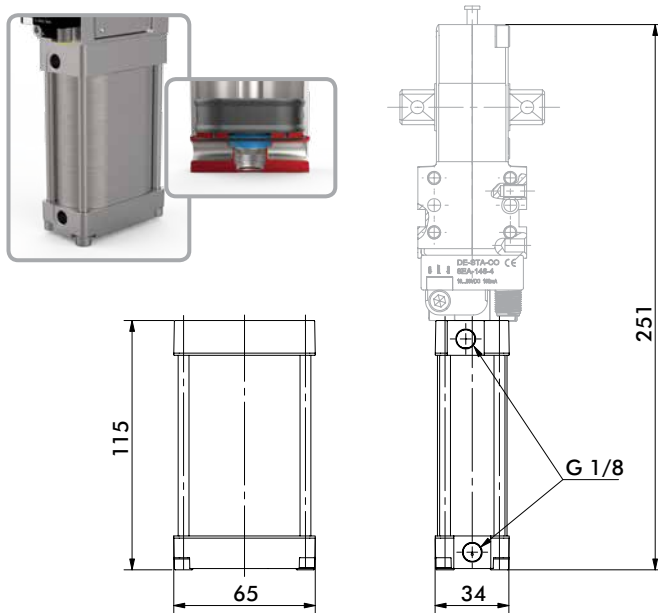

82M-3/TCC-2.....4A

Cylinder with Internal Hold Open Device


Securely holds clamp in the open position.

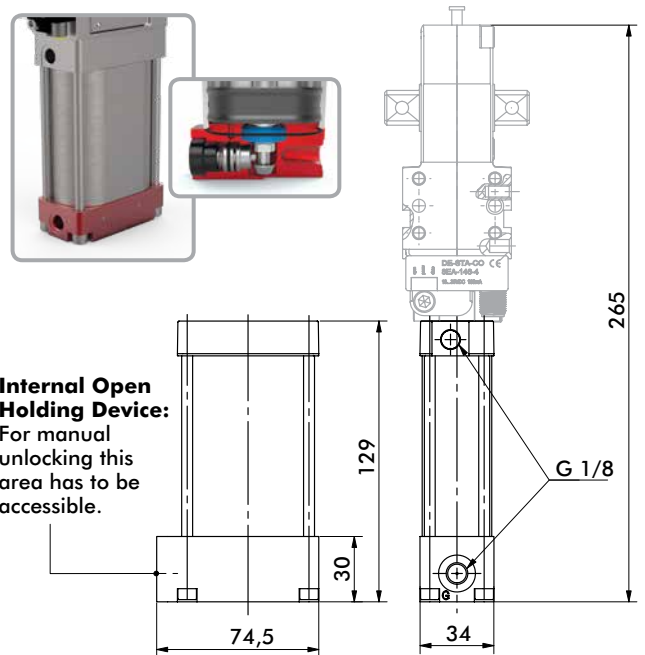

TCC-2.....4C

Cylinder with Unlock-able Return Valve


Pneumatically holds clamp arm in the closed position when air is released.

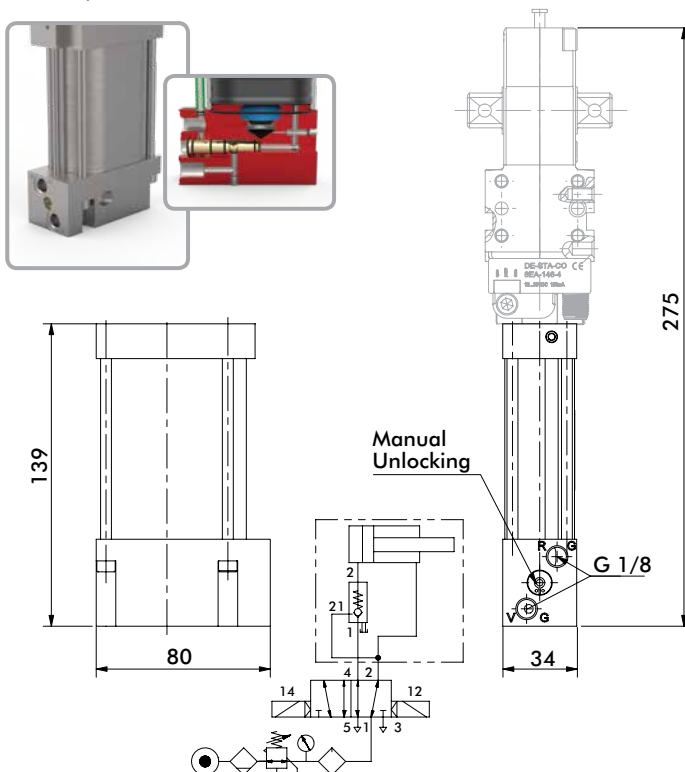



TCC-2.....4V

Cylinder with Rod Locking Device





Uses friction to clamp rod at any point between open and closed positions.

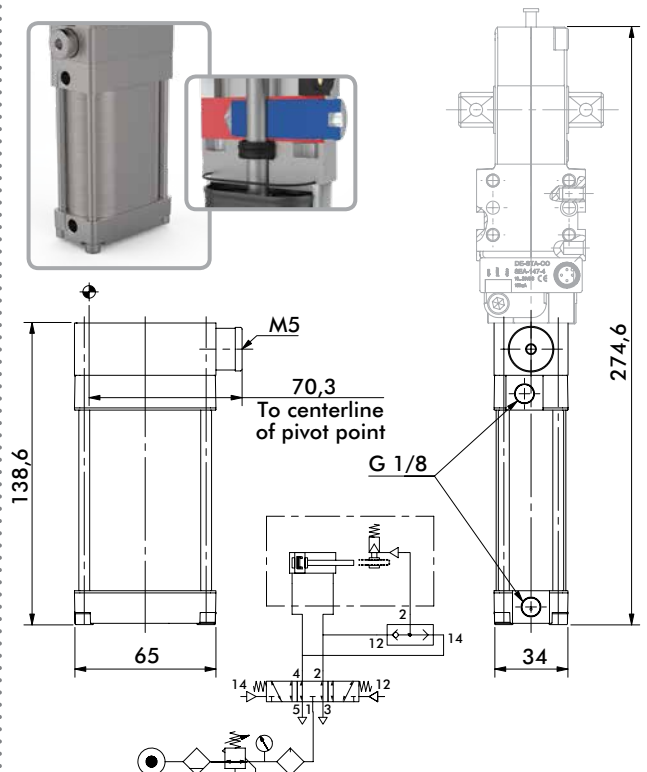

Pneumatic Power Clamps | Dimensions

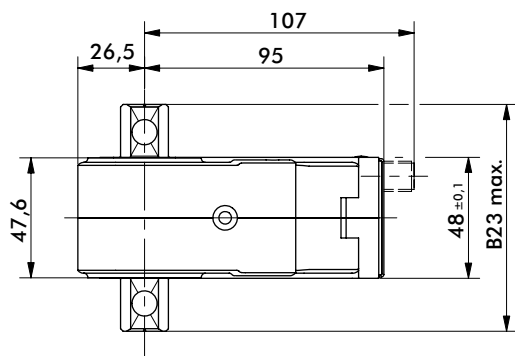

Model	B23 Max.	L17
82M-3E03/TCC-2E03..5...	72	12
82M-3E23/TCC-2E23..5...	90	21

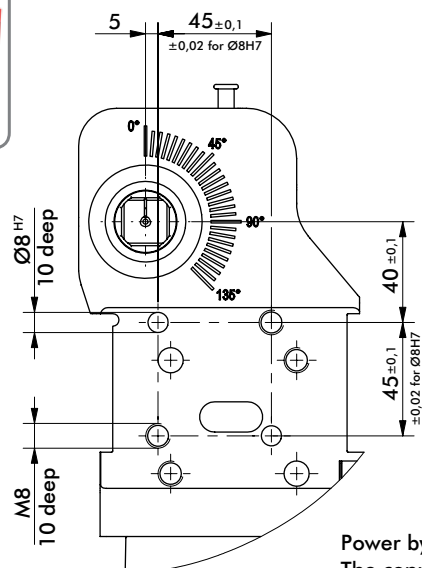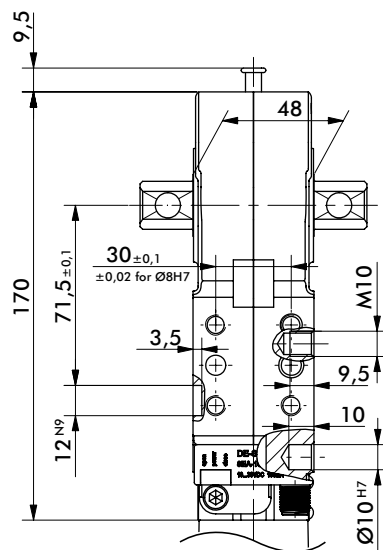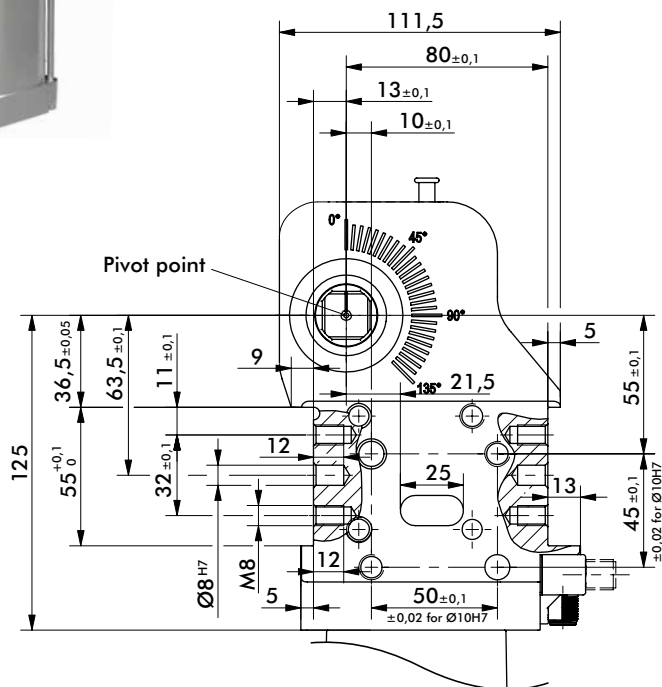


Power by compressed air, max. 6 bar operation with oil-free air is permissible.
The connector socket and the cable are not supplied with the unit.
Safe "holding/clamping" only under pressurization (for TCC models only).

82M-3/TCC-2 SERIES 50MM

Pneumatic Power Clamps | Cylinder Options Dimension and Technical Specifications

82M-3E/TCC-2E...50/5N

Standard Cylinder

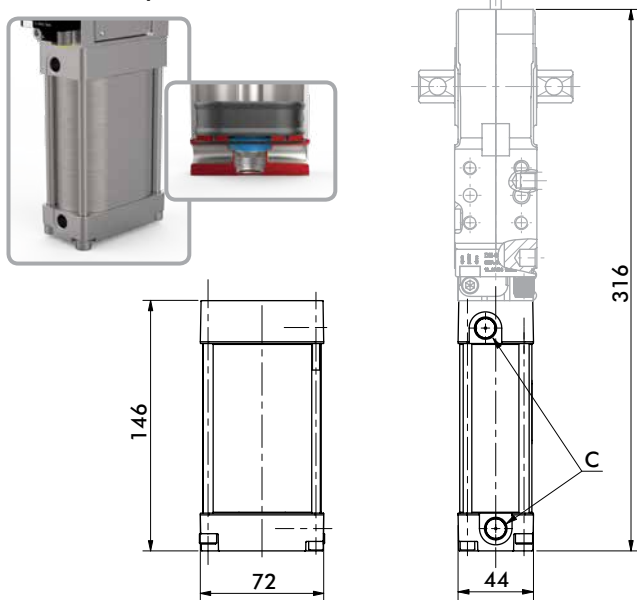


Ports	C
50	G1/4
5N	1/4-18 NPT

Important! For optimal cushioning, external pneumatic one-way flow control valves should be used.

82M-3E/TCC-2E...5A/5B

Cylinder with Internal Hold Open Device

Securely holds clamp in the open position.

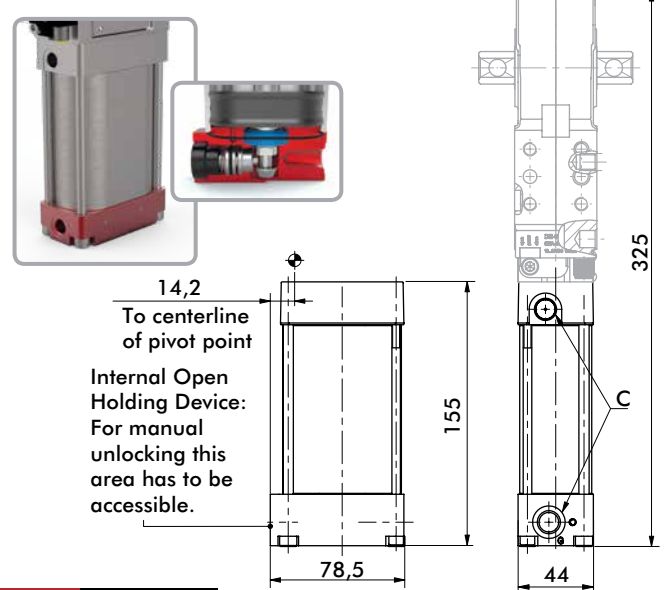


Ports	C
5A	G1/4
5B	1/4-18 NPT

Important! For optimal cushioning, external pneumatic one-way flow control valves should be used.

TCC-2E...5C/5D

Cylinder with Unlock-able Return Valve

Pneumatically holds clamp arm in the closed position when air is released.

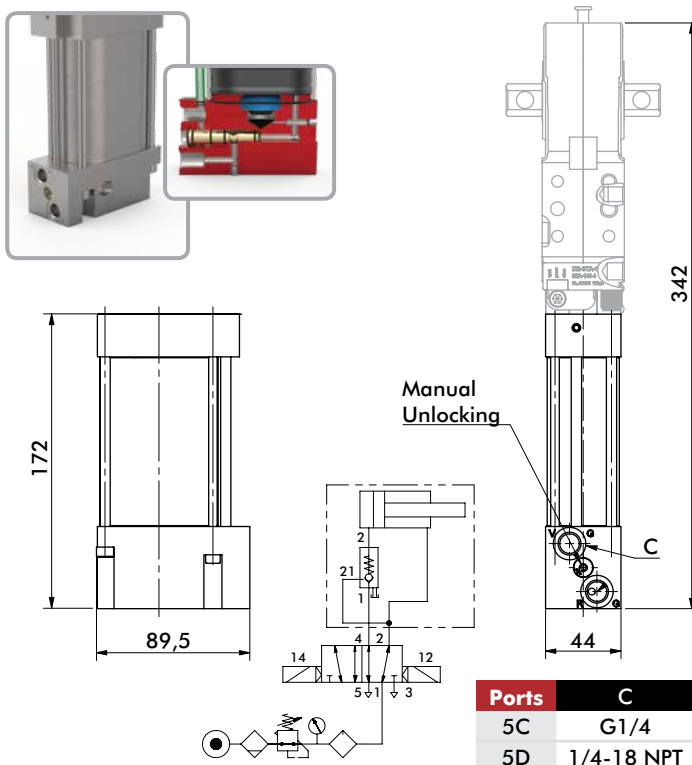


Ports	C
5C	G1/4
5D	1/4-18 NPT

TCC-2E...5V

Cylinder with Rod Locking Device

Uses friction to clamp rod at any point between open and closed positions.

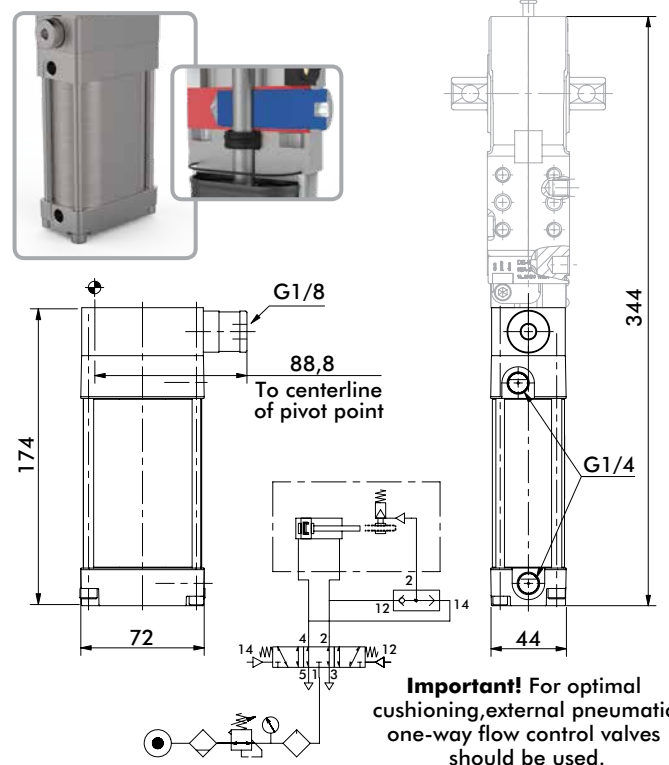


Important! For optimal cushioning, external pneumatic one-way flow control valves should be used.

82M-3/TCC-2 SERIES 63MM

Pneumatic Power Clamps | Cylinder Options Dimension and Technical Specifications

82M-3/TCC-2.....63/6N

Standard Cylinder

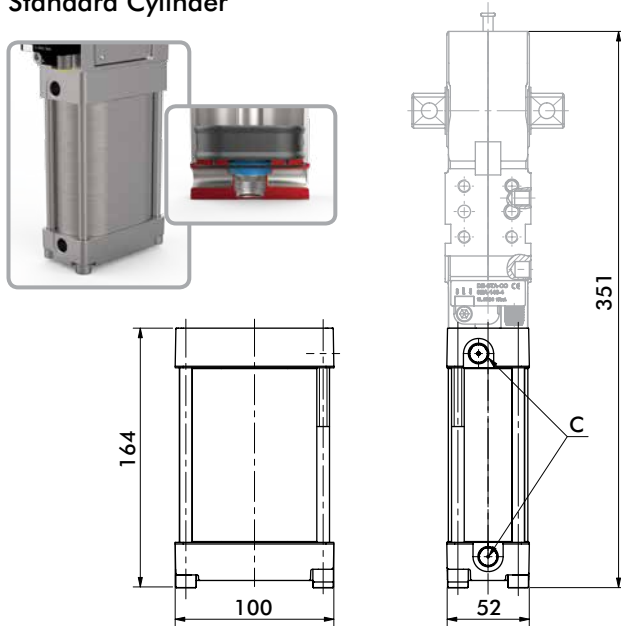


Ports	C
63	G1/4
6N	1/4-18 NPT

Important! For optimal cushioning, external pneumatic one-way flow control valves should be used.

82M-3/TCC-2.....6A/6B

Cylinder with Internal Hold Open Device

Securely holds clamp in the open position.

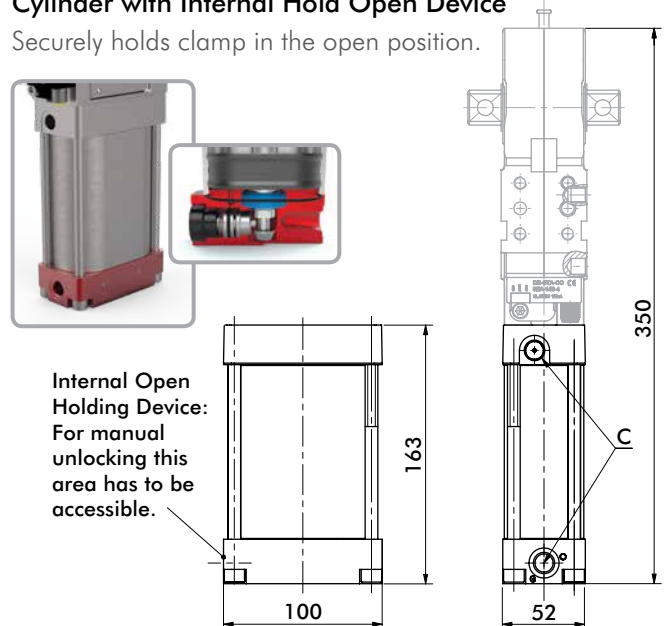

Internal Open Holding Device:
For manual unlocking this area has to be accessible.


Ports	C
6A	G1/4
6B	1/4-18 NPT

Important! For optimal cushioning, external pneumatic one-way flow control valves should be used.

TCC-2.....6C/6D

Cylinder with Unlock-able Return Valve

Pneumatically holds clamp arm in the closed position when air is released.

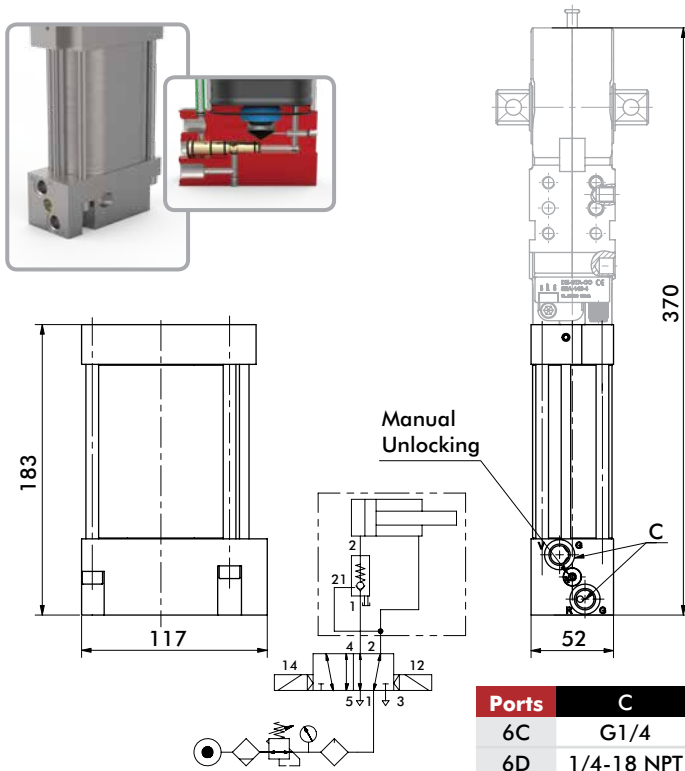


Ports	C
6C	G1/4
6D	1/4-18 NPT

TCC-2.....6V

Cylinder with Rod Locking Device

Uses friction to clamp rod at any point between open and closed positions.

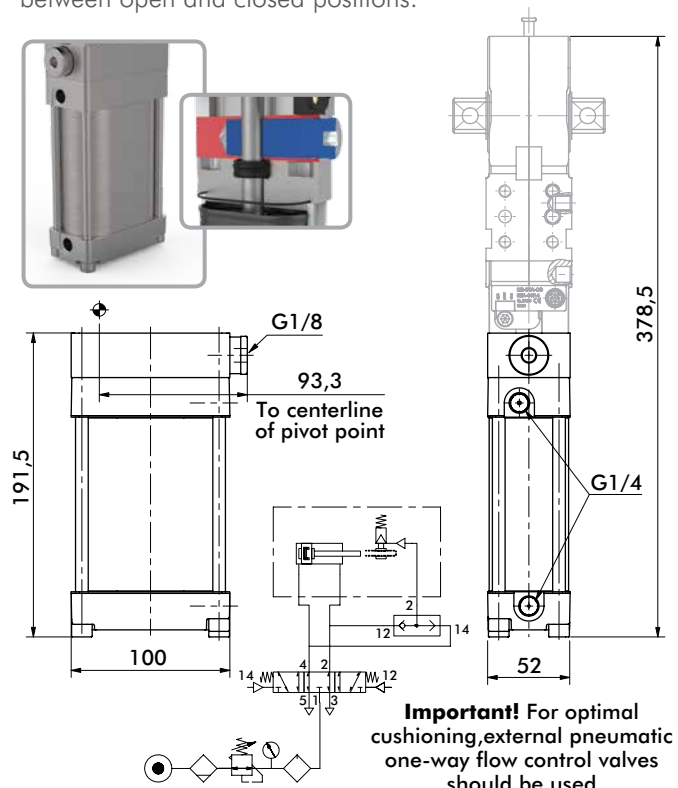


Important! For optimal cushioning, external pneumatic one-way flow control valves should be used.

82M-3 SERIES 80MM

Pneumatic Power Clamps | Cylinder Options Dimension and Technical Specifications

82M-3E...80/8N

Standard Cylinder

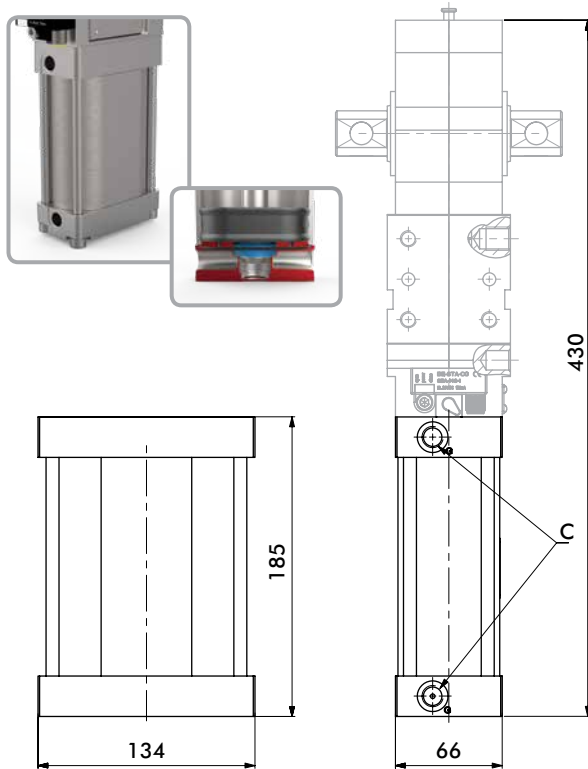


Ports	C
80	G1/4
8N	1/4-18 NPT

Important! For optimal cushioning, external pneumatic one-way flow control valves should be used.

82M-3E...8A/8B

Cylinder with Internal Hold Open Device

Securely holds clamp in the open position.

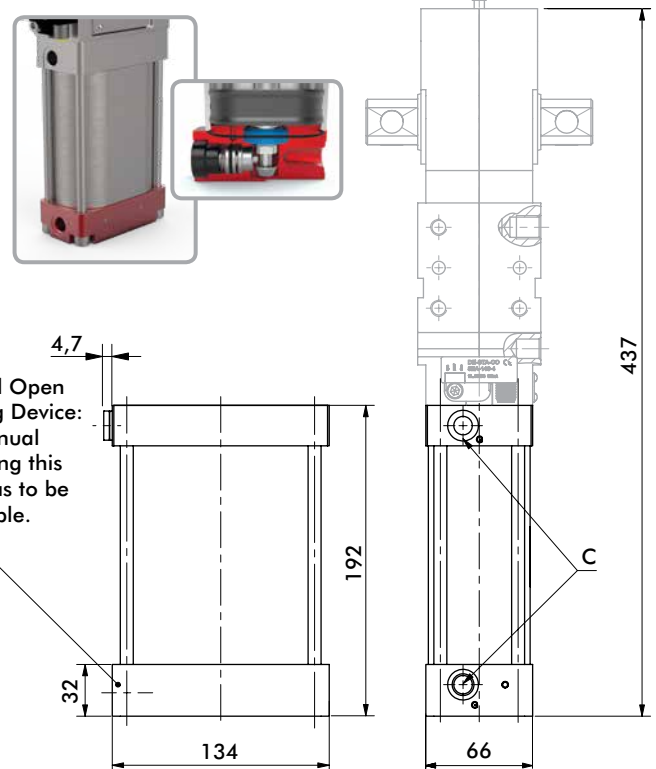


Ports	C
8A	G1/4
8B	1/4-18 NPT

Important! For optimal cushioning, external pneumatic one-way flow control valves should be used.

82M-3 ACCESSORIES

Pneumatic Power Clamps | Dimensions | Technical Specifications

Hand Lever

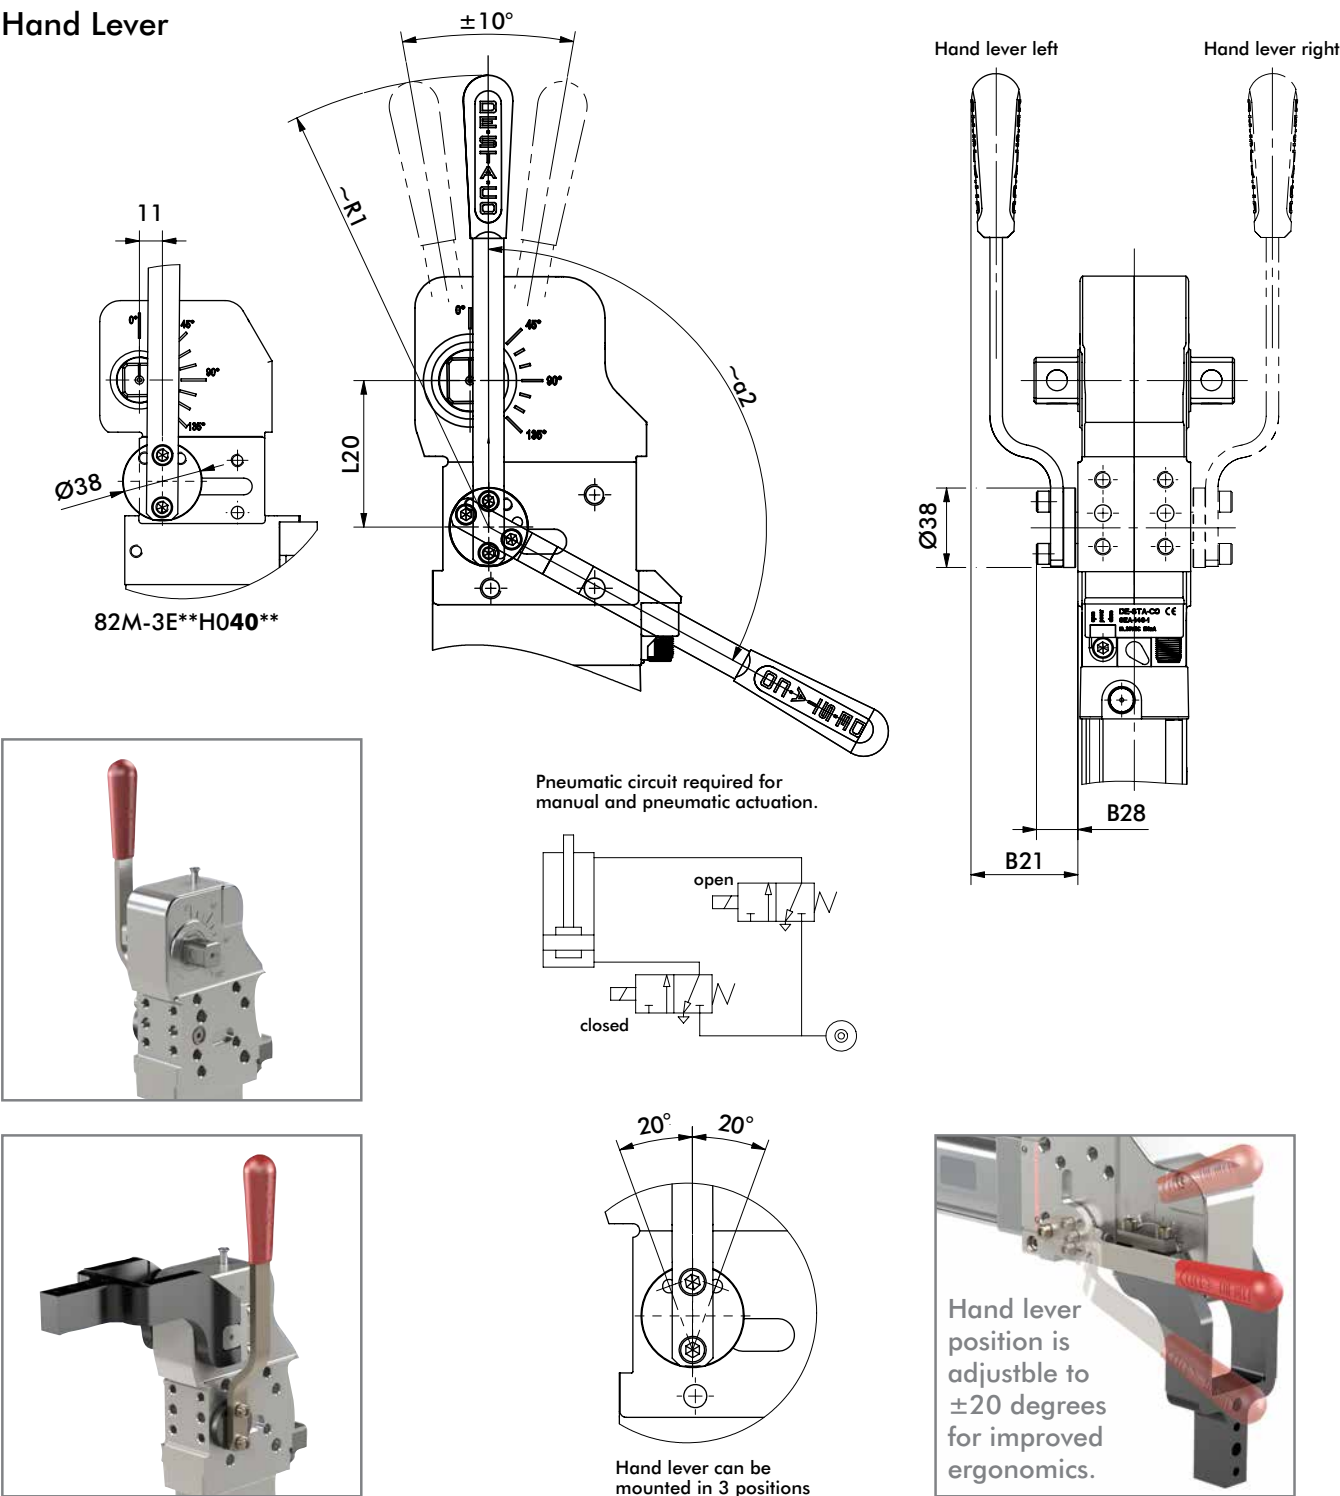


Model No.	B21	B28	L20	~R1	Swivel Angle $\alpha 2$ (with reference to opening angle of clamp arm)									
					0°	15°	30°	45°	60°	75°	90°	105°	120°	135°
82M-3...H040..	27	24	48,5	160	0°	31°	41°	49°	58°	69°	88°	113°	134°	144°
82M-3...H05...	52	20	70	218	-1°	30°	39°	46°	53°	61°	70°	81°	92°	103°
82M-3...H06..	52	20	70,5	218	0°	30°	39°	47°	56°	66°	79°	94°	108°	119°
82M-3...H08..	56	24	82	268	-1°	28°	37°	45°	53°	63°	75°	92°	107°	117°

82M-3 ACCESSORIES

Pneumatic Power Clamps | Dimensions | Technical Specifications

Locking Device for Hand Lever

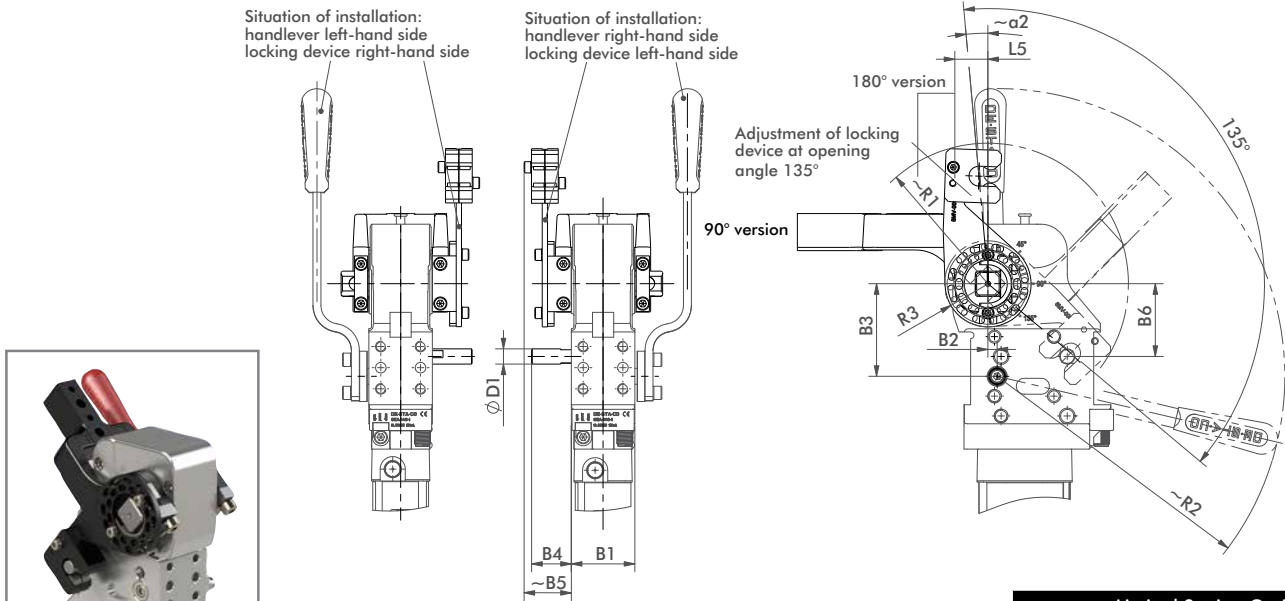


Order No.	For Model	B1	B2	B3	B4	B5	B6	ØD1	R1	R2	R3	α2	Limited Setting Options					
													Height of the clamping arm: L5 max.					
													90° version		180° version			
82ZB-162-1	82M-3...H040..	50	11	48,5	25	31	38,5	10,5	81	160	27	6	120°	—	105°	120°	120°	120°
82ZB-084-1	82M-3...H05...	48	7	70	30	36	55	11,5	107	218	32,5	6	120°	—	—	105°	120°	—
82ZB-039-1	82M-3...H06...	54	9	70,5	30	36	55	11,5	107	210	32,5	6	110°	105°	—	105°	120°	—



Anti-ramming device is only available for standard cylinder with 82M-3...00..00 and 82M-3...00..L8


Anti-Ramming Device

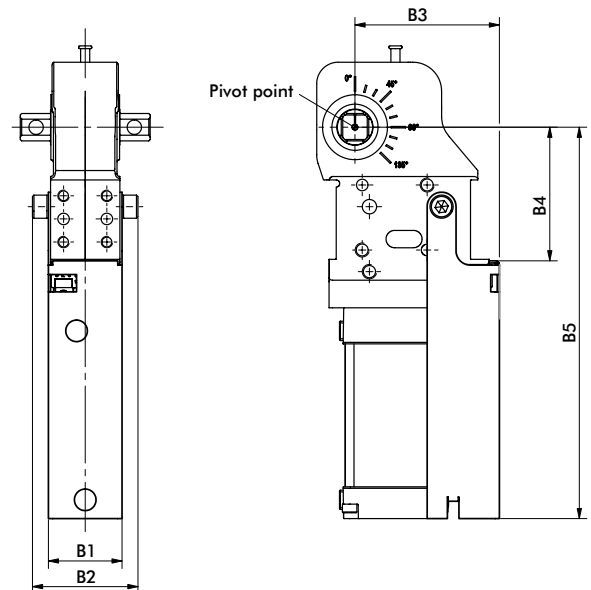

Order No.	For Model	B1	B2	B3	B4	B5
8AB-151-1	82M-3...40..	53	66,5	89,5	65,5	210,5
8AB-152-1	82M-3...5...	51	73	100	92,5	271
8AB-153-1	82M-3...6...	57	79	120	104,5	296
8AB-154-1	82M-3...8...	79	105,5	148	142,5	360

Cable and Connector



Order No.	Description
8EL-002-1	M12x1, Straight, 5-pin Connector with 5m Cable
8EL-003-1	M12x1, Angular, 4-pin Connector with 5m Cable

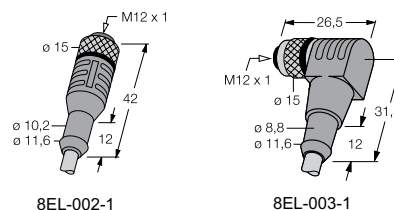

U-ARMS CENTER (ALUMINUM)

Pneumatic Power Clamps | Dimensions | Technical Specifications



For Size 40mm

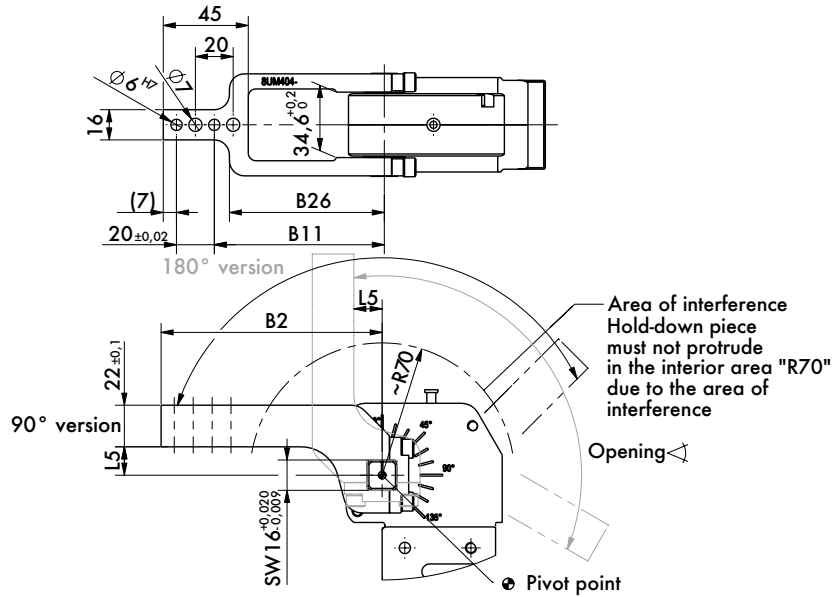

8UM404-00-117
8UM404-15-117
8UM404-25-117
8UM404-45-107

Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)	B2	B11 ±0,1	B26	L5
8UM404-00-117	135°	105°	0,23	117	90	82	0
8UM404-15-117		120°	0,24				15
8UM404-25-117		135°	0,25				25
8UM404-45-107	130°		0,24	107	80	72	45

For Size 50mm

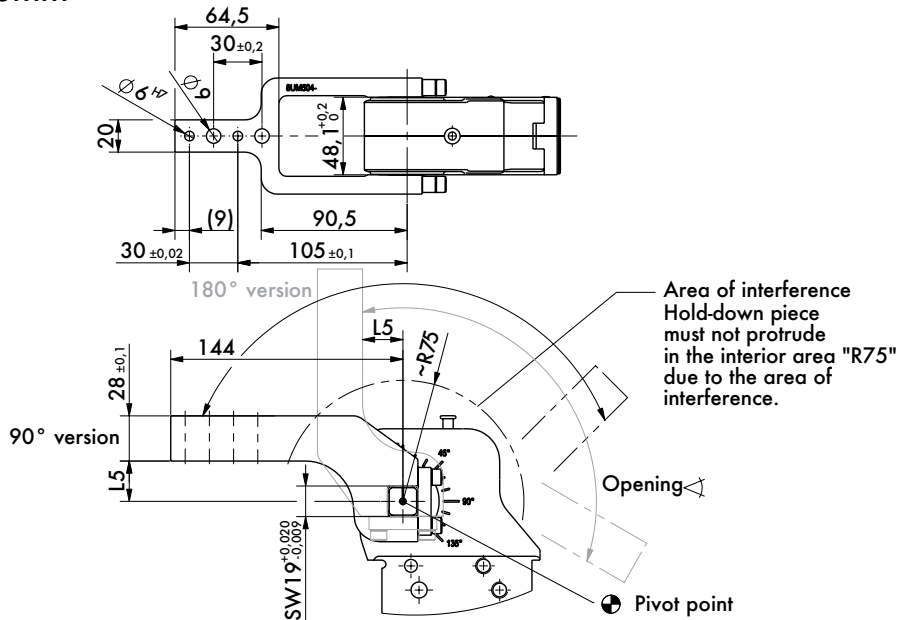

8UM504-15-144
8UM504-25-144
8UM504-45-144


Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)	L5
8UM504-15-144	135°	105°	0,44	15
8UM504-25-144		120°	0,45	25
8UM504-45-144		135°	0,48	45

U-ARMS CENTER (ALUMINUM)

Pneumatic Power Clamps | Dimensions | Technical Specifications




90°




180°


8UM634-15-144
8UM634-25-144
8UM634-45-144
8UM631-75-204

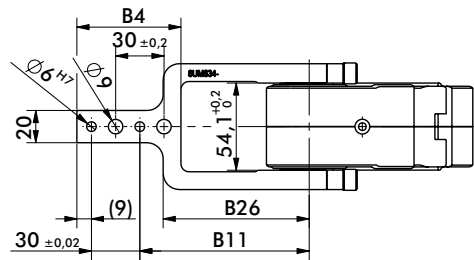

180° version

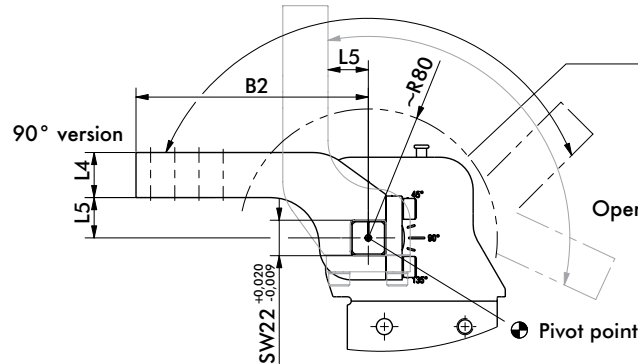

Opening



For Size 63mm


Dimensions are only for
8UM631-75-204

Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)	B2	B4	B11 ±0,1	B26	L4 ±0,1	L5
8UM634-15-144	135°	105°	0,50						15
8UM634-25-144		120°	0,53	144	64,5	105	90,5	28	25
8UM634-45-144		135°	0,56						45
8UM631-75-204*			1,7	204	82	165	107	30	75

* only steel version available.




90°




180°


8JG-169-2-01
8UM801-45-204

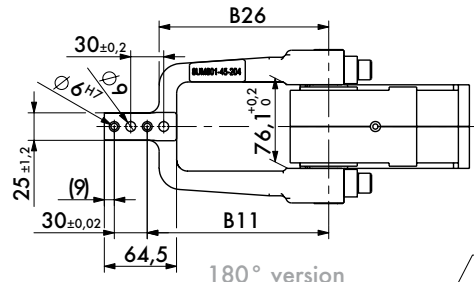

180° version

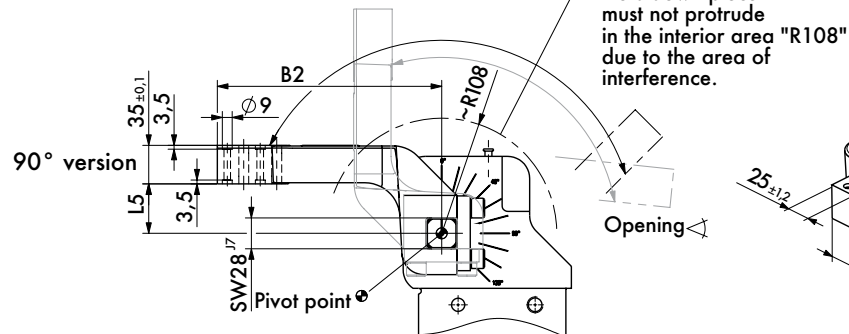

Opening

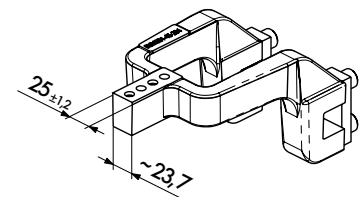

For Size 80mm

Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)	B2	B11 ±0,1	B26	L5** ±0,2
8JG-169-2-01	135°	105°	3,5	179	140	129	20
8UM801-45-204*		135°	4,1	204	165	154	45

*only steel version available.

** Tolerance measured 80mm from pivot point.

Pneumatic Power Clamps | Dimensions | Technical Specifications

U-clamp arm, right

U-clamp arm, left

180° version

90° version


Area of interference
Hold-down piece
must not protrude
in the interior area "R70"
due to the area of
interference

Opening

Pivot point

Dimensions and labels in the drawing include:

- $B26$
- $BUL006$
- 20
- $34,6^{+0,2}_{-0,1}$
- $23_{+0,1}$
- 16
- (7)
- $20_{\pm 0,02}$
- $B11$
- 45
- $L5$
- $B2$
- $22_{\pm 0,1}$
- $SW16_{+0,020/-0,009}$
- $\sim R70$
- 45°
- 90°



8UR404-00-117
8UR404-15-117
8UR404-25-117
8UR404-45-107

Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)	B2	B11 ±0,1	B26	L5
8U(•)404-00-117	135°	105°	0,23	117	90	82	0
8U(•)404-15-117		120°	0,24				15
8U(•)404-25-117		135°	0,25				25
8U(•)404-45-107	0,25		107	80	72	45	

Size 50mm

U-clamp arm, right

U-clamp arm, left

180° version

90° version

Area of interference
Hold-down piece
must not protrude
in the interior area "R75"
due to the area of
interference

Opening

Pivot point




8UR504-15-144
8UR504-25-144
8UR504-45-144

Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)	L5
8U(●)504-15-144	135°	105°	0,45	15
8U(●)504-25-144		120°	0,46	25
8U(●)504-45-144		135°	0,49	45


U-ARMS OFFSET (ALUMINUM)

Pneumatic Power Clamps | Dimensions | Technical Specifications

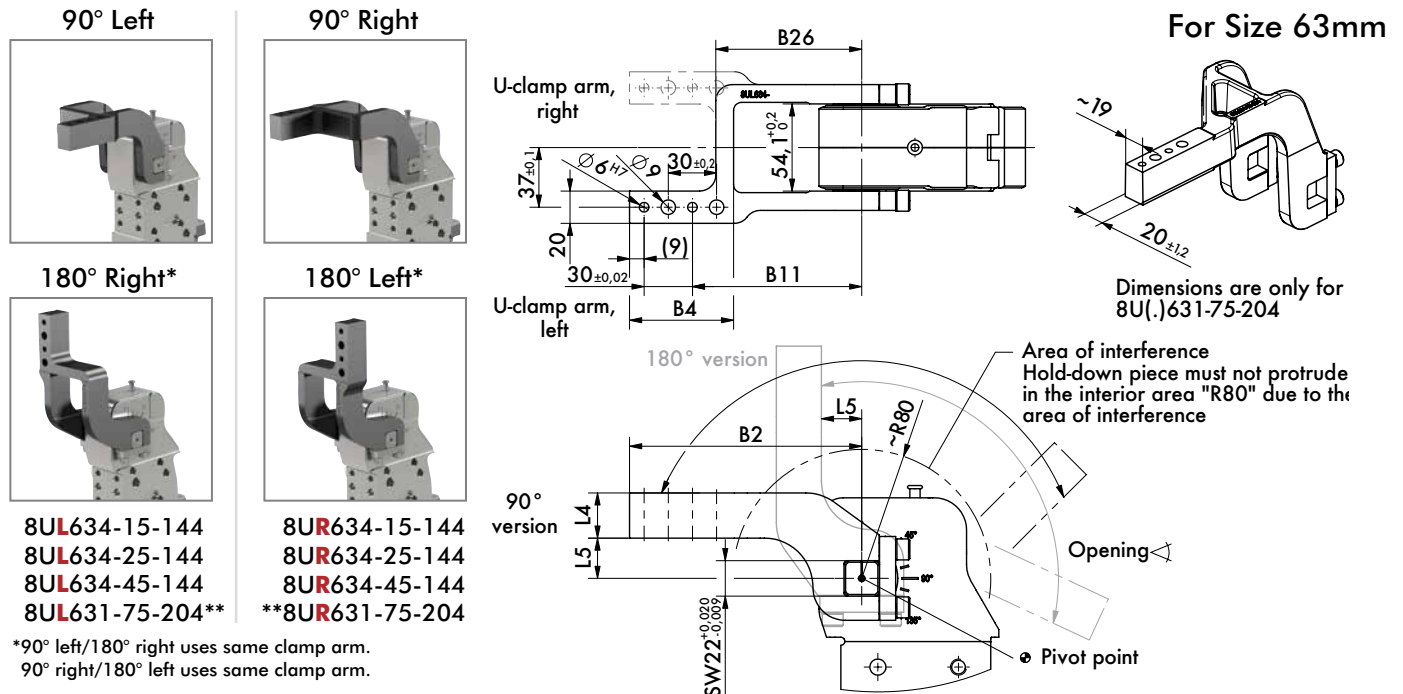

Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)	B2	B4	B11 ±0,1	B26	L4 ±0,1	L5
8U(.)634-15-144	135°	105°	0,52	144	64,5	105	90,5	28	15
8U(.)634-25-144		120°	0,54						25
8U(.)634-45-144		135°	0,58						45
8U(.)631-75-204**		135°	1,9						75

** only steel version available.

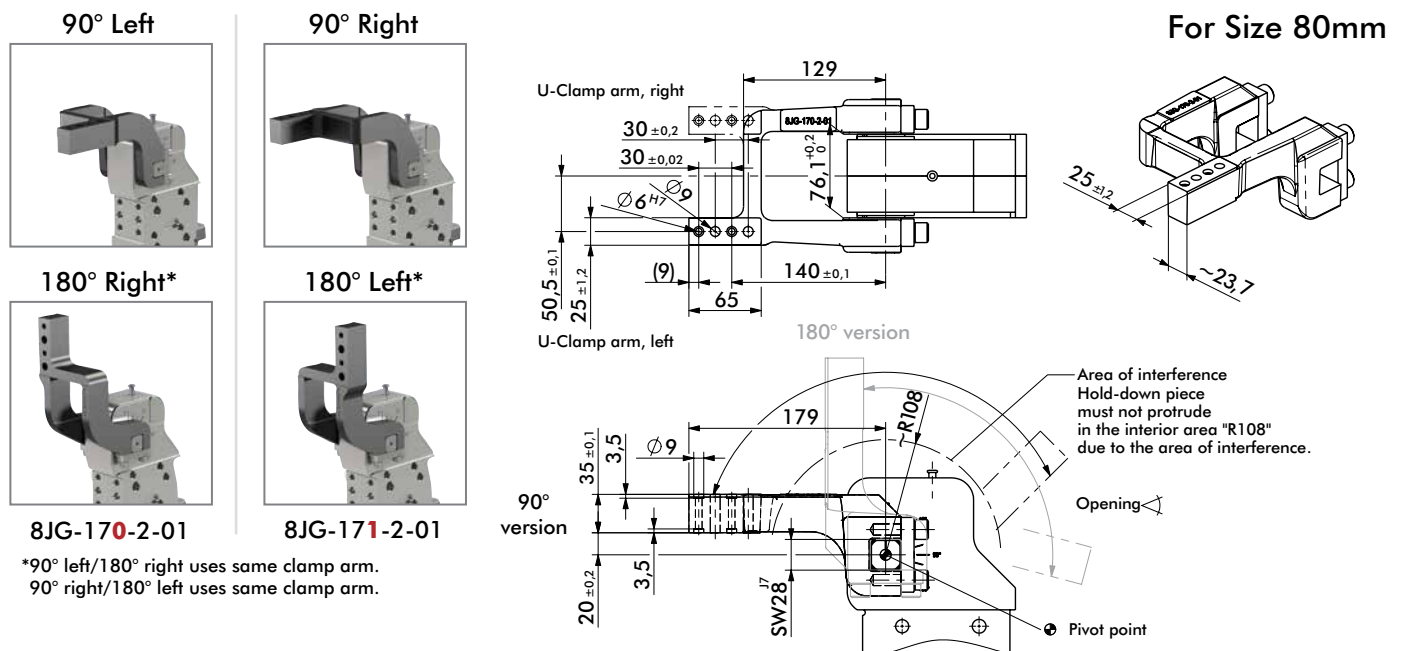



Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)
8JG-17(.)2-01**	135°	105°	3,5

**only steel version available.

LATERAL (SIDE) ARMS

Pneumatic Power Clamps | Dimensions | Technical Specifications

For Size 40mm

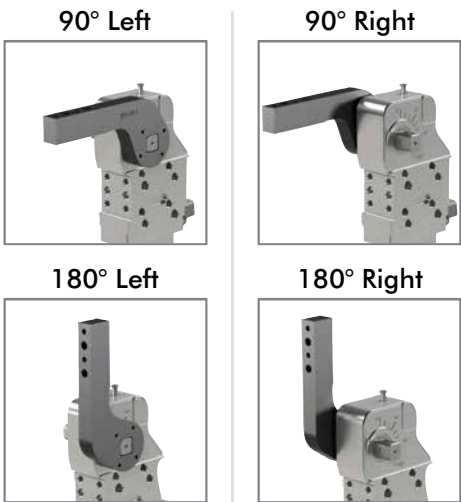
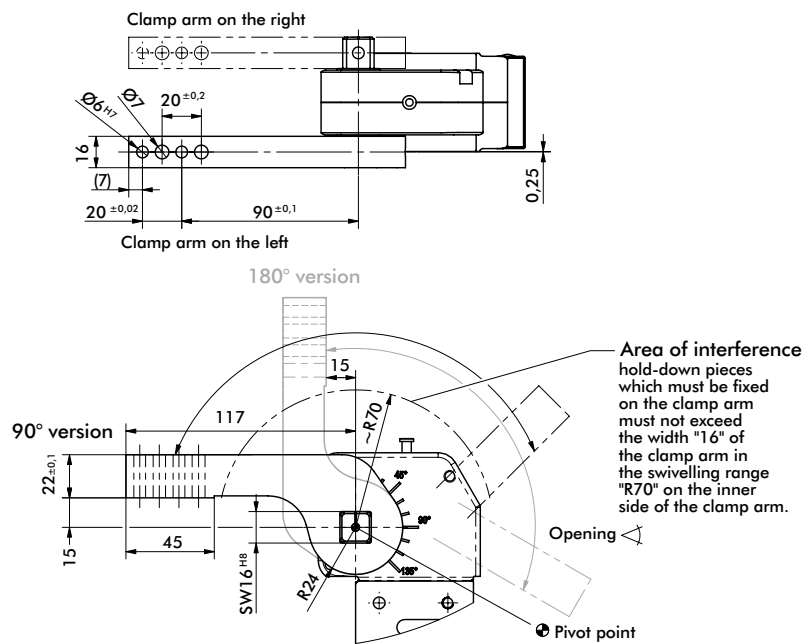


8S401-15-117

Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)
8S401-15-117	135°	120°	0,5

Models with 2 lateral clamp arms requires 2 clamp arm sets.

For Size 50mm

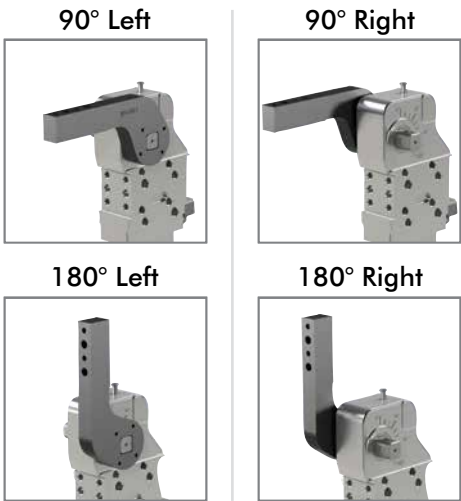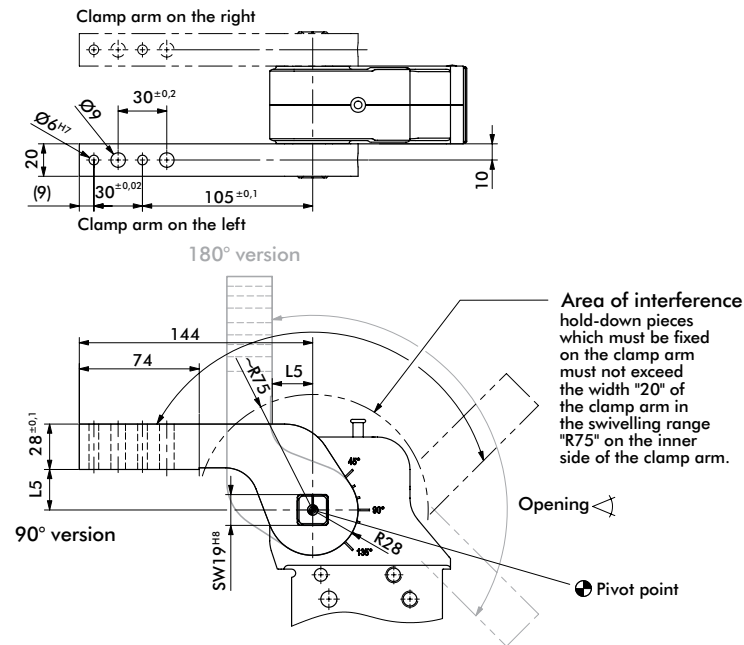

8JG-070-1-01
8S501-25-144

Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)	L5
8JG-070-1-01	135°	135°	0,9	15
8S501-25-144			1,0	25

Models with 2 lateral clamp arms requires 2 clamp arm sets.

LATERAL (SIDE) ARMS

Pneumatic Power Clamps | Dimensions | Technical Specifications

For Size 63mm


90° Left



90° Right





180° Left



180° Right



8JG-080-1-01
8S631-25-144
8S631-45-144
8S631-75-204

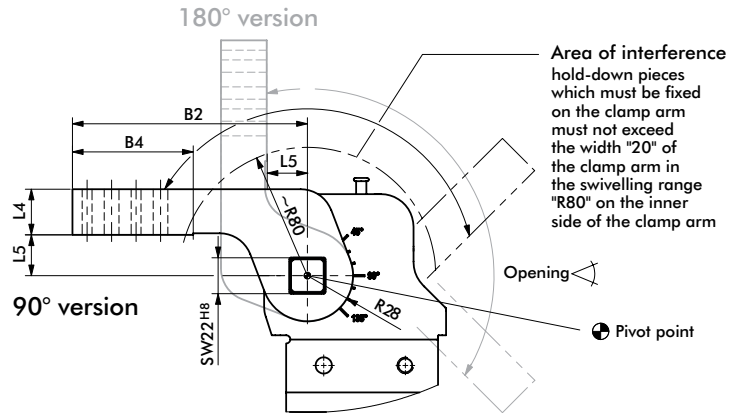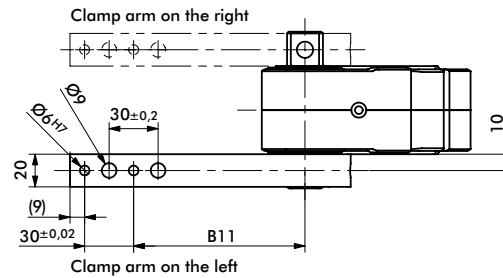

Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)	B2	B4	B11 ±0,1	L4 ±0,1	L5
8JG-080-1-01	135°	135°	0,9	144	74	105	28	15
8S631-25-144			1,0					25
8S631-45-144			1,1					45
8S631-75-204			1,5					75

Models with 2 lateral clamp arms requires 2 clamp arm sets.

90° Left



90° Right



180° Left





180° Right



8JG-1179-1-01
8S801-45-204

For Size 80mm

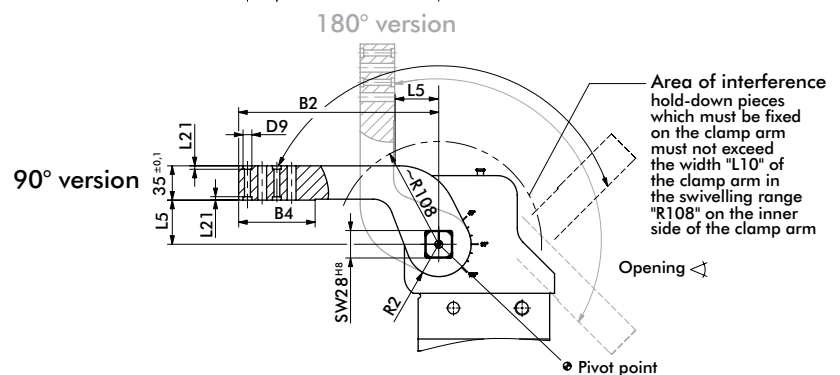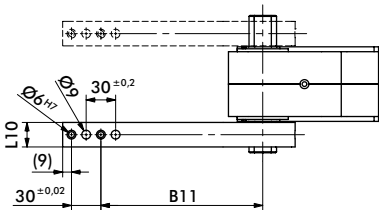


Arm Model No.	Max. Opening 90° Version	Max. Opening 180° Version	Weight (kg)	B2	B4	D9	B11 ±0,1	L5	L10	L21	R2
8JG-1179-1-01	135°	135°	2,1	179	74	-	140	20	30	-	35
8S801-45-204				204	78	9	165	45	25	3,5	33

Models with 2 lateral clamp arms requires 2 clamp arm sets.

LATERAL (SIDE) ARMS, NAAMS-STYLE

Pneumatic Power Clamps | Dimensions | Technical Specifications

For Size 50mm

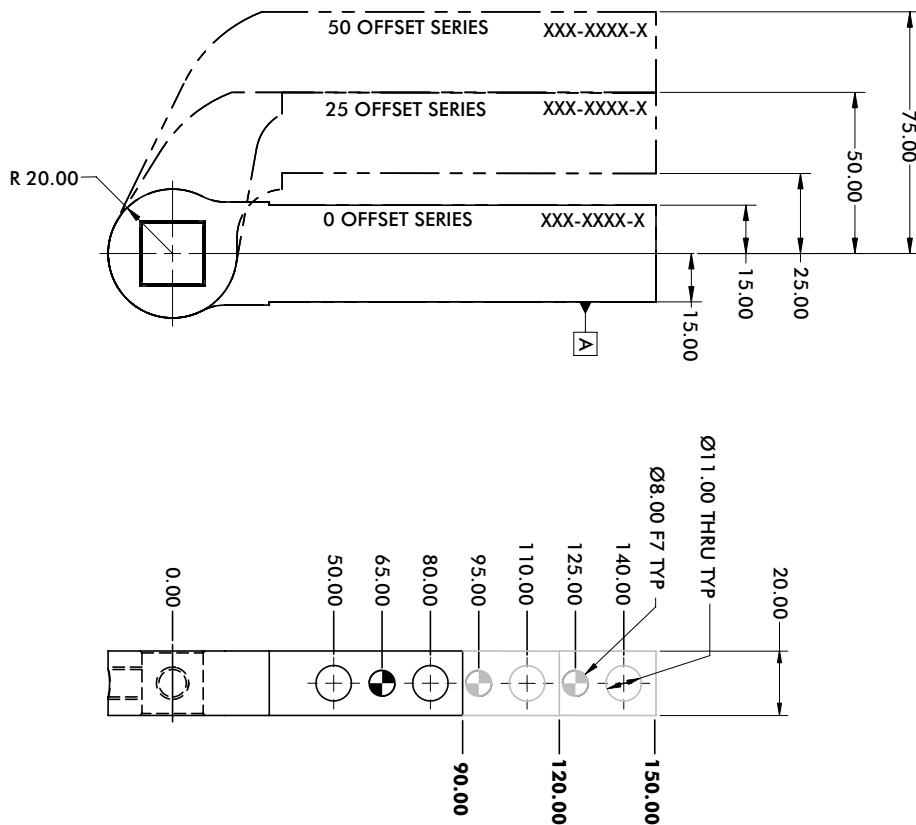

9mm Thru Hole (6.00 H7 Dowel)

90mm [3.54"] Arm Length			120mm [4.72"] Arm Length			150mm [5.90"] Arm Length		
Series	Arm Style	Model	Series	Arm Style	Model	Series	Arm Style	Model
50 Offset	▲ • 3256	B8JG-3256-1	50 Offset	▲ • 3257	B8JG-3257-1	50 Offset	▲ • 3258	B8JG-3258-1
25 Offset	▲ • 3246	B8JG-3246-1	25 Offset	▲ • 3247	B8JG-3247-1	25 Offset	▲ • 3248	B8JG-3248-1
0 Offset	▲ • 3236	B8JG-3236-1	0 Offset	▲ • 3237	B8JG-3237-1	0 Offset	▲ • 3238	B8JG-3238-1

11mm Thru Hole (8.00 F7 Dowel)

90mm [3.54"] Arm Length			120mm [4.72"] Arm Length			150mm [5.90"] Arm Length		
Series	Arm Style	Model	Series	Arm Style	Model	Series	Arm Style	Model
50 Offset	▲ • 1226	B8JG-1226-1	50 Offset	▲ • 1227	B8JG-1227-1	50 Offset	▲ • 1228	B8JG-1228-1
25 Offset	▲ • 1216	B8JG-1216-1	25 Offset	▲ • 1217	B8JG-1217-1	25 Offset	▲ • 1218	B8JG-1218-1
0 Offset	▲ • 1206	B8JG-1206-1	0 Offset	▲ • 1207	B8JG-1207-1	0 Offset	▲ • 1208	B8JG-1208-1

▲ Common in North America

(•) STANDARD ARM OFFERING


Maximum Opening Angle (shown in locked position)

Arm Styles	1206-1208/3236-3238	1216-1218/3246-3248	1226-1228/3256-3258	1206-1208/3236-3238	1216-1218/3246-3248	1226-1228/3256-3258
	135°	135°	100°	100°	N/A	N/A
	135°	N/A	50°	125°	N/A	30°
	125°	N/A	35°	135°	N/A	50°

LATERAL (SIDE) ARMS, NAAMS-STYLE

Pneumatic Power Clamps | Dimensions | Technical Specifications

For Size 63mm with 23 Clamp Arm Shaft Option

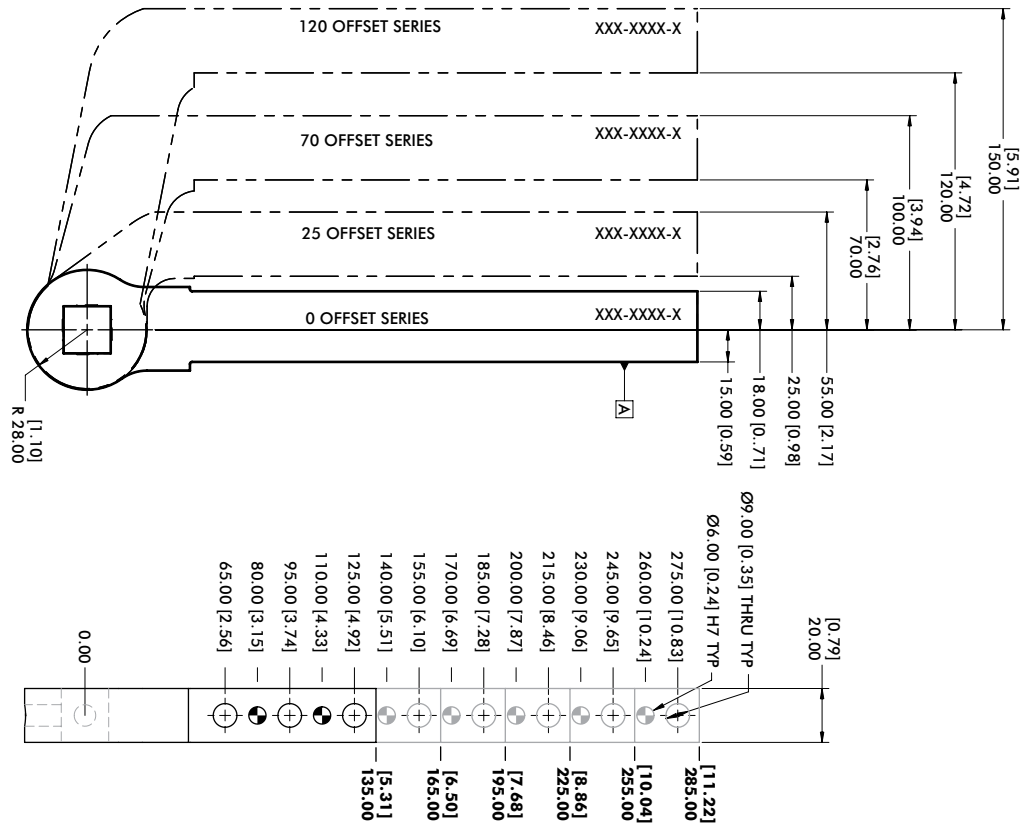

135mm [5.31"] Arm Length

Series	Arm Style	Model
120 Offset	▲ 1543	B8JG-1543-1
70 Offset	▲ 1531	B8JG-1531-1
25 Offset	▲ 1519	B8JG-1519-1
0 Offset	▲ 1507	B8JG-1507-1

165mm [6.50"] Arm Length

Series	Arm Style	Model
120 Offset	▲ 1544	B8JG-1544-1
70 Offset	▲ 1532	B8JG-1532-1
25 Offset	▲ 1520	B8JG-1520-1
0 Offset	▲ 1508	B8JG-1508-1

195mm [7.68"] Arm Length

Series	Arm Style	Model
120 Offset	▲ 1545	B8JG-1545-1
70 Offset	▲ 1533	B8JG-1533-1
25 Offset	▲ 1521	B8JG-1521-1
0 Offset	▲ 1509	B8JG-1509-1

225mm [8.86"] Arm Length

Series	Arm Style	Model
120 Offset	▲ 1546	B8JG-1546-1
70 Offset	▲ 1534	B8JG-1534-1
25 Offset	▲ 1522	B8JG-1522-1
0 Offset	▲ 1510	B8JG-1510-1

255mm [10.04"] Arm Length

Series	Arm Style	Model
120 Offset	▲ 1547	B8JG-1547-1
70 Offset	▲ 1535	B8JG-1535-1
25 Offset	▲ 1523	B8JG-1523-1
0 Offset	▲ 1511	B8JG-1511-1

285mm [11.22"] Arm Length

Series	Arm Style	Model
120 Offset	▲ 1548	B8JG-1548-1
70 Offset	▲ 1536	B8JG-1536-1
25 Offset	▲ 1524	B8JG-1524-1
0 Offset	▲ 1512	B8JG-1512-1

▲ Common in North America


Maximum Opening Angle (shown in locked position)

						
Arm Styles						
1510-1512/1507-1509	135°	135°	100°	100°	N/A	N/A
1522-1524/1519-1521	135°	N/A	50°	130°	N/A	40°
1534-1536/1531-1533	115°	N/A	25°	135°	N/A	75°
1546-1548/1543-1545	110°	N/A	20°	135°	N/A	85°

LATERAL (SIDE) ARMS, NAAMS-STYLE

Pneumatic Power Clamps | Dimensions | Technical Specifications

For Size 80mm

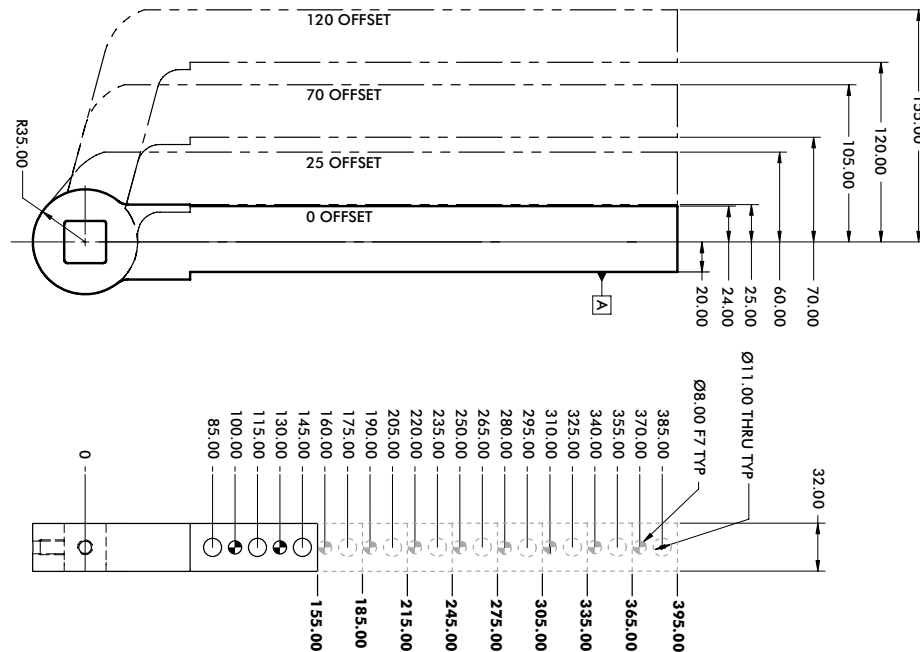

155mm [4.53"] Arm Length

Series	Arm Style	Model
120 Offset	▲ ⓘ 1170	B8JG-1170-1
70 Offset	▲ • 1150	B8JG-1150-1
25 Offset	▲ ⓘ 1130	B8JG-1130-1
0 Offset	▲ ⓘ 1110	B8JG-1110-1

185mm [7.28"] Arm Length

Series	Arm Style	Model
120 Offset	▲ ⓘ 1171	B8JG-1171-1
70 Offset	▲ ⓘ 1151	B8JG-1151-1
25 Offset	▲ ⓘ 1131	B8JG-1131-1
0 Offset	▲ ⓘ 1111	B8JG-1111-1

215mm [8.46"] Arm Length

Series	Arm Style	Model
120 Offset	▲ ⓘ 1172	B8JG-1172-1
70 Offset	▲ ⓘ 1152	B8JG-1152-1
25 Offset	▲ ⓘ 1132	B8JG-1132-1
0 Offset	▲ • 1112	B8JG-1112-1

245mm [9.65"] Arm Length

Series	Arm Style	Model
120 Offset	▲ ⓘ 1173	B8JG-1173-1
70 Offset	▲ ⓘ 1153	B8JG-1153-1
25 Offset	▲ ⓘ 1133	B8JG-1133-1
0 Offset	▲ ⓘ 1113	B8JG-1113-1

275mm [10.83"] Arm Length

Series	Arm Style	Model
120 Offset	▲ ⓘ 1174	B8JG-1174-1
70 Offset	▲ ⓘ 1154	B8JG-1154-1
25 Offset	▲ • 1134	B8JG-1134-1
0 Offset	▲ ⓘ 1114	B8JG-1114-1

305mm [12.00"] Arm Length

Series	Arm Style	Model
120 Offset	▲ ⓘ 1175	B8JG-1175-1
70 Offset	▲ • 1155	B8JG-1155-1
25 Offset	▲ ⓘ 1135	B8JG-1135-1
0 Offset	▲ ⓘ 1115	B8JG-1115-1

335mm [13.19"] Arm Length

Series	Arm Style	Model
120 Offset	▲ ⓘ 1176	B8JG-1176-1
70 Offset	▲ ⓘ 1156	B8JG-1156-1
25 Offset	▲ ⓘ 1136	B8JG-1136-1
0 Offset	▲ ⓘ 1116	B8JG-1116-1

365mm [14.37"] Arm Length

Series	Arm Style	Model
120 Offset	▲ ⓘ 1177	B8JG-1177-1
70 Offset	▲ ⓘ 1157	B8JG-1157-1
25 Offset	▲ ⓘ 1137	B8JG-1137-1
0 Offset	▲ ⓘ 1117	B8JG-1117-1

395mm [15.55"] Arm Length


Series	Arm Style	Model
120 Offset	▲ ⓘ 1178	B8JG-1178-1
70 Offset	▲ • 1158	B8JG-1158-1
25 Offset	▲ ⓘ 1138	B8JG-1138-1
0 Offset	▲ • 1118	B8JG-1118-1

▲ Common in North America

(•) STANDARD ARM OFFERING

ⓘ NON-STANDARD ARM OFFERING (extended leadtimes apply)

Maximum Opening Angle (shown in locked position)

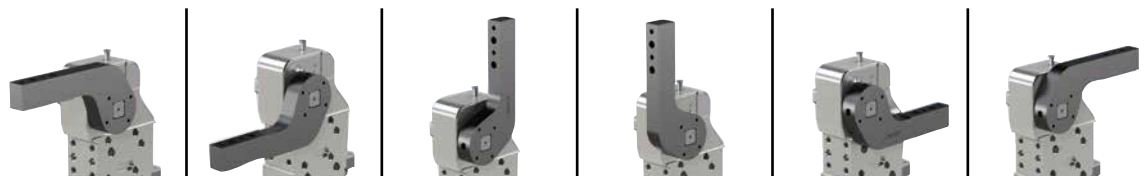

Arm Styles	1110 - 1118	1130 - 1138	1150 - 1158	1170 - 1178	1150 - 1158	1170 - 1178
1110 - 1118	135°	135°	100°	100°	N/A	N/A
1130 - 1138	135°	N/A	60°	120°	N/A	30°
1150 - 1158	125°	N/A	35°	135°	N/A	55°
1170 - 1178	115°	N/A	25°	135°	N/A	80°