

500 SERIES

.5-150 PSIG



ADJUSTABLE POPOFF & INLINE RELIEF VALVES

Features

- Zero-Leak to 95% of Cracking Pressure
- Factory Preset to Customer Requirements
- Accurate Set Pressure
- Wide Range of Cracking Pressures
- Tamper Proof Adjustment
- Maintenance Free Service
- 100% Tested

Technical Data

Materials of Construction

Body	—	2024-T4/T351 or 6061-T6/T651 Aluminum, 303 or 316 Stainless Steel
O-Rings	—	Buna N, Ethylene Propylene, Neoprene, Silicone, Teflon® or Viton®
Spring	—	302 Stainless Steel or 17-7PH Stainless Steel


Pressure Ratings

Operating Pressure	—	Vacuum to 200 PSIG
Inline Valve:		
Proof Pressure	—	400 PSIG (28 BAR)
Burst Pressure	—	Above 500 PSIG (34 BAR)

Temperature Range


-320°F to +400°F; -196°C to +204°C
Based on O-Ring Material, See Page 2

How It Works




CLOSED

Resilient seal design prevents leakage. Sealing efficiency increases with increased pressure up to cracking pressure. Metal to metal seat on low pressure side supports spring load and prevents sticking.

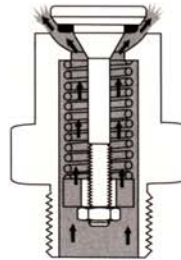

OPEN

When system pressure overcomes spring force, poppet opens momentarily exposing variable orifice between poppet and body to pass increasing flow with minimum pressure rise without blowdown.



RESEALING

Resilient seal automatically establishes line of contact with spherical seat. Seal provides dead tight reseal very close to cracking pressure.

Valve Sizes

1/4" to 1-1/2"



CIRCLE SEAL CONTROLS, INC.


A Subsidiary of Watts Industries, Inc. • World Class Valves
Certified to ISO 9001

2301 WARDLOW CIRCLE • P.O. BOX 3300 • CORONA, CALIFORNIA • 91718 • TEL: (909) 270-6200 • FAX: (909) 270-6201

500 SERIES

.5 - 150 PSI

How To Order

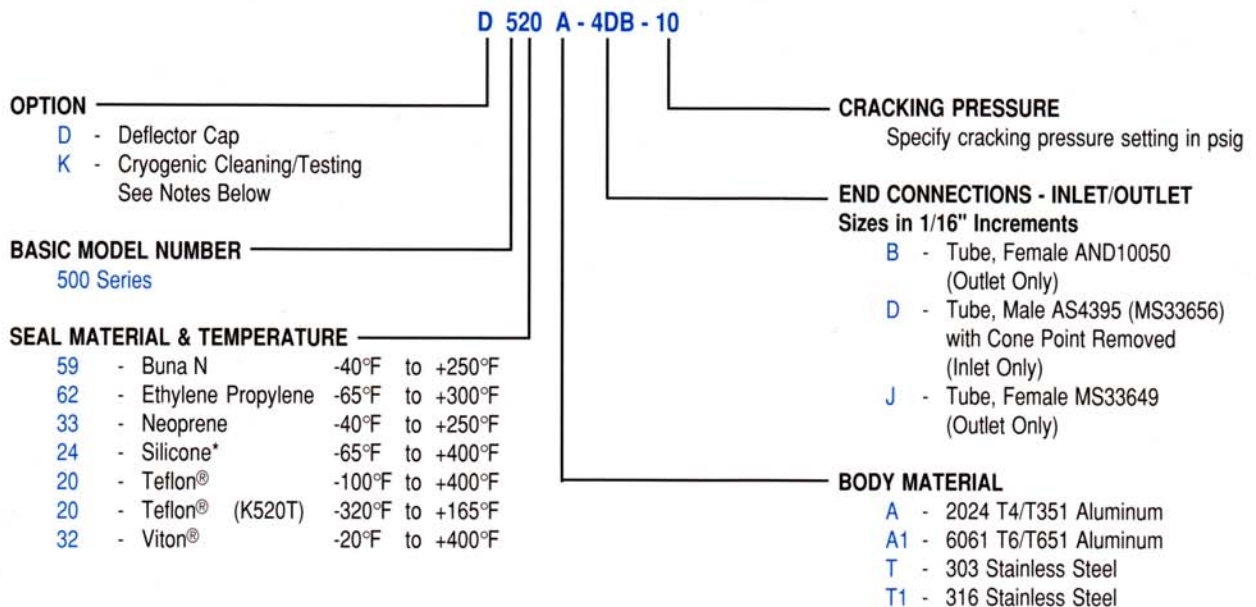

Notes:

D — Prefixed Part Number is supplied with a cap which diverts high pressure blasts from personnel and instruments, increases flow capacity and serves as a rain and dust shield.

NOT RECOMMENDED FOR CRACKING PRESSURES BELOW 2 PSI.

K — Cryogenic service (stainless steel valves only). Specially manufactured, cleaned and tested for cryogenic temperatures.


* Not available over 74.9 PSI

Teflon® and Viton® are registered trademarks of DuPont.

Please consult your Circle Seal Controls Representative or our factory for information on special connections, operating pressures, temperature ranges and materials.

Dimensions


VENT TO ATMOSPHERE

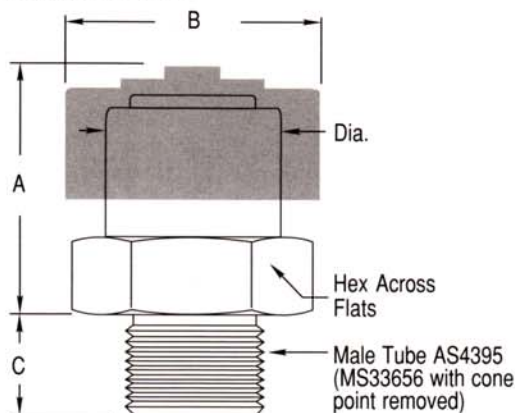

Vent To Atmosphere Dimensions

Tube Size	Male	A		Dia.	B		C
		Max	Hex		Max	Max	
1/4"	4D	.78	.62	.50	.63	.38	
3/8"	6D	1.02	.81	.62	.90	.38	
1/2"	8D	1.03	1.00	.75	1.21	.42	
3/4"	12D	1.76	1.37	1.12	1.45	.57	
1"	16D	2.56	1.50	1.44	1.89	.61	
1-1/2"	24D	4.08	2.12	2.00	2.77	.72	

INLINE

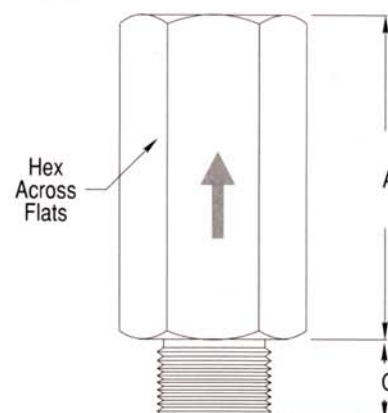

Inline Dimensions

Tube Size	Male & Female	A	Hex	C
1/4"	4DB	1.41	.69	.36
3/8"	6DB	1.91	.81	.36
1/2"	8DB	2.05	1.00	.41
3/4"	12DB	3.32	1.50	.55
1"	16DB	4.20	1.75	.60

Reseal Characteristics

CRACKING PRESSURE

Standard Seals & Silicone 5 cc/min.
 Teflon® 0.02 scfm

CRACKING PRESSURE TOLERANCE ±5%




Cracking pressure on initial crack may be higher than cracking pressure tolerance due to inherent characteristics of seals.
 (Consult Factory)

LEAKAGE Ascending Pressure

Standard Seals 0 to 95% of C.P.
 Silicone (524) & EPR (562) 0 to 80% of cracking pressure.
 Teflon® (520) 1 cc/min. to reseal pressure.
 10 cc/min. max. with gas from reseal to cracking pressure.

LEAKAGE at Reseal Pressure

All elastomeric seals zero. Teflon® (Consult Factory).


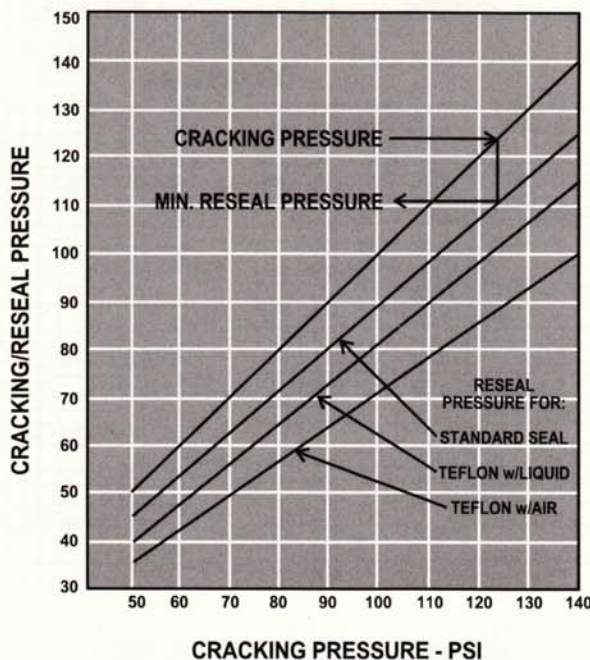
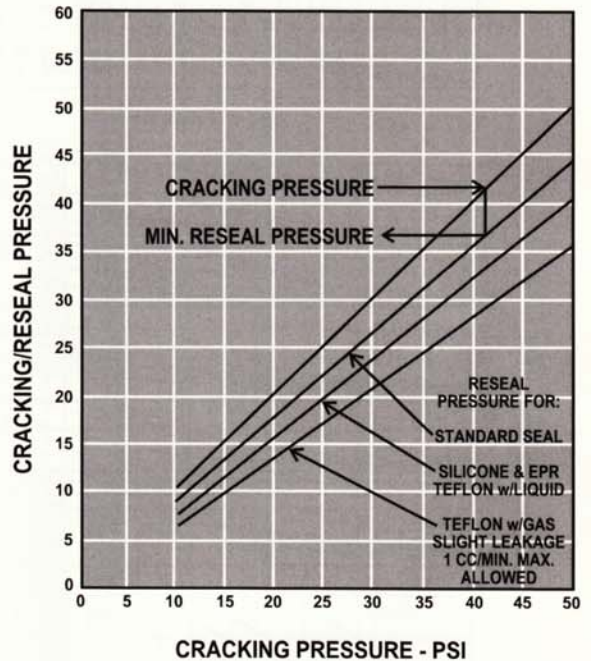
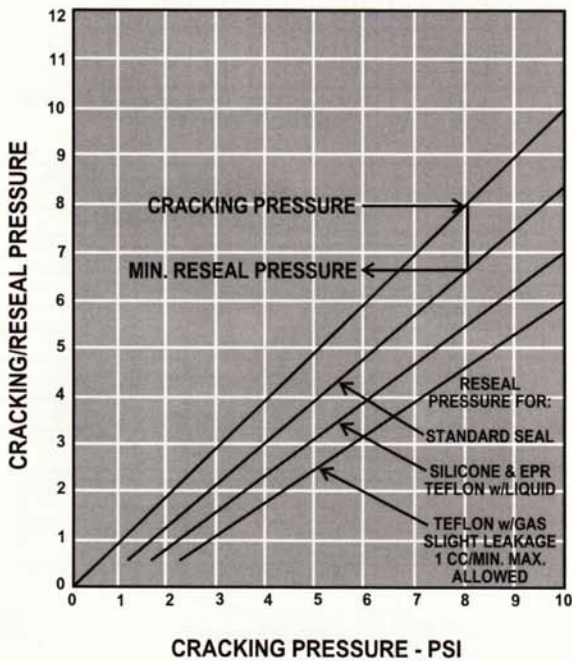


500 SERIES



.5 - 150 PSI

Typical Flow Curves

500 Series

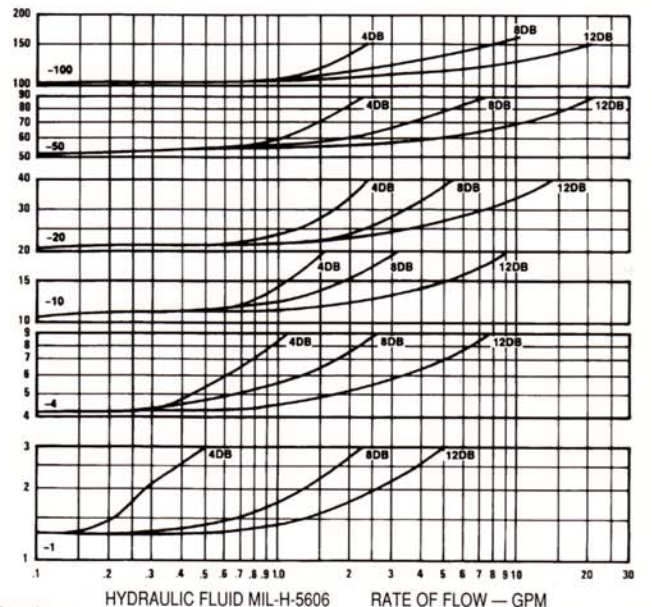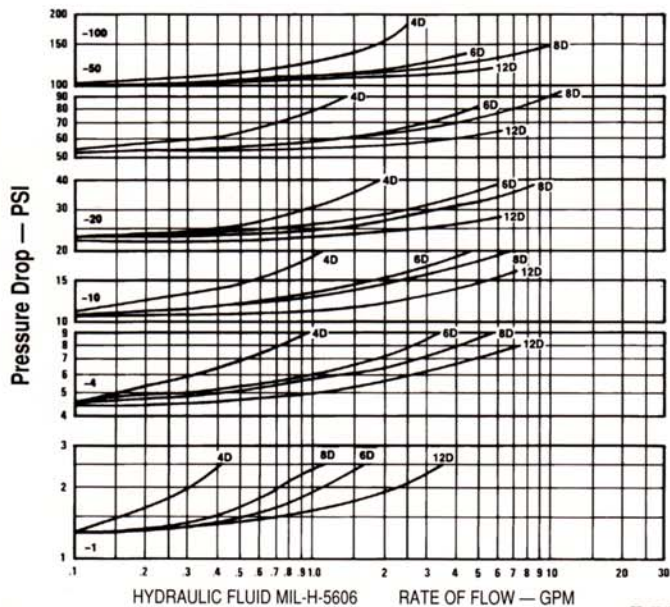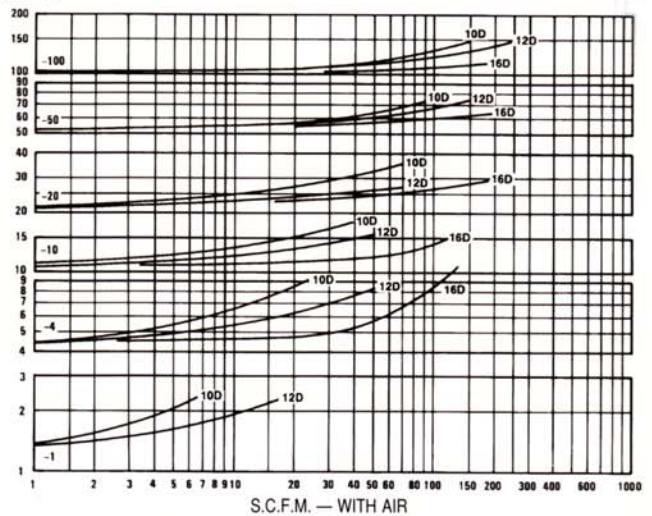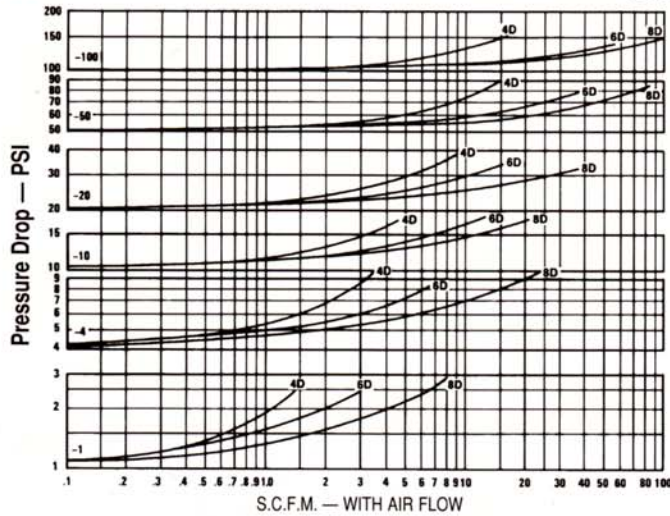

D500 Series

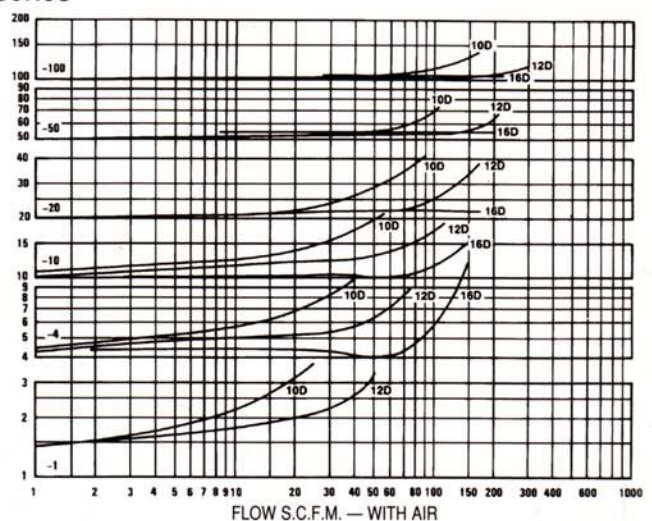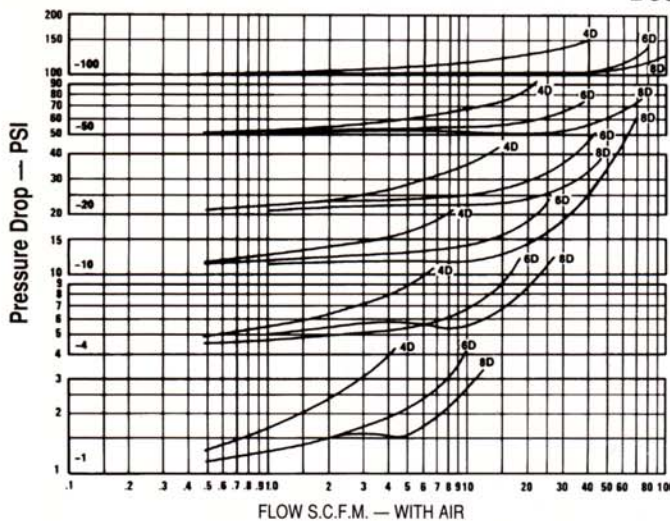

CIRCLE SEAL CONTROLS, INC.

A Subsidiary of Watts Industries, Inc. • World Class Valves

Certified to ISO 9001

2301 WARDLOW CIRCLE • P.O. BOX 3300 • CORONA, CALIFORNIA • 91718 • TEL: (909) 270-6200 •



FLOWTEKNIK
SCANDINAVIA APS

RUBENGET 19 C
2650 TALSTRUP
INFO@PGFLOWTEKNIK.DK
WWW.PGFLOWTEKNIK.DK