
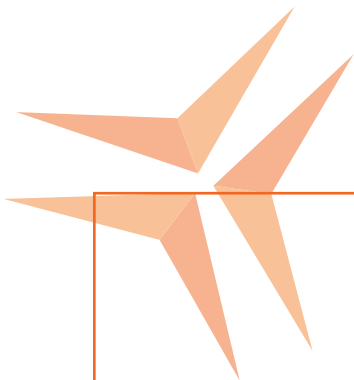



FLEKSIBLE VARMEMÅTTER

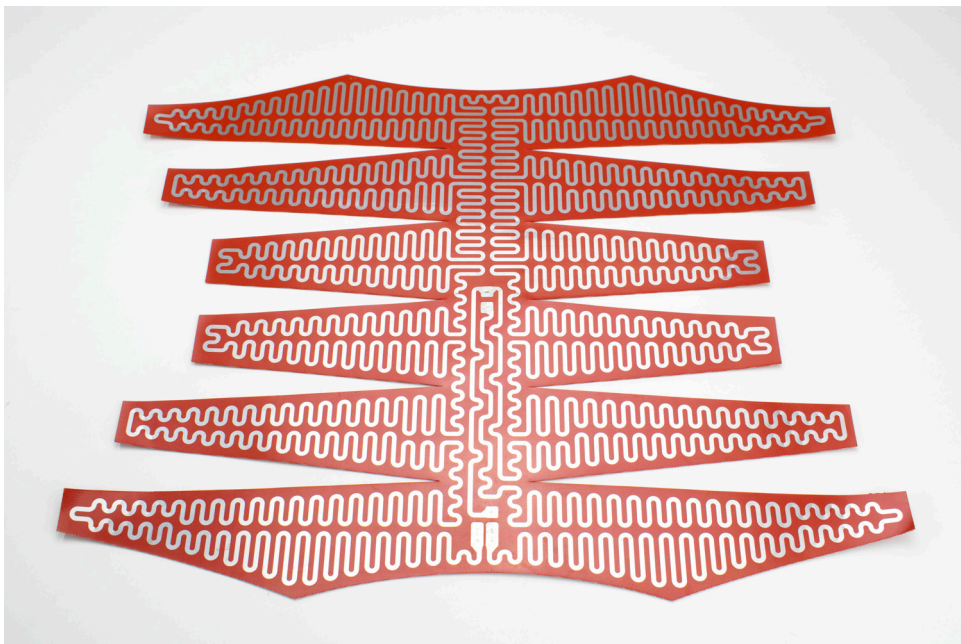

**SILIKONE
VARMEMÅTTER**



APPLICATIONS:

We supply silicone Etched Foil heaters for a multitude of applications including medical, industrial catering, battery warming, telecommunications, laboratory equipment, snow melting and anti condensation. The uses for Etched Foil heaters are extensive as they can suit many applications requiring surface heating up to 200°C. Using expertly designed chemically etched foil tracks, these heaters are perfect for applications which require excellent heat distribution and higher power densities. Manufactured to customer specifications these can be made in a wide range of shapes and sizes.

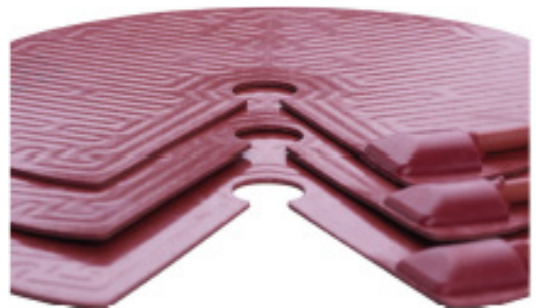

MAIN POINTS:

- Etched Foil Technology
- Precise Even Heating & Heat Distribution
- Flexible & Lightweight
- Moisture & Chemical Resistance
- IP64 or IP65 Protection
- Wide Temperature Range -60°C to 200°C
- UL & VDE Approval Available
- Low Smoke & Low Toxicity Options Available
- Low Mass, Rapid Heat Up Time

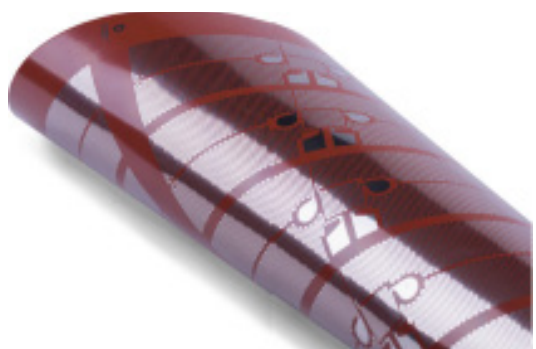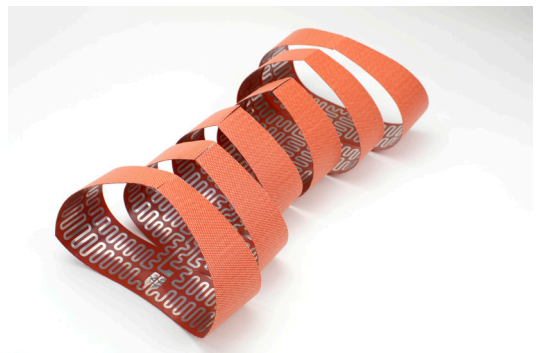

CONSTRUCTION:

Computer designed chemically etched foil tracks are laminated between sheets of silicone rubber to give precise, even heating. Suitable for both low and high volume production, Etched Foil heaters have low mass allowing for rapid heat up with precise temperature control.

CHARACTERISTICS:

Etched Foil heaters have good resistance to the following; weather & ageing, fungus & bacteria, acetone, alcohol, formic acid, brake fluid, acetic acid, greases, hydrochloric acid 10%, sulphuric acid 10%, waxes and plasticisers. In addition to this the heaters have adequate gas permeability and good steam resistance up 130°C or 2.5 bar respectively.

HEALTH AND SAFETY:

Etched Foil heaters are intended for use in industrial electric apparatus. They correspond to BS EN 60335-1 :2012.

The heater has to be operated in accordance with these standard and regulations and should be installed on an electrical system protected by a residual current circuit breaker.

TECHNICAL DATA	
MAXIMUM DIMENSIONS	WIDTH - 595MM LENGTH - 2500MM
THICKNESSES	0.8MM - 1.5MM
TEMPERATURE RANGES	-60°C - 200°C (NON ADHESIVE) -30°C - 180°C (SELF ADHESIVE)
POWER RATING	VARIABLE (DEPENDANT ON APPLICATION)
THERMAL CONDUCTIVITY	0.22 (WATT/METRE/K)

	KAPTON	SILICONE WIRE WOUND	SILICONE ETCHED FOIL
TEMPERATURE RANGE	-269°C TO 200°C	-60°C TO 250°C	-60°C TO 200°C
THICKNESS RANGE	0.2MM TO 0.3MM	1.1MM TO 3MM	0.8MM TO 1.5MM
MAXIMUM POSSIBLE SIZE	285MM X 550MM	940MM X 3000MM	595MM X 2500MM
UL & VDE APPROVAL AVAILABLE		✓	✓
SUITABLE FOR HIGH QUANTITY	✓		✓
LOW SMOKE LOW TOXICITY AVAILABLE		✓	✓



ELVARME



VORES PRODUKTSORTIMENT INKLUDERER:



FIXINGS



SPIRAL HEATERS



PREFORMED HEATERS



FOAM INSULATION



SENSORS



FLEKSIBLE VARMEMÅTTER

VI FØRER PRODUKTER INDENFOR KATEGORIERNE:



AUTOMATIK



**HVAC & BYGNINGS-
AUTOMATIK**



KØLEPROFILER



NEWTRONIC

Ove Jensens Alle 35 F
DK-8700 Horsens
Denmark
www.newtronic.eu
www.newtronic.dk
+45 7669 7090

