

CP042350

Primary Lithium / Manganese Dioxide Battery 3V
Swiss Made

Technical Data Sheet

Specifications

Renata Type CP042350
IEC Designation CP042350
Part Number 703668
Contact Method: Stainless-Steel tabs

Chemical system Li/MnO₂
Nominal Voltage 3.0 V
Rated Capacity 28.0 mAh
(4.8kΩ at 23°C to cut of 2.0V)
Bendability > 1000 cycles / Ø 50mm
(During discharge)

Internal Resistance < 30Ω (at 50% SOC and 23°C) DC pulse of 12.5 mA, 1 s

Thickness (t) 0.42 mm (±0.03mm)
Length (l) 50.1 mm (±0.2mm)
Width (w) 23.1 mm (±0.2mm)
Average Weight ~ 0.86 g


Discharge Characteristic

Cut off Voltage 2.0 V
Max discharge Current 0.625 mA (for continuous discharge)
12.5 mA (for non continuous discharge)

Operating/Storage Temperature -40°C ... +60°C
(0°C - 30°C recommended in case of storage for more than 3 months)

Self Discharge at 23°C < 5% / year

Dimensions

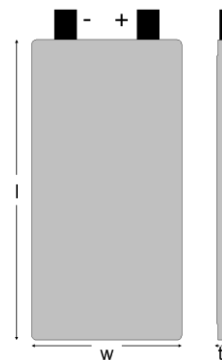

Information and contents in this data sheet are for reference purpose only. They do not constitute any warranty or representation and are subject to change without notice. For most current information and further details, please contact your Renata representative. For safety related information please consult the ASDS document related to that product or product family. The Products of Renata SA are neither designed nor authorized for use in certain areas of application of environment. For further details we refer to our webpage www.renata.com/downloads/restriction_of_use