

Electrically driven lubricator EDL1

for grease NLGI 1 and 2
for applications with long distances between filling pumps and lubrication points



Advantages:

- High output pressure enables provision of lubricant to progressive metering devices and distant lubrication points
- Easy to use
- Low maintenance
- Integrated control board for both impulse- and time-controlled lubrication
- Potential-free contacts notify of lubrication failure
- Protection class IP 65
- Optional pressure switch available

The Lincoln EDL1 is an innovative dosage and pressure-booster pump of unmatched simplicity. It is designed to increase input pressures of at least 2 bar (29 psi) up to a maximum of 280 bar (4 060 psi).

Utilizing progressive metering devices, the EDL1 has been developed for usage in sectional lubrication systems as well as in large machines with different lubrication requirements at varying distances.

The Lincoln EDL1 operates effectively in challenging environments, including outdoor applications with fluctuating temperatures. Because lubricant is supplied by means of filling pumps or pressurized cartridges, the device provides flexibility and self-sufficient function, even in remote locations.

The EDL1 is suitable for food and beverage and railroad applications, as well as cement and other heavy industries. It also can be utilized in many industrial applications that require an affordable sectional lubrication system.

Operational benefits

- Cost-effective solution**
 Affordable lubricator can be used with existing tubing, fitting material and barrel pumps
- Lower operational costs**
 No compressed air required; power consumption reduced
- Environmentally friendly**
 Electric power can be obtained using solar panels in outdoor applications
- Virtually maintenance free**
 No preventive maintenance necessary
- User-friendly design**
 Easy to setup and operate
- Remote monitoring**
 Fault or blockage signals are sent in case of lubrication failure
- Efficient**
 Requires very low input pressure (2 bar/29 psi), enabling use of smaller, less-expensive main lines

How it works

The integrated control board initiates a lubrication cycle based on adjustable intervals. According to the required settings, this can be accomplished by preset time intervals, by machine contact or by impulses generated by an external sensor.

The EDL1 utilizes an internal piston to dispense lubricant from a filling pump or pressurized cartridge to the connected lubrication system or lubrication point.



Basic layout and settings

Settings via DIP switches:

- 1/2 or 1/1 volume/stroke
- Pause time
- Operating modes (ON/OFF; machine contact; impulse)
- Pressure switch ON/OFF

Cable connections:

- Power supply
- External sensor
- Feedback signals

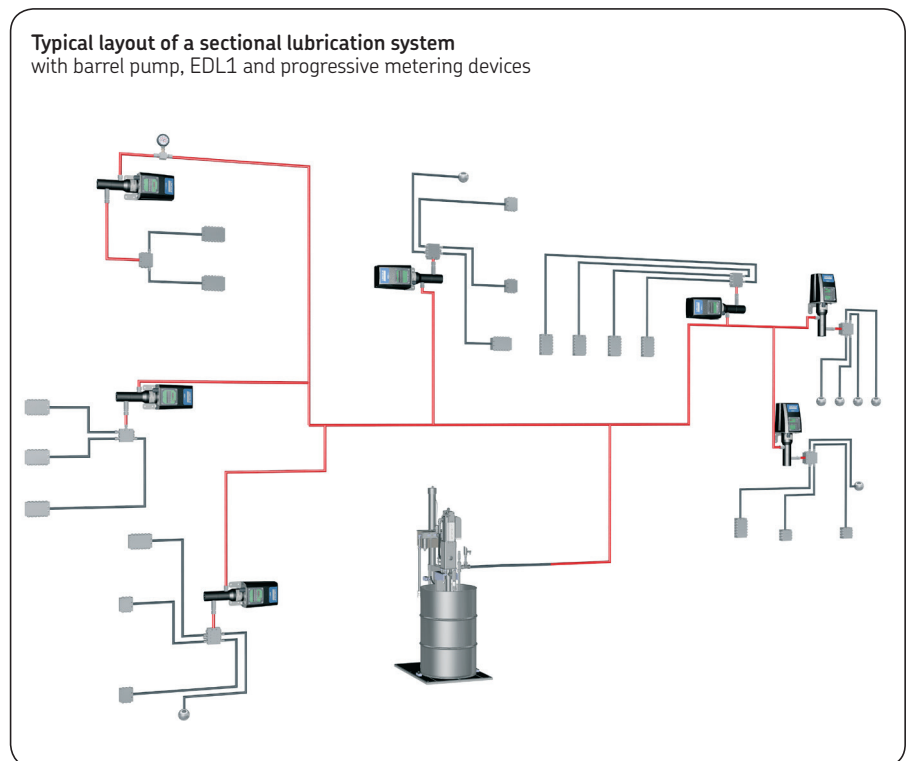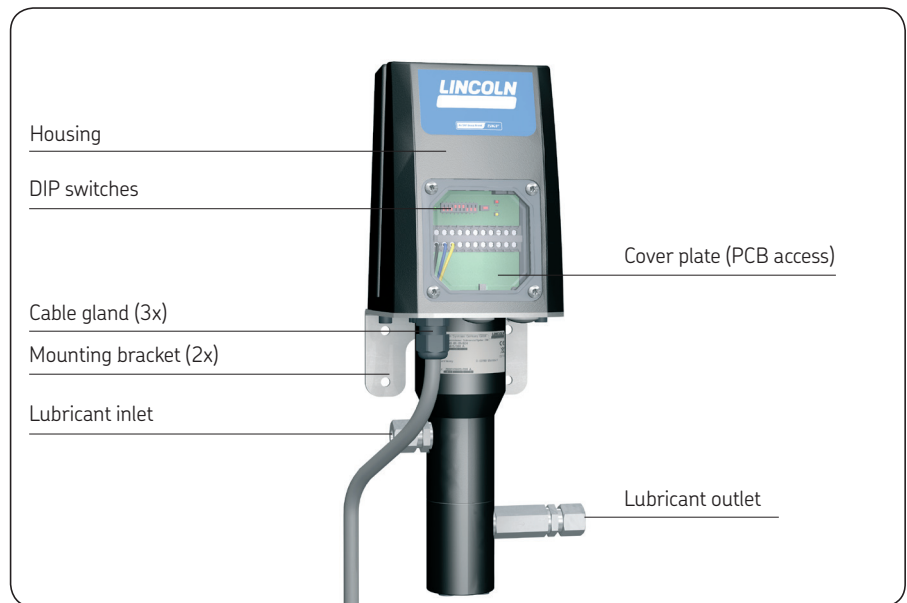

Technical data

Lubricant	Grease NLGI 1 and 2
Number of lubricant outlets	1
Input pressure	2–270 bar (29–3 920 psi)
Outlet pressure	max. 280 bar (max. 4 060 psi)
Delivery volume	max. 1,0 cm ³ /stroke (max. 0,06 in. ³ /stroke)
Operating frequency	max. 1 stroke/minute
Output volume	1/2 or 1/1 of max. volume per stroke
Operating temperature	–25 to +70 °C (–13 to +158 °F)
Operating voltage	24 V DC +/- 10 %
Protection class	IP65
Corrosion protection class	
DIN EN ISO 12944-2	C3

Dimensions

Size (LxWxD)	350x116x114 mm (13,8x4,6x4,5 in.)
Weight	4 kg (8,8 lbs)
Installation position	any, but not rotating

Spare parts

Part number

Housing cover assembly	556-60094-1
1 x housing cover incl. moulded seal and label	
1 x cover plate incl. seal	
1 x moulded seal	
2 x hex nut M5 C	
2 x hex socket head screw M5x12 C (8,8)	
4 x flat-head screw incl. seal	
Control PCB	556-60095-1
Control PCB 24 V DC	
Hydraulic fitting	
1 x Fitting GE 6-L G 1/4A CF (inlet/outlet)	223-12477-8
1 x Fitting GE 8-L G 1/4A CF (inlet/outlet)	223-12477-6
1 x Fitting GE 10-L G 1/4A CF (inlet/outlet)	223-12272-9
Check valve	556-60097-1
Check valve G1/4 A x G1/4	
Cable gland assembly	556-60096-1
3 x cable gland M16 x 1.5	
2 x blind plug M16 x 1.5	
Pressure switch	DSB1-S30000X-1A-01
Connection cable for pressure switch	
	664-85046-3

Order code

EDL1 -100-01 - 00 +924

Pump type

EDL1

Version¹⁾

Corrosion protection; inlet/outlet position

- 1 = C3; left/right
- 2 = C3; right/right
- 3 = C3; right/left
- 4 = C3; left/left

Inlet fitting¹⁾²⁾

- 0 = without
- 5 = GE-L ø10 mm

Outlet fitting at check valve¹⁾²⁾

- 0 = without
- 5 = GE-L ø10 mm
- E = GE-L ø10 mm with pressure switch (300 bar / 4350 psi) and cable

Controller

- 01 = ON/OFF mode
- 11 = Machine contact (automatic mode)
- 61 = Sensor (pulse mode)

Electrical connection¹⁾

- 00 = 3 x blind plug
- 01 = 1x M16 cable screw connection and 2 x blind plug
- 11 = 2x M16 cable screw connection and 2 x blind plug
- 31 = 3x M16 cable screw connection

Power supply

- 924 = 24 V DC

¹⁾ Further options on request

²⁾ Material and inlet/outlet position defined by version

The Power of Knowledge Engineering

Combining products, people, and application-specific knowledge, SKF delivers innovative solutions to equipment manufacturers and production facilities in every major industry worldwide. Having expertise in multiple competence areas supports SKF Life Cycle Management, a proven approach to improving equipment reliability, optimizing operational and energy efficiency and reducing total cost of ownership.

These competence areas include bearings and units, seals, lubrication systems, mechatronics, and a wide range of services, from 3-D computer modelling to cloud-based condition monitoring and asset management services.

SKF's global footprint provides SKF customers with uniform quality standards and worldwide product availability. Our local presence provides direct access to the experience, knowledge and ingenuity of SKF people.

© SKF is a registered trademark of the SKF Group.

© Lincoln is a registered trademark of Lincoln Industrial Corp.

© SKF Group 2016

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB LS/P2 16144 EN · January 2016

