

## **ELECTRICAL ENGINEERING AND ACCELERATOR TECHNOLOGY**

Ceramic-to-metal assemblies made of  
high-performance ceramics

# HIGH-PERFORMANCE CERAMICS CERAMIC-TO-METAL ASSEMBLIES

Physical-technical applications impose high requirements on the materials used. Our ceramic-to-metal assemblies have been optimally designed to meet these challenges.

Ceramic-to-metal assemblies combine the excellent properties of each individual material i.e. ceramic and metal into one single component:

- ▶ The high-performance ceramic part guarantees electrical insulation and dimensional stability.
- ▶ The metal component features electrical conductivity and weldability.
- ▶ The hard-soldered ceramic-to-metal joint exhibits mechanical strength and vacuum tightness.

We develop ceramic-to-metal assemblies for high-voltage and high-current applications, as well as for measuring and control technology, industrial applications, reactor construction and research. Our years of experience as a manufacturer of prototypes and standard components guarantee superior solutions to accomplish a variety of tasks.

## ADVANTAGES

- ▶ Operational safety
- ▶ Reliability
- ▶ Long service life
- ▶ Mechanical strength
- ▶ High thermal shock resistance
- ▶ Good thermal conductivity
- ▶ High electrical volume and surface resistance
- ▶ High dielectric strength
- ▶ Low dielectric loss at high frequencies
- ▶ Low cross section for neutron absorption when used in nuclear technology
- ▶ Many ceramic-to-metal assemblies are available with non-magnetisable metal parts



**For the highest demands we develop together  
with our customers ceramic components for  
applications in electrical engineering.**

# COMPONENTS FOR VACUUM TECHNOLOGY

New technologies are founded on tradition.  
Manufacturing processes under high vacuum challenge materials.



Single feedthroughs made of F99.7



Multiple feedthroughs made of F99.7




Feedthroughs with welded flange made of F99.7

## FEEDTROUGHES

The ultra-high vacuum imposes new requirements on conventional materials and joining techniques. Components made of high-performance ceramics meet these challenges and show their strength in vacuum applications.

Electrical feedthroughs made of ceramic-to-metal assemblies allow transmission of high currents, high voltages or the smallest measurement signals between the vacuum chamber and the exterior. Ceramics provide reliable separation of areas with different potentials.

The good electrical insulation of the material combined with high mechanical strength is an important requirement for efficient feedthroughs.

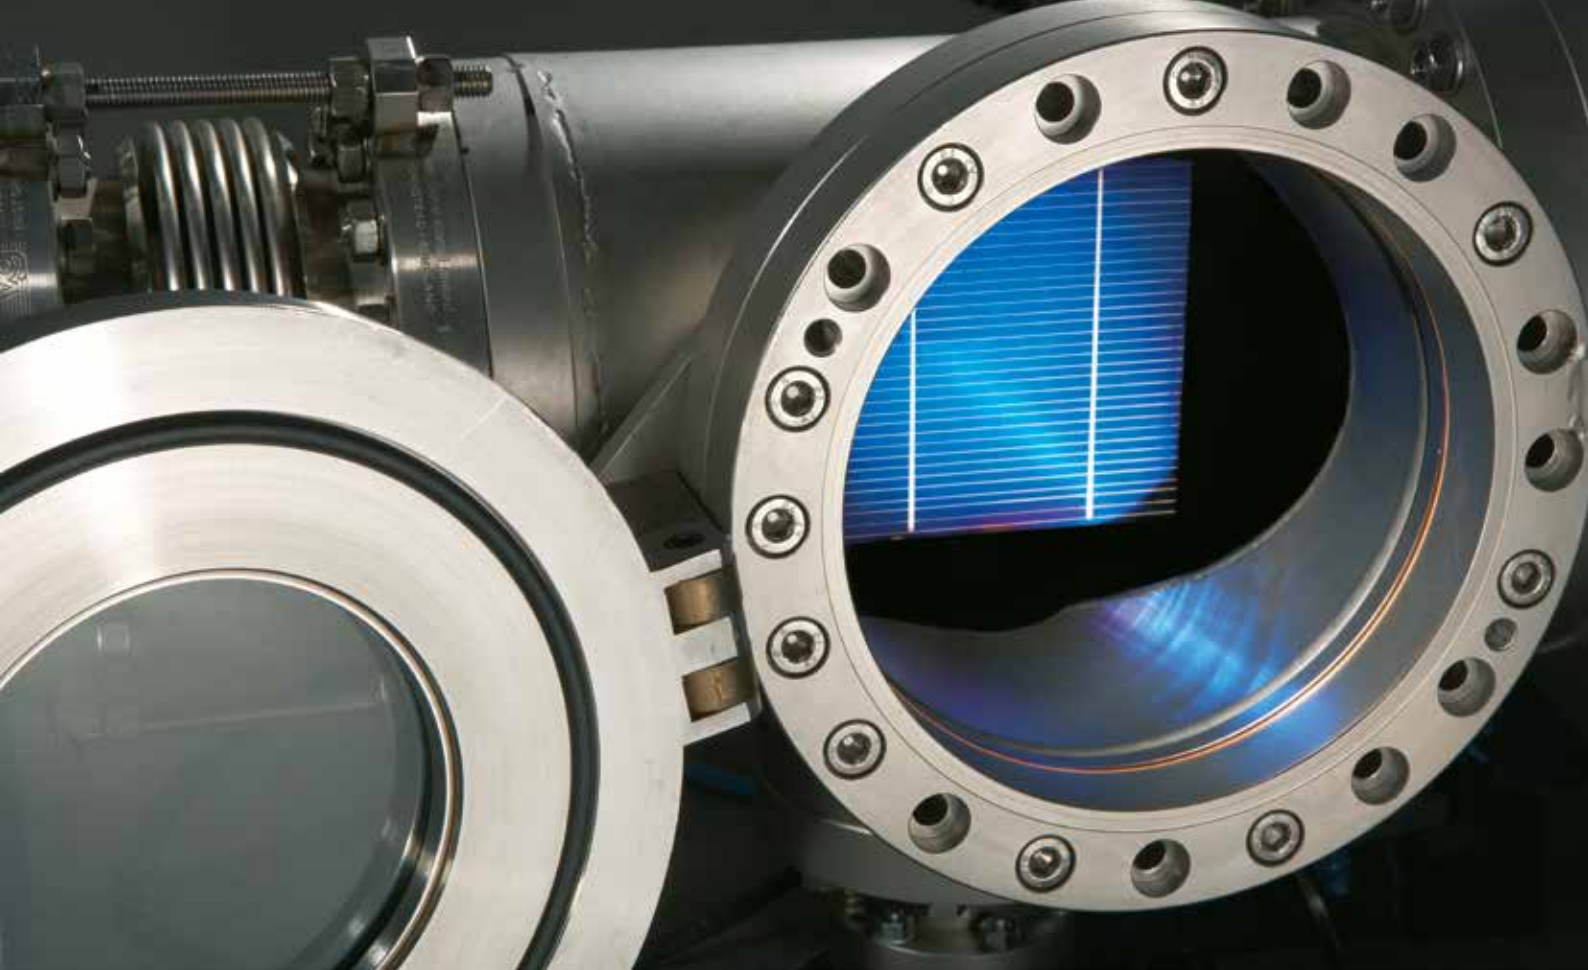

Insulation tubes made of F99.7



Pin insulators made of F99.7

## INSULATORS AND INSULATION TUBES

Insulators and insulation tubes made of F99.7 and F99.7 hf can be fitted with ribs and glazed on the outside. The rib structure increases the creepage distance, leading to higher dielectric strength when used in atmospheric applications. The glaze facilitates handling and cleaning of the component.


Depending on the construction, our insulation tubes are suitable for cryogenic applications using liquid helium or liquid nitrogen at temperatures ranging from  $-271^{\circ}\text{C}$  to  $450^{\circ}\text{C}$ .

Operating temperature:  $580^{\circ}\text{C}$  to  $675^{\circ}\text{C}$  (high temperature). As standard, the insulation tubes are tested for vacuum tightness and can be fitted with different flange types such as CF, KF or COF.



# COMPONENTS FOR RADIOLOGY AND MEDICAL ENGINEERING

Because of their excellent properties Kyocera aluminium oxide ceramics have been used in medical technology for many decades. In both X-ray technology and radiation oncology, ceramic-to-metal assemblies allow reliable diagnoses and safe treatment of the patient.

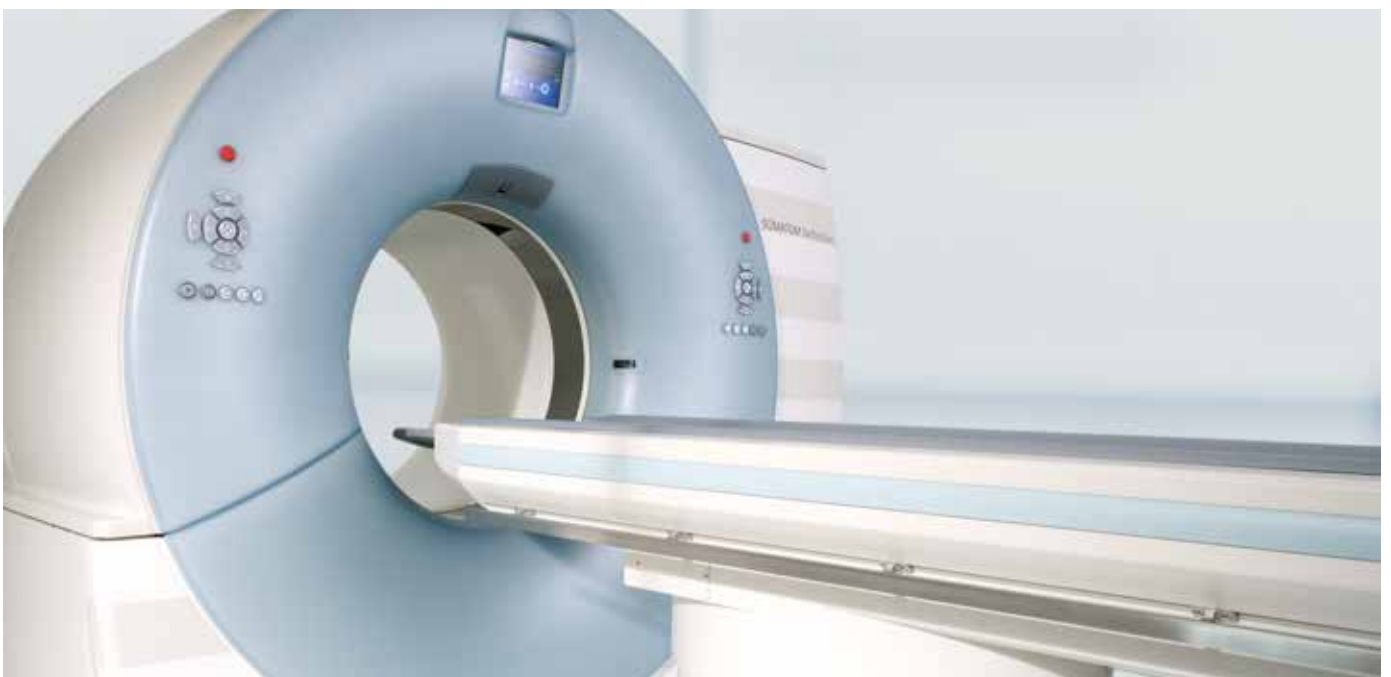

**Precise diagnosis  
with minimum  
radiation exposure.**



Rotary piston X-ray tube made of F99.7



Housing for X-ray image intensifier made of F99.7



Anode ceramic made of F99.7

The X-ray tube is the core of computerised tomography. It allows the medical professional to make a precise diagnosis while keeping radiation exposure to a minimum. The X-ray tube and X-ray image intensifier, made of oxide ceramics, are key components and indispensable for modern X-ray diagnostics. Our oxide ceramic products are the result of decades of experience combined with intense research and development and customised implementation.

The X-ray image intensifier using KYOCERA Fineceramics Solutions GmbH components is one of the most outstanding examples of successful and sustainable collaboration with our customers. The product has been tested over many years and has proved efficient in practice. It is now used in radiological applications throughout the world. The Heidelberg Ion-Beam Therapy Centre (HIT), designed as the first German institute for clinical radiation therapy and currently the only therapy unit for heavy ions in Europe, relies on our high-performance ceramics.

## COMPONENTS FOR SEMI-CONDUCTOR INDUSTRY

The computer industry is based on microchips. Only high-performance ceramics allow the use of this technology.






**Precision in  
the  $\mu\text{m}$  range.**



Test plate made of silicon nitride

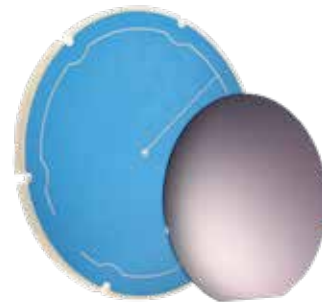

Wafer fixing plate made of F99.7

## TESTING

With the trend towards the development and manufacture of even smaller chips, there is no way around KYOCERA Fineceramics Solutions GmbH products. After all, computer components must be measured and checked in the  $\mu\text{m}$  range before initial operation. Material properties such as high dimensional stability at high temperatures turn our ceramic components into high-precision components.

## POSITIONING

High-performance ceramics are used in handling and positioning systems for wafer manufacturing because they are highly resistant to temperature, have excellent electrical properties and are dimensionally stable.

# COMPONENTS FOR RESEARCH & DEVELOPMENT AND MICROSCOPY

Focussing units in electron microscopes require tolerances of just a few  $\mu\text{m}$  allowing different specimens from research and technology to be inspected at maximum resolution and depth of field.



**High dimensional  
stability and best  
electrical insulation.**



Focussing unit made of F99.7



Insulation component made of F99.7



Single and multiple feedthroughs made of F99.7

The vacuum system in electron microscopes allows the electron to travel freely without unnecessary scattering caused by collisions with gas molecules and enables efficient use of the electron source. The ultra-high vacuum imposes new requirements that conventional materials are unable to meet.

Focussing units in electron microscopes require tolerances of just a few  $\mu\text{m}$  allowing different specimens from research and technology to be inspected at maximum resolution and depth of field. Minimum leakage and desorption rates are decisive for the functionality of the microscope. Components made of high-performance ceramics guarantee best measurement results due to their dimensional stability and excellent insulating properties.

Components made of oxide ceramics show their strength in vacuum applications. Minimum outgassing and leakage rates at best possible electric insulation and thermal resistance guarantee highest reliability in spectroscopy and microscopy.

# COMPONENTS FOR PHYSICAL AND MEDICAL FUNDAMENTAL RESEARCH

Metallised oxide ceramics are the solution for many demanding physical-technical applications. Oxide ceramics are therefore indispensable for medical engineering as well as for research and development.



Source: Heidelberg University Hospital / HIT

**Minimum outgassing  
and absorption rates.**



Kicker chamber Ø 150 x L 300 mm with TiN coating made of F99.7; manufactured for Conseil Européen pour la Recherche Nucléaire (CERN)



Insulator for ion source Ø 580 x L 145 mm made of F99.7; manufactured for Cornell University



High-voltage insulator Ø 560 x L 450 mm made of F99.7; manufactured for Budker Institute of Nuclear Physics

## **PARTICLE ACCELERATOR**

Oxide ceramics are the ideal material for demanding applications in physical fundamental research, particle physics and materials research. Its material properties meet the very highest demands even under extreme conditions. Vacuum chambers made of high-performance ceramics are used in accelerator units. They are used in fast-pulsed bending magnets to contribute to the injection and extraction of particles.

The requirements imposed on components made of oxide ceramics during operation are very demanding. Sufficient mechanical strength and high durability guarantee safe operation.

Components made of ceramic-to-metal joints are outstanding due to excellent properties such as maximum electric insulation, absolute tightness even when exposed to extreme pressure and vacuum conditions, exceptional corrosion and temperature resistance at temperatures exceeding 350 °C. Unlike metallic parts, ceramic components prevent the shielding of the rapidly changing external magnetic fields. Ceramics do not heat up when exposed to eddy currents. The additional coating on the inner surfaces of the ceramic chambers, e.g. Ti or TiN, ensures that image currents are reliably discharged and minimises secondary electron emission.

# CONSTRUCTION AND MATERIAL SELECTION

Construction affects approximately 70% of manufacturing costs. As a result, the construction has the task of providing the customer with a product that meets his or her requirements while at the same time ensuring competitive product manufacturing prices.

This means in particular:

- a) Implementation of required property features using simple solutions and standardised primary products
- b) Construction suited to ceramics
- c) Construction suited to production

The choice of ceramic and metal materials suitable for joining requires comprehensive knowledge of application conditions. Table 1 gives an overview of the main requirements imposed on the three constituents of joining, i.e. ceramic, joining area and metal.

Joint constructions are designed in accordance with geometric requirements of the user and the thermal suitability of the selected materials (see table 3 (p. 17)).

Table 2 shows some basic types of joint constructions which are frequently used for feedthroughs and insulating parts.

The ceramic-to-metal joint is designed in such a way that the metal part, once brazed, exerts compressive stress on the ceramic part. Construction type 1 comes close to the specified target. When it comes to external brazing, metal alloys (Ni42, NiCo 2918) or metals with a coefficient of thermal expansion (CTE) higher than that of ceramics are preferred. These alloys are also suited for internal brazing; however, the CTE of other metals should be lower than that of ceramics. Metals such as copper are an exception, as these materials exhibit a high ductility and are used for internal brazing despite of their high CTE. Adapted alloys or ductile metals with wall thicknesses up to 1 mm are used for external brazing. Larger diameters require the use of moveable shaped parts. If these are magnetisable, e.g. a Ni42 flange of type 1c is subsequently welded to a stainless steel flange (see Figure 11 (p. 22)).

Properties		Main focus on:		
		Ceramic	Joining area	Metal
Electric	Breakdown voltage	■		
	Sparkover voltage	■		
	Creepage distance	■		
	Dielectric constants	■		
	Resistance	■		
Magnetic				■
Thermal	Application temperature		■	
	Thermal shock resistance		■	
Mechanic	Strength		■	
Geometric	Dimensional tolerance	■		■
	Surface roughness	■		
UHV tightness	HE leakage rate		■	

Table 1: Main requirements



If circumference or internal brazing is required on both ends of a tube, a groove is cut into the ceramic (type 1b). The advantage of this construction is that it keeps brazing equipment to a minimum and allows the individual brazed parts to be mounted easily.

The use of construction type 1 is often limited to brazed diameters smaller than 50 mm when using non adapted metals, because the difference in the CTE of ceramics and metal at brazing temperature is too high. In such cases, construction type 2 is often used.

The same applies when brazing larger metal parts made of austenitic steel via a ductile intermediate copper layer, as this type of construction allows great mobility of the metal parts on the front edge of the ceramic part.

Compact constructions of type 3 are manufactured using adapted metal alloys or ductile metals. The mechanical safety of such a joint is increased by using a ceramic compensation ring of type 3b.

Feedthroughs are exposed to high mechanical stress and require that only compressive stresses occur inside the ceramic. If this construction principle is taken into consideration, highly resistant feedthroughs can be manufactured.







Type	a	b	c
1. Circumference brazing	 <div>internal and external</div>	 <div>with cut-in groove</div>	 <div>with cranked flange</div>
2. Front edge brazing			
3. Flat brazing		 <div>with compensation ring</div>	

Table 2: Basic types of joint constructions

# BRAZING TECHNOLOGY

With the exception of some products, usability requires material-bonded and highly vacuum-tight joining of ceramic parts with each other and with metal parts. Various joining techniques can be used to achieve this.

## GLASS BRAZING

Glass brazing is appropriate for gas-tight joining of ceramic components. This joining technique is characterised by a very good general chemical resistance and operating temperatures up to approx. 1,100 °C. These joints achieve strength values up to 100 MPa at room temperature (in accordance with DVS German Welding Society, Guideline 3101).

A coefficient of thermal expansion adjusted to the ceramic and the glass braze is decisive for the quality of the glass-braze joint. There is great freedom of design with regard to geometries, however, a suitable braze reservoir and an adequate brazing gap in the construction must be guaranteed. This joining technique is based mainly on the use of glass brazes with a thermal expansion matched to that of ceramics as glass shows no metallic ductile properties.



Fig. 1: Glass-brazed ozone generator



Fig. 2: Curved vacuum chamber with glass-brazed ceramic-to-ceramic joints  
bending angle: 15°, L 3,200 mm

## BRAZING OF METALLISED CERAMICS

Components made of high-performance ceramics are generally metallised using the molybdenum-manganese procedure (MoMn procedure) and subsequent nickel-plating (see fig. 5a). The starting point for this process is a compound of molybdenum and manganese. The compound is applied to the ceramic surface to produce a firmly bonded metallised coating through a firing process. As the majority of commercial vacuum hard solders do not wet the metallised surface, it is nickel-plated using a galvanic or autocatalytic method. The component can be brazed on this base metallised coating.

Metallisation allows for brazing at temperatures above 1,000 °C under protective gas atmosphere and/or in the vacuum. A silver-copper eutectic alloy is used as a standard brazing material. Brazing materials with increased melting properties are applied when higher requirements are imposed on the operating temperature, corrosive properties and use of metals that are hardly wetted by the silver-copper eutectic alloy. Table 3 gives an overview of available brazing alloys. Our metallised ceramics are available with galvanic coating such as Au, Ni or Cu to allow for the use of soft solders at low temperatures.

Brazing material	Brazing temperature (°C)
Ag Cu 28	780
Ag Cu 26,6 Pd 5	800 – 850
Ag Cu 21 Pd 25	900
Au Ni 18	950
Cu Ge 10	1,000
Au Cu 65	1,020
Au	1,070

Table 3: Brazing materials and brazing temperatures

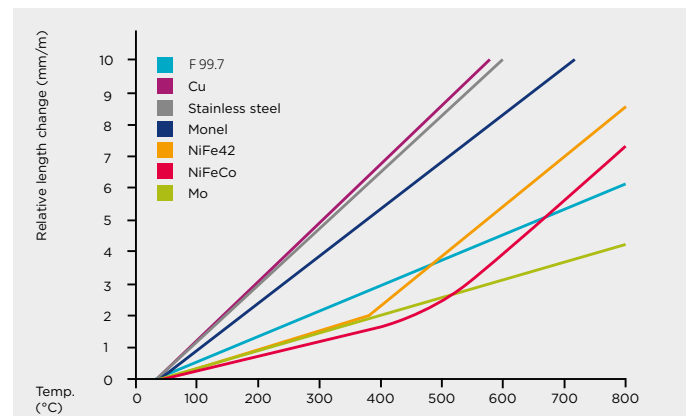


Fig. 3: Thermal expansion characteristics of metallic materials and F99.7 ceramics

# BRAZING TECHNOLOGY

Ceramic components prepared using this metallisation process can be hard-soldered with thermally adapted metal components such as NiFe 42 (e.g. VACODIL), NiFeCo (e.g. VACON 10/70), Ti, Mo, CU, etc. Figure 3 shows the coefficients of thermal expansion of different metals compared to that of F99.7.

Figure 4 shows the cross-section of a joining area of a F99.7/AgCu28/1.3917 compound. Tensile tests show that this material combination results in strength values exceeding 100 MPa (in accordance with DVS German Welding Society, Guideline 3101). If the construction is appropriate, these strengths can also be achieved using active brazing.

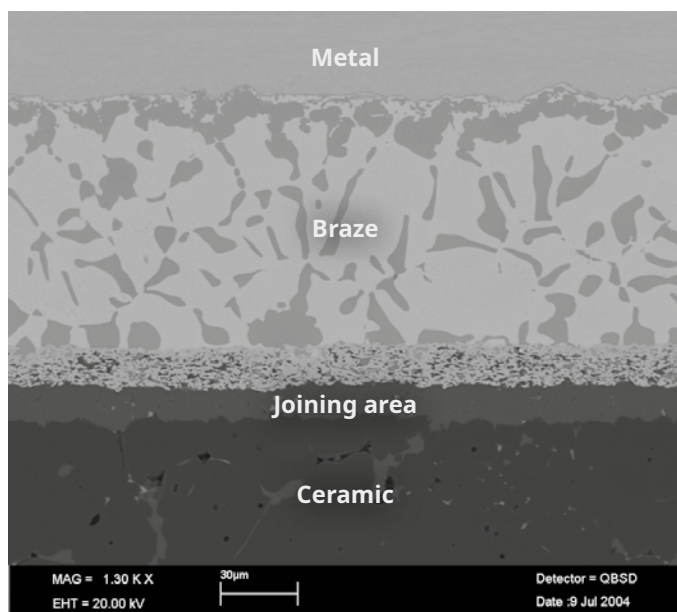


Fig. 4: Cross-section through metallised and hard-soldered  $\text{Al}_2\text{O}_3$  ceramic

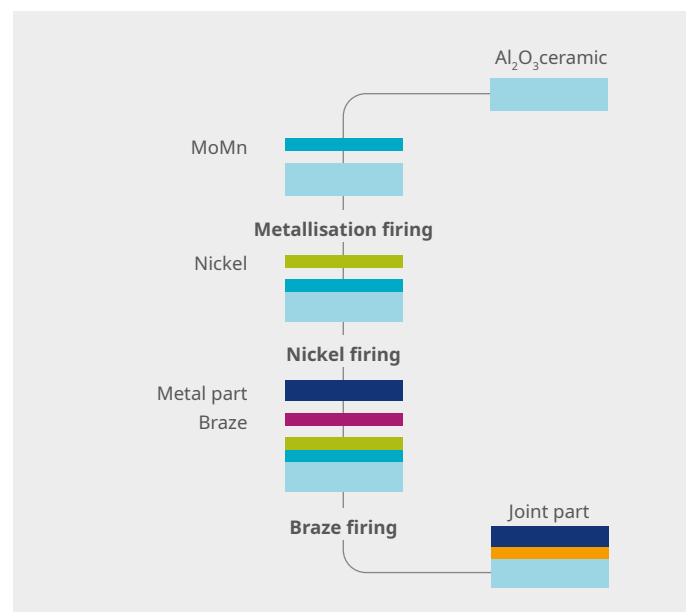


Fig. 5a: Schematic view of MoMn-brazing method

## ACTIVE BRAZING

Active brazing (see fig. 5b) is based on the use of brazing materials with a low oxygen-reactive metal content such as Ti, Zr, or Hf. They contribute to wetting of  $\text{Al}_2\text{O}_3$  thus eliminating the need for prior metallisation. The strength values of directly brazed  $\text{Al}_2\text{O}_3$  ceramics/Ni42 joints achieve values similar to those of brazed and metallised joints. Figure 6 shows a further example of a joining area of a  $\text{ZrO}_2$  ceramic and steel joint brazed with AgCu26, 5Ti3.

Although active brazing is attractive from a technical and economical point of view, its use with feedthroughs is restricted because the braze does not flow into the brazing gap but remains in the braze deposit. However, these restrictions can be avoided when the constructions take this particularity into consideration.

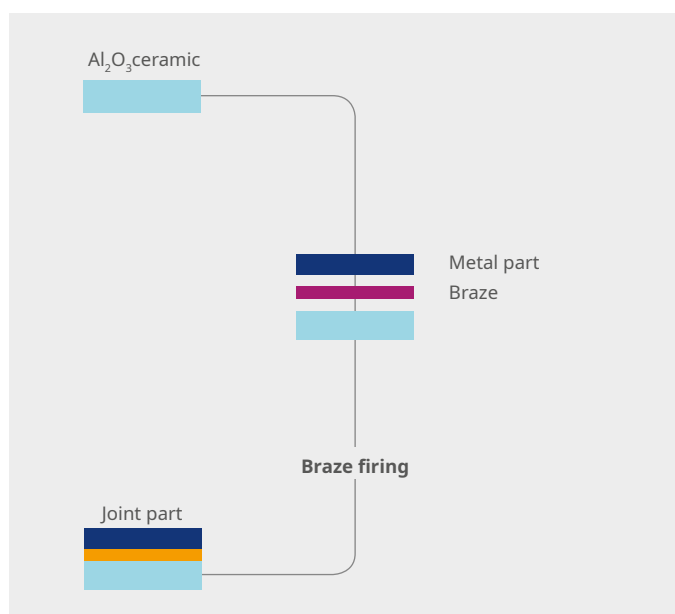


Fig. 5b: Schematic view of active brazing

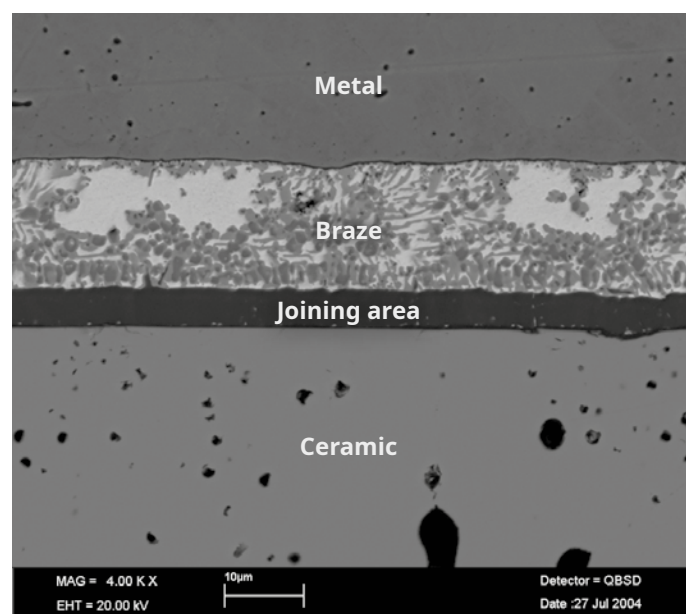


Fig. 6: Cross-section through an active-brazed  $\text{ZrO}_2$  ceramic

# OPERATING VOLTAGE AND CURRENT-CARRYING CAPACITY

## OPERATING VOLTAGE

Specification of flashover voltage values refers to the distance between two voltage-carrying electrodes under normal conditions (1,013 mbar, 50% relative humidity) where no flashover occurs. Their values increase 3-4 times in a vacuum of approximately  $10^{-6}$  mbar. High pressures of suitable dry gases or the use of insulating oils can also contribute to such an increase. The values also depend on the electrode geometry. If the ceramic body covers the electrodes, the flashover voltage depends only on creepage distance; the operating voltage can be removed from the diagram (see fig. 7).

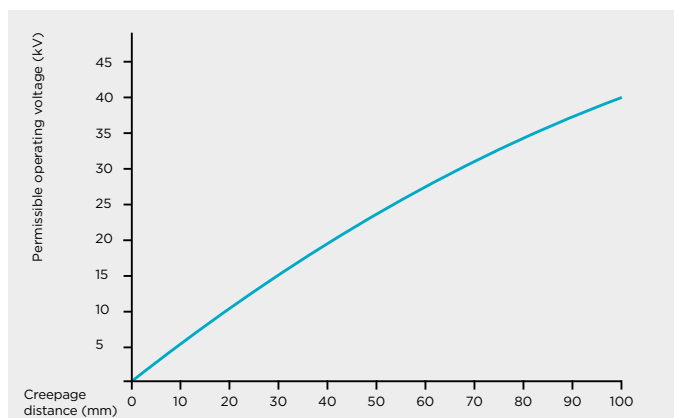


Fig. 7: Permissible operating voltage as a function of creepage distance

## CURRENT-CARRYING CAPACITY

The current-carrying capacity of the feedthroughs depends mainly on the type of conductor used. The specifications in the diagram (see fig. 8) are intended as general values. In specific cases, heat dissipation of the insulator must be taken into consideration.

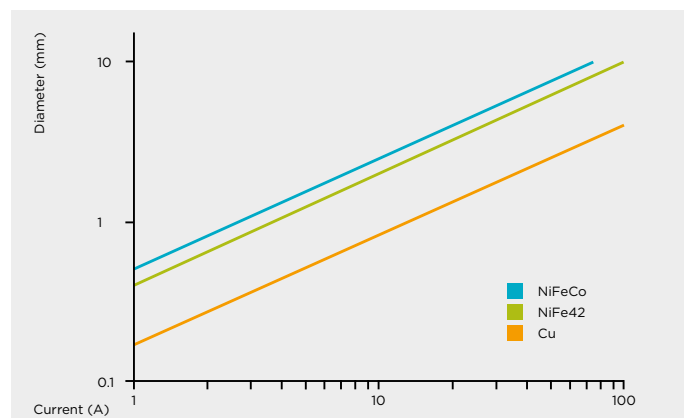


Fig. 8: Current-carrying capacity of different materials as a function of wire diameter



# ELECTRICAL RESISTANCE AND BENDING AND COMPRESSIVE STRENGTH

## ELECTRICAL RESISTANCE

When comparing the specific electrical resistance of different insulating ceramics as a function of temperature, highly pure ceramics show very good insulating properties even at higher temperatures (see fig. 9). While this high electrical resistance (approximately  $10^{14} \Omega \text{ cm}$  at room temperature for F99.7) results to a large extent from the lack of alkali, porcelain and other ceramic insulating bodies contain electric charges which are easy to move. Our ceramic-to-metal assemblies are made of F99.7 material. To avoid the effects of contamination on the surface of oxide ceramics, our ceramic-to-metal assemblies can be given a glaze with high melting points.

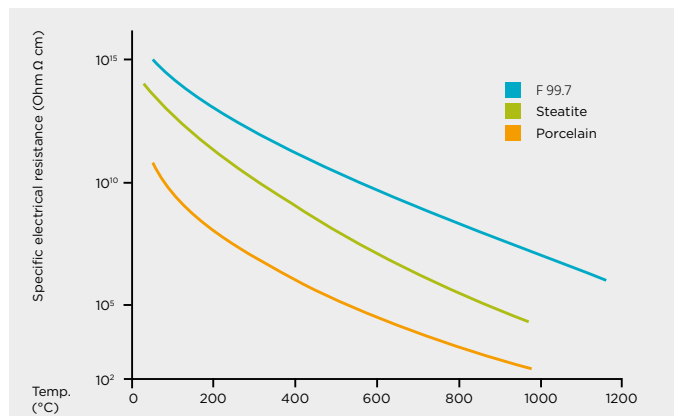


Fig. 9: Specific electrical resistance of different ceramic insulating materials as a function of temperature

## BENDING AND COMPRESSIVE STRENGTH

The compressive strength of ceramics is higher than that of metals at any temperature range. Although lower at room temperature, their bending strength exceeds that of metals above 700 °C. The reason for this behaviour is that the elasticity and fracture limits of ceramic materials coincide and occurring stress cannot be reduced by plastic flow. Unlike metals, our ceramics show no significant loss in strength at higher temperatures (see fig. 10).

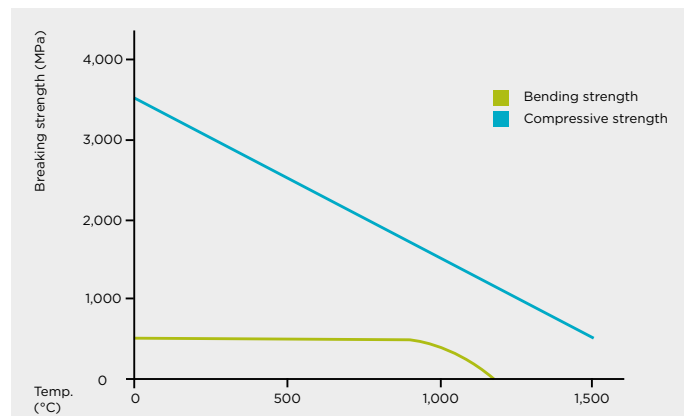


Fig. 10: Bending and compressive strength of F99.7 as a function of temperature

# CONSTRUCTION CHARACTERISTICS

## TEMPERATURE RESISTANCE

Hard-soldered metal-to-ceramic joints are particularly suitable for use at higher temperatures up to 600 °C in the vacuum or protective gas. Depending on size and design, the thermal shock resistance of ceramic-to-metal assemblies is approx. 180 °C. A heating up and cooling down rate of 5 °C/min. is a generally accepted reference value.

## CONSTRUCTION NOTES

While installing ceramic-to-metal assemblies made of high-performance ceramics, it is important to keep thermal stresses occurring during welding or brazing away from the ceramic-to-metal mating surfaces. This can be taken into consideration by using suitable design, flanges or appliances for heat dissipation.

Ceramic-to-metal assemblies are generally tested with mass spectrometer leak testing using helium as test gas with a sensitivity of approx.  $10^{-9}$  mbar l/sec. External partners are available for compressive strength tests of ceramic-to-metal assemblies. Feedthroughs are exposed to high mechanical stress and require that only compressive stresses occur inside the ceramic. Taking into consideration this construction principle allows for manufacturing of highly resistant feedthroughs.

Unless otherwise indicated, general dimensional tolerances in accordance with DIN 2768 medium (metal) and DIN 40680 medium (ceramics) apply.

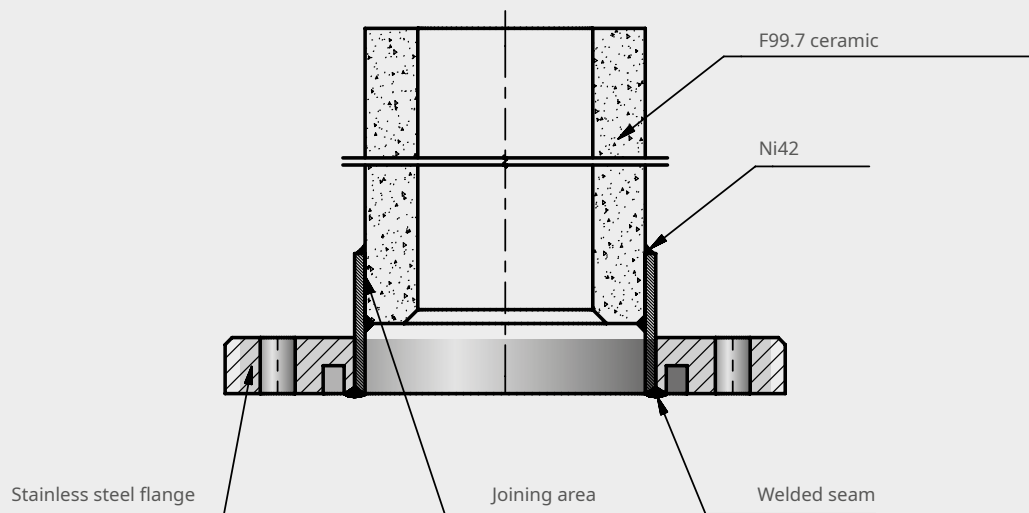


Fig. 11: Example for construction of ceramic insulation tube with flange connection

# HINTS FOR HANDLING

## Introduction

Cleanliness is a priority when handling vacuum equipment. The use of clean, lint- and powder-free gloves (vinyl) is recommended at all times. Internal surfaces of vacuum equipment should never be touched without gloves, as fingerprints will contaminate the system. Kyocera uses only highly pure materials because raw material manufacturing processes can influence a material's compatibility with vacuum applications. These hints give you important information about the handling and cleaning of ceramic-to-metal assemblies.

## Hints for ceramic-to-metal components

- ▶ Flange-mounting is the preferred method of installation for ceramic-to-metal components. They may also be welded directly to a chamber if a flange connection is not feasible. Please take care to avoid undue stress on the ceramic and the brazing point during the welding process.
- ▶ Quality control of ceramic-to-metal components consists of visual, mechanical inspection of dimensions and leak checking, as shown in the production drawing, certificates and inspection protocols.

## Packing

- ▶ Protect knife-edges and sealing surfaces with clean plastic flange caps. Alternatively, wrap them in a double layer of PE-foil.
- ▶ During transport, fix movable components (e.g. bellows and rotating flanges).
- ▶ UHV cleaned ceramic-to-metal components are sealed in PE bags with desiccants and/or nitrogen. Alternatively, they can be wrapped in a double layer of PE-foil.

## Avoiding contamination

- ▶ Avoid contamination of the components during the assembly and welding processes.
- ▶ Mount and weld in a clean room that is separate from the mechanical manufacturing.
- ▶ Wear clean, lint- and powder free gloves (vinyl) during the assembly.

## Avoiding stress on ceramic-to-metal components

- ▶ Do not expose the ceramic-to-metal components to impact loads, bending or thermal stress.
- ▶ Please take care to avoid undue stress on the ceramic and the brazing point during the welding process.

## Welding

- ▶ Possible welding methods are:
  - Electron beam and laser welding  
(a minimum distance of 5 mm to the brazing point is recommended)
  - Metal inert-gas (MIG) and tungsten inert-gas (TIG)  
(a minimum distance of 10 mm to the brazing point is recommended)
- ▶ The minimum distance also depends on the construction and complexity of the ceramic-to-metal assembly. Please contact us for any additional information.
- ▶ Alternative cooling methods, e.g. copper clamp to protect the brazing point from too much thermal energy.

## Brazed joints

- ▶ Braze joints only under vacuum or shielding gas atmosphere.
- ▶ Only if we know the temperature of the subsequent welding processes, we can use the correct pre-brazing material.

## Cleaning ceramic-to-metal components

- ▶ Clean in a laboratory washing machine by rinsing with alkaline detergent and deionised water.
- ▶ Use an ultrasonic bath with deionised water and alkaline detergent.
- ▶ Perform the ultrasonic cleaning cycles (e.g. 3 times for 5 min), interrupted by short rinsing periods (at least 1 min).
- ▶ Use clean alcohol (e.g. clean isopropanol or similar) to remove surface water or clean glazed surfaces.
- ▶ Dry by blowing off with dry, oil-free compressed air or hot air.
- ▶ Bake-out up to 250 °C (recommended 180 °C; rate of temperature 5 K/min).
- ▶ Clean vacuum parts that will be assembled into larger units in advance. Clean the parts after mechanical processing, taking into account the UHV cleaning requirements.

# MATERIAL PROPERTIES

Properties		Unit	Material F99.7
Main components		-	$\alpha$ - $\text{Al}_2\text{O}_3$
Purity		wt-%	> 99.5
Density		$\text{g/cm}^3$	$\geq 3.90$
Open Porosity		vol.-%	0
Average size of crystallites		$\mu\text{m}$	10
Bending strength $\sigma_m$	DIN EN 843-1	MPa	350
Weibulls modulus		-	> 10
Toughness $K_{Ic}$	SEVNB	$\text{MPa} \cdot \text{m}^{0.5}$	3.5
Compressive strength		MPa	3,500
Modulus of elasticity	static	GPa	380
Poisson's ratio		-	0.22
Hardness (HV1)	Knoop, 100 g	GPa	23
Maximum service temperature	in air	$^{\circ}\text{C}$	1,950 -
Linear coefficient of expansion	-100 – 20 $^{\circ}\text{C}$	$10^{-6}/\text{K}$	3.6
	20 – 100 $^{\circ}\text{C}$		-
	20 – 500 $^{\circ}\text{C}$		7.3
	20 – 900 $^{\circ}\text{C}$		-
	20 – 1,000 $^{\circ}\text{C}$		8.2
Specific heat	20 $^{\circ}\text{C}$	$\text{J}/(\text{kg} \cdot \text{K})$	900
Thermal conductivity	20 $^{\circ}\text{C}$	$\text{W}/(\text{m} \cdot \text{K})$	34.9
	100 $^{\circ}\text{C}$		-
	500 $^{\circ}\text{C}$		-
	900 $^{\circ}\text{C}$		-
	1,000 $^{\circ}\text{C}$		6.8
	1,500 $^{\circ}\text{C}$		5.3
Resistivity	20 $^{\circ}\text{C}$	$\Omega \cdot \text{cm}$	$10^{15}$
	600 $^{\circ}\text{C}$		-
	900 $^{\circ}\text{C}$		-
	1,000 $^{\circ}\text{C}$		$10^7$
Dielectric strength	20 $^{\circ}\text{C}$	$\text{kV}/\text{mm}$	> 30
Relative permittivity	70 MHz	-	10
	180 MHz		9.9
	30 – 40 GHz		9.8
Dielectric loss tangent	70 MHz	-	$270 \cdot 10^{-4}$
	180 MHz		$150 \cdot 10^{-4}$
	30 – 40 GHz		$20 \cdot 10^{-4}$
Chemical composition	$\text{Si}_3\text{N}_4$ / $\text{Al}_2\text{O}_3$ / MgO	vol.-%	-
Typical colour		-	ivory

The data indicated on this table are in line with the introductory German Industrial Standard DIN 40680 and relate to test specimens from which they were obtained. They are not unconditionally applicable to other forms of the same material. The data must be regarded as indicative only.

Material F99.7 hf	Material FZT	Material FZM	Material FZY
$\alpha - \text{Al}_2\text{O}_3$	$\alpha - \text{Al}_2\text{O}_3, \text{ZrO}_2$	$\text{ZrO}_2, \text{MgO}$	$\text{ZrO}_2, \text{Y}_2\text{O}_3, \text{Al}_2\text{O}_3$
> 99.5	> 99.5	> 99.7	> 99.7
$\geq 3.90$	$\geq 4.05$	$\geq 5.7$	$\geq 5.5$
0	0	0	0
10	5	50	30
350	460	500	400
$\geq 10$	> 15	> 15	-
3.5	3.3	6.3	-
3,500	3,000	2,000	2,000
380	360	185	200
0.22	0.24	0.3	-
20	20	16	17
1,950	1,700	900	1,700
-	-	-	-
3.6	3.9	-	-
-	-	9.3	9.2
7.3	7.5	10.4	10.4
-	-	10.6	-
8.2	8.3	-	10.9
900	850	400	400
34.9	-	3	-
-	25	-	2.5
-	-	2.3	-
-	-	2	-
6.8	-	-	-
5.3	-	-	-
$10^{14}$	-	$10^{10}$	$10^{10}$
-	-	-	$4 * 10^2$
-	-	84	-
$10^7$	-	-	15
> 30	-	-	-
9.8	-	-	-
9.8	-	-	-
9.8	-	-	-
$3.8 * 10^{-4}$	-	-	-
$2.5 * 10^{-4}$	-	-	-
$1.4 * 10^{-4}$	-	-	-
-	-	-	-
ivory	white	yellow	white

All data refer to a temperature of 20 °C, unless otherwise specified.  
To find information about characteristic values of other materials, please go to [www.kyocera-solutions.de](http://www.kyocera-solutions.de)

# KYOCERA FINECERAMICS SOLUTIONS GMBH

## THIS IS US. INNOVATION IN CERAMICS.

### ELEVATOR MESSAGE

*"Our extensive experience in high-performance ceramics and our alliance with Kyocera as a leading global technology group grant us access to innovation and resources that allow us to realize ambitious projects and take the lead for the future. We share our knowledge, and bring it together to create something new that goes beyond our company, beyond different industries and countries. As a team. Together with our customers."*

Armin Kayser, General Manager of KYOCERA Fineceramics Solutions GmbH

### KYOCERA Fineceramics Solutions GmbH - Summary

<b>Location:</b>	Mannheim, metropolitan Rhein-Neckar region
<b>Founding year:</b>	2019 - Spin-off from FRIATEC GmbH
<b>Employees:</b>	approx. 300 incl. approx. 30 trainees and apprentices
<b>Subsidiaries:</b>	KYOCERA Fineceramics Nordics AB (sales office for Northern Europe)

We look back on a long tradition in the manufacturing of ceramic products: Founded in Mannheim in 1863 as a brickyard known as "Deutsche Steinzeug", and later as "Friedrichsfeld GmbH", from 1993, the ceramics department continued its successful development under the brand FRIATEC GmbH. Since September 2019 we have been part of Kyocera Group, a leading global ceramics and technology company.

Kyocera companies benefit from the group's cross-department way of thinking and working. Because innovation and real milestones can only be achieved together. This is what we believe.

We are a provider of innovative solutions for numerous industries: system components for high-tech applications in electrical and sensor technology, mechanical engineering, analysis technology, medical and semiconductor technology, as well as laboratory technology.

We possess internationally recognized know-how in the field of high-performance ceramics, especially for ceramic-to-metal assemblies. Our products are characterized by high quality, precision, and durability. Our production and development location in Central Europe and our customized supply-chain solutions make us extremely agile and ensure maximum reliability for our customers.

We see ourselves as a partner in the development of high-performance ceramics solutions that provide added value for our customers and ensure their technological advantage in their respective markets. Our focus today is on where we want to be tomorrow – together. We develop sustainable solutions that meet the demands of the future, supported by an experienced team of 50 highly qualified and quality-oriented engineers, scientists, technology experts, and masters.



## ELECTRICAL ENGINEERING




## HIGH TEMPERATURE TECHNOLOGY



## MECHANICAL ENGINEERING



## SENSOR AND MEASURING TECHNOLOGY

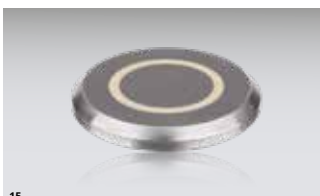

01. UHV vacuum chamber  
02. Special insulation tube for research institutes  
03. Feedthroughs with ISO-KF flange  
04. High-voltage feedthrough

05. Rectangular tubes  
06. Multi-bore tubes  
07. Crucibles, boats and annealing  
08. Boxes  
09. Plates with hole

09. Forming tools used in body construction  
10. Dosing unit used in the pharmaceutical and cosmetic industry  
11. Containment shells for the pump industry  
12. Grinding tools used in metal processing

13. Pressure sensor for aerospace  
14. Flow meters  
15. Humidity sensor  
16. Oxygen sensor



**Production site and sales office:**

**KYOCERA Fineceramics Solutions GmbH**

Steinzeugstrasse 92  
68229 Mannheim / Germany  
Tel: +49 621 40547-300  
E-mail: [info@kyocera-solutions.de](mailto:info@kyocera-solutions.de)  
[www.kyocera-solutions.de](http://www.kyocera-solutions.de)

**European headquarters:**

**KYOCERA Europe GmbH**

Fritz-Müller-Strasse 27  
73730 Esslingen / Germany  
Tel: +49 711 93 93 4-0  
E-mail: [info.fc@kyocera.de](mailto:info.fc@kyocera.de)  
[www.kyocera-fineceramics.eu](http://www.kyocera-fineceramics.eu)

**Sales office Nordics:**

**KYOCERA Fineceramics Nordics AB**

Jan Stenbecks Torg 17  
164 40 Kista / Sweden  
Tel: +46 8 44 66 910  
E-mail: [info@kyocera-solutions.se](mailto:info@kyocera-solutions.se)  
[www.kyocera-solutions.se](http://www.kyocera-solutions.se)