




110
1906 - 2016






















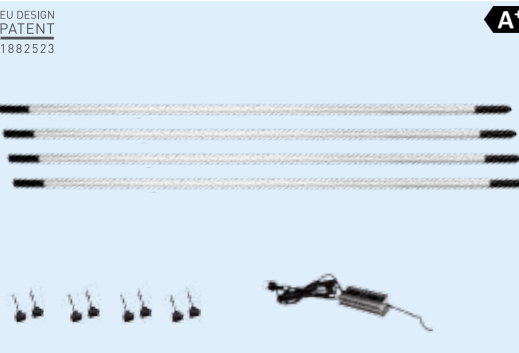
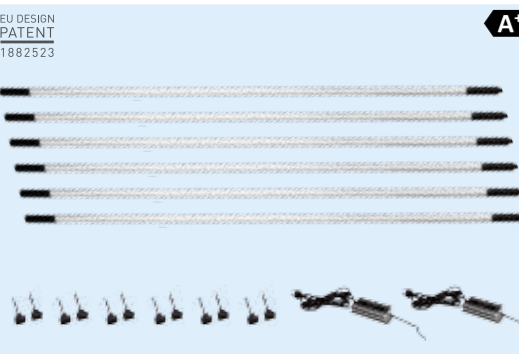
PRICELIST 2016





























| LINE LIGHT - INSPECTION HAND LAMPS | | Main light / Spotlight | | | | | | | | | | | | | | € | DKK | | | |
|--|--|------------------------|---------------|----------------------------------|---------------|----------------|---------|-------|---------|---------|----------------------------|-------------------|---|-------------|---------------|-----------|-------|-------|--------|---|
| | | LED | Lux@0.5m | Lumen | Beam angle | Operating time | Kelvin | CRI | IK | Battery | Charging time | Operating voltage | IP | Temperature | Measurements | Weight | | | | |
|  <p>NEW EU DESIGN PATENT 1882523</p> | <p>LINE LIGHT R Rechargeable inspection hand lamp. With top light incl. clip holder with hook and magnet</p> | 03.5244 | 5708997352441 | 24 X SMD LEDs/ 1 X CREE XP-G2 | 400/150 lumen | 75° /50° | 1.5h/4h | 6000K | Ra > 80 | IK07 | 3.7V 2600 mAh Li-ion | 6h | Charger input: 100-240V AC 50/60Hz Output 5VDC/ 1000mA | IP65 | -10° to +40°C | ø25x461mm | 270 g | 99,90 | 699,90 | 1 |
|  <p>NEW EU DESIGN PATENT 1882523</p> | <p>LINE LIGHT C+R Inspection hand lamp with DUAL SYSTEM and top light. Incl. clip holder with hook and magnet</p> | 03.5243 | 5708997352434 | 24 X SMD LEDs/ 1 X CREE XP-G2 | 600/150 lumen | 75° /50° | 2.5h/8h | 6000K | Ra > 80 | IK07 | 3.7V 5200mAh Li-ion | 4h | 5 m cable (2 X 1mm² H05RN-F) Charger input: 100-240V AC 50/60Hz Output: 4.2V DC/ 3.5A | IP65 | -10° to +40°C | ø25x461mm | 270 g | 99,90 | 699,90 | 1 |























































| LINE LIGHT - BONNET LIGHT | | Main light / Spotlight | | | | | | | | | | | | | | € | DKK | | | |
|---|---|------------------------|---------------|-------------|-------------------------------------|----------------|---------|-------|---------|---------|-----------------------------|-------------------|---|-------------|---------------|-------------|-------|--------|--------|---|
| | | LED | Lux@0.5m | Lumen | Beam angle | Operating time | Kelvin | CRI | IK | Battery | Charging time | Operating voltage | IP | Temperature | Measurements | Weight | | | | |
|  <p>NEW EU DESIGN PATENT 1882523</p> | <p>LINE LIGHT Bonnet light C+R Bonnet light with DUAL SYSTEM incl. telescopic holder and cable</p> | 03.5240 | 5708997352403 | 48xSMD LEDs | 500/1000 lumen step 1/ step 2 | 75° | 3h/1.5h | 6000K | Ra > 80 | IK07 | 3.7V/ 5200 mAh Li-ion | 4h | 5 m cable (2 X 1mm² H05RN-F) Charger input: 100-240V AC 50/60Hz Output: 4.2V DC/ 3.5A | IP65 | -10° to +40°C | ø25x1027 mm | 490 g | 169,90 | 999,90 | 1 |









| LINE LIGHT For automotive lifts and / or universal application | |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | |
|--|---|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|  EU DESIGN PATENT 1882523 | A+ LINE LIGHT 1 Complete lighting unit incl. 25W power supply unit and suspensions | 03.5203 | 5708997352038 | 216 SMD LED • 18W | 1100 lux | 1300 lumen | 6000K | Ra > 80 | IK07 | 75° | 24V DC | IP67 | -10 to +40°C | ø25x1630mm | 1.5 kg | 239.90 | 1399.90 | 1 |
|  EU DESIGN PATENT 1882523 | A+ LINE LIGHT 2 Complete lighting units incl. 80W power supply unit and suspensions | 03.5202 | 5708997352021 | 2 x 156 SMD LED • 2 x 13W | 2 x 1100 lux | 2 x 900 lumen | 6000K | Ra > 80 | IK07 | 75° | 24V DC | IP67 | -10 to +40°C | 2 x ø25x1234mm | 2.2 kg | 389.90 | 2299.90 | 1 |
|  EU DESIGN PATENT 1882523 | A+ LINE LIGHT 2-POST Lighting solution for 2-post lifts and mobile column lifts, with 25W power supply and 8m cable. Incl magnetic flexible suspensions | 03.5225 | 5708997352250 | 2 x 96 SMD LED • 2 x 8W | 2 x 900 lux | 2 x 550 lumen | 6000K | Ra > 80 | IK07 | 75° | 24V DC | IP67 | -10 to +40°C | 2 x ø25x770mm | 3.4 kg | 399.90 | 2799.90 | 1 |
|  EU DESIGN PATENT 1882523 | A+ LINE LIGHT 4 Complete lighting units incl. 80W power supply unit, 8m cable and suspensions | 03.5201 | 5708997352014 | 4 x 216 SMD LED • 4 x 18W | 4 x 1100 lux | 4 x 1300 lumen | 6000K | Ra > 80 | IK07 | 75° | 24V DC | IP67 | -10 to +40°C | 4 x ø25x1630mm | 4.65 kg | 999.90 | 5499.90 | 1 |
|  EU DESIGN PATENT 1882523 | A+ LINE LIGHT 6 Complete lighting units incl. 2 pcs 80W power supply units, 8m cable and suspensions | 03.5200 | 5708997352007 | 6 x 216 SMD LED • 6 x 18W | 6 x 1100 lux | 6 x 1300 lumen | 6000K | Ra > 80 | IK07 | 75° | 24V DC | IP67 | -10 to +40°C | 6 x ø25x1630mm | 8 kg | 1499.90 | 8499.90 | 1 |

| LINE LIGHT - DESIGN YOURSELF | | |  |  |  |  |  |  |  |  |  |  |  |  | | | | | | | |
|--|-----------|---|---|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---------|---|
| Combine LIGHTING UNITS with POWER SUPPLY/CABLE and SUSPENSIONS | | | | LED | Lux@0.5m | Lumen | Kelvin | CRI | IK | Beam angle | Operating voltage | Outlet | IP | Temperature | Measurements | Weight | € | DKK | | | |
| LIGHTING UNITS | | | | | | | | | | | | | | | | | | | | | |
|  | A+ | LINE LIGHT 75 | 03.5221 | 5708997352212 | | 96 SMD LED • 8W | 900 lux | 550 lumen | 6000K | Ra > 80 | IK07 | 75° | 24V DC | | IP67 | -10 to +40°C | ø25x 838mm | 500 g | 119,90 | 699,90 | 1 |
|  | A+ | LINE LIGHT 120 | 03.5222 | 5708997352229 | | 156 SMD LED • 13W | 1100 lux | 900 lumen | 6000K | Ra > 80 | IK07 | 75° | 24V DC | | IP67 | -10 to +40°C | ø25x 1234mm | 600 g | 199,90 | 1199,90 | 1 |
|  | A+ | LINE LIGHT 160 | 03.5223 | 5708997352236 | | 216 SMD LED • 18W | 1100 lux | 1300 lumen | 6000K | Ra > 80 | IK07 | 75° | 24V DC | | IP67 | -10 to +40°C | ø25x 1630mm | 700 g | 229,90 | 1299,90 | 1 |
|  | A+ | LINE LIGHT 200 | 03.5224 | 5708997352243 | | 276 SMD LED • 24W | 1100 lux | 1600 lumen | 6000K | Ra > 80 | IK07 | 75° | 24V DC | | IP67 | -10 to +40°C | ø25x 2027mm | 800 g | 269,90 | 1499,90 | 1 |
| POWER SUPPLY/CABLE | | | | | | | | | | | | | | | | | | | | | |
|  | | 25W power supply unit | 03.5229 | 5708997352298 | | | | | | | | | 90-264V AC/50-60Hz 2m (3x0,75 mm² H05VV-F) SCHUKO plug | 24VDC/20W 5m (H03VV-F) 2x0,75mm² | IP67 | -10 to +40°C | 180x28x 20mm | 700 g | 29,90 | 199,90 | 1 |
|  | | 80W power supply unit | 03.5226 | 5708997352267 | | | | | | | | | 230V AC/50Hz 2m (2x1 mm² H05RN-F) SCHUKO plug | 24VDC/80W 5m (H03VV-F, 2x0,5mm²) | IP67 | -10 to +40°C | 175x68x 43mm | 1.3 kg | 51,90 | 309,90 | 1 |
|  | | 20W PLUG IN power supply | 03.5212 | 5708997352120 | | | | | | | | | 100-240V AC 50/60Hz | 24VDC/ 800mA 5m (2x1mm² H05RN-F) | IP44 | -10 to +40°C | 10x70x 44mm | 80 g | 25,90 | 154,90 | 1 |
|  | | POWER CABLE 8m | 03.5215 | 5708997352151 | | | | | | | | | | 8m (2x0,5mm² H05RN-F) | | | 8m | 400 g | 7,90 | 44,90 | 1 |
| SUSPENSIONS | | | | | | | | | | | | | | | | | | | | | |
|  | | CLIP - 1 pc. - incl. fittings for suspension | 03.5214 | 5708997352144 | | | | | | | | | | | | | 35x107x 28mm | 100 g | 6,25 | 35,90 | 1 |
|  | | MAGNET - 1 neodymium magnet for clip - ø60mm. Ex. fittings and clip | 03.5216 | 5708997352168 | | | | | | | | | | | | | ø60 x 7mm | 100 g | 21,90 | 124,90 | 1 |
|  | | CLIP WITH HOOK AND MAGNET - Adjustable hook for flexible position | 03.5312 | 5708997353127 | | | | | | | | | | | | | 45x45x 135mm | 42 g | 7,90 | 39,90 | 1 |
|  | | FLEXIBLE ARM WITH SUCTION CUP - 20 cm flexible arm with clip holder and suction cup | 03.5219 | 5708997352199 | | | | | | | | | | | | | ø65x 270mm | 87 g | 24,90 | 179,90 | 1 |
|  | | FLEXIBLE ARM WITH MAGNET - 20 cm flexible arm with clip holder and neodymium magnet - ø60mm | 03.5218 | 5708997352182 | | | | | | | | | | | | | ø60x 281mm | 167 g | 29,90 | 199,90 | 1 |
|  | | FLEXIBLE MAGNET SUSPENSION - Ball socket joint with strong magnet for suspension for LINE LIGHT 2-POST | 03.5257 | 5708997352571 | | | | | | | | | | | | | ø60x 100mm | 135 g | 39,90 | 249,90 | 1 |
|  | | MAGNET With small clip - ø30mm | 03.5246 | 5708997352465 | | | | | | | | | | | | | ø30x 38mm | 24 g | 14,90 | 82,90 | 1 |
|  | | CLIP Small metal clip | 03.5213 | 5708997352137 | | | | | | | | | | | | | 10x25x 33mm | 10 g | 3,90 | 21,90 | 1 |

| Item |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | |
|---|---|---|---|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|----|
| | 817088692681 | LED | Lux@0.5m | Lumen | Operating time | Kelvin | CRI | Impact resistance | Beam angle | Battery | Charging time | Operating voltage / Power consumption | IP | Temperature | Measurements | Weight | € | DKK | | |
|  EU DESIGN PATENT 2704684 FLASH PEN R Rechargeable LED pencil flashlight with focus 90 m | 03.5120 | 5708997351208 | CREE XP-G2 | 500-800 lux | 100 lumen | 2h | 6000K | Ra > 70 | 1m | 10° - 70° | 3.7V/ 1100 mAh Li-ion | 4h | Charger input: 100-240V AC 50/60Hz / Output: 5V DC 1A | IP30 | -10°to +40°C | ø18,8x160 mm | 145 g | 39.90 | 249.90 | 50 |
|  EU DESIGN PATENT 2704684 FLASH 200 R Rechargeable LED flashlight with focus and belt pouch 200 m | 03.5126 | 5708997351260 | CREE XP-G2 | 1000-15000 lux | 200 lumen | 2h | 6000K | Ra > 70 | 1m | 10° - 70° | 3.7V/ 2600 mAh Li-ion | 6h | Charger input: 100-240V AC 50/60Hz / Output: 5V DC 1A | IP30 | -10°to +40°C | ø 38x160 mm | 290 g | 59.90 | 399.90 | 20 |
|  EU DESIGN PATENT 2704684 FLASH 400 R Rechargeable LED flashlight with focus and belt pouch 280 m | 03.5128 | 5708997351284 | CREE XM-L2 | 1500-25000 lux | 400 lumen | 2h | 6000K | Ra > 65 | 1m | 10° - 70° | 3.7V/ 2600 mAh Li-ion | 6h | Charger input: 100-240V AC 50/60Hz / Output: 5V DC 1A | IP30 | -10°to +40°C | ø42x216 mm | 500 g | 79.90 | 499.90 | 20 |
|  FLASH PEN LED pencil flashlight with focus 75 m | 03.5110 | 5708997351109 | CREE XP-G | 300-4000 lux | 100 lumen | 6h | 6000K | Ra > 70 | 1m | 10° - 70° | 2xAAA/1.5V Alkaline | | IP54 | -10°to +40°C | ø16x148 mm | 56 g | 27.90 | 159.90 | 50 | |
|  FLASH 100 LED flashlight with focus and belt pouch 125 m | 03.5105 | 5708997351055 | CREE XP-G | 800-12000 lux | 130lumen | 7h | 6000K | Ra > 70 | 1m | 10° - 70° | 3xAAA/1.5V Alkaline | | IP54 | -10°to +40°C | ø32x111 mm | 130 g | 34.90 | 199.90 | 50 | |
|  FLASH 200 LED flashlight with focus and belt pouch 180 m | 03.5106 | 5708997351062 | CREE XP-G | 800-22000 lux | 200 lumen | 3h | 6000K | Ra > 70 | 1m | 10° - 70° | 2xC/1.5 Alkaline | | IP54 | -10°to +40°C | ø40x165 mm | 335 g | 52.90 | 299.90 | 40 | |
|  FLASH 300 LED flashlight with focus and belt pouch 210 m | 03.5107 | 5708997351079 | CREE XP-G | 1200-35000 lux | 300 lumen | 9h | 6000K | Ra > 70 | 1m | 10° - 70° | 3xC/1.5 Alkaline | | IP54 | -10°to +40°C | ø42x216 mm | 446 g | 59.90 | 349.90 | 20 | |
|  FLASH R Rechargeable LED flashlight with focus 210 m | 03.5114 | 5708997351147 | CREE XP-G2 | 900-15000/1800-30000 lux step 1/ step 2 | 150 /300 lumen step 1/ step 2 | 4h/ 2h step 1/ step 2 | 6000K | Ra > 70 | 1m | 10° - 70° | 7.4V/ 1400 mAh Li-ion | 4h | Charger input: 100- 240V AC 50/60Hz Output: 10V DC 0.5A | IP54 | -10°to +40°C | 300x100x 100 mm | 210 g | 84.90 | 649.90 | 20 |
|  NEW FLASH 12V Small LED flashlight - recharge directly from cigarette lighter socket 100 m | 03.5124 | 5708997351246 | High power LED | 900-8000 lux | 130 lumen | 1h | 6000K | Ra >70 | 1m | 10° - 70° | 3.7V/ 550 mAh Li-ion | 2h | 10-28V DC Plug: Cigarette connector | IP30 | -10°to +40°C | ø30x105mm | 88 g | 29.90 | 189.90 | 50 |
|  FLASH MINI Small LED flashlight in display 50m | 03.5102 | 5708997351024 | High power LED | 2000 lux | 50 lumen | 10h | 8000K | Ra >70 | | | 3xAAA/1.5V Alkaline | | IP54 | -10°to +40°C | ø28x93,5 mm | 71 g | 7.90 | 69.90 | 144 pcs in display | |

| | | Main light / Spotlight | | | | | | | | | | | | | | | | | |
|--|---|---|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|------------------------------|
| Item |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | | |
| | | LED | Lux@0.5m | Lumen | Operating time | Battery | Kelvin | CRI | IK | Charging time | Operating voltage | IP | Temperature | Measurements | Weight | € | DKK | | |
|  NEW EU DESIGN PATENT | | | | | | | | | | | | | | | | | | | 12 • 6 pcs in display |
| STAR Work light and floodlight in one | 03.5620 | 5708997356203 | | 500/1000 lumen step 1 / step 2 | 5 h/2.5 h | 3.7V / 5200 mAh Li-ion | 6000K | Ra >80 | | 6 h | Charger input: 100-240V AC 50/60Hz Output: 5V DC /1A | IP65 | -10° to +40°C | 100x150x95 mm | 630 g | 99.90 | 699,90 | | |
|  NEW EU DESIGN PATENT | | | | | | | | | | | | | | | | | | | 24 • 12 pcs in display |
| SLIM Ultra-slim light for inspection with flashlight function | 03.5612 | 5708997356128 | 400/800 lux | 250/500 lumen Step 1 / step 2 Spot: 4800 lux | 2.5 h/5 h | 3.7V / 2600 mAh Li-ion | 6000K | Ra >80 | | 4 h | Charger input: 100-240V AC 50/60Hz Output: 5V DC /1A | IP30 | -10° to +40°C | 165x40x30 mm | 150 g | 74.90 | 449,90 | | |
|  NEW EU DESIGN PATENT | | | | | | | | | | | | | | | | | | | 24 • 12 pcs in display |
| MINI SLIM Small ultra-slim light for inspection with flashlight function | 03.5610 | 5708997356104 | 100/300 lux | 100/200 lumen Step 1 / step 2 Spot: 100 lumen | 6 h/3 h | 3.7V / 1200 mAh Li-ion | 6000K | Ra >80 | | 3 h | Charger input: 100-240V AC 50/60Hz Output: 5V DC /1A | IP30 | -10° to +40°C | 130 x40x9 mm | 90 g | 59.90 | 379,90 | | |
|  NEW EU DESIGN PATENT 2954123 | | | | | | | | | | | | | | | | | | | 24 • 12 pcs in display |
| MAG Rechargeable multipurpose SMD LED work light | 03.5400 | 5708997354001 | 7x SMD LEDs / High power LED | 250/500 lux | 120/50 lumen | 4 h/4 h | 3.7V / 1800 mAh Li-ion | 6000K | Ra >80 | 4 h | Charger input: 100-240V AC 50/60Hz Output: 5V DC /1A | IP20 | -10° to +40°C | 270x62x41mm | 245 g | 49.90 | 299,90 | | |
|  NEW EU DESIGN PATENT 2954123 | | | | | | | | | | | | | | | | | | | 24 • 12 pcs in display |
| MAG 3 Rechargeable multipurpose COB LED work light | 03.5401 | 5708997354018 | COB LED / High power LED | 500/1500 lux | 250/150 lumen | 3 h/3 h | 3.7V / 2200 mAh Li-ion | 6000K | Ra >80 | 4 h | Charger input: 100-240V AC 50/60Hz Output: 5V DC /1A | IP20 | -10° to +40°C | 270x62x41mm | 270g | 59.90 | 349,90 | | |
|  NEW EU DESIGN PATENT 2954123 | | | | | | | | | | | | | | | | | | | 24 • 12 pcs in display |
| MINI MAG Small rechargeable multipurpose COB LED work light | 03.5403 | 5708997354032 | COB LED / High power LED | 280/800 lux | 120/50 lumen | 4 h/4 h | 3.7V / 1200 mAh Li-ion | 6000K | Ra >80 | 3 h | Charger input: 100-240V AC 50/60Hz Output: 5V DC /1A | IP20 | -10° to +40°C | 202x40x28mm | 80g | 39.90 | 279,90 | | |
























Excl. charger

| Item | Barcode | Main light / Spotlight | | | | | | | | | | IP | Temperature | Measurements | Weight | € | DKK | Box | | | | |
|--|---------------|---------------------------------|-----------------------------------|------------------------------------|----------------------------|--------------------------|--------|--------|------|---------------|-------------------|--------|--|---|--|------------------|-------------------|------------------|---------|------------------------------------|------------------------------------|----|
| | | LED | Lux@0.5m | Lumen | Operating time | Battery | Kelvin | CRI | IK | Charging time | Operating voltage | | | | | | | | | | | |
|  <p>EU DESIGN PATENT 2532929 A+</p> <p>STARLINE Inspection work light</p> | 8170886912681 | 9 X SMD LG | 400 lux | 300 lumen | | | | | | | 6000K | Ra >80 | IK08 | | 5m cable (2x1mm²H05RN-F) 100-240V AC 50/60Hz SCHUKO plug 4W | IP40 | -10° to +40°C | 26x40x 340 mm | 650 g | 39.90 | 249,90 | 20 |
|  <p>EU DESIGN PATENT 2635946</p> <p>MAG PEN 2 Rechargeable pencil LED work lamp</p> <p>Excl. charger</p> | | 7x SMD/ 1 x CREE XP-G2 R5 | 130/1000 lux | 60/50 lumen | 2h/2h | 3.7V/ 750 mAh Li-ion | 6000K | Ra >70 | | 1.5 h | | | | Charger input: 100-240V AC 50/60Hz Output: 5V DC /1A | IP54 | -10° to +40°C | ø21x31x 173 mm | 105 g | 36.90 | 209,90 | 24 • 12 pcs in display | |
|  <p>EU DESIGN PATENT 2532929</p> <p>FLEX 2 Rechargeable LED work light</p> | | 7 x SMD / High power | 200/600 lux | 125/50 lumen | 4h/10h | 3.7V/ 1300 mAh Li-ion | 6000K | Ra >80 | | 3,5 h | | | Charger input: 100-240V AC 50/60Hz Output: 5V DC/1A | IP20 | -10° to +40°C | 40x50x212 mm | 210 g | 39.90 | 279,90 | 24 • 12 pcs in display | | |
|  <p>EU DESIGN PATENT</p> <p>I-VIEW Rechargeable COB LED headlamp with touchless sensor switch on/off</p> | | 2W COB LED | 300 /500 lux step 1/ step 2 | 100/200 lumen step 1/ step 2 | 6h/3h step 1/ step 2 | 1600 mAh li-polymer | 6000K | Ra >80 | IK07 | 4 h | | | Charger input: 100-240V 50/60Hz Output: 5V DC/1A | IP65 | -10° to +40°C | 101x49x 35 mm | 120 g | 69.90 | 429,90 | 40 | | |
|  <p>EU DESIGN PATENT NEW</p> <p>ZONE Rechargeable COB LED head-lamp</p> <p>Excl. charger</p> | | COB LED | 110/220 lux Step 1/step 2 | 60/120 lumen step 1/ step 2 | 5h/2.5h step1/step2 | 3.7V/ 800 mAh Li-ion | 6000K | Ra >80 | | 3 h | | | Charger input: 100-240V 50/60Hz Output: 5V DC/1A | IP30 | -10° to +40°C | 100x30x 35 mm | 65 g | 39.90 | 279,90 | 24 • 12 pcs in display | | |
|  <p>EU DESIGN PATENT NEW</p> <p>SENSOR 2 LED headlamp with focus and touchless sensor switch on/off</p> <p>40m</p> | | 1 x CREE XP-G2 | 400/800 lux Step 1/step 2 | 60/120 lumen step 1/ step 2 | 14h/7h step1/step2 | 3xAAA/1.5 V Alkaline | 6000K | Ra >80 | | | | | | IP54 | -10° to +40°C | 60x50x 45 mm | 100 g | 24.90* | 179,90* | 24 • 12 pcs in display | | |







SENSOR 2 is tested according to the ANSI/NEMA FL-1 standard.

* Deviating discount category






| | | Main light / Spotlight | | | | | | | | | | | | | | | | | | |
|---|--|---|--|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-------|--------|---------------------------|
| Item |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | | | |
| | | LED | Lux @0.5m | Lumen | Operating time | Kelvin | CRI | IK | Battery | Charging time | Operating voltage / Power consumption | IP | Temperature | Measurements | Weight | € | DKK | | | |
|  NEW EU DESIGN PATENT 2954123 | UNIFORM Sturdy rechargeable COB LED work light | 03.5407 | 5708997354070 | COB LED/ High power LED | 200/500 lux step 1/step 2 Spot: 2000 lux | 150/300 lumen step 1/step 2 Spot: 150 lumen | 6 h/3 h step 1/step 2 Spot: 3 h | 6000K | Ra > 80 | | 3.7 V / 2200 mAh Li-ion | 4 h | Charger input: 100-240V/AC 50/60Hz Output: 5V DC 1 A | IP65 | -10°to +40°C | 190x60x 32mm | 460 g | 84.90 | 529.90 | 24 • 12 pcs in display |
|  EU DESIGN PATENT 2373282 | MIDIFORM Rechargeable COB LED work light with top flashlight | 03.5421 | 5708997354216 | COB LED/ High power | 100/340 lux | 180/75 lumen | 3 h/3 h | 6000K | Ra > 80 | | 3.7V / 1600mAh Li-ion | 3 h | Charger input: 100- 240V AC 50/60Hz Output: 5V DC/1A | IP20 | -10°to +40°C | 31x157x 59 mm | 160 g | 64.90 | 429.90 | 24 • 12 pcs in display |
|  EU DESIGN PATENT 2373282 | MINIFORM Ultra slim pocket sized rechargeable COB LED work light | 03.5060 | 5708997350607 | COB LED | 130/260 lux step 1/step 2 | 55/125 lumen step 1/step 2 | 5 h/2.5 h step 1/step 2 | 6000K | Ra > 70 | | 3.7 V / 1000 mAh Li-ion | 2.5 h | Charger input: 100-240V AC 50/60Hz Output: 5V DC/1 A | IP20 | -10°to +40°C | 25x120 59 mm | 112 g | 54.90 | 329.90 | 24 • 12 pcs in display |
|  EU DESIGN PATENT 2373282 | UNIPEN Rechargeable pencil work light with COB LED and top flashlight | 03.5420 | 5708997354209 | COB LED/ High power | 100/340 lux | 100/50 lumen | 2.5h/2.5h | 6000K | Ra > 80 | | 3.7V / 700mAh Li-ion | 3 h | Charger input: 100- 240V AC 50/60Hz Output: 5V DC /1A | IP20 | -10°to +40°C | 25x155x 32 mm | 100 g | 44.90 | 279.90 | 24 • 12 pcs in display |
| Excl. charger  EU DESIGN PATENT 2373282 | UV-FORM Rechargeable COB LED work light with powerful UV top light (395nm) | 03.5408 | 5708997354087 | COB LED/ High power UV LED | 340 lux/ UV | 150 lumen/ UV | 3 h/3 h | 6000K | Ra > 80 | | 3.7 V / 1600 mAh Li-ion | 3 h | Charger input: 100- 240V AC 50/60Hz Output: 5V DC/1A | IP20 | -10°to +40°C | 31x157x 59 mm | 160 g | 74.90 | 449.90 | 24 |
|  EU DESIGN PATENT 2954123 | SUPERFORM COB LED work light | 03.5406 | 5708997354063 | 6W COB LED | 700 lux | 700 lumen | | 6000K | Ra > 80 | IK 08 | | | 5m cable (2x1mm² H05RN-F) SCHUKO plug 100-240V AC 50/60Hz 8W | IP54 | -10°to +40°C | 290x49x 31mm | 680 g | 59.90 | 399.90 | 18 |








| Item | Barcode 8 708869 268 | Main light / Spotlight | | | | | | | | | | | | | | Weight | € | DKK | Box | | |
|--|---|------------------------|---------------|-------------------------|----------------|------------------|-----------|-------|---------|---------------|---|----|-------------|---|------|---------------|------------------|---------|--------|---------|---|
| | | LED | Lux @0.5m | Lumen | Operating time | Kelvin | CRI | IK | Battery | Charging time | Operating voltage/ Power consumption | IP | Temperature | Measurements | | | | | | | |
| NOVA WORK LIGHTS | | | | | | | | | | | | | | | | | | | | | |
|  A+ EU DESIGN PATENT 2221044 | NOVA 20 C Strong 20W COB LED work light | 03.5057 | 5708997350577 | 20W HIGH CRI COB LED | 4000 lux | 2000 lumen | | 6000K | Ra >80 | IK07 | | | | 5m cable (3x1.0mm²H05RN-F) SCHUKO plug 230V/50Hz | IP67 | -10° to +40°C | 220x235 75mm | 1.9 kg | 134.90 | 849.90 | 4 |
| NEW GENERATION OF NOVA WORK LIGHTS - the best, most sturdy and highly unique COB LED work lights for the professional market | | | | | | | | | | | | | | | | | | | | | |
|  NEW A+ EU DESIGN PATENT 2954123 | NOVA 3K 3000 lumen COB LED work light | 03.5440 | 5708997354407 | High efficiency COB LED | 5000 lux | 300-3000 lumen | | 6000K | Ra >80 | IK07 | | | | 5m cable (3x1.0mm²H05RN-F) SCHUKO plug 100-240 AC 50/60Hz - 26W | IP67 | -10° to +40°C | 235x83x 233 mm | 2.15 kg | 149.90 | 999.90 | 4 |
|  NEW A+ EU DESIGN PATENT 2954123 | NOVA 3K C+R 3000 lumen COB LED work light with DUAL SYSTEM | 03.5441 | 5708997354414 | High efficiency COB LED | 5000 lux | 300-3000 lumen | 1h - 14 h | 6000K | Ra >80 | IK07 | 11.1V/ 4400 mAh Li-ion | 2h | | 5m cable (2x0.75mm²H05RN-F) SCHUKO plug 100-240 AC 50/60Hz Charger, Input voltage: 100-240 AC 50/60Hz Output: 12.6V/2.4A - 26 W | IP67 | -10° to +40°C | 261x274x 76.5 mm | 2.2 kg | 199.90 | 1399.90 | 4 |
|  NEW A+ EU DESIGN PATENT 2954123 | NOVA 5K 5000 lumen COB LED work light | 03.5442 | 5708997354421 | High efficiency COB LED | 8000 lux | 500-5000 lumen | | 6000K | Ra >80 | IK07 | | | | 5m cable (3x1.0mm²H05RN-F) SCHUKO plug 100-240 AC 50/60Hz - 42W | IP67 | -10° to +40°C | 267x87x 262mm | 2.66 kg | 179.90 | 1299.90 | 4 |
|  NEW A+ EU DESIGN PATENT 2954123 | NOVA 5K C+R 5000 lumen COB LED work light with DUAL SYSTEM | 03.5443 | 5708997354438 | High efficiency COB LED | 8000 lux | 500-5000 lumen | 1 h-12 h | 6000K | Ra >80 | IK07 | 11.1V/ 5200 mAh Li-ion | 2h | | 5m cable (2x0.75mm²H05RN-F) SCHUKO plug 100-240 AC 50/60Hz Charger, Input voltage: 100-240 AC 50/60Hz Output: 12.6V/4.3A - 42W | IP67 | -10° to +40°C | 267x87x 262mm | 2.6 kg | 279.90 | 1799.90 | 4 |
|  NEW A+ EU DESIGN PATENT 2954123 | NOVA 10K 10.000 lumen COB LED work light with integrated WIRELESS light control | 03.5444 | 5708997354445 | High efficiency COB LED | 16000 lux | 1000-10000 lumen | | 6000K | Ra >80 | IK07 | | | | 5m cable (3x1.0mm²H05RN-F) SCHUKO plug 100-240 AC 50/60Hz - 84W | IP67 | -10° to +40°C | 302x102x 298mm | 4 kg | 299.90 | 1999.90 | 4 |

Main light / Spotlight

| Item | Barcode | LED | Lux @0.5m | Lumen | Operating time | Kelvin | CRI | IK | Battery | Charging time | Operating voltage/ Power consumption | IP | Temperature | Measurements | Weight | € | DKK | Box | |
|--|---------|---------------|-----------|-----------------------------|------------------------------|-----------------------|-------|--------|---------|-----------------------|--------------------------------------|--|-------------|---------------|---------------|--------|---------------------|---------|---|
| VEGA WORK LIGHTS | | | | | | | | | | | | | | | | | | | |
|  NEW A+ EU DESIGN PATENT 2954123 | | | | | | | | | | | | | | | | | | | |
| VEGA 1500 C+R 1500 lumen LED floodlight with DUAL SYSTEM | 03.5451 | 5708997354513 | 83 LEDs | 1700/3000 lux (step1/step2) | 750/1500 lumen (step1/step2) | 3/1.5 h (step1/step2) | 6000K | Ra >80 | IK07 | 11.1V/2600 mAh Li-Ion | 1.5 h | 5m cable (2x0.75mm²H05RN-F) SCHUKO plug 100-240 AC 50/60Hz Charger, Input voltage: 100-240 AC 50/60Hz Output: 12.6V/ 2.4A 9/18 W (step 1 / step) | IP54 | -10° to +40°C | 288x103x280mm | 1.6 kg | 119.90* | 749.90* | 4 |
| | | | | | | | | | | | | | | | | | * NOTE DIY Category | | |
|  NEW A+ EU DESIGN PATENT 2954123 | | | | | | | | | | | | | | | | | | | |
| VEGA 2600 2600 lumen LED floodlight | 03.5452 | 5708997354520 | 83 LEDs | 4000 lux | 2600 lumen | | 6000K | Ra >80 | IK07 | | | 5m cable (2x1.0mm²H05RN-F) SCHUKO plug 100-240 AC 50/60Hz - 32 W | IP54 | -10° to +40°C | 288x103x280mm | 2 kg | 99.90* | 599.90* | 4 |
| | | | | | | | | | | | | | | | | | * NOTE DIY Category | | |
|  NEW A+ EU DESIGN PATENT 2954123 | | | | | | | | | | | | | | | | | | | |
| VEGA 4000 4000 lumen LED floodlight | 03.5453 | 5708997354537 | 123 LEDs | 6000 lux | 4000 lumen | | 6000K | Ra >80 | IK07 | | | 5m cable (3x1.5mm²H07RN-F) SCHUKO plug 2xSCHUKO power outlets 100-240 AC 50/60Hz - 48 W | IP54 | -10° to +40°C | 318x117x310mm | 2.5 kg | 119.90* | 749.90* | 4 |
| | | | | | | | | | | | | | | | | | * NOTE DIY Category | | |

* Deviating discount category

| SCANGRIP TRIPOD and WHEEL STAND | | Barcode | Measurements | Weight | € | DKK |
|--|---|---------|---------------|-------------------------|-------|---------------|
| NEW |  | | | | | |
| | SCANGRIP TRIPOD | 03.5431 | 5708997354315 | Ø 1.2 m 1.35 m - 3 m | 6 kg | 89.90 599.90 |
| NEW |  | | | | | |
| | SCANGRIP WHEEL STAND | 03.5433 | 5708997354339 | Ø 0.8 m 0 m - 1.9 m | 6 kg | 109.90 749.90 |
| NEW |  | | | | | |
| | DUAL BRACKET | 03.5308 | 5708997353080 | 2.5x2.5x60 cm | 1 kg | 24.90 169.90 |
| SUSPENSION | | | | | | |
| NEW |  | | | | | |
| | MAGNET BRACKET For VEGA, NOVA, STAR and MULTIMATCH 2, D-MATCH 2 | 03.5340 | 5708997353400 | 260x60x50 mm | 760 g | €39.90 249.90 |
| NEW |  | | | | | |
| | SCAFFOLDING BRACKET For VEGA, NOVA, STAR and MULTIMATCH 2, D-MATCH 2 | 03.5341 | 5708997353417 | 150x100x60 mm | 920 g | €29.90 179.90 |



Main light / Spotlight

| Item | Barcode 8 1708869 268 | LED | Lux @0.5m | Lumen | Operating time | Kelvin CCT | CRI | IK | Battery | Charging time | Operating voltage/ Power consumption | IP | Temperature | Measurements | Weight | € | DKK | Box | | |
|--|--|-----------|---------------|-------------------------|-----------------------------------|------------------------------------|------------------------------|---------------|---------|---------------|---|-----|---|---------------|---------------|-------------------|--------|---------|---------|----|
| DETAILING and COLOUR MATCH | | | | | | | | | | | | | | | | | | | | |
| | | | | Ultra high CRI COB LED | 300-4000 lux | 100 lumen | 2 h | 4000K | Ra >95 | | 2xAAA/1.5V Alkaline | | IP54 | -10° to +40°C | Ø16 x148mm | 60 g | 39.00 | 299,90 | 50 | |
| | NEW EU DESIGN PATENT 2635946 | | | Ultra high CRI+ COB LED | 250/500 lux step 1/ step 2 | 80/160 lumen step 1/ step 2 | 5h/2.5h step 1/ step 2 | 4500K / 6500K | Ra >96 | IK07 | 3.8V/ 1600 mAh Li-poly | 3h | Charger input: 100-240V AC 50/60Hz Output: 5V DC 1A | IP65 | -10° to +40°C | 105x52x 43 mm | 140 g | 79.00 | 499,90 | 40 |
| | NEW EU DESIGN PATENT 2373282 | | | Ultra high CRI COB LED | 1100/550 lux step 1/ step 2 | 400/180 lumen step 1/ step 2 | 1 h/3 h step 1/ step 2 | 4500K | Ra >96 | | 3.7 V/ 2200 mAh Li-ion | 4 h | Charger input: 100-240V AC 50/60Hz Output: 5V DC 1 Ah | IP65 | -10° to +40°C | 60x190x 40 mm | 300 g | 129.00 | 999,90 | 12 |
| | NEW EU DESIGN PATENT 2221044 | | | Ultra high CRI+ COB LED | 1100/550 lux step 1/ step 2 | 500/250 lumen step 1/ step 2 | 1 h/2 h step 1/ step 2 | 4500K / 6500K | Ra >96 | | 3.7 V/ 2600 mAh Li-ion | 4 h | Charger input: 100-240V AC 50/60Hz Output: 5V DC 1 Ah | IP65 | -10° to +40°C | 60x190x 40 mm | 300 g | 169.00 | 1299,90 | 12 |
| | NEW EU DESIGN PATENT 2221044 | A+ | | Ultra high CRI+ COB LED | 5000 lux | 250-2500 lumen | 1h-14 h | 4500K / 6500K | Ra >96 | IK07 | 11.1V/ 4400 mAh Li-ion | 2 h | 5m cable (2x0.75mm ² H05RN-F) SCHUKO plug 100-230V 50/60Hz Charger input voltage: 100-240V AC Output: 12.6V/ 2.2A - 26W | IP67 | -10° to +40°C | 235x88x 233 mm | 2.2 kg | 249.00 | 1749,90 | 4 |
| | NEW EU DESIGN PATENT 2221044 | A+ | | Ultra high CRI+ COB LED | 8000 lux | 500-5000 lumen | | 4500K / 6500K | Ra >95 | IK07 | | | 5m cable (3x1.0mm ² H05RN-F) SCHUKO plug 230V/50Hz - 54W | IP67 | -10° to +40°C | 267x88x 262 mm | 2.6 kg | 249.00 | 1749,90 | 4 |
| | NEW | | | | | | | | | | | | | | 49x12x44cm | 6 kg | 475.00 | 3299,90 | | |
| COLOUR MATCH KIT 2 1pc SUNMATCH 2 1 pc MATCHPEN 1pc MULTIMATCH 2 Comes in a custom made case | | 49.0142 | 5708997901427 | | | | | | | | | | | | | | | | | |

*MATCHPEN is tested according to the ANSI/NEMA FL-1 standard

Complete list of accessories, chargers, batteries and replacements parts:
scan QR code - or find it on www.scangrip.com



All prices are gross prices, ex works, VAT exclusive and effective from 1st September 2016. Prices are subject to change without notice. Nor is responsibility assumed for printing errors. Our GENERAL TERMS AND CONDITIONS apply for all business transacted with SCANGRIP. Valid terms and conditions are available for download from our website www.scangrip.com - go directly with the QR code.

Alle Preise sind unverbindliche Preisempfehlungen gültig ab 1. September 2016 und verstehen sich ab Werk ohne MwSt. Änderungen und Irrtümer vorbehalten. Bezüglich der Einzelheiten hinsichtlich Zahlung und Lieferung verweisen wir auf unsere AGBs, die von unserer Website www.scangrip.com heruntergeladen werden können. Oder QR-Code aufrufen.



Alle priser er vejledende salgspriser ekskl. moms og ab fabrik og er gældende fra 1. september 2016. Der tages forbehold for trykfejl og prisændringer. Vi henviser til vores GENERELLE SALGS- OG LEVERINGSBETINGELSER, der gælder for samtlige handelsaftaler indgået med SCANGRIP. Betingelserne er tilgængelige til download fra vores website www.scangrip.com - gå direkte med QR koden.



“We think new and we innovate
- yet we are founded on the tradition of good craftsmanship”

110 years

1906 - 2016



This year, SCANGRIP is celebrating its 110 years' anniversary. The company was established in 1906 as a small, local blacksmith, and has now been manufacturing high quality hand tools for the industrial and automotive sectors for 110 years.

ORIGINAL
SCANGRIP

SINCE 1906

// SCANGRIP is Europe's leading supplier of work lights for professionals and provides the strongest and most comprehensive range of work lights with the latest LED lighting technology available on the market.

SCANGRIP is innovation from Denmark: All products are designed and developed by SCANGRIP in Denmark, and the majority is protected by EU design patent.

SCANGRIP receives strong recognition in the marketplace for its product design, and the products are known for their high quality.

SCANGRIP strives for perfection, and is continuously optimizing and improving light output, battery capacity, design and ergonomics, durability, user-friendliness and functionality. The aim is to set new standards for professional work lights.

SCANGRIP was established in 1906 and has been manufacturing high quality hand tools for the industrial and automotive sectors for 110 years.

DUAL SYSTEM

SCANGRIP.COM

PRICELIST 2016