

Stainless steel casing and wetted parts. Seal less design. Shaft sealing by stainless steel bellows.

	Maximum Flow rate	Maximum differential pressure	Maximum temperature	Maximum speed	Maximum viscosity	Key markets (non restrictive)		
MicroC 125	0.125 m ³ /h	15 bar	110°C	1 000	2000 cSt	Chemical	Industrial	Hygienic
MicroC 250	0.25 m ³ /h	10 bar	110°C	1 000	2000 cSt	Chemical	Industrial	Hygienic
MicroC 500	0.5 m ³ /h	5 bar	110°C	1 000	2000 cSt	Chemical	Industrial	Hygienic
MicroC 800	0.8 m ³ /h	3 bar	110°C	1 000	2000 cSt	Chemical	Industrial	Hygienic
SLC11	1 m ³ /h	16 bar	110°C	1 000	10000 cSt	Chemical	Industrial	
SLS11	1 m ³ /h	16 bar	110°C	1 000	10000 cSt			Hygienic
SLC2i	2 m ³ /h	10 bar	110°C	1 000	10000 cSt	Chemical	Industrial	
SLS2i	2 m ³ /h	10 bar	110°C	1 000	10000 cSt			Hygienic
SLC3i	3 m ³ /h	6 bar	110°C	1 000	10000 cSt	Chemical	Industrial	
SLS3i	3 m ³ /h	6 bar	110°C	1 000	10000 cSt			Hygienic
SLC4i	4 m ³ /h	10 bar	100°C*	750	10000 cSt	Chemical	Industrial	
SLS4i	4 m ³ /h	10 bar	100°C	750	10000 cSt			Hygienic
SLC8i	8 m ³ /h	6 bar	100°C*	750	10000 cSt	Chemical	Industrial	
SLS8i	8 m ³ /h	6 bar	100°C	750	10000 cSt			Hygienic
SLC12i	12 m ³ /h	9 bar	100°C *	530	10000 cSt	Chemical	Industrial	
SLS12i	12 m ³ /h	9 bar	100°C	530	10000 cSt			Hygienic
SLC18i	18 m ³ /h	6 bar	100°C *	530	10000 cSt	Chemical	Industrial	
SLS18i	18 m ³ /h	6 bar	100°C	530	10000 cSt			Hygienic
SLC24i	24 m ³ /h	9 bar	100°C	460	10000 cSt	Chemical	Industrial	
SLS24i	24 m ³ /h	9 bar	100°C	460	10000 cSt			Hygienic
SLC36i	36 m ³ /h	6 bar	100°C	460	10000 cSt	Chemical	Industrial	
SLS36i	36 m ³ /h	6 bar	100°C	460	10000 cSt			Hygienic

* 160°C on HT version

For further technical information, please refer to individual pump specification sheet

IMPORTANT!

**This table is for general information and must not be used for pump selection.
Contact Mouvex or your local distributor for any pump selection.**

Z.I Plaine des Isles – 2 Rue des Caillottes F-89000 Auxerre France
www.mouvex.com

Non-contractual document. Mouvex may modify the products described in this document without prior notice.




Ductile iron casing and wetted parts. Seal less design. Shaft sealing by stainless steel bellows.

	Maximum Flow rate	Maximum differential pressure	Maximum temperature	Maximum speed	Maximum viscosity	Key markets (non restrictive)	
C4a	4 m3/h	9 bar	100°C	750	10000 cSt	Chemical	Industrial
C8a	8 m3/h	5 bar	100°C	750	10000 cSt	Chemical	Industrial
C12a	12 m3/h	9 bar	100°C	530	10000 cSt	Chemical	Industrial
C18a	18 m3/h	6 bar	100°C	530	10000 cSt	Chemical	Industrial



Stainless steel casing and wetted parts. Seal less design. Shaft sealing by FKM sleeve.

	Maximum Flow rate	Maximum differential pressure	Maximum temperature	Maximum speed	Maximum viscosity	Key markets (non restrictive)	
S2C	1.5 m3/h	6 bar	80°C	900	15000 cSt		Hygienic
S4C	4 m3/h	6 bar	80°C	750	15000 cSt		Hygienic
S6C	12 m3/h	6 bar	80°C	500	15000 cSt		Hygienic
S6C HP	6 m3/h	10 bar	80°C	500	15000 cSt		Hygienic

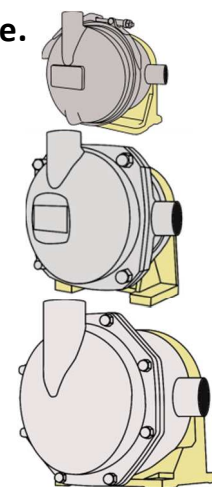

Ductile iron casing and wetted parts. Shaft sealing by mechanical seal.

	Maximum Flow rate	Maximum differential pressure	Maximum temperature	Maximum speed	Maximum viscosity	Key markets (non restrictive)		
A6	5.7 m3/h	10 bar	150°C	600	15000 cSt	Chemical	Industrial	Oil
A12	11.7 m3/h	10 bar	150°C	500	15000 cSt	Chemical	Industrial	Oil
A18	18 m3/h	10 bar	150°C	450	15000 cSt	Chemical	Industrial	Oil
A31	31 m3/h	10 bar	150°C	400	15000 cSt	Chemical	Industrial	Oil
A55	55 m3/h	10 bar	150°C	350	15000 cSt	Chemical	Industrial	Oil



For further technical information, please refer to individual pump specification sheet

IMPORTANT!

**This table is for general information and must not be used for pump selection.
Contact Mouvex or your local distributor for any pump selection.**