

# MOTOMAN MPL800 II

## Palletising with the MPL-series

The versatile and powerful 4-axis MOTOMAN MPL800 II robot provides high performance in box palletising, case palletising and many further logistical tasks for end-of-line or distribution center automation. Its extensive vertical reach of 3024 mm combined with 3159 mm horizontal reach enables high palletising loads. Internally

routed airlines and cables from base to end-of-arm tool maximize system reliability.


The MPL800 II is driven by the high-performance DX200 controller which is available with the optional Category 3 Functional Safety Unit (FSU), providing a variety of new safety functions.




### KEY BENEFITS

- Compact, flexible and powerful
- High acceleration and speed:  
Up to 1200 cycles/min., Suitable for box palletising
- High Payload: 800 kg
- Large motion range:
  - 2624 mm square reach (on pallet 1300 x 1300 mm)
  - 2363 mm stack height (on pallet 1600 x 1600 mm)
- Maximum reliability, internally routed airlines and cables
- Internally routed fieldbus connection to T-axis/tool
- Enhanced Safety Functions for DX200 Functional Safety Controller (FSU)
- Protection class IP54/67


# MOTOMAN MPL800 II

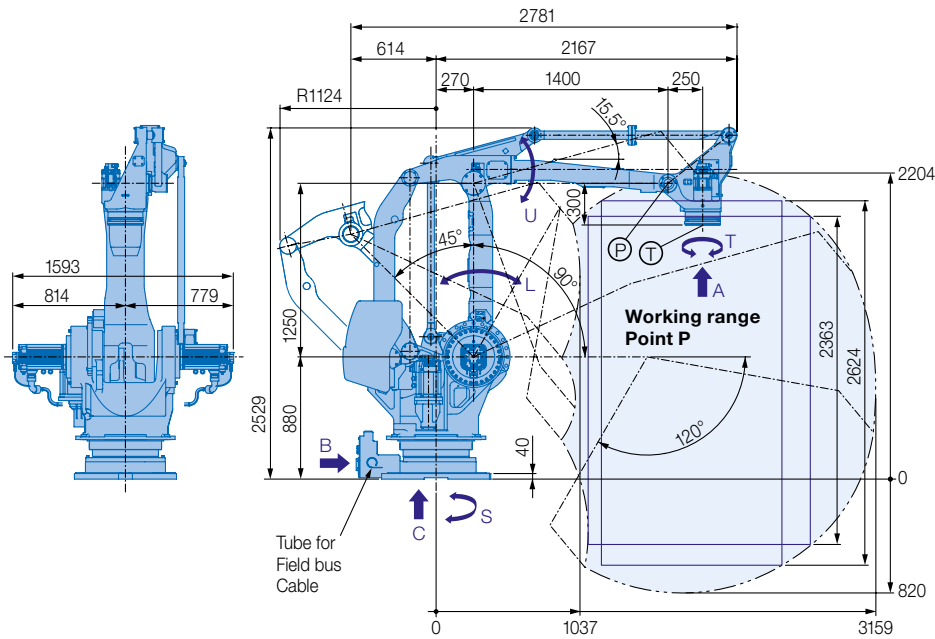


**View A**

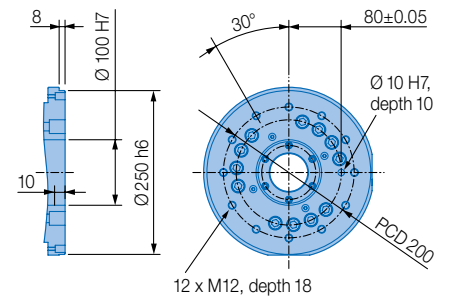

**View B**

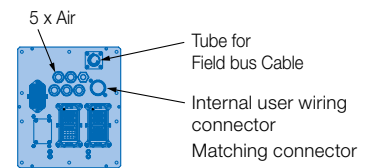


**View C**

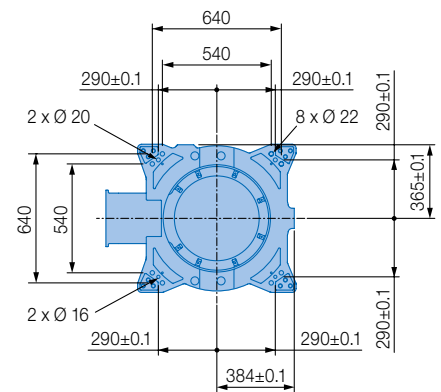


Mounting option: Floor

All dimensions in mm | Technical data may be subject to change without previous notice | Please request detailed drawings at [robotics@yaskawa.eu](mailto:robotics@yaskawa.eu) - YR-MPL0800-J00, A-12-2015, A-No. 177485

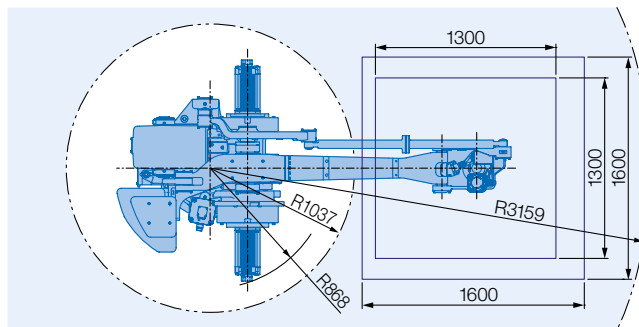

## Allowable wrist load

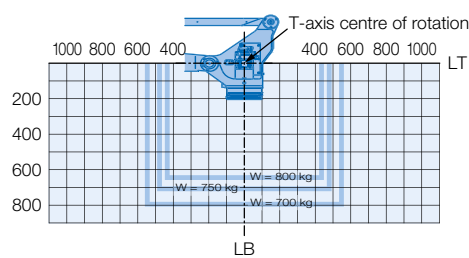

## Specifications MPL800 II

| Axes | Maximum motion range [°] | Maximum speed [°/sec.] | Allowable moment [Nm] | Allowable moment of inertia [kg · m <sup>2</sup> ] | Controlled axes             |          |
|------|--------------------------|------------------------|-----------------------|----------------------------------------------------|-----------------------------|----------|
|      |                          |                        |                       |                                                    | Max. payload [kg]           | 4        |
| S    | ±180                     | 65                     | —                     | —                                                  | Repeat. pos. accuracy [mm]  | ±0.5     |
| L    | +90/−45                  | 65                     | —                     | —                                                  | Max. working range R [mm]   | 3159     |
| U    | +15.5/−120               | 65                     | —                     | —                                                  | Temperature [°C]            | 0 to +45 |
| R    | —                        | —                      | —                     | —                                                  | Humidity [%]                | 20 – 80  |
| B    | —                        | —                      | —                     | —                                                  | Weight [kg]                 | 2550     |
| T    | ±360                     | 125                    | —                     | 550                                                | Power supply, average [KVA] | 8        |

**YASKAWA**

[robotics@yaskawa.eu](mailto:robotics@yaskawa.eu)  
[www.yaskawa.eu](http://www.yaskawa.eu)

## YASKAWA Headquarters

YASKAWA Europe GmbH · Robotics Division  
Yaskawastraße 1 · D-85391 Allershausen  
Tel. +49 (0) 8166/90-0 · Fax +49 (0) 8166/90-103

## YASKAWA academy and sales office Frankfurt

YASKAWA Europe GmbH · Robotics Division  
Hauptstraße 185 · D-65760 Eschborn  
Tel. +49 (0) 6196/77725-0 · Fax +49 (0) 6196/77725-39