

SynFlex Insulate



SynFlex Insulate


In the „Insulate“ product range, you can find all the insulation materials you need for your electrical insulation system.

The largest area comprises the insulating materials of the SynTherm® product group. Here, there are outstanding individual solutions such as laminates produced at the Blomberg and Shanghai locations, e.g. the SynTherm® APA or SynTherm® AHA, along with the aramid papers of the SynTherm® YT series. In addition, you can find films, pressboard and specialties such as the SynTherm® YT511 crepe tube.

The SynTape® range involves electrical adhesive tapes of diverse backing materials such as polyester, polyimide or PTFE combined with different adhesive types.

The SynTherm® and SynTape® ranges are also found in the SynPrep area. Here, customer-specific punchings are produced out of adhesive and non-adhesive insulation materials. These include traditional slot insulations and phase insulations, not to mention highly-specialized punched and formed parts, produced at our SynFlex locations in Schramberg and Denmark. An additional selection in the segment of „Insulates“ are the SynSleeve electrical insulation sleeveings. In addition to traditional F/GS and H/GS sleeveings, the highlight here is above all the F/GS fibreglass sleeving with an acrylate-based coating and complete UL approval. Comprising another major area are the impregnants and sealing compounds of the SynChem range. Special attention is placed on solvent-free paints and resins.



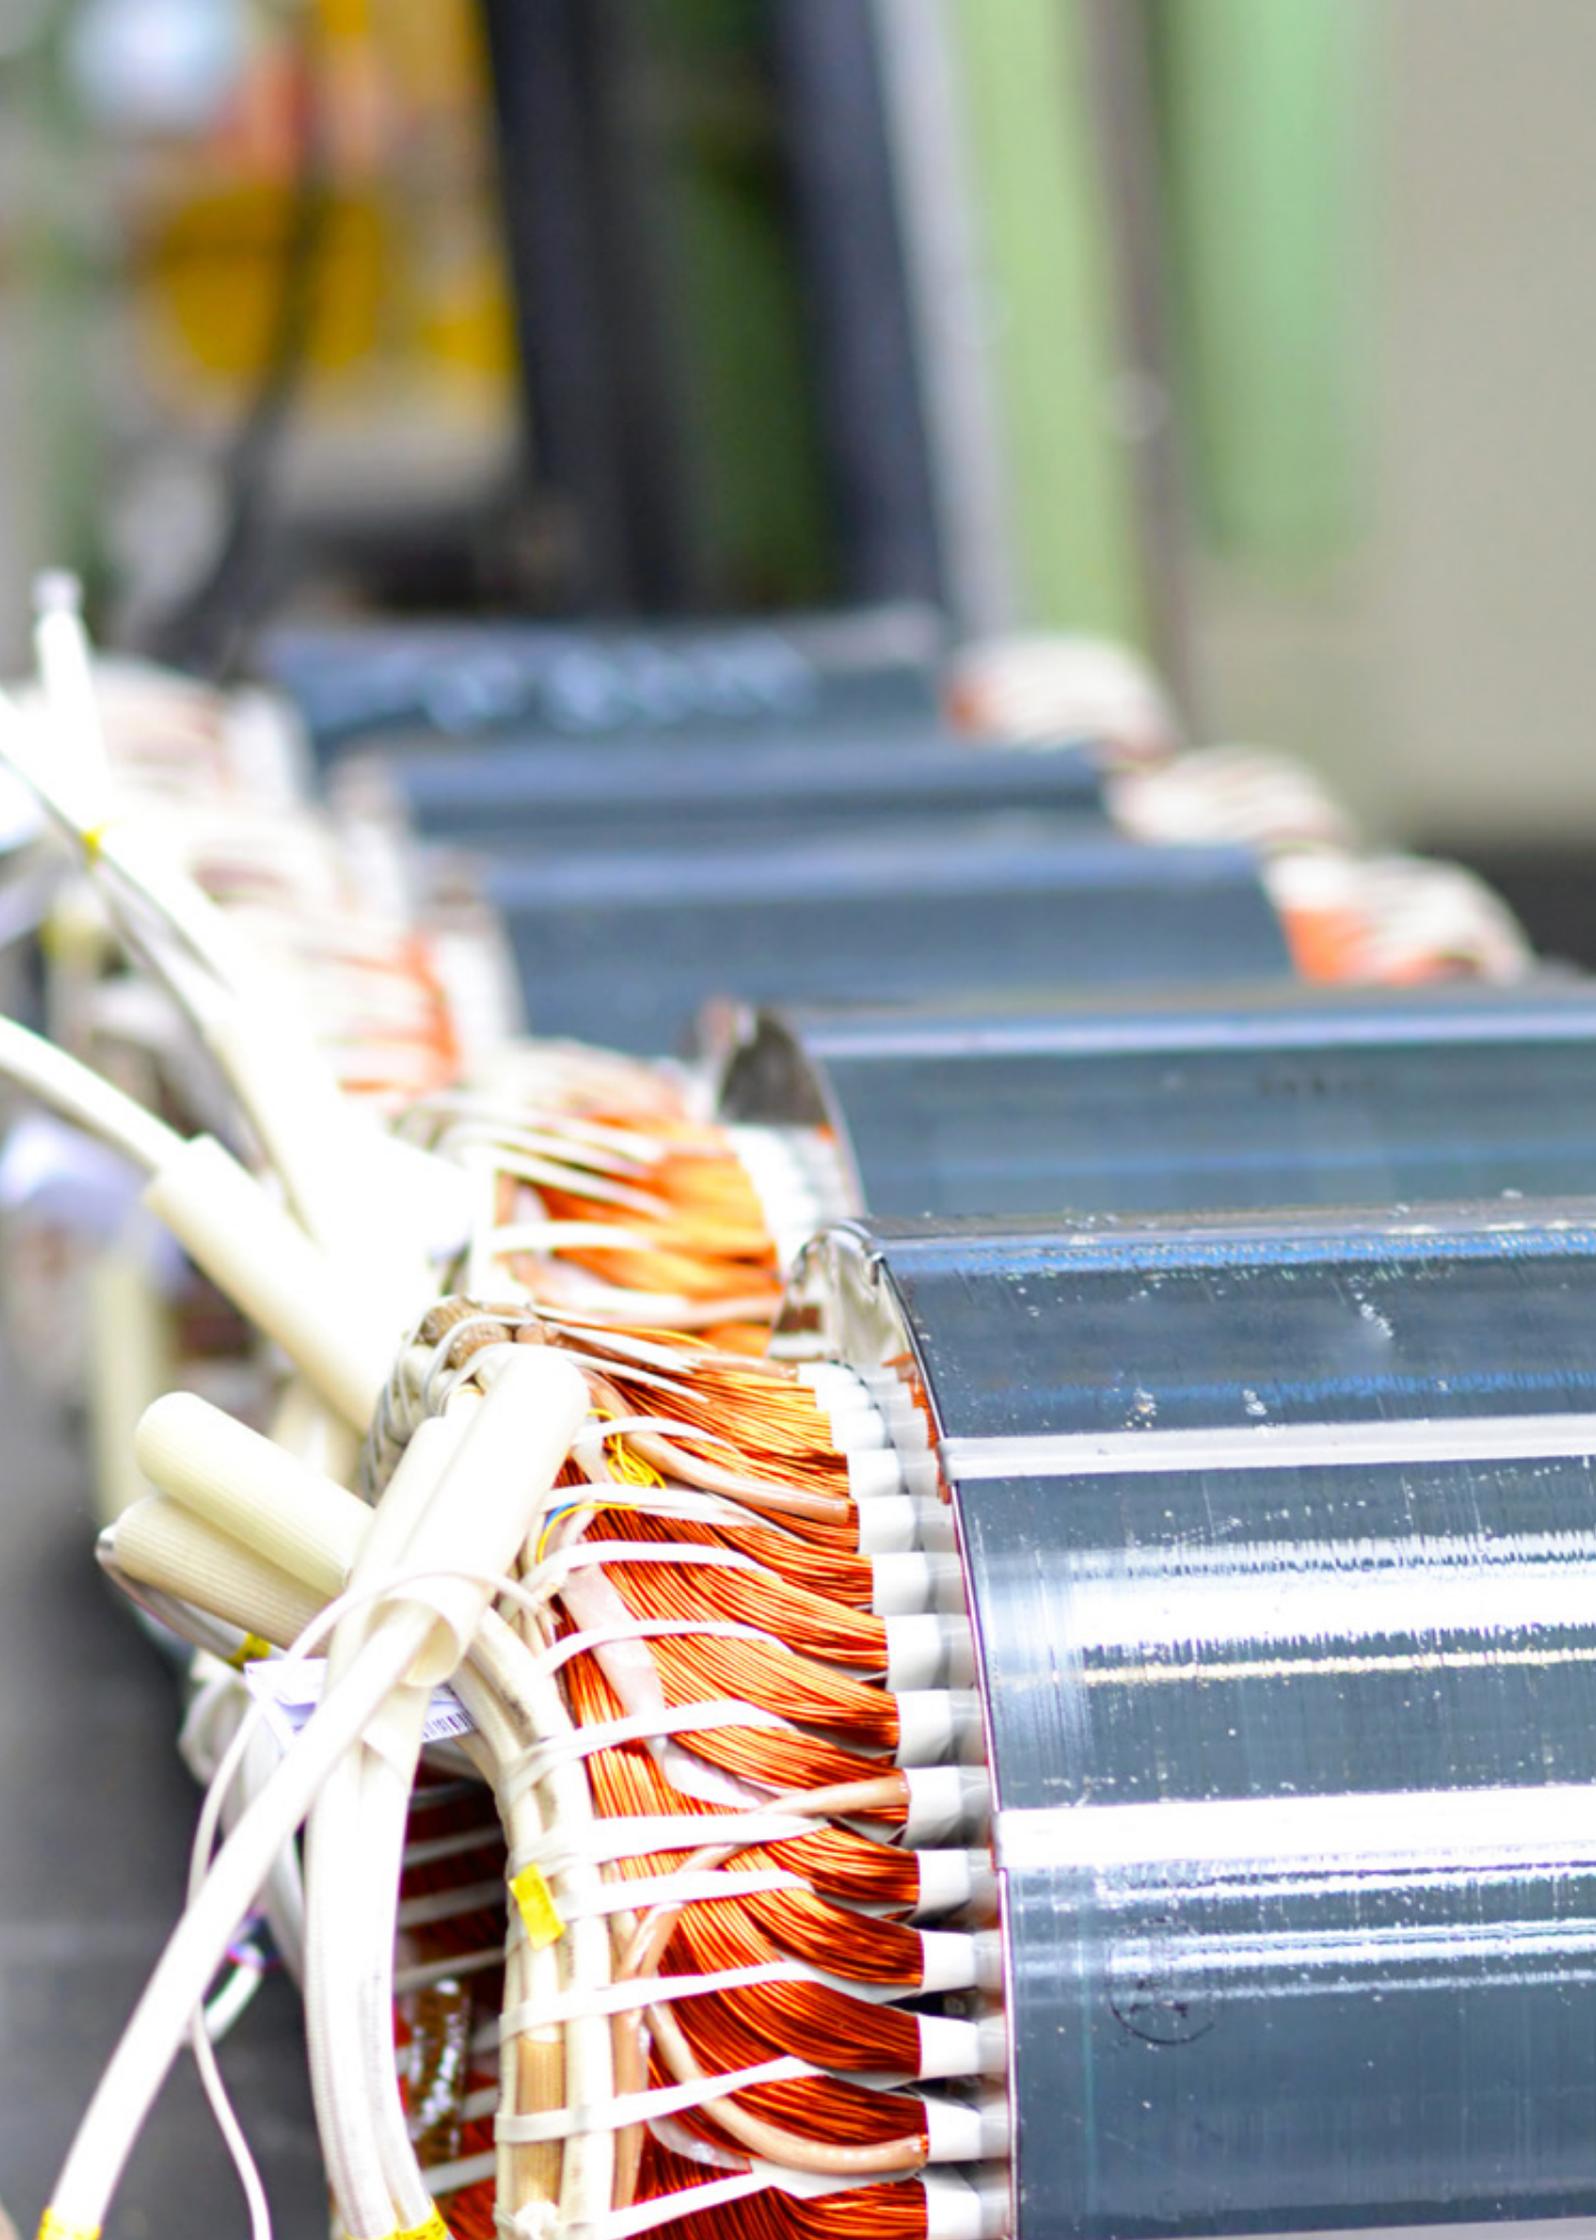

SynTherm® Insulating Materials

Insulating materials are used in electrotechnical and electronic applications for electrical insulation and mechanical protection. In addition to serving as anti-skid protection for machine processing, they increase operational safety.

SynFlex offers a wide range of materials and dimensions in the field of insulating materials, assembling the entire SynTherm® range on state-of-the-art cutting and punching machines, as well as laminating machines. The individually assembled insulating materials can be tailored to the customer's requirements.

The materials are available in thicknesses of 12 to 1,000 µm and, depending upon the thickness, in widths from 6 mm.

Within the SynTherm® product range, the most diverse materials are available, each adapted to the specific area of application. The range extends from mechanically heavy-duty pressboards up to high temperature-resistant SynTherm® YT aramid papers or polyimide films.

Synkraft®

pressboard and pressboard laminates

SynTherm®

electrical insulating films

SynTherm®

non-woven and non-woven laminates

SynTherm® YT

aramid paper and aramid laminates

SynTherm® H

polyimide films and polyimide laminates



SynKraft®

Pressboards and pressboard laminates

SynKraft® M

Thermal class A / 105 °C

- pressboard (unbleached sulphate pulb)

Properties

- high flexibility, tensile and compressive strength
- compatibility with dip and trickle resins
- good absorption of impregnants
- high pureness
- high mechanical strength

Applications

- layer insulation and final binding in transformers
- slot insulation in stators and rotors
- especially for electric motor construction

SynKraft® T

Thermal class A / 105 °C

- pressboard (unbleached sulphate pulb)

Properties

- high flexibility, tensile and compressive strength
- compatibility with dip and trickle resins
- good absorption of impregnants
- high pureness
- high mechanical strength

Applications

- layer insulation and final binding in transformers
- electrical insulating material in transformer and electric motor construction with little heat stress
- slot insulation for stators and rotors
- slot liner for electric motors
- especially for usage in transformer construction

SynKraft® E

Thermal class A / 105 °C

- pressboard (unbleached sulphate pulb)

Properties

- high flexibility, tensile and compressive strength
- compatibility with dip and trickle resins
- good absorption of impregnants
- high pureness
- high mechanical strength

Applications

- layer insulation and final binding in transformers
- electrical insulating material in transformer and electric motor construction with little heat stress

SynKraft® KP

Thermal class B / 130 °C

- 2-layer laminate made of:
 1. polyester film
 2. pressboard on rolls

Properties

- good absorption of impregnants
- improved electrical and mechanical properties of the pressboard layer within the compound
- high textile strength
- good sliding properties

Applications

- slot insulation in stators and rotors
- slot closure in stators and rotors
- interlayer and toplayer insulation in small transformer

SynKraft® VSP-H3

Thermal class B / 130 °C

- composite pressboard
- 3-layer laminate made of:
 1. pressboard
 2. polyester film
 3. pressboard

Properties

- high dielectric strength
- high textile strength
- good absorption of impregnants

Applications

- slot insulation and slot closure in stators and rotors

SynKraft® VSP-H2

Thermal class B / 130 °C

- composite pressboard
- 2-layer laminate made of:
 1. pressboard
 2. polyester film

Properties

- high dielectric strength
- high rupturing strength
- good absorption of impregnants

Applications

- slot insulation and liner in stators and rotors

SynTherm®

Electrical insulating films

Detailed information can be found in our technical data sheets.
 Mylar® is a registered trade mark of DuPont Teijin Films U.S., Ltd. Partnership
 Melinex® is a registered trade mark of DuPont Teijin Films U.S., Ltd. Partnership
 Teonex® is a registered trade mark of Teijin DuPont Films Japan Ltd.
 DuPont™ is a trade mark of E.I. Du Pont de Nemours and Company

SynTherm® P

Thermal class B / 130 °C

- PET film (polyethylene terephthalate)

Properties

- good electrical insulation
- high tensile strength
- good thermal properties
- resistant to standard solvents

Applications

- interlayer and toplayer insulation for transformers, chokes and relay coils
- slot- and phase insulation

Mylar® A

Thermal class B / 130 °C

- PET film (polyethylene terephthalate)

Properties

- good electrical insulation
- high tensile and rupturing strength
- good thermal properties
- resistant to standard solvents

Applications

- interlayer and toplayer insulation for transformers, chokes and relay coils
- slot and phase insulation

SynTherm® DDF

Thermal class B / 130 °C

- PET film (polyethylene terephthalate)
- coated with thermosetting varnish (diamond dotted)

Properties

- bonding of winding layers without impairment of adjacent components
- good electrical insulation
- good thermal properties

Applications

- special applications, e.g. in gas-cooled transformers

Melinex® 238

Thermal class B / 130 °C

- PET film (polyethylene terephthalate)

Properties

- good electrical insulation
- high tensile and rupturing strength
- good thermal properties
- resistant to standard solvents
- good compatibility to refrigerants due to small oligomer concentration

Applications

- interlayer and toplayer insulation for transformers, chokes and relay coils
- slot and phase insulation

Melinex® 401

Thermal class B / 130 °C

- crystal clear PET film (polyethylene terephthalate)

Properties

- very smooth on one side
- crystal clear
- food compatibility

Applications

- packaging industry
- punched and shaped parts

Teonex® Q51

Thermal class F / 155 °C

- PEN film (biaxially oriented polyethylene naphthalate)

Properties

- high dielectric strength
- good thermal conductivity
- good mechanical properties
- good resistance to solvents

Applications

- for thin insulations exposed to increased thermal load

SynTherm®

Aramid papers

In addition to single-layer insulating materials, SynFlex also offers a wide range of multi-layer laminates, most of which are produced at the Blomberg plant. This enables us to guarantee a superior level of quality in this area.

By means of fully-automatic order processing and an online link to the IT-supported production planning system, we deliver individually assembled tapes, punched and shaped parts, feathered and cut-to-length material in the shortest lead times - upon request within 48 hours.

Particularly attractive are individual multi-layer laminates, considering SynFlex's proprietary UL electrical insulation systems. By utilizing innovative insulating materials, technically demanding parameters with minimal construction heights can be achieved.

By integrating the high-quality SynTherm® YT aramid papers and the SynTherm® H polyimide film in our in-house production process, SynFlex is able to meet customer-specific requirements in addition to the defined standard laminates. As each application is special, our experienced product managers analyze the requirements in cooperation with the customer and determine the suitable product for each planned project. For relevant material requirements, SynTherm® multi-layer laminates can be developed and produced especially for the customer project. The 2- and 3-layer laminates can be customized not only in terms of the material combination but also with respect to the structure.

Maximum material purity

SynTherm® YT aramid papers consist of 100 % discrete meta-aramid.

Excellent starting material

Through many years of collaboration with our partner Yantai Metastar, we can guarantee that our SynTherm® YT aramid papers consist only of the best raw materials from Yantai Advanced Materials Co. Ltd.

Aramid paper with low halogen content

At < 400 ppm, SynTherm® YT aramid papers contain a very low level of halogen.

Already RoHS 2.0 compatible

Extensive laboratory investigations have shown that SynTherm® YT aramid papers already meet the strict requirements of RoHS 2.0. Furthermore, SynTherm® aramid papers contain no traces of PAA, PFOA, TBB-A, HBCDO, DMF or PVC.

Aramid papers to REACH standards

SynTherm® YT aramid papers meet all of the REACH requirements and SVHC criteria. The DMAC present in many aramid papers in SynTherm® YT aramid papers is at such a low level that it is well below the reporting limit, meaning that there is no risk in handling this material. SynTherm® YT – the green aramid paper.

Top marks for rail applications

In an electrical insulating system constructed in a way typical for its application, SynTherm® YT510 meets the demanding rail requirements R22, R23 and R24 in hazard class HL3 and can be used unrestrictedly both indoors and out.

High thermal stability

SynTherm® YT is UL-licensed with a RTI of 210 °C.

High flame retardance

Under tests to the standard UL94, SynTherm® YT aramid papers meet fire classifications VTM-0 and V-0. The LOI value is over 28 %.

Excellent electrical insulation

SynTherm® YT aramid papers are winners with their outstanding thermal and electrical properties. The extremely low moisture values of the material allow extremely good electrical properties, even in the case of long-term high-temperature applications. Due to a very low dielectric constant, the electromagnetic field is distributed very evenly. SynTherm® YT aramid papers can be used without restriction in indoor and outdoor areas.

Good mechanical properties

Due to their composition of discrete aramid fibres, SynTherm® YT aramid papers have an extremely high mechanical loading capacity. The material is characterised by high density, a smooth surface and high tensile load and tear strength.

High chemical resistance

SynTherm® YT aramid papers are compatible with all classes of standard resins, varnishes, adhesives, transformer fluids, lubricating oils and coolants. Standard solvents may cause slight, reversible swellings.

Impregnability and dielectric material properties

SynTherm® YT aramid papers have excellent impregnant absorption. Due to its discrete and open surface composition, impregnants can penetrate the material much better than other aramid papers.

The breakdown voltage of the materials can be increased enormously by impregnation.

Product	Technology	Application area	Special properties
SynTherm® YT510	<ul style="list-style-type: none"> high material density 100 % aramid fibres (meta-aramid) 	<ul style="list-style-type: none"> as a discrete material cable routing SynTherm® YT510 DDP 	<ul style="list-style-type: none"> UL certification (RTI 210 °C) rail standard EN45545-2:2013 R22, R23, R24
SynTherm® YT511	<ul style="list-style-type: none"> low material density 100 % aramid fibres (meta-aramid) 	<ul style="list-style-type: none"> SynTherm® AH511, AHA511 SynTherm® APA/130-511 	<ul style="list-style-type: none"> UL certification (RTI 210 °C) open-pore surface very good impregnating qualities
SynTherm® YT564	<ul style="list-style-type: none"> laminating quality with high density 	<ul style="list-style-type: none"> SynTherm® AP/40, APA/40 SynTherm® AP/50, APA/50 SynTherm® AP/80, APA/80 SynTherm® AH, AHA 	<ul style="list-style-type: none"> UL certification (RTI 210 °C) very good bonding with other insulating materials carrier materials for SynTape® YT
SynTherm® YT56	<ul style="list-style-type: none"> average density 	<ul style="list-style-type: none"> in transformer construction SynTherm® YT56 DDP 	<ul style="list-style-type: none"> UL certification (RTI 210 °C)
SynTherm® YT593		<ul style="list-style-type: none"> cable routing spacers 	<ul style="list-style-type: none"> good impregnation properties
SynTherm® YT Krepp		<ul style="list-style-type: none"> in transformer construction 	<ul style="list-style-type: none"> high mechanical resistance high elongation and flexibility
SynTape® YT		<ul style="list-style-type: none"> all typical adhesive-tape applications 	<ul style="list-style-type: none"> good impregnation properties

SynTherm®

Non-woven laminates

SynTherm® DMD

Thermal class F / 155 °C

- 3-layer laminate made of:
 1. polyester non-woven (impregnated)
 2. polyester film
 3. polyester non-woven (impregnated)

Properties

- high dielectric strength
- good mechanical stability
- good machine processability due to smooth surface

Applications

- slot insulation, wedges, phase insulation in motors and generators
- core-, layer- and final insulation in transformers

SynTherm® DM

Thermal class F / 155 °C

- 2-layer laminate made of:
 1. polyester non-woven (impregnated)
 2. polyester film

Properties

- high dielectric strength
- good mechanical stability
- good machine processability due to smooth surface

Applications

- slot insulation, wedges, phase insulation in motors and generators
- core-, layer- and final insulation in transformers

SynTherm® VPV

Thermal class B / 130 °C
(with UL EIS up to F / 155 °C)

- 3-layer laminate made of:
 1. polyester non-woven
 2. polyester film
 3. polyester non-woven

Properties

- high dielectric strength
- temperature class F possible through impregnation
- good absorbency for impregnants
- good chemical resistance

Applications

- slot and interphase insulation, slot covering, interlayer insulation and final insulation

SynTherm® VP

Thermal class B / 130 °C

- 2-layer laminate made of:
 1. polyester non-woven
 2. polyester film

Properties

- high dielectric strength
- good absorbency for impregnants
- good chemical resistance

Applications

- slot- or phase insulation, slot closure, layer insulation and final insulation

SynTherm®

Polyimide films and polyimide laminates

SynTherm® H

Thermal class H / 180 °C
(UL RT/ 230 °C)

- polyimide film

Properties

- high dielectric strength
- short-term resistant to 400 °C
- good chemical resistance

Applications

- insulation of windings, winding wires
- slot insulation in motors
- insulation of transformers and capacitors

Other standards

- polyimide film with low discharge resistant surface
- polyimide film with thermosetting fluoropolymer coating on one side

SynTherm® AHA

Thermal class N / 200 °C

- 3-layer laminate made of:
 1. aramid paper
 2. polyimide film
 3. aramid paper

Properties

- high dielectric strength
- good mechanical and thermal properties of the aramid paper
- good thermal properties of the polyimide film

Applications

- slot insulation, phase insulation and wedges in motors with high utilization level
- core-, layer- and final insulation in transformers exposed to high thermal and mechanical load

SynTherm® HP

Thermal class H / 180 °C

- 2-layer laminate made of:
 1. SynTherm® H
 2. PET-film

Properties

- high dielectric strength
- mechanical protection and stability due to PET film

Applications

- Cost effective substitute product for polyimide films / laminates currently in use as special core-, layer- and final insulation

SynTherm® AH

Thermal class N / 200 °C

- 2-layer laminate made of:
 1. aramid paper
 2. polyimide film

Properties

- high dielectric strength
- good mechanical and thermal properties of the aramid paper
- good thermal properties of the polyimide film

Applications

- slot insulation, phase insulation and wedges in motors with high utilization level
- core-, layer- and final insulation in transformers exposed to high thermal and mechanical load

SynTherm® YT

Aramid paper and aramid laminates

SynTherm® YT510

Thermal class H / 180 °C

- aramid paper
- calendered aromatic polyamide-fibrine-flock-composition

Properties

- high short-term dielectric strength
- compatible with all classes of standard resins, varnishes, adhesives and transformer liquids, lubricants and cooling agents

Applications

- alternating and direct current motors
- generators, liquid- and dry-type transformers, chokes, even when exposed to beta and gamma radiation

Other standards

- SynTherm® YT511 – uncalendered

SynTherm® YT56

Thermal class H / 180 °C

- aramid paper
- calendered aromatic polyamide-fibrine-flock-composition

Properties

- high short-term dielectric strength
- compatible with all classes of standard resins, varnishes, adhesives, and transformer liquids, lubricants and cooling agents

Applications

- alternating and direct current motors
- generators, liquid- and dry-type transformers, chokes, even when exposed to beta and gamma radiation

Other standards

- also available as non-calendered

SynTherm® YT593

Thermal class H / 180 °C

- aramid pressboard average density
- 100 % pure meta aramid

Properties

- very good absorption of liquids
- high temperature resistance
- good mechanical properties

Applications

- spacer in liquid-based systems

SynTherm® YT Crepe

Thermal class H / 180 °C

- aramid paper
- calendered aromatic polyamide-fibrine-flock-composition

Properties

- high dielectric strength
- good mechanical stability
- good thermal properties of the aramid paper

Applications

- winding applications with special requirements referring to elongation and flexibility.

SynTherm® APA

Thermal class H / 180 °C

- 3-layer laminate made of:
 1. aramid paper
 2. polyester film
 3. aramid paper

Properties

- high dielectric strength
- good mechanical stability
- good thermal properties of the aramid paper

Applications

- slot insulation, wedges, phase insulation
- in motors and generators
- core-, layer- and final insulation in transformers

SynTherm® AP

Thermal class F / 155 °C

- 2-layer laminate made of:
 1. aramid paper
 2. polyester film

Properties

- high dielectric strength
- good mechanical stability
- good thermal properties of the aramid paper

Applications

- slot insulation, wedges, phase insulation in motors and generators
- core-, layer- and final insulation in transformers



SynTape®

Electrical Adhesive Tapes

Variable use

- for electrical insulation
- for mechanical protection
- for fixing
- for masking
- for labelling
- for bundling
- for marking

Storage

SynTape® adhesive tapes should always be stored in a cool and dry place at approx. 20 °C and 50-60 % relative humidity.

Insulating material classification

The SynTape® electrical adhesive tape from SynFlex can be allocated to specific insulating material classes. The respective letter in the adhesive tape name states the highest permanent temperature at which the adhesive tapes can be used. The classification is realised by determining the limit temperature.

Cutting tolerance

Standard tolerance of SynTape® adhesive tapes is ± 0.3 mm. Smaller tolerances are available on request.

Resins and varnishes

Due to the variety of impregnants, it is impossible to make general statements. Especially impregnants containing styrene can be problematic. Please carry out autonomous testing. We will gladly provide you with samples. When using impregnants, it is recommended to apply adhesive tapes with acrylate adhesive.

Technical data sheets

Our technical data sheets contain detailed technical information. Download the data sheets at www.synflex.com or request them from us.

Processing instructions

The surface of components to which tapes are to be applied should be dry, free of grease and clean. The adhesive surface of the tapes should not be soiled when being applied.

Favourable processing temperatures are room temperatures (approx. 18 - 24 °C). The initial bonding strength is poor at lower temperatures.

The adhesive force depends on the contact developed by the adhesive on the surface.

Higher contact pressure will press the adhesive into the surface and increases the adhesive force considerably.

Note

Our technical data information is based on the information provided by our suppliers. This information is intended for specialists who should use it at their own discretion and at their own risk. Unfortunately, we cannot guarantee favourable results and shall not be responsible or liable for specified details or results based on this information.

Therefore, we recommend that you carry out test on the products which we supply to ensure their suitability for the intended processes and applications.

We guarantee the perfect quality of our products in accordance with our general sales terms and delivery conditions.



Polyester

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V_{eff}	Class
SynTape® B 107/ P.31		clear. yellow. beige	polyester	0.023	0.060	K	40.00	90	4.20	4500	B 130 °C
SynTape® B 108/ P.315		yellow. black	polyester	0.050	0.087	K	70.00	90	4.50	9000	B 130 °C
SynTape® B/ TA.2560	-	5 colours*	polyester	0.025	0.060	A	35.00	80	3.50	4500	B 130 °C
SynTape® B 113/ P.34		6 colours**	polyester	0.023	0.060	A	40.00	90	4.00	4500	B 130 °C
NR. 1350F-1 from 3M™		yellow, white	polyester	0.025	0.063	A	44.00	100	3.30	5500	B 130 °C
NR. 1350F-2 from 3M™		yellow, white	polyester	0.050	0.088	A	88.00	110	3.30	7000	B 130 °C
NR. 5 from 3M™		translucent	polyester	0.025	0.063	A	44.00	100	3.80	5500	B 130 °C
SynTape® B/ P.355	-	yellow, clear	polyester	0.050	0.085	A	70.00	90	4.00	9000	B 130 °C
SynTape® B/ P.40	-	green	polyester	0.023	0.060	S	40.00	90	3.00	4500	B 130 °C
SynTape® B/ P.42	-	red	polyester	0.023	0.100	S	40.00	90	2.00	4500	B 130 °C
SynTape® B/ P.47	-	clear	polyester	0.075	0.110	S	95.00	65	3.50	11000	B 130 °C

* clear, yellow, green, blue, black

** clear, yellow, green, blue, black, red

Acetate fabric

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V_{eff}	Class
SynTape® A/ 560/ CA.100	-	black, white	acetate fabric	0.16	0.21	K	55	10	3	2000	A 105 °C
NR. 28 from 3M™	-	white	acetate fabric	-	0.203	K	70	10	4.4	2000	A 105 °C

Glass fibre

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V_{eff}	Class
SynTape® B 616/ GL.95		white, black	glass fibre	0.12	0.165	K	280	5	4	2500	B 130 °C
NR. 27 from 3M™		white	glass fibre	-	0.18	K	250	5	3	3000	B 130 °C
SynTape® F 562/ GL.94		white	glass fibre	0.12	0.16	A	280	5	4	2500	F 155 °C
NR. 79 from 3M™		white	glass fibre	0.127	0.177	A	262	5	3.3	3000	F 155 °C
SynTape® H/ GL-1350G	-	white	glass fibre	0.125	0.175	S	280	5	3.6	2500	H 180 °C
SynTape® H 618/ GL.96		white	glass fibre	0.12	0.165	S	280	5	3.5	2500	H 180 °C
SynTape® H/ GL.99		white	glass fibre	0.12	0.165	S	280	5	2.7	2000	H 180 °C
NR. 69 from 3M™		white	glass fibre	0.15	0.18	S	180	6	2.5	2500	H 180 °C

Polyester glass filament reinforced

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V_{eff}	Class
SynTape® B/ PR.25		white	polyester*	0.085	0.13	K	200	5	3.2	5000	B 130 °C
SynTape® B/ PR.30		white	polyester*	0.1	0.17	K	450	5	4.5	5000	B 130 °C
SynTape® F/ PS.25		translucent	polyester*	0.085	0.155	A	200	5	5.5	5000	F 155 °C
SynTape® F/ PS.30		translucent	polyester*	0.1	0.17	A	450	5	3	5000	F 155 °C

* Polyester glass filament reinforced

Polyester glass fibre reinforced

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V_{eff}	Class
SynTape® F/ PVX.30		translucent	polyester/ glass fibre	0.13	0.17	A	380	4	5	5000	F 155 °C

Double-sided adhesive tape

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V_{eff}	Class
SynTape® A16-320	-	yellow	non-woven	-	0.1	A	-	-	6.4	-	-40 to +100 °C
SynTape® B/ P.231	-	yellow	polyester	0.023	0.1	K	40	90	4.2	4500	B 130 °C
NR. 75 from 3M™		yellow	polyester	0.025	0.096	K	44	100	4.9	6500	B 130 °C

Laminates

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V_{eff}	Class
SynTape® B/ PT.25		white	polyester/ polyester non-woven	0.09	0.14	K	25	15	5	4800	B 130 °C
SynTape® B/ PT.45		white	polyester/ polyester non-woven	0.18	0.235	K	45	20	5	5000	B 130 °C
SynTape® B 354/ R.180		cream	polyester/ paper	0.16	0.23	K	70	20	4.5	8000	B 130 °C
SynTape® F/ PX.50		cream	aramid paper/ polyester	0.09	0.13	K	65	10	5.5	7000	F 155 °C
SynTape® F/ PT.20-20		translucent	polyester/ polyester non-woven	0.098	0.14	A	30	45	7	4800	F 155 °C
SynTape® F 131/ PT.40		translucent	polyester/ polyester non-woven	0.16	0.2	A	45	20	4.5	5000	F 155 °C
SynTape® F 356/ PX.50AC	-	cream	aramid paper/ polyester	0.09	0.14	A	65	10	4.5	5500	F 155 °C
SynTape® F/ PX.11/18/23	-	cream	aramid paper/ polyester	0.225	0.265	A	40	100	4	6000	F 155 °C

Aramid

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V_{eff}	Class
SynTape® F/ X.50		cream	aramid paper	0.05	0.09	A	35	5	4	2500	F 155 °C
SynTape® F/ X.80	-	cream	aramid paper	0.08	0.12	A	60	5	4	3800	F 155 °C

PEN

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V_{eff}	Class
SynTape® F/ K.30AC		translucent	PEN	0.025	0.06	A	40	50	4	5300	F 155 °C
SynTape® F/ K.30		blue	PEN	0.025	0.06	S	32	50	3	6000	H 180 °C

Polyimide

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V _{eff}	Class
SynTape® F 118/ H.20AC	-	brown-translucent	polyimide	0.025	0.06	A	45	35	3.5	6000	F 155 °C
SynTape® F/ H.50AC	-	brown-translucent	polyimide	0.05	0.092	A	75	35	3.8	10000	F 155 °C
SynTape® H/ 301	-	brown-translucent	polyimide	0.03	0.06	S	35	50	1.6	5500	H 180 °C
SynTape® H/ 560	-	brown-translucent	polyimide	0.025	0.06	S	33	20	3	5500	H 180 °C
NR. 92 from 3M™		brown-translucent	polyimide	0.025	0.075	S	50	55	2.5	7000	H 180 °C
SynTape® H 428/ H.20		brown-translucent	polyimide	0.025	0.06	S	41	40	2.7	6000	H 180 °C
SynTape® H/ H.50		brown-translucent	polyimide	0.05	0.085	S	75	35	2.5	11000	H 180 °C

Polyester non-woven line coated

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/25 mm	Dielectric strength V _{eff}	Class
SynTape® B.564		white	polyester non-woven	0.055	0.11 to 0.12	K	32	15	12.50	500 V*	B 130 °C

* unimpregnated

** Isolierstoffklasse und Durchschlagsspannung richten sich nach dem von Ihnen eingesetzten Imprägniermittel

Specialties

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V _{eff}	Class
SynTape® AL.050		aluminium	aluminium	0.05	0.09	A	38	4	5	-	-40 to +150 °C
SynTape® AS.050		aluminium	aluminium	0.05	0.09	A	38	4	5	-	-50 to +150 °C
SynTape® AL.080	-	aluminium	aluminium	0.08	0.115	A	65	5	5	-	-40 to +150 °C
SynTape® AS.080	-	aluminium	aluminium	0.08	0.12	A	60	5	6	-	-40 to +150 °C
SynTape® AR.050	-	aluminium	aluminium	0.05	0.09	A	45	4	5	-	-40 to +150 °C
SynTape® AR.080	-	aluminium	aluminium	0.08	0.12	A	65	5	5	-	-40 to +150 °C
SynTape® B/ PM.099	-	aluminium	polyester alum. matelised	0.023	0.06	A	40	90	3.5	-	B 130 °C
SynTape® 1695	-	copper	polyester alum. matelised	0.023	0.045	A	50	6	2.6	-	-15 to +130 °C
SynTape® SCUT 36	-	copper	copper foil	0.036	0.08	A	44	-	4.4	-	-40 to +120 °C
NR. 1181 from 3M™		copper	copper foil	0.04	0.07	A	44	-	3.8	-	-
NR. 1194 from 3M™		copper	copper foil	0.04	0.07	A	50	6	4	-	-
SynTape® TF.50	-	brown	PTFE	0.05	0.1	S	25	100	3	9000	H 180 °C
SynTape® TFE.130	-	grey	PTFE	0.13	0.18	S	38	320	3	11500	H 180 °C

Masking tape for circuit boards

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/10 mm	Dielectric strength V_{eff}	Class
SynTape® B/ P.40	-	green	polyester	0.023	0.06	S	40	90	3	4500	B 130 °C
SynTape® B/ P.42	-	red	polyester	0.023	0.1	S	40	90	2	4500	B 130 °C
SynTape® B/ P.47	-	clear	polyester	0.075	0.11	S	95	65	3.5	11000	B 130 °C
SynTape® H/ 301	-	brown-translucent	polyimide	0.03	0.06	S	35	50	1.6	5500	H 180 °C
SynTape® H/ 560	-	brown-translucent	polyimide	0.025	0.06	S	33	20	3	-	H 180 °C
NR. 92 from 3M™		brown-translucent	polyimide	0.025	0.075	S	50	55	2.5	7000	H 180 °C
SynTape® H 428/ H.20		brown-translucent	polyimide	0.025	0.06	S	41	40	2.7	6000	H 180 °C

Paper

Product	UL Spec.	Colour	Backing	Backing thickness mm	Total thickness mm	Adhesive	Tear resistance N/10 mm	Elongation %	Adhesive-ness on steel N/25 mm	Dielectric strength V_{eff}	Class
SynTape® CS.60	-	cream	light crepe paper	0.095	0.13	K	60	10	3	800	Y 90 °C
SynTape® A/ CP.50	-	cream	light crepe insulating paper	0.11	0.15	K	43	12	2	800	A 105 °C

Adhesives

A= acrylate adhesive
K= rubber adhesive
S= silicone adhesive

Acrylate adhesive

Acrylate adhesives are temperature and ageing resistant. Furthermore they are characterised by their improved resistance to impregnants.

Rubber adhesive

Rubber adhesives have a high initial adhesive strength. Furthermore they are easy to process.

Silicone adhesive

Silicone adhesives are characterised by their high temperature and ageing resistance. They are suitable for bonding on non-adhesive surfaces and can be removed without residue.

Thermal class

Y	90 °C
A	105 °C
B	130 °C
F	150 °C
H	180 °C


SynSleeve

Electrical Insulating Sleeving

In electrical and electronic applications, sleeveings are used as additional mechanical protection and to improve the electrical insulation of transformers, motors and equipment.

SynFlex supplies its sleeves in rings, on spools, in drums or as sections - individually according to customer requirements. From an inner diameter of 0.5 mm, they are available in standard colors and dimensions and can be delivered within 24 hours. Upon request, they are also available in many other colors.

Our range includes polyurethane, acrylate or silicone rubber sleeveings, as well as fibre glass sleeveings. They are available with or without UL certification and in thermal classes A to C.

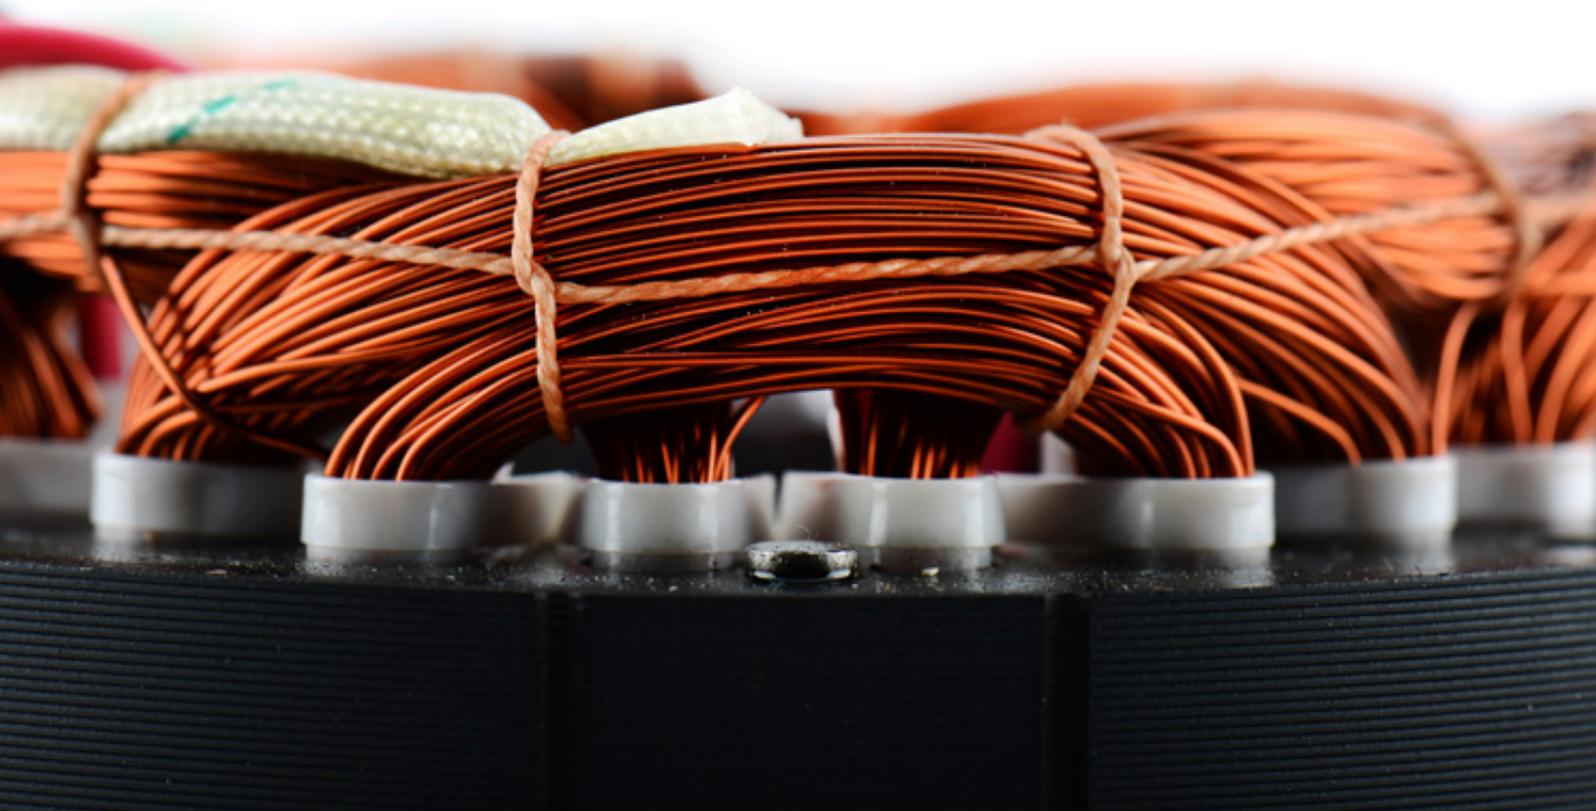

Fibre glass sleeveings or non-woven sleeveings suitable for use as temperature resistant protective insulation of conductors in electrical machines, transformers and series application in electrical engineering and electronics.

F/GS AC UL

Thermal class F / 155°C

- coating on acrylic basis
- full UL approval UZFT2, UZFT8
- E 468446, grade 7 kV
- high UV stability
- high resistance to solvents

F/GS (UL)

Thermal class F / 155°C

- coating on PUR basis
- with or without UL approval UZKXZ
- E 363755
- flame retardant

H/GS (UL)

Thermal class H / 180°C

- Coating on silicone basis
- with or without UL approval UZIQ2
- flame retardant VW-1

Silicone sleeving

Thermal class H / 180°C

- non-woven
- extruded sleeving on silicone basis
- highly flexible



SynChem

Resins & Varnishes

From selected suppliers – for the sake of employees and the environment

In the winding industry, impregnating agents are used to solidify the windings and protect them from external influences such as moisture, dust or chemicals. This increases the service life of the products, and the windings can withstand the forces generated during operation. In addition, the impregnating agents are used for electrical insulation and increase thermal conductivity.

For the protection of the environment and employees, SynFlex uses extremely compatible impregnants. We offer solvent-free, low-emission and environmentally-friendly impregnating agents expressly for these purposes: Impregnating, trickling and casting resins, electric UV resins, varnishes and sprays, as well as impregnating varnishes with water as a solvent – low odor for a pleasant working environment.

The range also includes: sealing compounds, electro pastes, adhesive pastes and other miscellaneous additives.



Voltatex® 4200 Series

Thermal class H / 180 °C

- low-emission 1-component impregnating resin
- based on polyesterimide
- UL approved E 101752 (M)
- high temperature resistance
- minimal workplace pollution
- can be processed using impregnating, dip, VPI and current-UV procedures
- shelf life: 6 months

Voltatex® 4200

- setting for highly-stressed electric motors, stators and particularly rotors
- freon 12-resistant

Voltatex® 4230

- pseudoplastic setting for improved resin absorption and thickness of impregnating coating for transformers

Voltatex® 4250

- current-UV impregnating resin for stators

Voltatex® 4204

- electric motors, generators, including large machines and transformers
- particularly for Mica-insulated litz cables
- for the medium- and high voltage range

Damisol 3630 Series

Thermal class H / 180 °C

- Low-emission 1-component impregnating resins based on polyesterimide
- UL approved E 98511 (VOC free)
- no solvents
- no MAC value
- shelf life: 12 months

Damisol 3630 VPI 01

- pseudoplastic setting for improved resin absorption and thickness of impregnating coating for transformers and large stators

Damisol 3630 HTP 01/300

- resin of very-low viscosity
- standard resin for stators and rotors

Dolphon® XL 2100 Series

Thermal class H / 180 °C

- low-emission impregnating resins based on polyester
- UL approved E 317427 and E 317429
- rapid hardening
- good baking resistance
- no MAC value
- can be processed in impregnating, dip, VPI and in current-UV procedures
- shelf life: 12 months

XL2102

- standard resin for stators and rotors

XL 2103

- pseudoplastic setting for transformers and large stators and rotors
- high film thickness
- high resin absorption
- very good penetration behaviour

XL 2109

- current-UV impregnating resin for stators

XL 2112

- particularly environmentally-friendly impregnating resin

AQUA-THERM Series

Thermal class H / 180 °C

- 1-component water-based varnishes
- very low emissions
- very low resin application
- hardens quickly
- good baking resistance
- highly flexible
- good electrical properties
- can be used for impregnating rotors, stators and transformers of up to medium size
- shelf life: 12 months

AQUA-Therm BC-367-8320

- 1-component varnish based on saturated polyester

AQUA-Therm BC-380

- 1-component varnish based on epoxy resin

Voltacast 3000 Series

Thermal class E / 120 °C to B / 130 °C

- 2-component polyurethane casting resin
- resin based on polyester polyethers containing hydroxyl groups
- hardener based on aromatic polyisocyanates
- resistant to transformer oil, organic solvents, and vapours such as petrol and hydrocarbons
- good adhesion to most metals
- for casting transformers, structural elements and units, as well as small objects
- non-abrasive
- recommended hardener: Voltacast H

Voltacast 3100 / H131

- Thermal class E / 120 °C to B / 130 °C
- elastic

Voltacast 3110 / H132

- Thermal class E / 120 °C to B / 130 °C
- UL approved E 72640
- flame retardant acc. to UL 94 V-2
- elastic

Voltacast 3200 / H132

- Thermal class B / 130 °C to B / 140 °C
- low shrinkage
- hard

Voltacast 3210 / H131

- Thermal class B / 130 °C to B / 140 °C
- UL-approved E 72640
- flame retardant acc. to UL 94 V-0
- low shrinkage
- hard

Damival® 13682/13481

Thermal class B / 130 °C

- 2-component casting resin based on polyurethane
- free from CMR substances
- MDI-free hardener
- temperature range for application: -60 °C to +150 °C
- very low water absorption
- high thermal conductivity
- flexible even at low temperatures
- for casting delicate objects

WEVOPUR Series

Thermal class B / 130 °C to F / 155 °C

- 2-component polyurethane casting resin
- resin based on polyurethane and modified polyurethanes
- no halogenated flame retardants
- non-abrasive mineral filler
- UL approved E 108835
- recommended hardener: WEVONAT

WEVOPUR 390 / WEVONAT 300

- temp. range for appl.: -40 °C to +130 °C
- casting resin for the low- and medium-volt range
- flame retardant according to UL 94 V-2
- viscoplastic

WEVOPUR 403FL / WEVONAT 300 RE

- temp. range for appl.: -50 °C to +165 °C
- for the casting of components under high thermal stress, such as winding materials, brakes, sensors; particularly suitable for explosion-protection applications
- flame retardant according to UL 94 V-0

WEVOPUR 552FL / WEVONAT 300

- temp. range for appl.: -40 °C to +130 °C
- for the casting of electrical components such as transformers, sensors and capacitors
- flame retardant according to UL 94 V-0
- viscoplastic

WEVOPUR 7210FL / WEVONAT 507

- temp. range for appl.: -40 °C to +145 °C
- high dimensional stability under heat
- flame retardant according to UL 94 V-0
- hard and tough

Damisol

Thermal class H / 180 °C

- 1-component casting resin based on epoxide
- low viscosity

Damisol 3500 LoV

- freon-resistant
- for low- and medium-voltage motors

Damisol 3418 API

- VOC-free
- also for high-voltage applications and Samica tapes
- can be used for API and traction motors

SynPrep

Stamped & Shaped Components

The range of SynPrep stamped and shaped components is very comprehensive and offers individual product solutions in perfection. The products are used for covering, insulating, protecting, underlaying and insulating.

SynFlex offers a wide range of stampings and preformed parts: as rolls (with remnants removed), component parts, single- and double-sided adhesive or non-adhesive, with or without grip handle, printed or plain.

We cut, stamp, mill and saw preformed parts, or produce them using water jet cutting. A wide variety of materials are processed into individual punched parts, including all types of films, non-wovens, foams, fabrics, laminates, but also mineral materials such as graphite.

The fields of application are as versatile as the cut pieces themselves. Customers come from the automotive industry, the electrical and electronic industries, medical and shielding technologies and communication and information technologies. You simply provide us with drawings, sketches, CAD graphics or explain your ideas. We will then work with you to find the matching solution.

Fields of application

- slot insulation
- mechanical stabilization
- mechanical protection
- phase insulations
- field coil insulation
- anchor insulation

Our product range

- punchings
- individual parts
- adhesive, single- or double-sided
- with and without a grip handle
- bent components
- cut pieces
- rolled products
- feathering

The materials

- PET films, PI films (e.g. SynTherm® H)
- aramid papers (e.g. SynTherm® YT510)
- foams made of PUR e.g.
- fleece made of polyester e.g.
- fabric made of rayon staple e.g.
- laminates made of various materials such as DMD, VPV, APA, AHA
- pressboard
- polycarbonate
- PMMA
- metals such as copper, aluminum
- mineral materials such as graphite, e.g.
- and many other materials

Our service

- technical application advisory (also on-site)
- technical approvals according to PPAP specifications
- support in the selection of suitable materials
- testing in proprietary SynLab® test lab
- manufacturing also in small series
- issue of test certificates
- integrated UL approval through UL repackaging certificate



In addition to the company-specific product ranges of SHWire, SynFlex and IsoTek, the SynFlex Group offers all customers interdisciplinary services to which they have access at all times.

You can take advantage of these Group-wide services internationally at any time in all the SynFlex locations in Europe, Asia, Turkey and beyond.

SynFlex Group and UL – A strong partnership

The basic idea of UL is to make the world in which we live and work into a safer place. This pertains specifically to the field of electrical safety. The chemical interactions of various products within an electrical insulation system (EIS) is the focus here.

As the only test laboratory in Europe accredited by UL, the SynLab® carries out all the tests required for the enhancement and new configuration of an EIS.

The objective of this cooperation is to support customers in new approval, enhancement or adaptation of existing UL systems.

The SynLab® test laboratory – Comprehensive testing services

The SynFlex Group test laboratories at the SynFlex locations in Blomberg and Shanghai, and at headquarters of SHWire in Lügde are known for their variety of thermal, mechanical, chemical and electrical testing procedures.

In the SynLab® tests are conducted not only on the interactions of various components of the electrical insulation system as part of UL, but also on selective and long-term impacts of products and product groups.

SynServ – services of the SynFlex Group Logistics competence

Rapid and reliable availability of goods is the core objective of logistics in the SynFlex Group. From Blomberg, we supply our logistics and production plants of our subsidiaries and affiliates worldwide. Moreover, the complete logistics of SHWire are handled via the logistics center at the Blomberg plant.

Metal trading

Fluctuating volumes of demand, volatile commodity exchange prices and the necessity of a reliable basis for calculation are realities that are extremely difficult to reconcile when dealing with metals. To provide you, as a customer and partner of SynFlex Group, with greater certainty, not only commercially but also organizationally, we offer you several services, for example copper hedging, alongside the material supply of copper and aluminum.

Product management

The product management of the SynFlex Group provides you with competent support in the development, optimization and implementation of new ideas. We calculate, test and certify materials, components, structures, products or production processes. The technical and economic know-how of our product managers bridges the gap between research and market-driven products.



SynFlex International

The network of the SynFlex Group provides its customers with consistent quality of the service and products, goods availability and professional advice. We have production and logistics capacities at every location in Europe, Asia and Turkey. Thanks to our extensive sales network, we are also active in countries where we do not have a site, and we can provide individual advice there.

SynFlex Scandinavia

With our location in Copenhagen, we deliver to all of Scandinavia and parts of the Baltic countries.

SynFlex France

With our location in Paris, we supply France, the southern countries of Spain and Portugal, as well as North Africa.

SynFlex Italy

With our location in Bologna, we deliver to customers in Italy and to neighboring countries in the Eastern Mediterranean region.

SynFlex Austria

With our location in Vienna, in addition to covering the Austrian market, we also cover the entire Eastern European region from the Czech Republic to Albania, and all the way to Ukraine.

SynFlex Poland

With our location in Warsaw, we deliver to customers in Poland, the southern Baltic countries, all the way to Belarus.

SynFlex Turkey

With our location in Istanbul, we supply customers in Turkey. At the same time, this location serves as a gateway to the Caucasus and the Middle East.

SynFlex China

With our location in Shanghai, we serve the vast Chinese market, along with all neighboring countries in Central, Southern and Eastern Asia.

At highest level.
The complete **SynFlex** product range.

SynFlex Winding

SHWire
Premium Winding Wires

SynWire
Winding Wires

SynWire WW
Litz & Special Wires

SynShield®
Copper &
Aluminium Foils

SynFlex Insulate

SynTherm®
Insulating Materials

SynTape®
Electrical Adhesives Tapes

SynSleeve
Electrical Insulating
Sleeving

SynChem
Resins & Varnishes

SynPrep
Stamped & Shaped
Components

SynBob
Bobbins

SynFlex Connect & Equip

SynCon®
Connecting Cables &
Transformer Terminals

SynParts
Special Components &
Accessoires

SynFlex Group

SynLab®
Laboratory Services & UL
SynServ
Consulting & Services

SynFlex International
SynFlex Scandinavia
SynFlex Austria
SynFlex Poland
SynFlex Italy
SynFlex France
SynFlex Turkey
SynFlex China

Common Goal – Joint Progress:
The Resource of Power.



Insulation Systems, www.synflex.com



Magnet Wires, www.sh-wire.de



Electric Insulation, www.isotek-gmbh.de