



Twin tower model

OXYGEN PSA GENERATOR - UF-02

WWW.ULTRA-FILTER.COM

OXYGEN PSA GENERATOR

UF-O2



Twin tower model

Oxygen generators allow you to produce your own oxygen where and when you need it.

Producing your own oxygen is easy – facts which can give you a competitive advantage. An on-site generator gives you 24-hour access to oxygen.

Technical Data

 Pressure dew point: $\leq -40^{\circ}\text{C}$

 240V/110V - 50/60Hz

 Capacity: 2 - 200 Nm³/h

Features & Benefits

Operating cond.: 5°C - max. 45°C

Noise Level: $< 75 \text{ dB(A)}$

Purity 90%

Model	Nm ³ /h	Purity %	Feed air requirement m ³ /h	Min.Air / N ₂ receiver liter	Inlet / outlet connection	Feed air pressure bar(G) min/max	Product pressure bar(G) min/max
UF-O002	2,2	90	24	60	3/8-3/8	5-8	2-6,5
UF-O003	3,6	90	39	60	3/8-3/8	5-8	2-6,5
UF-O005	6,2	90	66	60	3/8-3/8	5-8	2-6,5
UF-O009	10,5	90	108	90	1/2-3/8	5-8	2-6,5
UF-O015	19,0	90	192	500	1/2-3/8	5-8	2-6,5
UF-O020	23,0	90	240	500	1/2-3/8	5-8	2-6,5
UF-O022	26,0	90	276	500	3/4-1/2	5-8	2-6,5
UF-O030	34,0	90	360	1000	1-1/2	5-8	2-6,5
UF-O037	40,0	90	426	1000	1-3/4	5-8	2-6,5
UF-O055	60,0	90	690	1500	1 1/2-5/4	5-8	2-6,5
UF-O075	77,0	90	870	1500	1 1/2-5/4	5-8	2-6,5
UF-O085	90,0	90	1140	2000	DN50-DN32	5-8	2-6,5
UF-O110	113,0	90	1410	2000	DN65-DN50	5-8	2-6,5
UF-O160	155,0	90	-	-	-	-	-
UF-O200	200,0	90	-	-	-	-	-

OXYGEN PSA GENERATOR

UF-O2



Purity 93%

Model	Nm3/h	Purity %	Feed air requirement m3/h	Min.Air / N2 receiver liter	Inlet / outlet connection	Feed air pressure bar(G) min/max	Product pressure bar(G) min/max
UF-O002	2	93	21	60	3/8-3/8	5-8	2-6,5
UF-O003	3,5	93	36	60	3/8-3/8	5-8	2-6,5
UF-O005	6	93	60	60	3/8-3/8	5-8	2-6,5
UF-O009	10	93	102	90	1/2-3/8	5-8	2-6,5
UF-O015	17	93	174	500	1/2-3/8	5-8	2-6,5
UF-O020	22	93	228	500	1/2-3/8	5-8	2-6,5
UF-O022	24	93	264	500	3/4-1/2	5-8	2-6,5
UF-O030	32	93	336	1000	1-1/2	5-8	2-6,5
UF-O037	37	93	402	1000	1-3/4	5-8	2-6,5
UF-O055	57	93	606	1500	11/2-5/4	5-8	2-6,5
UF-O075	75	93	822	1500	11/2-5/4	5-8	2-6,5
UF-O085	88	93	1080	2000	DN50-DN32	5-8	2-6,5
UF-O110	110	93	1356	2000	DN65-DN50	5-8	2-6,5
UF-O160	-	-	-	-	-	-	-
UF-O200	-	-	-	-	-	-	-

Purity 95%


Model	Nm3/h	Purity %	Feed air requirement m3/h	Min.Air / N2 receiver liter	Inlet / outlet connection	Feed air pressure bar(G) min/max	Product pressure bar(G) min/max
UF-O002	1,5	95	18	60	3/8-3/8	5-8	2-6,5
UF-O003	2,5	95	30	60	3/8-3/8	5-8	2-6,5
UF-O005	3,8	95	48	60	3/8-3/8	5-8	2-6,5
UF-O009	7,7	95	90	90	1/2-3/8	5-8	2-6,5
UF-O015	12,5	95	153	500	1/2-3/8	5-8	2-6,5
UF-O020	18	95	210	500	1/2-3/8	5-8	2-6,5
UF-O022	21	95	252	500	3/4-1/2	5-8	2-6,5
UF-O030	28	95	324	1000	1-1/2	5-8	2-6,5
UF-O037	32	95	396	1000	1-3/4	5-8	2-6,5
UF-O055	50	95	600	1500	11/2-5/4	5-8	2-6,5
UF-O075	62	95	750	1500	11/2-5/4	5-8	2-6,5
UF-O085	75	95	960	2000	DN50-DN32	5-8	2-6,5
UF-O110	97	95	1170	2000	DN65-DN50	5-8	2-6,5
UF-O160	-	-	-	-	-	-	-
UF-O200	-	-	-	-	-	-	-



THE SCANDINAVIAN FILTRATION PARTNER

SHOP ONLINE

At www.ultra-filter.com you will find a wide selection of filtration products ready for you to order.

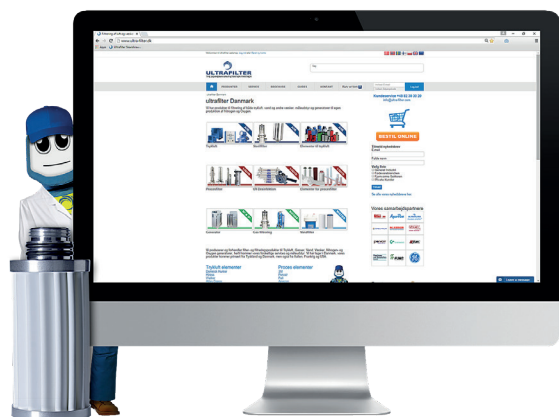

www.ultra-filter.com


ABOUT US

Ultrafilter Scandinavia offers a wide selection of filtration products for compressed air, liquids and gas. We have stock in Denmark and from here we distribute all of our products to Scandinavia and the Baltic countries.

Ultrafilter Scandinavia is a part of the Ultrafilter group. Our production facility is in Germany and we have several subsidiaries in Europe and the United States.

You can buy our products on local websites. Information about our products as well as brochures and manuals can be found on our website (www.ultra-filter.com).

We can adapt all of our filtration products to your needs, and we offer visits from our consultants in order to find the right solution for you. We also offer on going service on our products once they are installed.



ULTRAFILTER SKANDINAVIEN APS

Sunekær 1
5471 Søndersø
Denmark

+45 82 30 30 20
info@ultra-filter.com
www.ultra-filter.com