

# **NOVADRY**

Get in Touch with the New Vacuum Star...



# **NOVADRY**

## Dry Screw Vacuum Pumps

Vacuum is an important and widely-used utility in the food industry. Until today, oil sealed rotary vane pumps were the norm. However, using such pumps bears risks as the pump oil could end up polluting your workspace or, even worse, your food. To avoid these risks and **to ensure product freshness, Leybold has developed the**  "NOVADRY". This 100% oil free vacuum pump will revolutionise the market.

The following key pump features will demonstrate you.



#### 100 % FOOD SAFETY

NOVADRY combines a 100 % oil free pump concept with a design compliant with the basic hygienic principles. That makes NOVADRY the vacuum benchmark for Food Safety!

#### **100 % OIL FREE**

NOVADRY is a 100% oil free pump. Thus say goodbye to any possible risk, contaminating your processed food with pump oil!

FOOD SAFETY
100%
OIL FREE

[Leybold NOVADRY



## Fast & Consistent

NOVADRY is recognized for its high performance, which is constant over time for each working pressure. This consistency is a direct consequence of using a wear-free dry screw design.



## Minimum TCO

NOVADRY offers energy savings with its energy-efficient design. The additional air cooling, simple commissioning and reduced maintenance needs, offer you a minimal Total Cost of Ownership.



## Optimized Noise Level

NOVADRY features a quiet operation combined with a pleasant sound, without any rattling or high-pitched noise. NOVADRY clearly improves the working environment.



Double Chamber Packaging Machine

Packaging under vacuum is used to remove air which leads to an extended food shelf life.

The challenges for vacuum pumps in packaging machines, include the frequent pump down and the built-in use of the pump.

None of these are a problem for NOVADRY:



NOVADRY offers the shortest pump down times, even until the lowest pressures.



NOVADRY's compact design & optimised noise level make it ideal to be built-in.




NOVADRY is 100% oil free, therefore it doesn't emit oil via the exhaust into the environment.



Hygienic Enclosure

#### **HYGIENIC ENCLOSURE**

Even in the harshest applications, NOVADRY is still the ideal choice. The optional stainless steel DIY enclosure kit makes the NOVADRY suitable for your daily wash down, even with aggressive industrial cleaners.

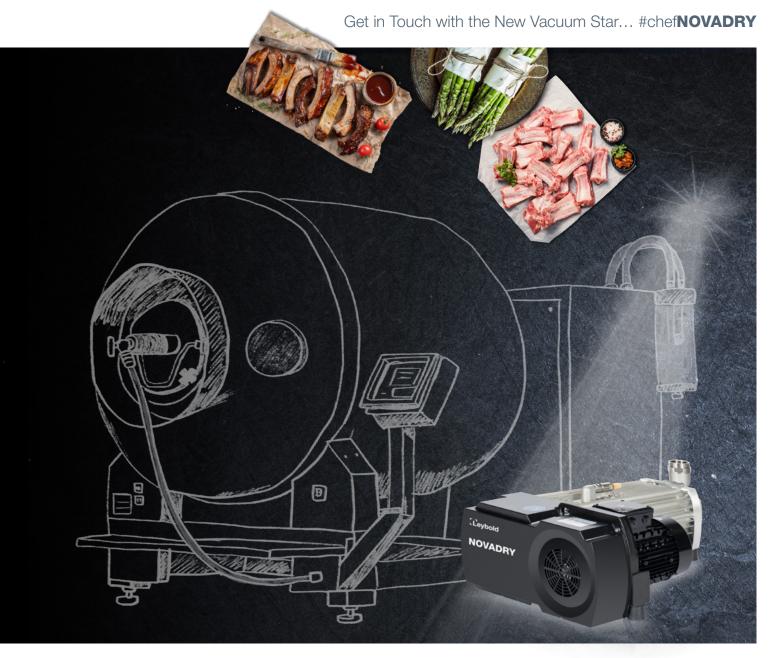

## **Tumbler**



Vacuum tumbling is a widely-used method, e.g. for marinating meat. The vacuum supports the meat's absorption of the marinades and enhances product taste, colour and texture. The process ingredients and the rough operating pressures make tumbling a real challenge for oil sealed vane pumps, resulting in high maintenance efforts.

NOVADRY is especially designed for these challenges:



NOVADRY can handle heavy forms of contamination as marinade, oils, etc.



NOVADRY offers a high and consistent level of performance at any operating pressure.



NOVADRY is completely oil free, so there's no chance for an oil back-flow into the tumbler.



**Thermoformer** 

Thermoformers are the most efficient & sophisticated machines for fast packaging of a wide variety of food products. The packaging varies from standard vacuum packs to skin and MAP packs.

This application versatility and the required fast cycle-times are challenging for vacuum pumps.

NOVADRY distinguishes itself clearly:



NOVADRY can work efficient at any operating pressure.



NOVADRY guarantees a maximum uptime and a high yield for intensively utilized machines.



The NOVADRY ensures the highest level of food safety, even for the highest output.

## **Stuffer**

Stuffer machines are used to produce a wide range of food products, such as sausage or dough. Vacuum helps to create a better product by removing air and improving texture.

The main vacuum pump challenges are the built-in use and the possible ingestion of process ingredients.

NOVADRY is perfectly equipped for these challenges:



NOVADRY's sturdy dry screw principle is highly resistant to ingestion of process media.



NOVADRY is developed to be built-in, the service requirements and TCO are optimized.





NOVADRY is 100% oil free, what avoids oil leakages via the bottom of your stuffer.



NOVADRY's sturdy dry screws are made for all F&P applications and guarantee a stable performance over the complete lifecycle.


Scan the QR-code to have a closer look.



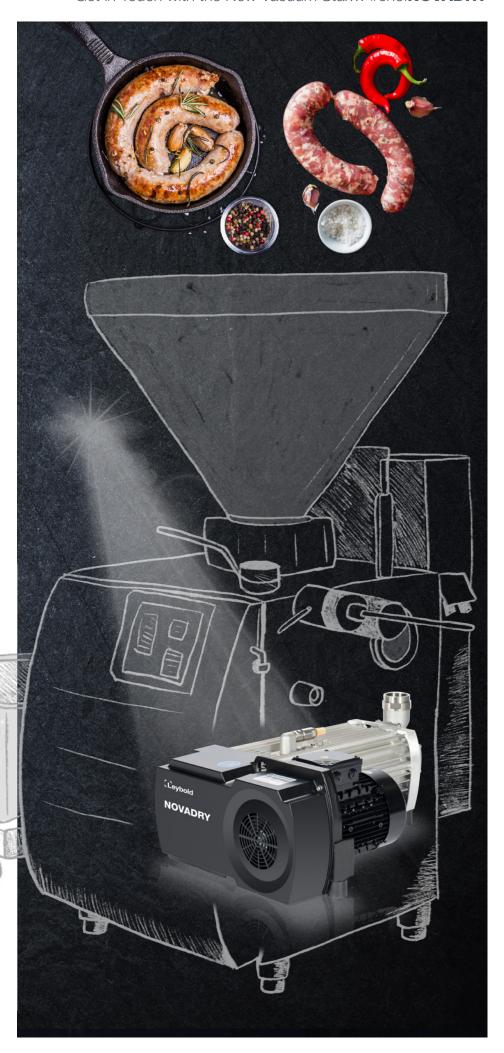

### **NOVADRY** Dry Screw Vacuum Pumps

# Pumping Speed 200 150 150 NOVADRY ND200 NOVADRY ND160 NOVADRY ND160



Technical Data		NOVADRY				
		ND 65	ND 100	ND 160	ND 200	
Max. pumping speed	$m^3 / h$	63	96	138	175	
Ultimate pressure without gas ballast	mbar	0.1				
Max. permissible outlet pressure (rel. to ambient)	mbar	200				
Max. permissible inlet pressure	mbar	1050				
Water vapor tolerance with gas-ballast	mbar	60				
Water vapor capacity with gas ballast	kg/h	1.9	2.9	5.2	6.9	
Noise level at ultimate pressure (50/60 Hz)*	dB(A)	67 / 70 70 / 73				
Permissible ambient temperature	°C	0 - 40				
Motor power	kW	1.5	2.2	3.0	4.0	
Protection class		IP 55				
Dimensions [L x W x H]	mm	644 x 488 x 315	736 x 488 x 315	889 x 488 x 315	889 x 488 x 315	
Weight	kg	85	95	105	115	
In- & outlet connection		G 2" (In) G 1 1/2" (Out)				

<sup>\*</sup> According to DIN EN ISO 2151

Ordering Information	ND 65	ND 100	ND 160	ND 200
50 Hz, 200/400 V ±10 %, 3 ph	111065N10	111100N10	111160N10	111200N10
60 Hz, 230/460 V ±10 %, 3 ph	111065N11	111100N11	111160N11	111200N11
60 Hz, 200/380 V ±10 %, 3 ph	111065N21	111100N21	111160N21	111200N21

