



TYROLIT GROUP 2

## **The TYROLIT Group**

TYROLIT is one of the world's leading manufacturers of grinding and dressing tools and is also a system provider for the construction industry.

Since 1919, our innovative tools have been making an important contribution to technological development in numerous industries. TYROLIT offers tailored grinding solutions for a varied range of applications and a comprehensive assortment of standard tools for customers all over the world.

The family-owned company based in Schwaz, Austria, combines the dynamic strengths of the Swarovski Group with over a hundred years of commercial and technological experience.



TYROLIT company headquarters in Schwaz, Austria

## **Facts & figures**



**80,000**+ products



**29** production locations



4,500+ employees worldwide



37 sales locations



**500+** international patents

Sales companies in Argentina, Australia, Austria, Belgium, Brazil, Canada, China, Czech Republic, Denmark, Estonia, Finland, France, Germany, Hungary, India, Indonesia, Italy, Netherlands, Norway, Poland, Portugal, Russia, Spain, South Africa, South Korea, Sweden, Switzerland, Thailand, UAE, UK and the US. Sales partners in 65 other countries.

SERVICE & KNOW-HOW

# Your competent partner in the foundry industry

Years of experience in the foundry industry and the cooperation with noted end-users and machine manufacturers have made TYROLIT one of the market leaders in this field. With innovative technologies and highest quality products, TYROLIT repeatedly set new standards in the preparation of steel and cast iron.

TYROLIT not only sets standards for quality and processing time, but also lays a big focus on optimizing the product range in terms of ergonomics, safety and environmental compability.

### Our services for the foundry industry at a glance:

Application technology



Innovative products

Customer-specific solutions

Global presence

GLOBAL PRESENCE 4

# Application technology The best team for your application

Foundry industry applications can present a particular challenge during machining. Over many decades, TYROLIT has gathered well-founded expertise in the machining of varied materials and provided its customers with on-site support.

Material-specific products to ensure the most effective and efficient results on a variety of materials present in the foundry industry and beyond.

#### TYROLIT application technology in practice

Documenting and analysing the customer specific task

Drawing up individual proposals for a solution to the customer's

Working on a process solution in close consultation with the customer

Implementing the process solution at the customer's site

Passing on acquired knowledge in training sessions

#### Your benefits

- + The global presence of our application engineers
- + Tailor made solutions and process optimisation to suit individual tasks
- Close cooperation with machine manufacturers
- Internal and external seminars and training courses





# Decades of know-how in the foundry industry!

#### Highest efficiency in manual fettling...












... as well as in the automated machining of castings!







PRODUCT INNOVATIONS 7

## Product innovations

## **Grinding & cutting in the foundry industry**

Innovation leadership can only be achieved by constantly coming up with something new that serves the whole industry. TYROLIT did just that in 1952 when it introduced glass fibre reinforcements and thus took on a pioneering role in cut off grinding. Another first amongst TYROLIT's impressive milestones was the use of super abrasives for the dry machining of grey cast iron and spheroidal graphite cast iron.



2002 FOCUR SA

The diamond of grinding wheels

– for automatic fettling



2007

Vibration-damping grinding wheels



2011 FOCUR EXTRA

New line with improved easy cutting behaviour – for pedestal and swing frame grinding



2019

**CERABOND X grinding wheels**Grinding wheels with extreme lifetime and highest aggressiveness



2001

FOCUR EXTRA easy cut
The complete assortment
for off-hand grinding



2004

**FOCUR SA** 

Optimised for even cooler grinding



2009

FOCUR EXTRA easy cut

Extended assortment for steel castings and extremely hard cast materials



2014

**Diamond cut-off wheels FOCUR SA**Unbelievable lifetime for very demanding applications






## **Cut-off wheels for angle grinder**

#### ★★★ PREMIUM

#### **LONGLIFE** cut-off wheels

for steel and cast steel

Shape



Shape 42

In standard widths, this high-performance tool not only offers a cost-efficient solution, but also the highest safety standards. This is provided by the longest lifetime and stability of the PREMIUM LONGLIFE. The tool is suitable for cutting cast steel, metal sheets, profiles, pipes, rods and solid material.




Type number	Dimensions	Specification	VP	
637072	125×2.5×22,23	A30S-BFXA	25	
637073	178×3.0×22,23	A30S-BFXA	25	
637074	230×3.0×22,23	A30S-BFXA	25	



#### **FOCUR Extra cut-off wheels**

for cast iron



Shape 42

The PREMIUM FOCUR Extra cut-off wheel offers maximum abrasiveness coupled with the best cut-ting ability. Innovative production technology combined with high-quality zirconium aluminium oxide makes this possible. This high-performance tool has been developed for use on all cast materials.


	Shape	Type number	Dimensions	Specification	VP	
	42	929887	178×3.5×22,23	ZA30R-BFXA	25	
TROLD		635268	230×3.0×22,23	ZA30P-BFXA*	25	
		855818	230×3.5×22,23	ZA30P-BFXA*	25	
C states		929889	230×3.5×22.23	ZA30R-BFXA	10	

<sup>\*</sup> Fe, S, CI free.



#### **Cut-off wheels**

for nonferrous metals and nonferrous castings



Shape 41

In order to cut nonferrous metals, the tool must have a high cutting ability. To this end, TYROLIT has developed a special formula and production method in order to achieve short cutting times with NF metals too. New specifications prevent the clogging and dulling of the grinding wheel which used to be a common result of material abrasion.

	Shape	Type number	Dimensions	Specification	VP	
	41	366888	125×2.5×22,23	A30N-BFXA	25	
TAOLD		5485	178×3.0×22,23	A30N-BFXA	25	
		30741	230×3.0×22,23	A30N-BFXA	25	



#### **FOCUR SA Diamond cut-off wheel**

for cast iron



Shape UC3


FOCUR SA diamond cut-off wheels from Tyrolit are the optimum tool for machining grey and spheroidal cast iron. These products combine a long lifetime with maximum economic efficiency. FOCUR SA cut-off wheels are available in diameters from 125 to 230 mm.

Shape	Type number	Dimensions	Specification	VP	
UC3	34192268	125×3.0×22,23	DC CI	1	
	102811	180×3.0×22,23	DC CI	1	
	102813	230×3.0×22,23	DC CI	1	



#### **Cut-off wheels**

for stone and cast iron with metal penetration



Shape 42

This STANDARD cut-off wheel reduces the work of the operator due to its excellent cutting ability. When used on stone or materials with metal penetration, the wheel impresses by achieving clean cutting edges and good cutting quality.


	Shape	Type number	Dimensions	Specification	VP	
TYROUT	42	367787	125×2.5×22.23	C30S-BF	25	
	UNUL	367801	178×3.0×22.23	C30S-BF	25	
Trace to		367084	230×3.0×22.23	C30S-BF	25	

## **Cut-off wheels for stationary cutting machines**




#### **Cut-off wheels**

for steel and cast steel



Shape 41

TYROLIT provides the optimal tools for use on stationary cutting machines in chop cut. These include the PREMIUM cut-off wheel for steel in diameters from 400 to 600 mm. This special tool is ideal for cutting workpieces with large cross-sections, as well as solid material and profiles. As with all TYROLIT PREMIUM cut-off wheels, this tool has been optimised to achieve the best possible cutting ability and lifetime.






#### **Cut-off wheels**

Shape 41

for stainless steel and cast iron



TYROLIT provides the optimal tools for use on stationary cutting machines in chop cut. The tool is suitable for cutting cast steel, metal sheets, profiles, pipes, rods and solid material. Despite its versatile use, the tool offers maximum cutting ability and the longest lifetime.

The chemical purity of this tool is a requirement of machining stainless steel in order to avoid impairments to the material, such as corrosion, pitting or a reduction in the fatigue strength.




Type number	Dimensions	Specification	VP	
647218	400×4.0×40	A24Q4BF97M	10	
460744	500×5.0×40	A24P4-BF97M	10	
647232	600×6.0×60	A24O4BF97M2	10	



#### **Cut-off wheels**

for nonferrous metals and nonferrous castings



Shape 41

In order to cut nonferrous metals, the tool must have a high cutting ability. To this end, TYROLIT has developed a special formula and production method in order to be able to perform stationary cutting on NF metals too. New specifications prevent the clogging and dulling of the grinding wheel which used to be a common result of material abrasion.

As with all TYROLIT PREMIUM cut-off wheels, this tool has been optimised to achieve the best possible cutting ability and lifetime.



Shape	Type number	Dimensions	Specification	VP
41	800035	400×4.0×40	A30O4BF59M	10
	422374	500×5.5×40	A24N5BF59M2	10



#### **FOCUR SA**

Sł

Diamond cut-off wheel for cast iron



Shape UC3

FOCUR SA diamond cut-off wheels from TYROLIT are the optimum tool for machining grey and spheroidal cast iron. These products combine a long lifetime with maximum economic efficiency. FOCUR SA cut-off wheels are available in diameters from 400 to 600 mm.




Shape	Type number	Dimensions	Specification	VP	
UC3	102850	400×4.0×60	DC CI	1	
	102856	500×5.0×60	DC CI	1	
	102859	600×5.0×60	DC CI	1	




#### Laboratory cut-off wheels

for steel, cast steel and stainless steel



Shape 41N


The PREMIUM laboratory cut-off wheel is a high-performance cut-off wheel for ferrous metals such as steel and stainless steel. It is used for cutting laboratory samples that have to be cut quickly and without structural alterations, workpiece deformations or cracks. Assembly is usually carried out on wet cutting systems with a manual or automatic feed, at a maximum operating speed of 50 m/s. The workpiece must be fixed during machining and the wheel must not be exposed to lateral load.





#### Laboratory cut-off wheels

for nonferous metals, nonferrous castings and titanium



Shape 41N

The PREMIUM laboratory cut-off wheel is a high-performance cut-off wheel for ferrous metals such as steel and stainless steel. It is used for cutting laboratory samples that have to be cut quickly and without structural alterations, workpiece deformations or cracks. Assembly is usually carried out on wet cutting systems with a manual or automatic feed, at a maximum operating speed of 50 m/s. The workpiece must be fixed during machining and the wheel must not be exposed to lateral load.

	Shape	Type number	Dimensions	Specification	VP	
	41N	167210	250×1.5×32	C80-BN50	10	
		167229	$300 \times 2.0 \times 32$	C80-BN50	10	
.0		167335	$350\times2.5\times32$	C80-BN50	10	
		167432	400×3.0×32	C80-BN50	10	
		167354	432×3.0×32	C80-BN50	10	

Items with grey lettering are only available on request.






## Grinding wheels for angle grinder

#### ★★★ PREMIUM

#### **CERABOND X rough grinding wheels**

for steel, cast steel and stainless steel



Shape 27

The combination of ceramic grains and our unique TYROLIT bonding system guarantees continuous aggressiveness with an unmatchable lifetime. CERABOND X stays sharp, making it the best solution for grinding steel, cast steel and stainless steel in heavy-duty applications. Whether you're edge grinding, surface grinding or removing welding seams, CERABOND X will get the job done faster.




Type number	Dimensions	Specification	VP	
34387126	125×7.0×22.23	CA24Q-BFP	5	
34401850	178×7.0×22.23	CA24Q-BFP	5	
34387127	230×7.0×22.23	CA24Q-BFP	5	



#### LONGLIFE Z-MAX rough grinding wheels

for steel and cast steel

Shape



Shape 27

The PREMIUM LONGLIFE is a high-performance rough grinding wheel for surface and edge grinding. It is distinguished by its excellent lifetime.




	Shape	Type number	Dimensions	Specification	VP	
TEROLE	27	34353684	125×7.0×22.23	ZA24S-BFX	10	
± muur		34353687	178×7.0×22.23	ZA24S-BFX	10	
		34353689	230×7.0×22.23	ZA24S-BFX	10	



#### **FOCUR EXTRA rough grinding wheels**

for cast iron

Shape



Shape 27

The PREMIUM FOCUR Extra offers maximum stock removal rates coupled with the longest lifetime. Innovative production technology combined with high-quality zirconium aluminium oxide makes this possible.

This high-performance tool has been developed for application on all cast materials and can be used for surface grinding, deburring work and rendering. ZA24N-BFX: particularly for surface grinding, ZA24P-BFX: universal type, ZZA24R-BFX: the deburring specialist and ZZA24S-BFX: for long lifetimes.




Type number	Dimensions	Specification	VP
233756	125×7.0×22.23	ZA24N-BFX	10
233759	178×7.0×22.23	ZA24N-BFX	10
233762	230×7.0×22.23	ZA24N-BFX	10
233768	178×7.0×22.23	ZA24P-BFX	10
233771	230×7.0×22.23	ZA24P-BFX	10
233776	178×7.0×22.23	ZZA24R-BFX	10
233778	230×7.0×22.23	ZZA24R-BFX	10
929018	178×7.0×22.23	ZZA24S-BFX	10
929020	230×7.0×22.23	ZZA24S-BFX	10



#### Rough grinding wheels

Shape 27

for nonferrous metals and nonferrous castings



Shape 27

The PREMIUM rough grinding wheel developed specifically for nonferrous metals prevents clogging of the tool in order to reduce loading or dulling. Even at very low pressure, the wheel achieves extremely high abrasiveness.

TYROLIT's formula and production methods enable exceptionally high stock removal rates to be obtained for nonferrous metal applications.




Type number	Dimensions	Specification	VP
5316	125×7.0×22.23	A36N-BFX	10
5365	178×7.0×22.23	A36N-BFX	10
5416	230×7.0×22.23	A36N-BFX	10



#### **FOCUR** rough grinding wheels

for cast iron



Shape 27

With the STANDARD FOCUR rough grinding wheel you will obtain a tool that has been optimised in terms of its cutting ability and offers a high level of dimensional stability. Even with low pressure, the tool is abrasive and durable. This powerful tool has been developed for application on all cast materials and can be used for surface grinding, deburring work and rendering.




Shape	Type number	Dimensions	Specification	VP
27	154544	178×7.0×22.23	ZA300- BF	10
	154545	230×7.0×22.23	ZA300- BF	10



#### Rough grinding wheels

Shape

for stone and cast iron with metal penetration



Shape 27

The abrasive STANDARD rough grinding wheel for stone and cast iron is quick and convenient to use and requires minimal exertion. This rough grinding wheel with silicon carbide is specifically for stone and cast iron with metal penetration.




Type number	Dimensions	Specification	VP	
367549	125×6.0×22.23	C30S-BF	10	
367552	178×6.0×22.23	C30S-BF	10	
367557	230×6.0×22.23	C30S-BF	10	



### Rough grinding wheels

for cast iron



Shape 27

With the BASIC rough grinding wheel for cast iron you will obtain a tool that has been specially designed for rendering and offers a high level of dimensional stability. Even with low pressure, the tool is easy cutting and durable. This tool has been developed for application on all cast materials and is particularly suitable for smoothing cast materials.



Type number	Dimensions	Specification	VP	
567352	178×8.0×22.23	AC30N-BF	10	
567353	230×8.0×22,23	AC30N-BF	10	



#### Resin cup wheel

Shape 27

for steel and cast steel materials



Cup wheels achieve maximum stock removal rates and lifetime for grinding jobs on large areas. The PREMIUM cup wheel for steel and cast steel is ideal for edge grinding and bevelling. There is a choice of bore design 22.23 and thread design M14 for fitting to the tool. Observe operating speed: max. 50 m/s



Shape	Type number	Dimensions	Specification	VP
11BT	310183	110/90×55×22.23	A16P4B84	2
	311096	110/90×55×22.23	A36O4B84	2
	310997	130/90×55×22.23	A36O4B84	2



#### Resin cup wheel

for stone and cast iron with metal penetration



Cup wheels achieve maximum stock removal rates and lifetime for grinding jobs on large areas. The cup wheel is suitable for grinding on metal with penetration, concrete, marble and granite. There is a choice of bore design 22.23 and thread design M14 for fitting to the tool. Observe operating speed: max. 50 m/s



	Snape	Type number	Dimensions	Specification	VP
_	11BT	318070	110/90×55×22.23	1C24L4B2	2



#### Resin cup wheel

#### for steel and cast steel materials



Cup wheels achieve excellent stock removal rates and lifetime for grinding jobs on large areas. The cup wheel for steel and cast steel is ideal for edge grinding, bevelling and grinding welding seams. There is a choice of bore design 22.23 and thread design M14 for fitting to the tool. Observe operating speed: max. 50 m/s



Shape	Type number	Dimensions	Specification	VP	
11BT	895678	110/90×55×22.23	A16P-B	2	
	895669	110/90×55×22.23	A36P-B	2	



#### Resin cup wheel

#### for stone and cast iron with metal penetration



Cup wheels achieve excellent stock removal rates and lifetime for grinding jobs on large areas. The cup wheel is suitable for grinding on metal with penetration, concrete, marble and granite. There is a choice of bore design 22.23 and thread design M14 for fitting to the tool. Observe operating speed: max. 50 m/s



Shape	Type number	Dimensions	Specification	VP	
11BT	895679	110/90×55×22.23	C16J-B	2	

# **Grinding wheels for straight grinders**



#### **Grinding wheels**

Shape 1F80

#### for steel and cast steel materials

Shape 1F80

The PREMIUM 1F80 high-performance rough grinding wheel is particularly suitable for universal grinding tasks on hard-to-reach areas. Using the wheel, flutes and notches can be added, and gears can be deburred.

In addition, the wheel makes light work of maintaining turbine blades, and rough grinding curved surfaces in cavities and ridges. For diameters above 80 mm, we recommend using a protection cover.



Type number	Dimensions	Specification	VP
441207	50×10×10	A30S-BFX80	25
34512038	100×25×25	A30S-BFX80	25
441206	50×10×10	A30R-BFX80	25
441203	100×25×25	A30R-BFX80	25
441247	50×10×10	A36N-BFX80	25
34512039	100×25×25	A36N-BFX80	25
34518080	50×10×10	ZA24P-BFX80*	25
34182994	100×25×25	ZA24P-BFX80*	25
803404	S6/H10/M10	Accessory	1







## Pedestal and pendular grinding

TYROLIT tools for pedestal and pendular grinding impress with their high performance and ecoanomic efficiency.


Due to their high cutting ability, the exertion on the part of the user is considerably reduced. Furthermore, they offer the highest safety standards for manual grinding applications. By choosing the appropriate

specification, you can either deburr or machine large feeder cross sections and hard cast materials. We offer you individual applications engineering support in this regard.



### FOCUR-EXTRA for pedestal and pendular grinding

Manual machining of cast workpieces on pedestal and swing frame grinders





In most abrasive mixtures, zirconia alumina is used for grinding cast materials, enabling much shorter grinding times, higher stock removal rates and longer lifetimes to be achieved.



Shape	Type number	Dimensions	Specification	VP
1	34507308	400×50×127	A16-BA/63	1
	34507309	500×50×127	A16-BA/63	1
	34535416	500×60×127	A16-BH/63	1
	34507364	500×60×127	A16-BA/63	1
	34507369	600×60×127	A14-BA/63	1
1F63	34535417*	600×60×203,2	A16-BFA/63	1
1	34507368	600×60×203,2	A14-BA/63	1
	34535418	760×76×305	A14-BH/63	1
	34507370	760×76×305	A14-BA/63	1

# Good, better, FOCUR SA! Revolution in automated fettling

In using diamond we achieved a quantum leap in the machining quality of grey cast iron and spheroidal graphite cast iron.

#### Your benefits

- Constant outer diameter of the tool
- Precise shape accuracy throughout the useful life of the tool
- + Top lifetime
- + No dressing cycle
- Reduced noise and dust emissions
- Reduced cycle times resulting from optimised parameters
- Maximum product safety
- Making use of the option of having the FOCUR Super Abrasive tool replated at TYROLIT increases the tool profitability






Shape 9LL1S

### FOCUR SA - keep cool

For the grinding of large surfaces, runners and risers we recommend the application of FOCUR SA with slots. These slots provide greater chip space and enable cooler grinding, whereby both the lifetime and the ability to produce a white surface have been decisively improved.

Besides a defined standard assortment for all the MAUS automatic fettling machines from SAM 300 – SAM 2000 we can also supply tools for all other manufacturers of automatic fettling machines on request.

To receive a prompt offer for a FOCUR SA product please send a drawing of your current tool to your nearest TYROLIT sales office and the appropriate tool recommendation will be sent by return.

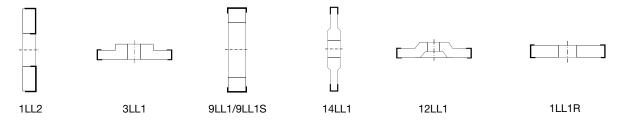

Product designs can be adjusted to suit your individual grinding process by our experienced application engineers.





#### ★★★ PREMIUM

## Ceramic points for steel and cast steel

In foundries and mould making, using ceramic mounted points is often the only method of achieving improved surface results on hard-to-reach parts. TYROLIT PREMIUM mounted points offer the highest possible lifetime

even for hardened steels. These tools also strike a perfect balance in terms of chip performance and the intended surface finish. Maximum operating speed: 50 m/s

Shape		Type number	Dimensions	Specification	VP
=	52ZY	548169	25×40 6×40	88A36P5V38	25
		34511977	25×40 6×40	88A60P5V38	25
		828192	40×40 6×40	88A36P5V38	25
		34511977	40×40 6×40	88A60P5V38	25 25
=	52A-11	148517	22×50 6×40	88A36P5V38	
		20031	22×50 6×40	88A60P5V38	25
=	52A-3	11480	25×70 6×40	88A36P5V38	25
		104894	25×70 6×40	88A60P5V38	25



## Resin-bonded mounted points for cast iron

The PREMIUM resin mounted points (dark brown) have a vibration reducing effect due to their composition and therefore boast low impact sensitivity. Due to their special quality, these points are best suited to deburring,

bevelling and edge breaking on cast iron materials. Due to their bond, they are specially suited to casting. Maximum operating speed: 50 m/s  $\,$ 

Shape	,	Type number	Dimensions	Specification	VP
=	52ZY	108261	10×25 6×40	A36Q4B84	25
=	52W	310504	16×50 6×40	A46S4B84	25
=	52ZY	682107	20×40 6×40	A36Q4B0	25
		544688	25×40 6×40	A36Q4B84	25
		282635	30×30 6×40	A36Q4B84	25
		673613	30×50 6×40	A46S4B84	25
		682111	40×20 6×40	A36Q4B0	25
		336830	40×40 6×40	A36Q4B84	25
		912344	40×40 8×40	A36Q4B84	25
		859255	50×30 8×40	A36Q4B84	25
	52A-11	126460	22×50 6×40	A46P4B84	25
-	52A-3	129260	25×70 6×40	A46P4B84	25



# Tungsten carbide burrs for cast iron, steel and stainless steel

Production of the TYROLIT PREMIUM burrs is performed on modern CNC grinding machines. The result is a highly efficient precision tool that achieves optimum grinding results. With this tungsten carbide burr you can achieve the longest lifetimes when used on practically any material.

By choosing the right machine, the correct revolutions per minute and operating speed, and the appropriate cutting and tooth profile, you will pave the way for PREMIUM results.

	Shape		Type number	Dimensions	Specification	VP
		52ZYA-S	768712	8×19 6×65	MX	1
	*		766116	10×19 6×65	MX	1
With.			766949	12×19 6×65	MX	1
			768721	16×25 6×70	MX	1
**		52WRC	768881	10×19 6×65	MX	1
			766930	12×25 6×70	MX	1
		52KEL	766068	10×19 6×65	MX	1
			768894	12×30 6×75	MX	1
			-			



#### **Tungsten carbide burrs**

for steel and cast steel

TYROLIT tungsten carbide burrs are produced on modern CNC grinding machines. The result is a highly efficient precision tool that achieves optimum grinding results. The specially developed wheel geometry ensures the longest lifetime and the best results on all types of steel.

The abrasive cutter profile is especially long-chipping and ensures a high stock removal volume. A reduced generation of heat protects the milling cutter and the workpiece.

	Shape	,	Type number	Dimensions	Specification	VP
	<b>—</b> »	52ZYA-S	34213557	6×18-6×50	SC	1
	404		34213559	10×19-6×64	SC	1
COMP.		52WRC	34213583	8×19-6×64	SC	1
All like			34213585	3×25-6×70	SC	1



#### Tungsten carbide burrs

for cast iron, steel and stainless steel

Production of the TYROLIT PREMIUM burrs is performed on modern CNC grinding machines. The result is a highly efficient precision tool that achieves optimum grinding results. With this tungsten carbide burr you can achieve the longest lifetimes when used on practically any material.

By choosing the right machine, the correct revolutions per minute and operating speed, and the appropriate cutting and tooth profile, you will pave the way for PREMIUM results.

	Shape		Type number	Dimensions	Specification	VP
<u> </u>		52WRC	766133	12×25 6×70	MXX	1
		52KEL	837619	12×30 8×75	MXX	1



#### **Tungsten carbide burrs**

for nonferrous metals and nonferrous castings

Production of the TYROLIT PREMIUM burrs is performed on modern CNC grinding machines. The result is a highly efficient precision tool that has been specially developed for use on nonferrous metals. With these products you can achieve the longest lifetimes.

By choosing the right machine, the correct revolutions per minute and operating speed, and the appropriate cutting and tooth profile, you will pave the way for PREMIUM results.

	Shape		Type number	Dimensions	Specification	VP
		52ZYA-S	768715	10×19 6×65	ALU	1
	· vov		768717	12×25 6×70	ALU	1
		52WRC	768884	10×19 6×65	ALU	1
Charles .			768885	12×25 6×70	ALU	1
4-		52KEL	766935	10×27 6×75	ALU	1
			768896	12×30 6×75	ALU	1



#### **Diamond mounted points**

for cast iron

Production of the TYROLIT PREMIUM diamond mounted points is performed on modern CNC grinding machines. The result is a highly efficient precision tool that has been specially developed for use on cast iron.

Compared to conventional ceramic or resin mounted points, diamond tools are characterized by a long lifetime and shorter grinding time. They also offer a high level of dimensional accuracy.

 Shape		Type number	Dimensions	Specification	VP
	1A1W	34530842	30×15×8	D851XGST	1
	1A1W	34530843	20×40×8	D851XGST	1
		34530844	30×40×8	D851XGST	1
	1A1W	34530845	20×30×8	D851XGST	1
		34530846	30×40×8	D851XGST	1





GRINDING BELTS 30



#### **CA-P93 PE Y belts**

#### for steel, cast steel and stainless steel

Belts with self-sharpening ceramic grain offer a high stock removal rate on steel, cast steel and stainless steel. Thanks to this self-sharpening effect, an even surface quality is achieved over the entire lifetime of the abrasive belts. Moreover, the composition of the abrasive belt reduces effort for the operator as less pressure is required.

Shape		Type number	Dimensions	Specification	VP
	Belt 3	34508612	120×1500	24 - CA-P93 PEY JTS	10
		34508613	120×1500	36 - CA-P93 PEY JTS	10
		34266750	120×1500	60 - CA-P93 PEY JTS	10
		34508614	120×1500	80 - CA-P93 PEY JTS	10
		34508615	120×1500	120 - CA-P93 PEY JTS	10
		34508616	150×1500	24 - CA-P93 PEY JTS	10
		34508617	150×1500	36 - CA-P93 PEY JTS	10
		34308447	150×1500	60 - CA-P93 PEY JTS	10
		34508618	150×1500	80 - CA-P93 PEY JTS	10
		34508619	150×1500	120 - CA-P93 PEY JTS	10
		34168478	75×2000	24 - CA-P93 PEY JTS	10
		34168479	75×2000	36 - CA-P93 PEY JTS	10
		34168481	75×2000	60 - CA-P93 PEY JTS	10
		34168482	75×2000	80 - CA-P93 PEY JTS	10
		34168483	75×2000	120 - CA-P93 PEY JTS	10
		34268895	100×2000	24 - CA-P93 PEY JTS	10
		34242019	100×2000	36 - CA-P93 PEY JTS	10
		34238231	100×2000	60 - CA-P93 PEY JTS	10
		34268899	100×2000	80 - CA-P93 PEY JTS	10
		34251161	100×2000	120 - CA-P93 PEY JTS	10
		34239044	150×2000	24 - CA-P93 PEY JTS	10
		34221594	150×2000	36 - CA-P93 PEY JTS	10
		34218356	150×2000	60 - CA-P93 PEY JTS	10
		34228323	150×2000	80 - CA-P93 PEY JTS	10
		34228324	150×2000	120 - CA-P93 PEY JTS	10
		34375053	120×1500	36 - ZA-P48 PEY JTS	10
		34253197	120×1500	60 - ZA-P48 PEY JTS	10
		34253197	120×1500	80 - ZA-P48 PEY JTS	10
		34257847	120×1500	120 - ZA-P48 PEY JTS	10
		34508611	150×1500	36 - ZA-P48 PEY JTS	10
		34456563	150×1500	60 - ZA-P48 PEY JTS	10
		34296812	150×1500	80 - ZA-P48 PEY JTS	10
		34508600	150×1500	120 - ZA-P48 PEY JTS	10

Items with grey lettering are only available on request.

**GRINDING BELTS** 31




#### ZA-P48 PE Y belts

#### for steel, cast steel and stainless steel

Due to the hard zirconium used in these PREMIUM belts they are ideal for very high pressure and deliver above-average stock removal rates. Active coolants reduce the generation of heat while grinding.

This high-performance product equipped with durable polyester backing has been developed for demanding steel, cast steel and stainless steel applications. These products are mainly used for dry applications.

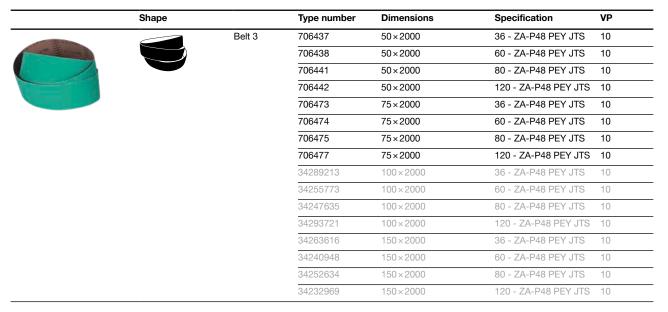

Type number

**Dimensions** 



#### ZA-P41 PC X belts

for steel, cast steel and nonferrous castings

Belt 3

This high-performance product equipped with durable polycotton has been developed for demanding cast steel, nonferrous castings and nonferrous metal applications. Combined with hard zirconium, these belts are ideal for very high pressure and deliver above-average stock removal rates. Active

coolants reduce the generation of heat while grinding. Another special

Specification

VP





Shape

feature: the product can also be used wet with oil, emulsion or water and still delivers optimal results.

Type Hamber	Dimonorono	Орсонюцион	••
34182550	120×1500	40 - ZA-P41 PCX JTS	10
34292022	120×1500	60 - ZA-P41 PCX JTS	10
34198215	120×1500	80 - ZA-P41 PCX JTS	10
34254727	120×1500	120 - ZA-P41 PCX JTS	10
34508596	150×1500	40 - ZA-P41 PCX JTS	10
34260054	150×1500	60 - ZA-P41 PCX JTS	10
34508597	150×1500	80 - ZA-P41 PCX JTS	10
34508598	150×1500	120 - ZA-P41 PCX JTS	10
706426	50×2000	40 - ZA-P41 PCX JTS	10
706464	50×2000	60 - ZA-P41 PCX JTS	10
706465	50×2000	80 - ZA-P41 PCX JTS	10
706466	50×2000	120 - ZA-P41 PCX JTS	10
706463	75×2000	40 - ZA-P41 PCX JTS	10
706464	75×2000	60 - ZA-P41 PCX JTS	10
706465	75×2000	80 - ZA-P41 PCX JTS	10
706466	75×2000	120 - ZA-P41 PCX JTS	10
34309910	100×2000	40 - ZA-P41 PCX JTS	10
34178544	100×2000	60 - ZA-P41 PCX JTS	10
34332978	100×2000	80 - ZA-P41 PCX JTS	10
34382494	100×2000	120 - ZA-P41 PCX JTS	10
706504	150×2000	40 - ZA-P41 PCX JTS	10
706506	150×2000	60 - ZA-P41 PCX JTS	10
706507	150×2000	80 - ZA-P41 PCX JTS	10
34323171	150×2000	120 - ZA-P41 PCX JTS	10

#### TYROLIT SCHLEIFMITTELWERKE SWAROVSKI K.G.

Swarovskistrasse 33 | 6130 Schwaz | Austria Tel. +43 5242 606-0 | Fax +43 5242 63398

Our worldwide subsidiary companies can be found on our website at www.tyrolit.com









