



STEEL WIRE ROPES & ACCESSORIES

STÅLWIRER & TILBEHØR





STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE ROPES - TOWING WIRE ROPES - WIRE ROPESLING

STÅLTØV - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - WIRESLING

INDEX

- 6X36 FC
- 6X36 IWRC
- 6 STRAND IWRC - COMPACTED
- 6-STRAND X-LARGE
- MOORING WIRE ROPES
- MOORING LINE - DYNAONE
- 7X7
- 7X19
- 6X36 IWRC - AISI 316
- CASAR ALPHALIFT
- CASAR TURBOLIFT
- CASAR STRATOPLAST
- 8 STRAND COMPACT
- CASAR TURBOPLAST
- CASAR SUPERPLAST 8
- CASAR PARAPLAST
- 18X7 WSC
- 4X36 WS+WRC
- LT 24
- 35X7
- 35x7 COMPACT
- CASAR STARLIFT
- LT 24 K
- NR 15 MAXILIFT COMPACT
- CASAR EUROLIFT
- NR MAXIPACT® COMPACT
- CASAR POWERPLAST
- CONTAINER WIRE
- FLATBRAIDED WIRE SLINGS
- STANDARD WIRE SLINGS
- WIRE GROMMET SLING
- THIMBLE
- HEAVY DUTY STUB-END THIMBLE
- THIMBLE WITH LINK
- SOLID THIMBLE
- CLOSED SPELTER SOCKET
- OPEN SPELTER SOCKET
- OPEN WEDGE SOCKET
- CR SOCKET
- FAST CONNECTOR SOCKETS W/ PIN
- FAST CONNECTOR SOCKETS W/ BOLT
- SUPER REEVE CONNECTOR SOCKETS W/ PIN
- SUPER REEVE CONNECTOR SOCKETS W/ BOLT
- WIRE ROPE SWIVEL
- WIRE BLOCK - SINGLE
- WIRE BLOCK - DOUBLE
- WIRE BLOCK - TRIPLE
- SNATCH BLOCK S SERIES - W/ HOOK
- SNATCH BLOCK S SERIES - W/ SHACKLE
- SNATCH BLOCK - FOR SHACKLE LIFTING
- PULLEY BLOCK
- PULLEY BLOCK - W/ SWIVEL JOINT
- SECU WIRE GRIP
- WIRE ROPE GRIP
- NORDIC TOWING SLEEVE
- CABLE GRIPS
- WIRELOCK
- WIRE ROPE GREASE - FLUID
- WIRE OIL

INDHOLDSFORTEGNELSE

- 6X36 FC
- 6X36 IWRC
- 6 SLÅET IWRC - KOMPAKT
- 6-SLÅET X-LARGE
- FORTØJNINGSWIRER
- FORTØJNINGSLINE - DYNAONE
- 7X7
- 7X19
- 6X36 IWRC - AISI 316
- CASAR ALPHALIFT
- CASAR TURBOLIFT
- CASAR STRATOPLAST
- 8 SLÅET KOMPACT
- CASAR TURBOPLAST
- CASAR SUPERPLAST 8
- CASAR PARAPLAST
- 18X7 WSC
- 4X36 WS+WRC
- LT 24
- 35X7
- 35x7 KOMPACT
- CASAR STARLIFT
- LT 24 K
- NR 15 MAXILIFT KOMPACT
- CASAR EUROLIFT
- NR MAXIPACT® KOMPACT
- CASAR POWERPLAST
- CONTAINER WIRE
- FLADFLETTEDE WIRE STROPPER
- STANDARD WIRE STROPPER
- SIRE GROMMETS
- KOVS
- KRAFTIG KOVS MED KILE
- KOVS MED OVALRING
- MASSIV KOVS
- LUKKET WIRESKO
- ÅBEN WIRESKO
- ÅBEN KILEWIRELÅS
- CR WIRESKO
- WIRESKO FOR MOBILKRAN M. PIN
- WIRESKO FOR MOBILKRAN M. BOLT
- SUPER WIRESKO FOR MOBILKRAN M. PIN
- SUPER WIRESKO FOR MOBILKRAN M. BOLT
- STÅLWIRE SVIRVEL
- WIRE BLOK - ENKELT
- WIRE BLOK - DOBBELT
- WIRE BLOK - TREDOBBELT
- KASTEBLOK S SERIE - M. KROG
- KASTEBLOK S SERIE - M. SJÆKEL
- KASTEBLOK - FOR SJÆKEL LØFT
- WIRESKIVE
- WIRESKIVE - M. DREJELED
- SECU WIRELÅS
- WIRELÅS
- NORDIC TOWING SLEEVE
- TRÆKSTRØMPE
- WIRELOCK
- WIRE FEDT - FLYDENDE
- WIREOLIE



STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE ROPES - TOWING WIRE ROPES - WIRE ROPESLING
STÅLTÖV - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - WIRESLING

6X36 FC

- Galvanized
- With fibrecore

Art. No.*	Dia. mm	100m kg	MBL Ton		Art. No.*	Dia. mm	100m kg	MBL Ton	
			1770 N/mm ²	1960 N/mm ²				1770 N/mm ²	1960 N/mm ²
01 01 0001	8	23,5	3,81	4,22	01 01 0018	26	248	40,3	44,6
01 01 0002	9	29,7	4,82	5,34	01 01 0020	28	288	46,7	51,7
01 01 0003	10	36,7	5,96	6,60	01 01 0021	30	330	53,6	59,4
01 01 0004	11	44,4	7,21	7,99	01 01 0022	32	376	61,0	67,5
01 01 0005	12	52,8	8,58	9,50	01 01 0024	36	476	77,2	85,5
01 01 0006	13	62,0	10,1	11,1	01 01 0025	38	530	86,0	95,0
01 01 0007	14	71,9	11,6	13,0	01 01 0026	40	587	95,3	106,1
01 01 0009	16	94,0	15,3	16,9	01 01 0028	44	711	115	127
01 01 0011	18	119	19,3	21,4	01 01 0030	48	846	138	152
01 01 0013	20	147	23,9	26,4	01 01 0032	52	992	161	178
01 01 0014	22	178	28,9	31,9	01 01 0033	56	1150	187	207
01 01 0016	24	211	34,3	38,0	01 01 0034	60	1320	214	238

*Is for 1960 N/mm², if 1770 N/mm² is required,
please write in a 01 instead of 00 in the last 4 numbers!
Ex. 01 01 0101


NB! Other sizes available on request!

6X36 FC

- Galvaniseret
- Med fiberhjerter

*Er for 1960 N/mm², hvis 1770 N/mm² er ønsket,
så skriv venligst 01 i stedet for 00 i de sidste 4 tal!
Ex. 01 01 0101

NB! Andre størrelser muligt på forespørgsel!



6X36 IWRC

- Galvanized
- With steel core


Art. No.*	Dia. mm	100m kg	MBL Ton		Art. No.*	Dia. mm	100m kg	MBL Ton	
			1770 N/mm ²	1960 N/mm ²				1770 N/mm ²	1960 N/mm ²
01 02 0001	8	26,2	4,11	4,56	01 02 0021	30	368	57,8	64,0
01 02 0002	9	33,1	5,20	5,76	01 02 0022	32	419	65,8	72,9
01 02 0003	10	40,9	6,42	7,12	01 02 0023	34	473	74,2	82,3
01 02 0004	11	49,5	7,77	8,60	01 02 0024	36	530	83,3	92,2
01 02 0005	12	58,9	9,25	10,2	01 02 0025	38	591	92,8	103
01 02 0006	13	69,1	10,8	12,0	01 02 0026	40	654	103	114
01 02 0007	14	80,2	12,6	14,0	01 02 0027	42	721	113	125
01 02 0009	16	105	16,4	18,3	01 02 0028	44	792	124	138
01 02 0011	18	133	20,8	23,0	01 02 0030	48	942	148	164
01 02 0012	19	148	23,2	25,7	01 02 0031	51	1064	167	185
01 02 0013	20	164	25,7	28,5	01 02 0032	52	1110	173	193
01 02 0014	22	198	31,1	34,5	01 02 0033	56	1280	202	223
01 02 0016	24	236	37,0	41,0	01 02 0034	57	1329	208	231
01 02 0018	26	276	43,4	48,1	01 02 0035	60	1470	232	256
01 02 0020	28	321	50,4	55,8	01 02 0036	64	1675	263	291

*Is for 1960 N/mm², if 1770 N/mm² is required,
please write in a 01 instead of 00 in the last 4 numbers!
Ex. 01020101

NB! Other sizes available on request!

*Er for 1960 N/mm², hvis 1770 N/mm² er ønsket,
så skriv venligst 01 i stedet for 00 i de sidste 4 tal!
Ex. 01 02 0101

NB! Andre størrelser muligt på forespørgsel!





STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - WIRE ROPESLING
STÅLTOV - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER – SLÆBEWIRER - WIRESLING

6 STRAND IWRC COMPACTED

- Galvanized
- With Steel Core

6 SLÅET IWRC KOMPAKT

- Galvaniseret
- Med Stål Hjerter

Art. No.	Model	Diameter mm	Cross section mm ²	Weight kg/m	MBL kN 1960 N/mm ²
01 06 0001	6xK19S+IWRC	10	52	0,44	87,7
01 06 0001		11	64	0,54	107
01 06 0001		12	75	0,64	126
01 06 0001		13	89	0,76	150
01 07 0001	6xK26WS+IWRC	14	103	0,87	169
01 07 0002		15	116	0,98	191
01 07 0003		16	133	1,12	219
01 07 0004		17	152	1,29	251
01 07 0005		18	168	1,42	277
01 07 0006		19	189	1,60	311
01 08 0001	6xK31WS+IWRC	20	209	1,77	345
01 08 0002		22	254	2,15	419
01 08 0003		24	306	2,59	504
01 08 0004		26	363	3,08	598
01 08 0005		28	414	3,50	682
01 09 0001	6xK36WS+IWRC	30	477	4,05	786
01 09 0002		32	541	4,59	891
01 09 0003		34	614	5,21	1012
01 09 0004		36	687	5,83	1132
01 09 0005		38	765	6,50	1261
01 09 0006		40	850	7,22	1402
01 09 0007		42	928	7,88	1530
01 09 0008		44	1032	8,77	1701
01 09 0009		46	1121	9,52	1847
01 09 0010		48	1221	10,37	2012
01 09 0011		50	1322	11,23	2179
01 09 0012		52	1434	12,18	2364

Tolerance on diameter +1%; +4%
Available in 2160 N/mm² on request!

Tolerance på diameter +1%; +4%
Muligt som 2160 N/mm² på forespørgelse!



LUFFING WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - RAMP WIRE - ELEVATOR WIRE
BOOM HEJSEWIRE - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - RAMPEWIRE - ELEVATORWIRE

6-STRAND X-LARGE

- Galvanized
- With steel core

6-SLÅET X-LARGE

- Galvaniseret
- Med stålhjerte

Art. No.	Diameter mm	Weight kg/m	MBL Ton 1960 N/mm ²
01 66 0001	67	19,0	330
01 66 0002	71	20,8	360
01 66 0003	74	22,8	392
01 66 0004	77	24,7	425
01 66 0005	80	26,8	458
01 66 0006	83	29,0	493
01 66 0007	87	31,3	528
01 66 0008	90	33,8	563
01 66 0009	96	38,7	640
01 66 0010	103	44,0	720
01 66 0011	109	49,6	788
01 66 0012	115	55,7	876
01 66 0013	122	62,1	967
01 66 0014	128	68,8	1063

NB! Other sizes available on request!

NB! Andre størrelser muligt på forespørgsel!





LUFFING WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - RAMP WIRE - ELEVATOR WIRE
BOOM HEJSEWIRE - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - RAMPEWIRE - ELEVATORWIRE

MOORING WIRE ROPES

- 6X36+IWRC
- 2 mtr. Eye in each end
- Std. length = 220 mtr.
- Other lengths available on request

FORTØJNINGSWIRER

- 6X36+IWRC
- 2 mtr. Øje i hver ende
- Std. længde = 220 mtr.
- Andre længder muligt på forespørgelse

Art. No.	Dia. - mm	MBL - kN	Weight - kg/100m
01 64 0001	26	437	248,1
01 64 0002	28	547	320,7
01 64 0003	30	628	368,1
01 64 0004	32	715	418,8
01 64 0005	34	807	472,8
01 64 0006	36	904	530,1
01 64 0007	38	1008	590,6
01 64 0008	40	1116	654,4
01 64 0009	42	1231	721,5

OCIMF recommends mooring tails with a MBL of 125% related to the mooring wire rope. See our **MOORING TAILS** in chapter 5. They have equal breaking strength under wet and dry conditions.

OCIMF anbefaler førtøjnings sabber med en MBL på 125% i forhold til fortøjnings wirer. Se vores **FORTØJNINGSWIRER** i kapitel 5. De har samme brudstyrke i henholdsvis våde og tørre forhold.

MOORING LINE - DYNAONE

- 2 mtr. Eye in each end
- Std. length = 220 mtr.
- Other lengths available on request

FORTØJNINGSLINE - DYNAONE

- 2 mtr. Øje i hver ende
- Std. længde = 220 mtr.
- Andre længder muligt på forespørgelse

Art. No.	Dia. - mm	MBL - ton	Weight - kg/100m
01 65 0001	22	24,3	39,26
01 65 0002	24	28,5	45,99
01 65 0003	26	33,0	52,72
01 65 0004	28	39,0	61,69
01 65 0005	32	50,7	80,76
01 65 0006	34	55,7	90,86
01 65 0007	36	60,8	98,71
01 65 0008	38	71,0	107,68
01 65 0009	40	76,0	112,51
01 65 0010	44	91,5	134,60



LUFFING WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - RAMP WIRE - ELEVATOR WIRE
BOOM HEJSEWIRE - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - RAMPEWIRE - ELEVATORWIRE


7X7

- Galvanized
- Steel Core

Art. No	Diameter - mm	kg/100 mtr.	MBL Ton - 1960 N/mm ²
01 03 0001	1,0	0,38	0,057
01 03 0002	1,5	0,86	0,13
01 03 0003	2,0	1,54	0,26
01 03 0004	2,5	2,40	0,36
01 03 0005	3,0	3,46	0,58
01 03 0006	4,0	6,14	1,04
01 03 0007	5,0	9,60	1,62
01 03 0008	6,0	13,8	2,34
01 03 0009	8,0	24,6	4,15

7X7

- Galvaniseret
- Stålhjerte




7X19

- Galvanized
- Steel Core

Art. No.	Diameter - mm	kg/100 mtr.	MBL Ton - 1960 N/mm ²
01 04 0001	3,0	3,43	0,65
01 04 0002	4,0	6,10	1,16
01 04 0003	5,0	9,53	1,81
01 04 0004	6,0	13,7	2,61
01 04 0005	8,0	24,4	4,63
01 04 0006	9,0	30,9	5,86
01 04 0007	10,0	38,1	7,24
01 04 0008	12,0	54,9	10,4

7X19

- Galvaniseret
- Stålhjerte




7X19 AISI 316

- Stainless
- Steel Core

Art. No.	Diameter - mm	kg/100 mtr.	MBL Ton - 1570 N/mm ²
01 56 0001	2,0	1,52	0,23
01 56 0002	3,0	3,43	0,52
01 56 0003	4,0	6,10	0,93
01 56 0004	5,0	9,50	1,45
01 56 0005	6,0	13,7	2,09
01 56 0006	8,0	24,4	3,71
01 56 0007	9,0	30,9	4,70
01 56 0008	10,0	38,1	5,80
01 56 0009	12,0	54,9	8,35

7X19 AISI 316

- Rustfri
- Stålhjerte




6X36+IWRC AISI 316

- Stainless
- Steel Core

Art. No.	Diameter - mm	kg/mtr	MBL (kN) - 1570 N/mm ²
01 55 0000	14	82	11,2
01 55 0001	16	107	14,6
01 55 0002	18	135	18,5
01 55 0003	20	167	22,8
01 55 0004	22	202	27,6
01 55 0005	24	241	32,8
01 55 0006	26	283	38,5

6X36+IWRC AISI 316

- Rustfri
- Stålhjerte





MULTI FALLWIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - WINCH WIRE ROPE
STÅLTÖV - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - SPIL WIRE


CASAR ALPHALIFT

8-strand steel wire rope which is very flexible.
Casar Alphalift may not be used with a swivel.

CASAR ALPHALIFT

8-slået stål wire som er meget fleksibel.
Casar Alphalift må ikke bruges med en svirvel.

Art. No.*	Diameter mm	Metallic area mm ²	kg/m	MBL (kN)		
				1770 N/mm ²	1960 N/mm ²	2160 N/mm ²
01 05 0001	4	8	0,06	11,7	13	14,3
01 05 0002	4,5	10	0,08	15,1	16,7	18,4
01 05 0003	5	12,3	0,1	19	21,1	23,2
01 05 0004	5,5	14,8	0,12	23,6	26,1	28,8
01 05 0005	6	18,2	0,15	28,5	31,5	34,7
01 05 0006	6,5	22,4	0,19	34,2	37,9	41,8
01 05 0007	7	24,9	0,21	38,5	42,6	47
01 05 0008	7,5	28,5	0,24	44,8	49,6	54,6
01 05 0009	8	33	0,28	49,6	55	60,6
01 05 0010	8,5	37,1	0,31	53	58,7	64,6
01 05 0011	9	41,4	0,35	65	72	79,3
01 05 0012	10	50,2	0,43	75,8	84	92,5
01 05 0013	11	60,7	0,52	92,9	102,9	113,3
01 05 0014	12	72,3	0,62	111,3	123,2	135,8
01 05 0015	12,7	81	0,69	123,5	136,8	150,7
01 05 0016	13	84,8	0,72	129,4	143,3	157,9
01 05 0017	14	98,4	0,84	150,3	166,4	183,4
01 05 0018	15	112,9	0,97	175,7	194,6	214,5
01 05 0019	16	128,5	1,1	196,1	217,1	239,3
01 05 0020	17	145	1,24	216,9	240,1	264,7
01 05 0021	18	162,6	1,39	246,9	273,4	301,3
01 05 0022	19	181,2	1,55	280,7	310,9	342,6
01 05 0023	20	200,8	1,72	308,6	341,7	376,5
01 05 0024	21	221,3	1,9	340,1	376,6	415,1
01 05 0025	22	242,9	2,08	370,6	410,4	452,3
01 05 0026	23	265,5	2,28	400,2	443,2	488,4
01 05 0027	24	289,1	2,48	435,7	482,5	531,7
01 05 0028	25	313,7	2,69	483,8	535,8	590,5
01 05 0029	26	339,3	2,91	519,7	575,5	634,3
01 05 0030	27	365,9	3,14	557,3	617,1	680,1
01 05 0031	28	393,5	3,38	605,9	671,3	736,3



*Is for 1960 N/mm², if 1770 N/mm² is required,
please write in a 01 instead of 00 in the last 4 numbers!
02 for 2160 N/mm²
Ex. 01 05 0101 or 01 05 0201

*Er for 1960 N/mm², hvis 1770 N/mm² er ønskes,
så skriv venligst 01 i stedet for 00 i de sidste 4 tal!
02 for 2160 N/mm²
Ex. 01 05 0101 eller 01 05 0201



LUFFING WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - RAMP WIRE - ELEVATOR WIRE
BOOM HEJSEWIRE - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - RAMPEWIRE - ELEVATORWIRE

CASAR TURBOLIFT

8-strand steel wire rope made of compacted strands in a parallel lay construction.


Casar Turbolift may not be used with a swivel.

CASAR TURBOLIFT

8-slået stål wire, lavet af kompakte tråde i en parallel slået konstruktion.

Casar Turbolift må ikke bruges med en svirvel.

Art. No.*	Dia. mm	Metallic area mm ²	kg/m	MBL (kN)		
				1770 N/mm ²	1960 N/mm ²	2160 N/mm ²
01 10 0001	10	56,9	0,47	84,9	94,0	103,6
01 10 0002	11	69,1	0,58	102,6	113,6	125,2
01 10 0003	12	82,5	0,69	112,4	135,5	149,3
01 10 0004	12,7	92,7	0,77	136,5	151,2	166,5
01 10 0005	13	97,1	0,81	143,0	158,4	174,5
01 10 0006	14	112,6	0,94	166,2	184,1	202,8
01 10 0007	15	129,4	1,08	191,8	212,4	234,1
01 10 0008	16	147,2	1,23	218,4	241,9	266,5
01 10 0009	17	166,1	1,39	248,1	274,8	302,8
01 10 0010	18	185,3	1,55	278,5	308,4	339,8
01 10 0011	19	207,5	1,74	307,3	340,3	375,0
01 10 0012	20	229,6	1,92	342,3	379,0	417,7
01 10 0013	21	251,1	2,11	375,0	415,2	457,6
01 10 0014	22	278,4	2,33	414,4	458,9	505,7
01 10 0015	23	304,2	2,55	453,0	501,7	552,8
01 10 0016	24	330,5	2,77	490,2	542,8	598,2
01 10 0017	25	357,3	3,00	532,7	589,9	650,1
01 10 0018	26	391,6	3,28	574,4	636,0	700,9
01 10 0019	27	424,1	3,56	624,8	691,8	762,4
01 10 0020	28	452,1	3,79	670,4	742,4	818,1
01 10 0021	29	486,5	4,08	721,5	799,0	880,5
01 10 0022	30	519,5	4,36	772,4	855,3	942,6
01 10 0023	31	560,0	4,70	822,9	911,3	1004,3
01 10 0024	32	593,4	4,98	874,4	968,2	1067,0
01 10 0025	33	634,1	5,32	930,3	1030,2	1135,3
01 10 0026	34	666,8	5,60	988,9	1095,0	1206,8
01 10 0027	36	747,4	6,27	1101,7	1220,0	1344,5
01 10 0028	38	836,5	7,02	1230,3	1362,4	1501,4
01 10 0029	40	931,7	7,02	1367,7	1514,5	1669,1
01 10 0030	42	1021,7	8,58	1513,7	1676,2	1847,2
01 10 0031	44	1126,3	9,46	1653,3	1830,8	2017,6
01 10 0032	46	1230,3	10,33	1807,2	2001,2	2205,4
01 10 0033	48	1331,8	11,18	1960,8	2171,3	2392,8
01 10 0034	50	1436,7	12,06	2136,4	2365,7	2607,1
01 10 0035	52	1557,5	13,08	2293,4	2539,6	2798,7
01 10 0036	54	1679,6	14,10	2485,9	2752,8	3033,7
01 10 0037	56	1824,7	15,32	2659,3	2944,8	3245,2



CASAR
TURBOLIFT

Diameters up to 72mm on request!

*Is for 1960 N/mm², if 1770 N/mm² is required,
please write in a 01 instead of 00 in the last 4 numbers!
02 for 2160 N/mm²

Ex. 01 10 0101 or 01 10 0201

Diameter op til 72mm på forespørgelse!

*Er for 1960 N/mm², hvis 1770 N/mm² er ønsket,
så skriv venligst 01 i stedet for 00 i de sidste 4 tal!
02 for 2160 N/mm²

Ex. 01 10 0101 eller 01 10 0201



LUFFING WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - RAMP WIRE - ELEVATOR WIRE
BOOM HEJSEWIRE - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - RAMPEWIRE - ELEVATORWIRE

CASAR STRATOPLAST

8-strand steel wire rope with a plastic layer between the steel core and the outer strands.

Casar Stratoplast may not be used with a swivel.

CASAR STRATOPLAST

8-slået stål wire, med et plastik lag mellem stål kernen og de ydre tråde.

Casar Stratoplast må ikke bruges med en svirvel.

Art. No*	Dia. mm	Metallic area mm ²	kg/m	Calculated aggregate break load (kN)		MBL (kN)	
				1770 N/mm ²	1960 N/mm ²	1770 N/mm ²	1960 N/mm ²
01 11 0001	8	30,6	0,27	54,2	60,1	47,2	52,3
01 11 0002	9	38,8	0,34	68,6	76,0	60,0	66,4
01 11 0003	10	48,8	0,43	86,4	95,6	74,0	82,0
01 11 0004	11	59,6	0,53	105,4	116,8	88,5	98,0
01 11 0005	12	68,3	0,60	120,8	133,8	106,6	118,0
01 11 0006	12,7	78,0	0,69	138,0	152,8	119,4	132,2
01 11 0007	13	81,7	0,72	144,6	160,1	125,5	138,9
01 11 0008	14	95,1	0,84	168,3	186,4	144,6	160,1
01 11 0009	15	110,8	0,98	196,1	217,2	166,3	184,1
01 11 0010	16	125,4	1,11	222,0	245,8	189,0	209,3
01 11 0011	17	140,3	1,24	248,2	274,9	211,5	234,2
01 11 0012	18	157,7	1,40	279,2	309,2	239,8	265,5
01 11 0013	19	178,6	1,59	316,1	350,0	264,5	292,9
01 11 0014	20	198,2	1,76	350,7	388,4	295,3	327,0
01 11 0015	21	217,1	1,93	384,3	425,5	324,2	359,0
01 11 0016	22	245,4	2,18	434,4	481,0	356,2	394,5
01 11 0017	23	258,1	2,29	456,8	505,9	386,8	428,3
01 11 0018	24	280,0	2,49	495,6	548,8	423,4	468,9
01 11 0019	25	302,0	2,68	534,5	591,9	464,3	514,2
01 11 0020	26	326,8	2,90	578,4	640,4	504,7	558,8
01 11 0021	27	353,2	3,14	625,1	692,3	535,8	593,3
01 11 0022	28	375,2	3,33	664,1	735,4	576,2	638,0
01 11 0023	29	407,7	3,62	721,6	799,1	618,0	684,3
01 11 0024	30	435,8	3,87	771,4	854,2	666,3	737,8
01 11 0025	31	464,3	4,13	821,8	910,0	708,3	784,3
01 11 0026	32	495,4	4,40	876,9	971,1	756,7	837,9
01 11 0027	33	526,4	4,68	931,7	1031,7	809,6	896,5
01 11 0028	34	556,8	4,95	985,6	1091,3	853,7	945,3
01 11 0029	36	626,5	5,57	1198,9	1227,9	952,4	1054,7
01 11 0030	38	705,1	6,27	1248,0	1382,0	1071,1	1186,0
01 11 0031	40	770,1	6,85	1363,0	1509,91	1181,1	1307,9
01 11 0032	42	859,3	7,64	1521,0	1684,3	1308,06	1448,9
01 11 0033	44	942,5	8,38	1668,2	1847,3	1430,1	1583,7
01 11 0034	46	1031,6	9,18	1825,8	2021,8	1556,7	1723,8
01 11 0035	48	1123,1	9,99	1987,9	2201,3	1692,8	1874,5
01 11 0036	50	1212,7	10,79	2146,5	2376,9	1850,7	2049,4



CASAR
STRATOPLAST

*Is for 1960 N/mm², if 1770 N/mm² is required, please write in a 01 instead of 00 in the last 4 numbers!
Ex. 01 11 0101

*Er for 1960 N/mm², hvis 1770 N/mm² er ønskes, så skriv venligst 01 i stedet for 00 i de sidste 4 tal!
Ex. 01 11 0101



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

8 STRAND COMPACT

- Galvanized
- Regular or Lang's lay
- May NOT be used with a Swivel

8 SLÅET KOMPAKT

- Galvaniseret
- Regulær- eller langs slået
- Må IKKE bruges med en Svirvel

Art. No.*	Model	Dia. mm	Cross section mm ²	Weight kg/m	MBL kN 1960 N/mm ² (1)	MBL kN 2160 N/mm ² (1)	MBL kN 1960 N/mm ² (2)
01 12 0101	8xK12W+IWRC	8	33	0,29	-	58,0	-
01 12 0102		9	42	0,36	-	73,6	-
01 12 0103		10	53	0,45	-	92,4	-
01 12 0104		11	64	0,55	-	112	-
01 13 0001	8xK17S+IWRC	12	75	0,65	125	131	121
01 13 0002		13	90	0,77	150	157	143
01 13 0003		14	103	0,89	172	180	167
01 13 0004		15	120	1,03	200	210	191
01 13 0005		16	134	1,16	224	234	214
01 14 0001	8xK26WS+IWRC	18	172	1,49	287	300	275
01 14 0002		19	191	1,65	318	334	304
01 14 0003		20	214	1,85	358	375	342
01 14 0004		22	257	2,23	430	451	406
01 14 0005		24	308	2,66	513	538	491
01 14 0006		26	359	3,10	600	629	571
01 14 0007		28	415	3,58	692	725	660
01 15 0001	8xK31WS+IWRC	30	479	4,16	800	859	764
01 15 0002		32	549	4,375	916	961	868
01 15 0003		34	620	5,38	1035	1086	987
01 15 0004		36	689	5,95	1149	1205	1104
01 15 0005		38	771	6,66	1286	1349	1235
01 15 0006		40	852	7,36	1421	1480	1360
01 15 0007		42	938	8,12	1564	1640	1488
01 16 0001	8xK36WS+IWRC	44	1031	8,92	1721	-	1685
01 16 0002		46	1133	9,80	1891	-	1834
01 16 0003		48	1222	10,57	2040	-	1997
01 16 0004		50	1327	11,51	2214	-	2178
01 16 0005		52	1440	12,53	2404	-	2344
01 16 0006		54	1565	13,51	2611	-	2536
01 16 0007		56	1667	14,42	2781	-	2727
01 16 0008		58	1794	15,52	2993	-	2925
01 16 0009		60	1920	16,61	3203	-	3119

Tolerance on +1%; +4%

(1) Regular lay

(2) Langs lay

Optional: PPI (Plastic Protected Impregnated Core)

*Is for 1960 N/mm²(1), if 2160 N/mm²(1) is required, please write in a 01 instead of 00 in the last 4 numbers! 02 for 1960 N/mm²(2)

Ex. 01 16 0101 or 01 16 0201

Tolerance på +1%; +4%

(1) Regulær slået

(2) Langs slået

Option: PPI (Plastik Beskyttet Imprægneret Kerne)

*Er for 1960 N/mm², hvis 1770 N/mm² er ønskes, så skriv venligst

01 i stedet for 00 i de sidste 4 tal! 02 for 1960 N/mm²(2)

Ex. 01 16 0101 eller 01 16 0201



BOOM HOIST WIRE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - RAMP WIRE - ELEVATOR WIRE
BOM HEJSEWIRE - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - RAMPEWIRE - ELEVAOTRWIRE - HÆNGEDÆKS WIRE

CASAR TURBOPLAST

8-strand steel wire rope made of compacted strands with a plastic layer between the steel core and the outer strands.

Casar Turboplast may not be used with a swivel.

CASAR TURBOPLAST

8-slået stål wire lavet af kompakte tråde, med et plastik lag mellem stål kernen og de ydre tråde.

Casar Turboplast må ikke bruges med en svirvel.

Art. No.*	Diameter mm	Metallic area mm ²	kg/m	Calculated aggregate break load (kN)		MBL (kN)	
				1770 N/mm ²	1960 N/mm ²	1770 N/mm ²	1960 N/mm ²
01 17 0001	8	33,4	0,29	59,1	65,4	51,1	56,6
01 17 0002	9	42,8	0,37	75,7	83,9	66,0	73,0
01 17 0003	10	53,0	0,46	93,7	103,8	80,2	88,7
01 17 0004	11	63,8	0,55	112,8	124,0	97,1	107,5
01 17 0005	12	75,7	0,65	134,0	148,3	115,1	127,4
01 17 0006	12,7	84,9	0,73	150,3	166,5	129,6	143,5
01 17 0007	13	89,5	0,77	158,3	175,3	136,6	151,3
01 17 0008	14	103,1	0,89	182,5	202,1	157,9	174,8
01 17 0009	15	119,0	1,03	210,6	233,2	183,1	202,7
01 17 0010	16	135,5	1,17	239,9	265,6	207,2	229,4
01 17 0011	17	152,4	1,32	269,7	298,7	230,6	255,4
01 17 0012	18	168,9	1,46	299,0	331,1	260,2	288,2
01 17 0013	19	189,0	1,64	334,5	370,4	292,1	323,5
01 17 0014	20	210,7	1,83	372,9	412,9	321,0	355,5
01 17 0015	21	226,9	1,97	401,6	444,8	350,8	388,5
01 17 0016	22	251,9	2,19	445,8	493,7	391,7	433,7
01 17 0017	23	275,1	2,39	486,9	539,2	425,7	471,4
01 17 0018	24	299,5	2,60	530,1	587,0	464,5	514,3
01 17 0019	25	324,2	2,82	573,8	635,4	504,2	558,2
01 17 0020	26	352,4	3,06	623,8	690,7	548,9	607,8
01 17 0021	27	380,3	3,30	673,1	745,4	584,9	647,7
01 17 0022	28	405,2	3,52	717,2	794,2	629,6	697,3
01 17 0023	29	436,0	3,79	771,6	854,5	678,8	736,9
01 17 0024	30	470,8	4,09	833,2	922,7	727,1	789,3
01 17 0025	31	502,3	4,37	889,1	984,6	776,8	843,3
01 17 0026	32	533,7	4,64	944,6	1046,0	828,0	911,0
01 17 0027	33	571,8	4,97	1012,1	1120,7	875,2	950,1
01 17 0028	34	601,4	5,23	1064,4	1178,7	936,4	1024,9
01 17 0029	36	670,5	5,83	1168,8	1314,02	1040,1	1129,2
01 17 0030	38	753,1	6,55	133,0	1476,0	1163,0	1262,6
01 17 0031	40	837,9	7,29	1483,1	1642,3	1285,5	1395,5
01 17 0032	42	914,7	7,95	1619,1	1792,9	1422,0	1543,8
01 17 0033	44	1010,7	8,79	1788,9	1980,9	1554,3	1687,4
01 17 0034	46	1102,4	9,59	1951,3	2160,7	1713,0	1859,7

Diameters up to 72mm on request!


*Is for 1960 N/mm², if 1770 N/mm² is required, please write in a 01 instead of 00 in the last 4 numbers!

Ex. 01 11 0101

Diameter op til 72mm på forespørgelse!

*Er for 1960 N/mm², hvis 1770 N/mm² er ønskes, så skriv venligst 01 i stedet for 00 i de sidste 4 tal!

Ex. 01 11 0101

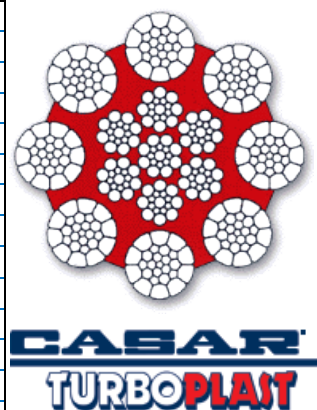



BOOM HOIST WIRE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - RAMP WIRE - ELEVATOR WIRE
BOM HEJSEWIRE - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - RAMPEWIRE - ELEVAOTRWIRE - HÆNGEDÆKS WIRE

CASAR SUPERPLAST 8

10-strand steel wire rope with a plastic layer between the steel core and the outer strands.

Casar Superplast 8 may not be used with a swivel.

CASAR SUPERPLAST 8

10-slået stål wire, med et plastik lag mellem stål kernen og de ydre tråde.

Casar Superplast 8 må ikke bruges med en svivel.


Art. No.*	Dia. mm	Metallic area mm ²	kg/m	MBL (kN)		
				1770 N/mm ²	1960 N/mm ²	2160 N/mm ²
01 18 0001	10	54,6	0,46	82,6	90,9	99,6
01 18 0002	11	65,9	0,56	98,9	108,9	119,3
01 18 0003	12	77,0	0,66	115,6	127,2	139,4
01 18 0004	12,7	86,9	0,74	131,0	144,2	158,0
01 18 0005	13	90,9	0,78	137,9	151,8	166,2
01 18 0006	14	103,9	0,89	157,9	173,8	190,4
01 18 0007	15	119,8	1,03	181,5	199,8	218,9
01 18 0008	16	137,0	1,17	205,7	226,5	248,1
01 18 0009	17	156,6	1,34	236,2	260,0	284,8
01 18 0010	18	176,0	1,51	266,0	292,8	320,8
01 18 0011	19	194,0	1,66	291,0	320,4	351,0
01 18 0012	20	215,4	1,85	326,5	359,4	393,8
01 18 0013	21	237,7	2,04	360,4	396,8	434,7
01 18 0014	22	260,0	2,23	392,6	432,2	473,5
01 18 0015	23	286,4	2,46	429,7	473,0	518,2
01 18 0016	24	312,2	2,68	470,0	517,4	566,9
01 18 0017	25	336,5	2,89	516,0	585,0	613,4
01 18 0018	26	363,7	3,12	549,5	604,9	662,7
01 18 0019	27	390,7	3,36	587,6	646,8	708,6
01 18 0020	28	420,3	3,61	654,0	720,0	822,0
01 18 0021	29	445,8	3,83	670,2	737,8	808,3
01 18 0022	30	480,5	4,13	723,8	796,8	872,9
01 18 0023	31	509,3	4,38	769,1	846,7	927,5
01 18 0024	32	560,3	4,81	841,0	925,9	1014,3
01 18 0025	33	585,1	5,03	879,7	968,4	1060,9
01 18 0026	34	630,2	5,42	950,2	1046,0	1145,9
01 18 0027	36	704,1	6,05	1065,1	1172,5	1284,5
01 18 0028	38	774,3	6,65	1165,1	1282,5	1405,0
01 18 0029	40	861,9	7,41	1298,3	1429,3	1565,8
01 18 0030	42	949,8	8,16	1436,7	1581,5	1732,6
01 18 0031	44	1038,3	8,92	1567,8	1725,8	1890,7
01 18 0032	46	1150,9	9,89	1725,3	1899,3	2080,7
01 18 0033	48	1249,9	10,74	1879,4	2068,9	2266,6
01 18 0034	50	1342,9	11,54	2027,8	2232,3	2445,5
01 18 0035	52	1455,2	12,51	2199,5	2421,3	2652,6
01 18 0036	54	1582,1	13,60	2386,0	2626,5	2877,4

Diameters up to 72mm on request!

*Is for 1960 N/mm², if 1770 N/mm² is required, please write in a 01 instead of 00 in the last 4 numbers! 02 for 2160 N/mm²
Ex. 01 10 0101 or 01 10 0201

Diameter op til 72mm på forespørgelse!

*Er for 1960 N/mm², hvis 1770 N/mm² er ønsket, så skriv venligst 01 i stedet for 00 i de sidste 4 tal! 02 for 2160 N/mm²
Ex. 01 10 0101 eller 01 10 0201

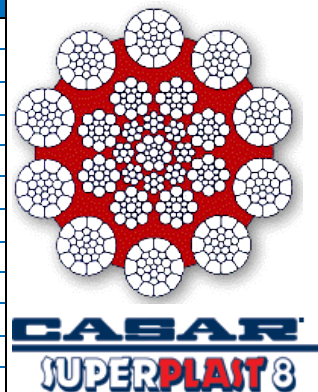



BOOM HOIST WIRE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - RAMP WIRE - ELEVATOR WIRE - CAR DECK WIRE ROPE
BOM HEJSEWIRE - STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER - RAMPEWIRE - ELEVATORWIRE - HÆNGEDÆKS WIRE

CASAR PARAPLAST

8-strand steel wire rope made of compacted strands in a parallel lay construction with a plastic layer between the steel core and the outer strands.


Casar Paraplast may not be used with a swivel.

CASAR PARAPLAST

8-slået stål wire lavet af kompakte tråde i en parallel slået konstruktion, med et plastik lag mellem stål kernen og de ydre tråde.

Casar Paraplast må ikke bruges med en svirvel.

Art. No.*	Dia. mm	Metallic area mm ²	kg/m	MBL (kN)		
				1770 N/mm ²	1960 N/mm ²	2160 N/mm ²
01 19 0001	6	19,0	0,16	29,5	32,7	35,2
01 19 0002	7	26,3	0,22	41,0	45,4	48,9
01 19 0003	8	34,8	0,29	54,2	60,0	64,6
01 19 0004	9	44,1	0,37	68,6	76,0	81,8
01 19 0005	10	54,2	0,46	84,5	93,5	100,7
01 19 0006	11	65,7	0,55	102,4	113,4	122,1
01 19 0007	12	79,6	0,67	123,9	137,2	147,8
01 19 0008	12,7	88,4	0,75	137,6	152,4	164,1
01 19 0009	13	92,6	0,78	144,2	159,7	172,0
01 19 0010	14	107,1	0,91	166,9	184,8	199,0
01 19 0011	15	123,1	1,04	191,7	212,3	228,6
01 19 0012	16	139,4	1,18	217,1	240,4	258,9
01 19 0013	17	158,5	1,34	246,8	273,3	294,4
01 19 0014	18	176,4	1,50	274,8	304,3	327,7
01 19 0015	19	198,3	1,68	308,9	342,0	368,4
01 19 0016	20	220,1	1,87	342,9	379,7	408,9
01 19 0017	21	240,4	2,04	374,5	414,7	446,6
01 19 0018	22	264,8	2,25	412,5	456,8	491,9
01 19 0019	23	299,8	2,54	467,0	517,1	556,9
01 19 0020	24	325,7	2,76	507,3	561,8	605,0
01 19 0021	25	353,1	3,00	550,0	609,0	655,9
01 19 0022	26	383,9	3,26	598,0	662,2	713,1
01 19 0023	27	412,3	3,50	642,1	711,0	765,8
01 19 0024	28	441,0	3,74	686,8	760,6	819,1
01 19 0025	29	475,6	4,04	740,8	820,3	883,5
01 19 0026	30	512,5	4,35	798,3	884,0	952,0
01 19 0027	31	546,62	4,64	841,7	921,4	1003,6
01 19 0028	32	580,37	4,93	893,7	978,3	1065,6
01 19 0029	33	618,50	5,25	952,4	1042,5	1135,6
01 19 0030	34	650,80	5,53	1002,2	1097,0	1194,9
01 19 0031	35	690,47	5,86	1063,3	1163,9	1267,7
01 19 0032	36	731,99	6,22	1127,2	1233,8	1343,9
01 19 0033	37	770,79	6,55	1186,9	1299,2	1415,2
01 19 0034	38	817,03	6,94	1258,1	1377,2	1500,0
01 19 0035	39	851,53	7,23	1311,3	1435,3	1563,4
01 19 0036	40	909,74	7,73	1400,9	1533,5	1670,3
01 19 0037	42	996,76	8,47	1534,9	1680,1	1830,1
01 19 0038	44	1098,37	9,33	1691,4	1851,4	2016,6
01 19 0039	46	1200,03	10,20	1847,9	2022,8	2203,3
01 19 0040	48	1306,37	11,10	2011,7	2202,0	2398,5
01 19 0041	50	1403,26	11,92	2160,9	2365,3	2576,4



CASAR
PARAPLAST

*Is for 1960 N/mm², if 1770 N/mm² is required,
please write in a 01 instead of 00 in the last 4 numbers!
02 for 2160 N/mm²
Ex. 01 19 0101 or 01 19 0201

*Er for 1960 N/mm², hvis 1770 N/mm² er ønsket,
så skriv venligst 01 i stedet for 00 i de sidste 4 tal!
02 for 2160 N/mm²
Ex. 01 19 0101 eller 01 19 0201




HOIST WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE – WINCH WIRE ROPE

STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

19x7 WSC

- Rotation resistant
- Galvanized
- Steel Core

Art. No.	Diameter mm	100m kg	MBL Ton 1960 N/mm ²
01 20 0001	4	6,4	1,05
01 20 0002	5	10,0	1,64
01 20 0003	6	14,4	2,36
01 20 0004	7	19,7	3,21
01 20 0005	8	25,7	4,20
01 20 0006	9	32,5	5,31
01 20 0007	10	40,1	6,56
01 20 0008	11	48,5	7,93
01 20 0009	12	57,7	9,44
01 20 0010	13	67,8	11,1
01 20 0011	14	79,0	12,9
01 20 0012	15	90,0	14,8
01 20 0013	16	103	16,8
01 20 0014	18	130	21,2
01 20 0015	19	145	23,7
01 20 0016	20	160	26,2
01 20 0017	22	194	31,7
01 20 0018	24	231	37,8
01 20 0019	26	271	44,3
01 20 0020	28	314	51,4




19x7 WSC

- Rotations svag
- Galvaniseret
- Stålhjerte

4x36 WS+WRC

- Non Rotating
- Steel core

Art. No.	Diameter mm	Kg/m	MBL (kN) 1960 N/mm ²
01 21 0001	20	1,79	278
01 21 0002	22	1,82	335
01 21 0003	24	2,20	385
01 21 0004	26	2,60	467
01 21 0005	28	2,99	543
01 21 0006	30	3,44	624
01 21 0007	32	3,88	709
01 21 0008	34	4,45	801
01 21 0009	36	4,85	898



4x36 WS+WRC

- Rotations Fri
- Stålhjerte



HOIST WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE – WINCH WIRE ROPE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

LT 24

- Rotation resistant
- Galvanized
- Flexible - Lang's lay


LT 24

- Rotations svag
- Galvaniseret
- Fleksibel – Langs slået

Art. No.	Model	Dia. mm	Cross section mm ²	Weight kg/m	MBL kN 1960 N/mm ²
01 22 0001	24(W)x7	7,2	23,4	0,21	39,1
01 22 0002		8	29,0	0,25	48,4
01 22 0003		9	37,9	0,33	63,2
01 22 0004		10	48,8	0,42	82,0
01 22 0005		11	57	0,51	96
01 22 0006		12	69	0,60	114
01 22 0007		13	80	0,71	134
01 22 0008		14	93	0,82	155
01 22 0009		15	107	0,94	178
01 22 0010		16	120	1,06	201
01 22 0011		18	155	1,37	259
01 22 0012		19	170	1,50	284
01 22 0013		20	188	1,65	313
01 22 0014		22	231	2,03	385
01 22 0015		24	276	2,43	461

Tolerance on +1%; +4%.
Filling factor (f): 24x7 = 0,606

Tolerance på +1%; +4%
Fyldfaktor (f): 24x7 = 0,606

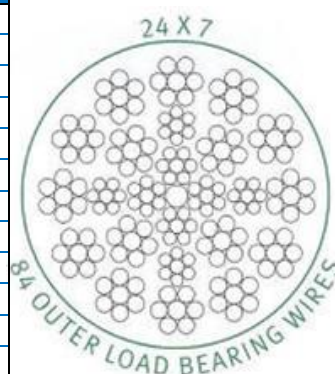

35x7

- Rotation resistant
- Galvanized
- Steel core
- RHOL


35x7

- Rotations svag
- Galvaniseret
- Stålhjerte
- RHOL

Art. No.	Dia. mm	kg/100m	MBL Ton 1960 N/mm ²
01 54 0101	10	45,4	7,20
01 54 0102	11	54,9	8,71
01 54 0103	12	65,4	10,4
01 54 0104	13	76,7	12,1
01 54 0105	14	89,0	14,1
01 54 0106	16	116	18,5
01 54 0107	18	147	23,4
01 54 0108	20	182	28,8
01 54 0109	22	220	34,9
01 54 0110	24	262	41,4
01 54 0111	26	307	48,6
01 54 0112	28	356	56,4
01 54 0113	32	465	73,7
01 54 0114	36	588	93,2
01 54 0115	38	656	104
01 54 0116	40	726	115

Other sized available on request!

Andre størrelser muligt på forespørgsel!





HOIST WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - WINCH WIRE ROPE
STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER


35x7 COMPACT

- Rotation resistant
- Galvanized
- Steel core
- RHOL

35x7 KOMPAKT

- Rotations svag
- Galvaniseret
- Stålhjerte
- RHOL

Art. No.	Dia. mm	kg/100m	MBL Ton 2160 N/mm ²
01 54 0201	10	48	9,900
01 54 0202	11	58	11,825
01 54 0203	12	68	14,271
01 54 0204	13	81	16,514
01 54 0205	14	94	17,533
01 54 0206	16	122	25,484
01 54 0207	18	155	31,397
01 54 0208	20	195	40,775
01 54 0209	22	241	49,134
01 54 0210	24	284	58,512
01 54 0211	26	335	67,380
01 54 0212	28	391	80,122
01 54 0213	32	503	100,612
01 54 0214	36	642	127,217
01 54 0215	38	718	140,775
01 54 0216	40	793	155,454



Other sized available on request!

Andre størrelser muligt på forespørgsel!



HOIST WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - WINCH WIRE ROPE
STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER

CASAR STARLIFT

A non rotating steel wire rope with a compacted special designed steel core.

CASAR STARLIFT

Rotations fri stål wire, med en kompakt og speciel designet stål kerne.

Art. No.*	Dia. mm	Metallic area mm ²	kg/m	Calculated aggregate break load (kN)		MBL (kN)	
				1770 N/mm ²	1960 N/mm ²	1770 N/mm ²	1960 N/mm ²
01 23 0001	7	25,0	0,22	44,2	49,0	34,1	37,8
01 23 0002	8	32,8	0,29	58,1	64,3	44,5	49,3
01 23 0003	9	40,8	0,36	72,7	80,0	55,4	61,3
01 23 0004	10	51,7	0,46	91,5	101,3	69,2	76,6
01 23 0005	11	62,2	0,56	110,2	122,0	83,1	92,1
01 23 0006	12	73,9	0,66	130,9	145,0	99,9	110,7
01 23 0007	12,7	82,2	0,74	146,5	162,2	111,7	114,1
01 23 0008	13	86,9	0,78	153,7	170,3	117,3	129,8
01 23 0009	14	100,4	0,90	177,8	196,8	135,9	150,5
01 23 0010	15	116,0	1,04	205,3	227,4	156,3	173,0
01 23 0011	16	132,3	1,19	234,1	259,3	178,1	197,2
01 23 0012	17	147,8	1,33	261,5	289,6	200,1	221,6
01 23 0013	18	165,5	1,49	293,0	324,4	222,6	246,5
01 23 0014	19	186,6	1,67	330,3	365,7	250,9	277,8
01 23 0015	20	205,0	1,84	362,9	401,8	277,7	307,5
01 23 0016	21	266,7	2,04	401,2	444,3	306,3	339,2
01 23 0017	22	250,0	2,25	442,5	490,0	337,0	373,2
01 23 0018	23	271,2	2,44	480,0	531,5	366,5	405,9
01 23 0019	24	296,0	2,66	523,8	580,1	400,5	443,5
01 23 0020	25	319,9	2,87	566,2	627,0	431,9	478,3
01 23 0021	26	347,0	3,12	614,2	680,2	469,2	519,5
01 23 0022	27	372,9	3,35	660,0	730,9	508,3	562,9
01 23 0023	28	402,1	3,61	711,7	788,1	548,8	607,7
01 23 0024	29	432,5	3,89	765,5	847,7	585,8	648,6
01 23 0025	30	464,7	4,18	822,6	910,9	627,1	694,4
01 23 0026	31	493,1	4,43	872,8	966,5	665,6	736,9
01 23 0027	32	526,4	4,73	931,7	1031,7	710,5	786,7
01 23 0028	33	558,0	5,02	987,6	1093,6	753,1	833,9
01 23 0029	34	591,2	5,32	1046,4	1158,8	803,9	890,2
01 23 0030	36	661,5	5,95	1170,8	1296,5	906,1	1003,4
01 23 0031	38	742,5	6,68	1314,2	1455,3	1005,5	1113,5
01 23 0032	40	818,1	7,36	1448,0	1603,5	1111,9	1231,3
01 23 0033	44	994,4	8,95	1760,1	1949,1	1352,7	1497,9
01 23 0034	48	1186,5	10,67	2100,0	2325,5	1608,1	1780,7
01 23 0035	52	1391,7	12,52	2463,3	2727,7	1832,5	2029,2
01 23 0036	56	1609,7	14,48	2849,1	3154,9	2141,3	2371,1

Diameters up to 72mm on request!

*Is for 1960 N/mm², if 1770 N/mm² is required, please write in a 01 instead of 00 in the last 4 numbers!
Ex. 01 23 0101

Diameter op til 72mm på forespørgelse!

*Er for 1960 N/mm², hvis 1770 N/mm² er ønskes, så skriv venligst 01 i stedet for 00 i de sidste 4 tal!
Ex. 01 23 0101





STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

LT 24 K

- Rotation resistant (LT = Low Torque)
- Galvanized
- For multilayer spooling

LT 24 K

- Rotations Svag
- Galvaniseret
- Flerlags spolning

Art. No.	Model	Diameter mm	Metallic area mm ²	Weight kg/m	MBL kN 1960 N/mm ²
01 24 0001	24(W)xK7	7,2	26	0,23	43,7
01 24 0002		8	33	0,29	55,1
01 24 0003		9	41	0,37	69,6
01 24 0004		10	53	0,46	88,2
01 24 0005		11	65	0,57	108
01 24 0006		12	77	0,68	128
01 24 0007		13	89	0,78	149
01 24 0008		14	104	0,91	173
01 24 0009		15	119	1,04	198
01 24 0010		16	137	1,21	230
01 24 0011		18	177	1,55	295
01 24 0012		19	194	1,70	324
01 24 0013		20	212	1,86	354
01 24 0014		22	259	2,27	432
01 24 0015		24	311	2,74	519
01 25 0001	24(W)xK17	16	138	1,21	229
01 25 0002		18	174	1,54	290
01 25 0003		19	194	1,72	324
01 25 0004		20	215	1,91	359
01 25 0005		22	259	2,30	433
01 25 0006		24	315	2,79	526
01 25 0007		25,4	345	3,06	575
01 25 0008		26	366	3,24	610
01 25 0009		28	423	3,75	706
01 25 0010		30	484	4,27	808
01 25 0011		32	561	4,96	937
01 25 0012		34	628	5,54	1047
01 25 0013		36	699	6,17	1165
01 25 0014		38	776	6,85	1295

Tolerance on diameter +1%; +4%



Filling factor (f): 24xK7 = 0,679; 24xK17 = 0,686

Optional: PPI

Tolerance på diameter +1%; +4%

Fyldfaktor (f): 24xK7 = 0,679; 24xK17 = 0,686

Option: PPI





HOIST WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - LIFEBOAT FALL WIRE
STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER

NR 15 MAXILIFT COMPACT

- Non Rotating
- Galvanized
- For Multilayer Spooling

NR 15 MAXILIFT KOMPAKT

- Rotations Fri
- Galvaniseret
- Flerlags Spolning

Art. No.*	Model	Diameter mm	Metallic area mm ²	Weight kg/m	MBL kN	
					1960 N/mm ²	2160 N/mm ²
01 26 0001	27(W)xK7	10	53,9	0,47	90	95
01 26 0002		11	66,6	0,58	111	117
01 26 0003		12	77,3	0,67	129	135
01 26 0004		13	90,9	0,79	152	159
01 26 0005		14	105,5	0,91	176	187
01 26 0006		15	122,3	1,06	204	214
01 26 0007		16	138,8	1,20	232	243
01 26 0008		17	155,5	1,34	260	272
01 26 0009		18	175,0	1,52	292	306
01 26 0010		19	193,9	1,68	324	340
01 26 0011		20	215,7	1,86	360	378
01 26 0012		21	241,7	2,09	403	423
01 27 0001	31(W)xK7	22	266,5	2,31	445	-
01 27 0002		23	290,4	2,52	485	-
01 27 0003		24	315,9	2,74	527	-
01 27 0004		25	344,6	2,98	575	-
01 27 0005		26	369,9	3,20	617	-
01 27 0006		27	395,5	3,44	660	-
01 27 0007		28	437,1	3,79	729	-
01 27 0008		28,6	451,8	3,92	754	-
01 27 0009		30	496,0	4,30	828	-
01 27 0010		32	560,5	4,84	935	-
01 27 0011		34	628,0	5,45	1048	-
01 27 0012		36	717,2	6,22	1197	-
01 27 0013		38	797,3	6,93	1330	-
01 27 0014		40	873,6	7,58	1457	-
01 27 0015		42	981,7	8,53	1638	-

Tolerance on +1%; +4%

Optional: PPI

*Is for 1960 N/mm², if 2160 N/mm² is required,
please write in a 01 instead of 00 in the last 4 numbers!

Ex. 01 27 0101

Tolerance på +1%; +4%

Option: PPI

*Er for 1960 N/mm², hvis 2160 N/mm² er ønskes,
så skriv venligst 01 i stedet for 00 i de sidste 4 tal!

Ex. 01 27 0101



HOIST WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - LIFEBOAT FALL WIRE
STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER


CASAR EUROLIFT

A non rotating steel wire rope with a compacted special designed steel core.

CASAR EUROLIFT

En rotations fri stål wire, med et kompakt og speciel designet stålhjerte.

Art. No.*	Diameter mm	Metallic area mm ²	kg/m	MBL (kN)		
				1770 N/mm ²	1960 N/mm ²	2160 N/mm ²
01 28 0001	10	56,2	0,48	81,9	89,6	97,4
01 28 0002	11	68,7	0,59	99,5	108,8	118,4
01 28 0003	12	82,0	0,71	118,2	130,8	139,9
01 28 0004	12,7	90,8	0,79	132,2	146,4	161,4
01 28 0005	13	95,2	0,82	139,0	152,7	165,4
01 28 0006	14	110,4	0,96	161,7	179,1	190,9
01 28 0007	15	126,3	1,09	184,5	204,0	219,5
01 28 0008	16	145,6	1,26	209,4	230,6	249,1
01 28 0009	17	163,3	1,42	235,9	257,9	280,6
01 28 0010	18	183,7	1,59	266,9	293,9	317,5
01 28 0011	19	204,0	1,77	297,1	329,0	352,8
01 28 0012	20	227,5	1,97	329,3	362,2	391,7
01 28 0013	21	249,0	2,16	362,3	396,1	430,9
01 28 0014	22	273,9	2,38	398,5	441,4	472,0
01 28 0015	23	299,6	2,60	431,5	471,8	513,2
01 28 0016	24	326,8	2,84	474,3	524,3	564,1
01 28 0017	25	348,8	3,03	512,8	567,9	609,4
01 28 0018	26	377,9	3,28	555,0	614,9	657,4
01 28 0019	27	410,5	3,57	598,3	654,2	711,7
01 28 0020	28	442,5	3,85	643,7	712,9	765,6
01 28 0021	29	473,4	4,11	690,2	754,6	821,0
01 28 0022	30	505,4	4,39	738,1	817,4	877,9
01 28 0023	31	539,7	4,69	785,3	869,7	958,4
01 28 0024	32	579,4	5,04	843,4	930,0	1000,2
01 28 0025	33	616,1	5,36	896,6	992,8	1094,1
01 28 0026	34	652,0	5,67	950,8	1045,0	1130,9
01 28 0027	36	735,6	6,40	1070,0	1185,0	1262,3
01 28 0028	38	815,3	7,09	1191,0	1319,0	1412,2
01 28 0029	40	909,9	7,91	1360,0	1462,0	1560,4
01 28 0030	42	1000,8	8,70	1455,0	1611,2	1667,4
01 28 0031	44	1098,1	9,55	1596,0	1767,0	1823,7
01 28 0032	46	1204,8	10,48	1748,0	1935,0	1989,7
01 28 0033	48	1310,4	11,40	1908,4	2113,3	2187,0
01 28 0034	50	1414,1	12,30	2052,5	2272,8	2504,7
01 28 0035	52	1531,7	13,32	2223,2	2461,8	2713,0
01 28 0036	54	1649,6	14,35	2394,2	2651,2	2921,7
01 28 0037	56	1774,0	15,43	2574,8	2851,2	3142,2
01 28 0038	58	1903,0	16,55	2762,0	3058,5	3370,6



*Is for 1960 N/mm², if 1770 N/mm² is required, please write in a 01 instead of 00 in the last 4 numbers!
02 for 2160 N/mm²
Ex. 01 28 0101 or 01 28 0201

*Er for 1960 N/mm², hvis 1770 N/mm² er ønskes, så skriv venligst 01 i stedet for 00 i de sidste 4 tal!
02 for 2160 N/mm²
Ex. 01 28 0101 eller 01 28 0201



HOIST WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - WINCH WIRE ROPE

STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER



NR MAXIPACT® COMPACT

- Non Rotating
- Galvanized
- Multi-layer spooling

NR MAXIPACT® KOMPAKT

- Rotations fri
- Galvaniseret
- Flerlags spoling

Art. No.*	Model	Diameter mm	Cross section mm ²	Weight kg/m	MBL kN	
					1960 N/mm ²	2160 N/mm ²
01 29 0001	34(W)xK7	13	94	0,81	156	164
01 29 0002		14	109	0,94	182	191
01 29 0003		15	124	1,07	207	217
01 29 0004		16	143	1,24	239	250
01 29 0005		17	160	1,39	267	280
01 29 0006		18	178	1,54	297	311
01 29 0007		19	198	1,71	330	347
01 29 0008		20	220	1,90	367	385
01 29 0009		21	247	2,14	412	432
01 29 0010		22	267	2,31	446	467
01 29 0011		23	295	2,55	492	516
01 29 0012		24	320	2,77	534	560
01 29 0013		25	353	3,06	581	617
01 29 0014		26	379	3,27	632	663
01 29 0015		27	407	3,52	679	712
01 29 0016		28	436	3,77	728	763
01 30 0001	37(W)xK7	30	507	4,38	846	887
01 30 0002		32	575	4,97	959	1006
01 30 0003		34	647	5,59	1079	1132
01 30 0004		36	732	6,33	1221	1281
01 30 0005		38	811	7,01	1352	1418
01 30 0006		40	896	7,75	1495	1568
01 30 0007		42	997	8,62	1664	1745
01 30 0008		44	1090	9,43	1819	1907
01 30 0009		46	1196	10,34	1996	2093
01 30 0010		48	1301	11,26	2171	2277
01 30 0011		50,8	1443	12,47	2407	2524
01 30 0012		52	1528	13,21	2549	2673

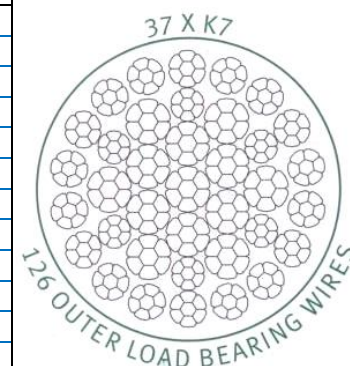

Tolerance on +1%; +4%

10mm, 11mm and 12mm available on special request

Optional: NR Maxipact® PPI

(Plastic Protected Impregnated Core)

*Is for 1960 N/mm², if 2160 N/mm² is required,
please write in a 01 instead of 00 in the last 4 numbers!

Ex. 01 30 0101

Tolerance på +1%; +4%

10mm, 11mm og 12mm er muligt på forespørgelse

Option: NR Maxipact® PPI

(Plastik Beskyttet Imprægneret Kerne)

*Er for 1960 N/mm², hvis 2160 N/mm² er ønsket,
så skriv venligst 01 i stedet for 00 i de sidste 4 tal!

Ex. 01 30 0101





HOIST WIRE ROPE - STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - WINCH WIRE ROPE - OFFSHORE CRANE WIRE
STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER

CASAR POWERPLAST

A non rotating steel wire rope made of compacted strands, with a plastic layer between the steel core and the outer strands.

CASAR POWERPLAST

En rotations fri stål wire, lavet af kompakte tråde, med et plastik lag mellem stål kernen og de ydre tråde.

Art. No.*	Dia. mm	Metallic area mm ²	kg/m	MBL (kN)	
				1770 N/mm ²	1960 N/mm ²
01 31 0001	12	81,8	0,72	118,2	130,8
01 31 0002	13	97,2	0,85	139	152,7
01 31 0003	14	111,7	0,98	161,7	179,1
01 31 0004	15	127,6	1,12	184,5	204
01 31 0005	16	147	1,29	209,4	230,6
01 31 0006	17	164,2	1,44	235,4	260,7
01 31 0007	18	186,7	1,64	266,9	293,9
01 31 0008	19	207,2	1,82	297,1	329
01 31 0009	20	227,7	2	329,3	362,2
01 31 0010	21	251,9	2,21	361,2	400
01 31 0011	22	276,2	2,43	398,5	441,4
01 31 0012	23	300,9	2,64	431,4	477,6
01 31 0013	24	326,3	2,87	474,3	524,3
01 31 0014	25	358,3	3,15	512,8	567,9
01 31 0015	26	389,2	3,42	555	614,9
01 31 0016	27	417,9	3,67	599,2	663,5
01 31 0017	28	446,6	3,93	643,7	712,9
01 31 0018	29	482,2	4,24	691,3	765,4
01 31 0019	30	514,4	4,52	738,1	817,4
01 31 0020	31	554,2	4,87	794,6	879,9
01 31 0021	32	584,9	5,14	843,4	930
01 31 0022	33	624,3	5,49	895,1	991,2
01 31 0023	34	656,9	5,78	950,8	1045
01 31 0024	36	738,6	6,5	1070	1185
01 31 0025	38	826,4	7,27	1191	1319
01 31 0026	40	926,6	8,15	1360	1462
01 31 0027	42	1013,4	8,91	1455	1611,2
01 31 0028	44	1107,6	9,74	1596	1767
01 31 0029	46	1220,6	10,74	1748	1935
01 31 0030	48	1323,7	11,64	1908,4	2113,3
01 31 0031	50	1427,1	12,55	2069	2292
01 31 0032	52	1563	13,75	2200	2436
01 31 0033	54	1662,1	14,62	2377	2632
01 31 0034	56	1797,9	15,82	2577,6	2854,3
01 31 0035	58	1938,7	17,06	2779,9	3077,9

*Is for 1960 N/mm², if 1770 N/mm² is required,
please write in a 01 instead of 00 in the last 4 numbers!
Ex. 01 31 0101

*Er for 1960 N/mm², hvis 1770 N/mm² er ønskes,
så skriv venligst 01 i stedet for 00 i de sidste 4 tal!
Ex. 01 31 0101





STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

CONTAINER WIRE

- 6x36+IWRC - 1960 N/mm²
- Galvanized
- Thimble one end, other end fused and tapered

Art. No.	Dimensions - mm	Length - mtr.	MBL - Ton
01 57 0001	14	8	14
01 57 0002	14	8,5	14
01 57 0003	14	9	14
01 57 0004	14	9,5	14
01 57 0005	14	10	14
01 57 0006	16	9	18,3
01 57 0007	16	9,5	18,3
01 57 0008	16	10	18,3
01 57 0009	16	10,5	18,3
01 57 0010	16	11	18,3
01 57 0011	16	12	18,3

CONTAINER WIRE

- 6x36+IWRC - 1960 N/mm²
- Galvaniseret
- Kavs i en ende, anden ende spidset

FLATBRAIDED WIRE SLINGS

- Made of Aircraft Cable 7X7 or 7x19
- Galvanized

Art. No.	Width - mm	Thickness - mm	Wire dia. - mm	WLL - Ton	Std. Eye Size - mm
01 58 0001	18	6	2,6	0,95	150
01 58 0002	25	9	3,4	1,6	200
01 58 0003	30	11	4,2	2,4	300
01 58 0004	34	12	5,0	3,4	300
01 58 0005	42	15	6,0	4,7	300
01 58 0006	46	17	6,6	5,8	400
01 58 0007	58	22	8,4	9,2	500

FLADFLETTEDE WIRE STROPPER

- Lavet af Aircraft Cable 7x7 eller 7x19
- Galvaniseret



STANDARD WIRE SLINGS

- Made of 6x36 WA/SE - 1770 N/mm²
- Galvanized

Art. No.	Wire dia. mm	1-legged - ton		2-legged - ton		3- & 4-legged - ton	
01 59 0001	8	0,76	0,53	1,06	0,76	1,59	1,14
01 59 0002	10	1,10	0,77	1,54	1,10	2,30	1,65
01 59 0003	12	1,70	1,19	2,38	1,70	3,50	2,55
01 59 0004	14	2,30	1,60	3,20	2,30	4,80	3,40
01 59 0005	16	3,00	2,10	4,20	3,00	6,30	4,50
01 59 0006	18	3,80	2,60	5,20	3,80	7,90	5,70
01 59 0007	20	4,70	3,30	6,60	4,70	9,80	7,00
01 59 0008	22	5,70	4,00	8,00	5,70	11,9	8,50
01 59 0009	24	6,80	4,70	9,40	6,80	14,2	10,2
01 59 0010	26	8,00	5,60	11,2	8,00	16,8	12,0
01 59 0011	28	9,30	6,50	13,0	9,30	19,5	13,9
01 59 0012	30	10,6	7,40	14,8	10,6	22,2	15,9
01 59 0013	32	12,1	8,50	17,0	12,1	25,4	18,1
01 59 0014	34	13,7	9,60	19,2	13,7	28,7	20,5
01 59 0015	36	15,4	10,7	21,4	15,4	32,3	23,1
01 59 0016	38	17,1	12,0	24,0	17,1	35,9	25,6
01 59 0017	40	19,0	13,3	26,6	19,0	40,1	28,6
01 59 0018	42	21,0	14,7	29,4	21,0	44,1	31,5
01 59 0019	44	23,0	16,1	32,2	23,0	48,3	34,5

NB! Remember to apply wished length when ordered!

NB! Husk at påføre ønsket længde ved bestilling!



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

WIRE GROMMET SLING

WIRE GROMMETS

Art. No.	Rope diameter mm	Diameter mm	WLL ton	kg/m
01 34 0001	3	9	1,4	0,290
01 34 0002	4	12	2,5	0,460
01 34 0003	5	15	3,8	0,650
01 34 0004	6	18	5,5	1,230
01 34 0005	7	21	6,6	1,390
01 34 0006	8	24	9	1,910
01 34 0007	9	27	11,5	2,410
01 34 0008	10	30	14	3,070
01 34 0009	12	36	20	4,420
01 34 0010	13	39	23,5	5,180
01 34 0011	14	42	27	6,010
01 34 0012	16	48	35,5	7,870
01 34 0013	18	54	45	9,970
01 34 0014	20	60	55,5	12,300
01 34 0015	22	66	69	14,850
01 34 0016	24	72	84	17,700
01 34 0017	26	78	102	20,770
01 34 0018	28	84	121	24,070
01 34 0019	32	96	168	31,420
01 34 0020	36	108	227	39,750
01 34 0021	38	114	262	42,280
01 34 0022	40	120	300	46,830
01 34 0023	42	126	344	51,660
01 34 0024	44	132	392	56,700
01 34 0025	48	144	505	67,480
01 34 0026	52	156	700	79,100
01 34 0027	56	168	800	95,200
01 34 0028	64	192	1000	119,700



NB! Remember to apply wished length when ordered!
WLL based on metal core according to: EN 13414-2

NB! Husk at påføre ønsket længde ved bestilling!
WLL baseret på metal kerne i henhold til: EN 13414-2


THIMBLE

- Hot dip galvanized



KOVS

- Varmt galvaniseret

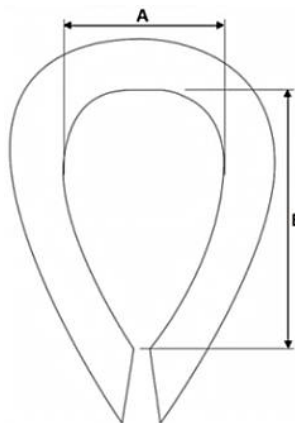


Art. No.	Size/str. mm	Dimension mm		kg
		A	B	
01 35 0001	3	12	19	0,005
01 35 0002	4	13	21	0,008
01 35 0003	5	14	23	0,01
01 35 0004	6	16	25	0,016
01 35 0006	8	21	31	0,03
01 35 0007	10	24	37	0,047
01 35 0008	12	28	46	0,068
01 35 0009	14	40	54	0,1
01 35 0010	16	35	59,5	0,145
01 35 0011	18	42	64	0,2
01 35 0012	20	43	72	0,29
01 35 0013	22	50	80	0,32
01 35 0014	24	56	92	0,47
01 35 0015	26	60	95	0,59
01 35 0016	28	70	110	0,80
01 35 0017	30	77	121	1,1
01 35 0018	32	80	128	1,23
01 35 0019	34	95	131	1,56
01 35 0020	36	100	160	1,76
01 35 0021	38	110	179	1,92



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER


THIMBLE WITH GUSSET

- Optional with Master Link

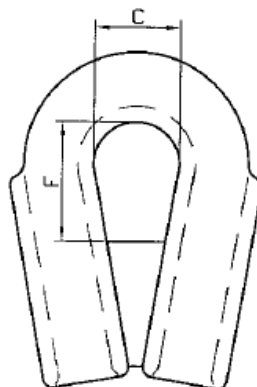

KOVS MED KILE

- Option med Ovalring

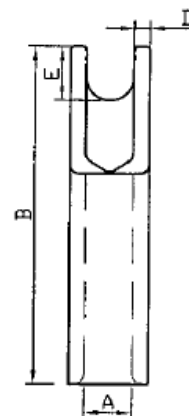

Art. No.	A mm	B mm	C mm	D mm	E mm	F mm	Weight kg	For wire max.
14 29 0001	12	84	23	4,0	8	24	0,36	10
14 29 0002	15	95	27	5,0	10	31	0,52	12
14 29 0003	17	100	27	5,0	10	38	0,55	14
14 29 0004	19	112	32	5,0	12	46	0,65	16
14 29 0005	22	125	35	5,0	15	47	0,90	18
14 29 0006	25	150	45	6,3	16	61	1,26	22
14 29 0007	28	157	45	7,0	16	56	1,64	24
14 29 0008	30	170	47	7,0	18	68	2,02	25
14 29 0009	35	190	60	7,0	22	73	2,50	32
14 29 0010	40	212	70	9,0	36	80	3,70	36
14 29 0011	45	228	70	7,0	27	94	3,71	38
14 29 0012	50	255	75	7,0	35	97	4,65	42
14 29 0013	55	268	80	7,0	31	99	4,90	48
14 29 0014	60	270	100	7,0	37	120	-	54
14 29 0015	80	370	150	7,0	46	150	-	70

Available as galvanized!

Alternativt som galvaniseret model!




STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

SOLID THIMBLE

- Cast iron
- Galvanized (Optional: Painted)

Suitable for wire rope

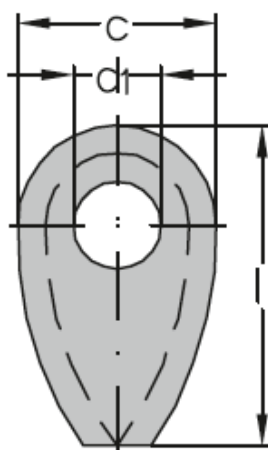


8 - 14 mm

MASSIV KOVS

- Støbejern
- Galvaniseret (Option: Malet)

Egnet til wire

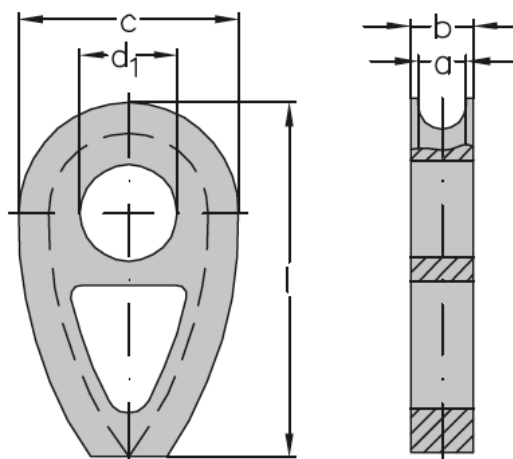

16 - 80 mm

Art. No.	Rope size mm	a mm	b (approx.) mm	d1 mm	c mm	l mm	Weight kg
01 38 0001	8	9	15	20	40	66	0,2
01 38 0002	10	11	17,5	25	50	82	0,3
01 38 0003	12	13	20	30	60	98	0,5
01 38 0004	14	16	23,5	35	70	114	0,7
01 38 0005	16	18	26	40	80	130	0,8
01 38 0006	18	20	28,5	45	90	145	1,1
01 38 0007	20	22	31	50	100	161	1,4
01 38 0008	22	24	33,5	55	110	177	1,8
01 38 0009	24	26	36	60	120	193	2,3
01 38 0010	26	29	39,5	65	130	209	3,0
01 38 0011	28	31	42	70	140	224	3,7
01 38 0012	32	35	47	80	160	256	5,3
01 38 0013	36	40	53	90	180	288	7,5
01 38 0014	40	44	58	100	200	320	10,4
01 38 0015	44	48	63	110	220	352	13,4
01 38 0016	48	53	69	120	240	384	17,8
01 38 0017	52	57	74	130	260	416	23,1
01 38 0018	56	62	80	140	280	448	29,0
01 38 0019	64	70	90	160	320	512	41,3
01 38 0020	72	79	101	180	360	576	66,0
01 38 0021	80	88	112	200	400	640	99,0

Tolerance ± 5%



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER


CLOSED SPELTER SOCKET

- Cast steel.
- Galvanized (Optional: Painted)



LUKKET WIRESKO

- Støbejern
- Galvaniseret (Option: Malet)

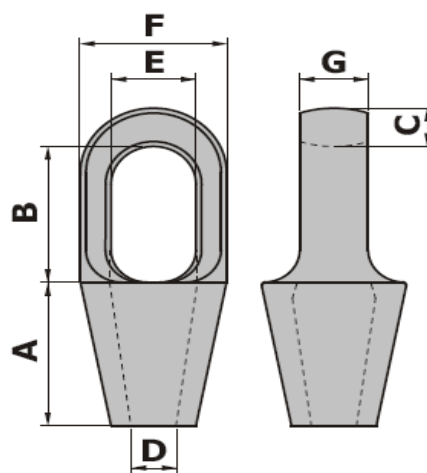

Art. No.	Type No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kg
01 39 0001	290	6 to 7	3	51	46	11	8	20	36	13	0,3
01 39 0002	292	8 to 10	6	51	52	14	11	24	43	16	0,4
01 39 0003	294	11 to 13	12	64	59	18	14	29	51	22	0,8
01 39 0004	296	14 to 16	24	77	65	20	18	35	67	25	1,4
01 39 0005	298	18 to 19	32	90	75	26	21	42	75	31	2,1
01 39 0006	201	20 to 22	45	101	90	33	24	47	92	38	4
01 39 0007	204	23 to 26	70	114	103	36	28	57	104	44	6
01 39 0008	207	27 to 30	100	127	116	39	32	63	114	51	7
01 39 0009	212	31 to 36	125	139	130	43	38	70	127	57	11
01 39 0010	215	37 to 39	150	152	155	51	41	79	136	63	13
01 39 0011	217	40 to 42	200	165	171	54	44	82	146	70	17
01 39 0012	219	43 to 48	260	190	198	55	51	89	171	76	24
01 39 0013	222	49 to 54	280	216	224	62	57	96	193	82	37
01 39 0014	224	55 to 60	360	228	247	73	63	108	216	92	56
01 39 0015	226	61 to 68	450	248	270	79	73	140	241	102	65
01 39 0016	227	69 to 75	480	279	286	76	79	159	273	124	93
01 39 0017	228	76 to 80	520	305	298	83	86	171	292	133	110
01 39 0018	229	81 to 86	600	330	311	102	92	184	311	146	142
01 39 0019	230	87 to 93	700	356	330	102	99	197	330	159	170
01 39 0020	231	94 to 102	875	381	356	108	108	216	362	178	225

Tolerance $\pm 5\%$

Other sizes on request!

Tolerance $\pm 5\%$

Andre størrelser på forespørgelse!



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER


OPEN SPELTER SOCKET

- Cast steel
- Galvanized (Optional: painted)



ÅBEN WIRESKO

- Støbejern
- Galvaniseret (Option: Malet)

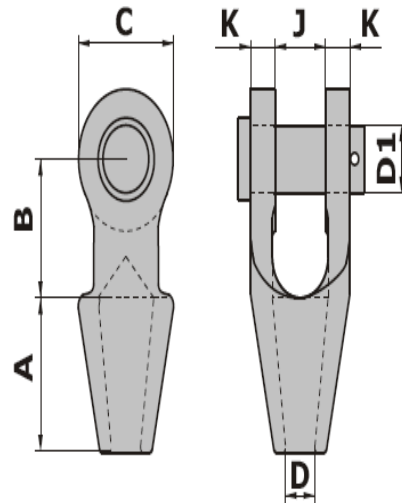

Art. No.	Type No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	D1 mm	J mm	K mm	Weight kg
01 40 0001	192	6 to 7	3	52	40	34	8	18	17	8	0,4
01 40 0002	194	8 to 10	6	58	45	40	11	21	20	11	0,6
01 40 0003	196	11 to 13	12	64	51	49	14	26	25	12	1,3
01 40 0004	198	14 to 16	24	76	64	62	18	30	32	14	2
01 40 0005	100	18 to 19	32	89	76	80	21	35	38	16	4
01 40 0006	104	20 to 22	45	101	89	90	24	41	44	19	5
01 40 0007	108	23 to 26	70	114	101	120	28	51	51	22	7
01 40 0008	111	27 to 30	100	127	114	130	32	57	57	25	12
01 40 0009	115	31 to 36	125	139	127	144	38	63	63	28	16
01 40 0010	118	37 to 39	150	152	162	160	41	70	76	30	24
01 40 0011	120	40 to 42	200	165	165	176	44	76	76	33	27
01 40 0012	125	43 to 48	260	190	178	200	51	89	89	39	38
01 40 0013	128	49 to 54	280	216	228	216	57	95	101	46	59
01 40 0014	130	55 to 60	360	228	250	236	63	108	113	53	87
01 40 0015	132	61 to 68	450	248	273	264	73	121	127	60	130
01 40 0016	135	69 to 75	480	279	279	276	79	127	133	73	157
01 40 0017	138	76 to 80	520	305	286	284	86	133	146	76	192
01 40 0018	140	81 to 86	600	330	298	296	92	140	159	79	243
01 40 0019	142	87 to 93	700	356	318	340	99	152	171	83	287
01 40 0020	144	94 to 102	875	381	343	362	108	178	191	89	370

Tolerance $\pm 5\%$

Other sizes on request!

Tolerance $\pm 5\%$

Andre størrelser på forespørgelse!



STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - PEEWEE SOCKET - GOLD NOSE SOCKET - SHORT BOW SOCKET
STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER


OPEN WEDGE SOCKET

- Cast steel
- Galvanized (Optional: Painted)



ÅBEN KILEWIRELÅS

- Støbejern
- Galvaniseret (Option: Malet)

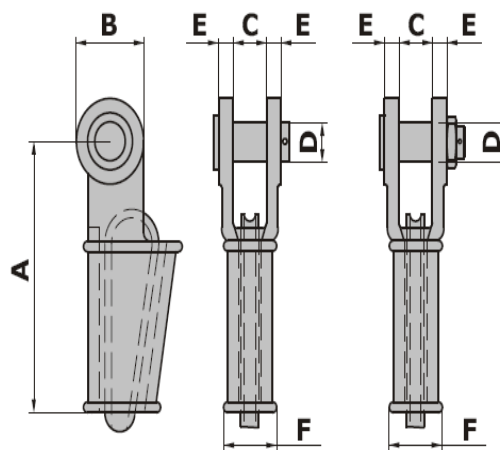

Art. No.	Type No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	Weight kg
01 41 0001	0,5	9 to 10	10	122	47	20	21	11	26	2
01 41 0002	1	11 to 13	16	146	57	25	25	12	32	3
01 41 0003	2	14 to 16	25	176	70	31	30	15	44	4
01 41 0004	3	18 to 19	32	212	80	38	35	16	44	6
01 41 0005	4	20 to 22	45	240	96	44	41	19	52	9
01 41 0006	5	24 to 26	70	274	114	51	50	22	58	15
01 41 0007	6	28	100	310	130	57	57	25	66	20
01 41 0008	7	32	125	350	146	63	64	28	79	25
01 41 0009	8	35	125	400	148	69	64	28	79	38
01 41 0010	9	38	150	450	160	76	70	30	93	55
01 41 0011	10	41	200	500	174	76	76	33	95	66
01 41 0012	11	44 to 48	260	550	200	89	89	39	111	90
01 41 0013	12	51	280	650	200	101	95	46	140	142
01 41 0014	13	56	360	660	250	114	108	54	136	172
01 41 0015	14	63	450	840	270	127	121	60	161	271
01 41 0016	15	75	520	1000	300	146	133	76	186	437

Tolerance $\pm 5\%$

Optional: Safety pin with nut and split

Tolerance $\pm 5\%$

Option: Sikkerheds pin med møtrik og split



STEEL WIRE ROPES - CRANE WIRE ROPES - MOORING WIRE - TOWING WIRE - PEEWEE SOCKET - GOLD NOSE SOCKET - SHORT BOW SOCKET
STÅLWIRER - KRANWIRER - FORTØJNINGSWIRER - SLÆBEWIRER


CR SOCKET

- Cast steel
- Galvanized (Optional: Painted)



CR WIRESKO

- Støbejern
- Galvaniseret (Option: Malet)

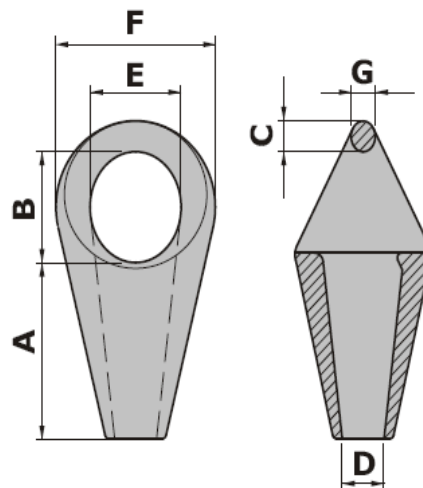

Art. No.	Type no.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kg
01 42 0001	512	31 to 36	140	140	85	38	39	75	124	35	6,5
01 42 0002	517	38 to 42	160	160	110	42	42	92	130	38	10
01 42 0003	519	43 to 48	200	188	128	50	50	110	180	45	17
01 42 0004	522	49 to 54	250	215	125	55	55	115	200	50	23
01 42 0005	524	55 to 60	300	230	145	65	65	135	230	57	33
01 42 0006	526	61 to 68	400	250	160	75	75	160	265	65	50
01 42 0007	527	69 to 75	500	280	175	80	80	170	278	70	59
01 42 0008	528	76 to 80	600	315	210	85	85	184	300	75	74
01 42 0009	529	81 to 86	700	340	205	100	100	204	320	90	89
01 42 0010	530	87 to 93	800	360	220	105	105	215	340	95	104
01 42 0011	531	94 to 102	900	380	240	110	110	234	376	100	134
01 42 0012	533	108 to 115	1000	450	260	125	125	252	400	110	180
01 42 0013	540	122 to 130	1250	517	293	140	140	275	460	125	310

Tolerance $\pm 5\%$

On request: MPI & US inspection

Tolerance $\pm 5\%$

På forespørgelse: MPI & US inspektion




STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

FAST CONNECTOR SOCKETS W/ PIN

- Electrical zinc plated
- Painted blue (Galvanized is optional)

WIRESKO FOR MOBILKRAN M. PIN

- Elektronisk forzinket
- Malet blå (Galvaniseret som option)

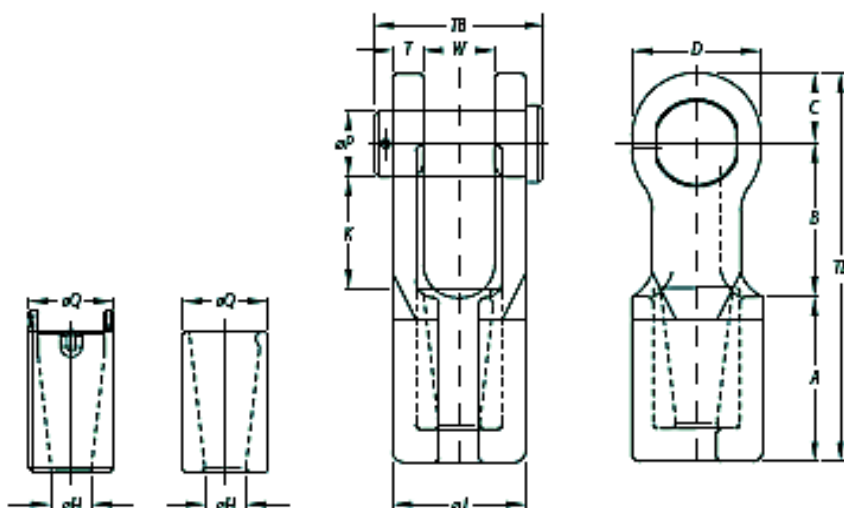

Art. No.	Model No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	ØH mm	ØP mm	ØQ mm	ØJ mm	T mm	W mm	K mm	TB mm	TL mm	Weight kg
01 68 0001	FCS 701 P	11-13	20	62	61	27	50	15	25	33	49	12	25	46	67	150	1,6
01 68 0002	FCS 702 P	13-16	25	72	78	32	58	18	30	38	60	14	32	59	85	182	2,6
01 68 0003	FCS 703 P	16-19	40	85	93	40	70	21	35	45	70	16	38	69	95	218	4,5
01 68 0004	FCS 704 P	20-22	55	102	106	45	80	24	41	50	82	19	44	81	110	253	6,5
01 68 0005	FCS 705 P	23-26	75	115	123	60	104	28	51	60	95	22	51	90	128	298	11
01 68 0006	FCS 706 P	27-29	90	140	152	65	114	32	57	70	107	25	57	116	142	357	16

Spin Resistant Connector

Rotationsfri Connector

Art. No.	Model No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	ØH mm	ØP mm	ØQ mm	ØJ mm	T mm	W mm	K mm	TB mm	TL mm	Weight kg
01 68 0101	FCS 705 P.SR	23-26	75	115	123	60	104	28	51	60	95	22	51	90	128	298	11
01 68 0102	FCS 706 P.SR	27-29	90	140	152	65	114	32	57	70	107	25	57	116	142	357	16
01 68 0103	FCS 707 P.SR	30-32	125	150	159	73	126	36	63	80	119	28	63	120	155	382	18
01 68 0104	FCS 708 P.SR	33-36	125	160	171	73	126	39	64	85	125	28	69	130	160	404	23
01 68 0105	FCS 709 P.SR	37-39	150	176	187	80	142	42	70	90	136	30	76	142	177	443	29
01 68 0106	FCS 710 P.SR	40-42	170	188	198	88	156	45	76	95	142	33	76	150	187	474	36
01 68 0107	FCS 711 P.SR	43-48	225	210	232	100	176	52	89	110	167	39	89	175	215	542	58




STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

FAST CONNECTOR SOCKETS W/ BOLT

- Electrical zinc plated
- Painted blue (Galvanized is optional)

WIRESKO FOR MOBILKRAN M. BOLT

- Elektronisk forzinket
- Malet blå (Galvaniseret som option)

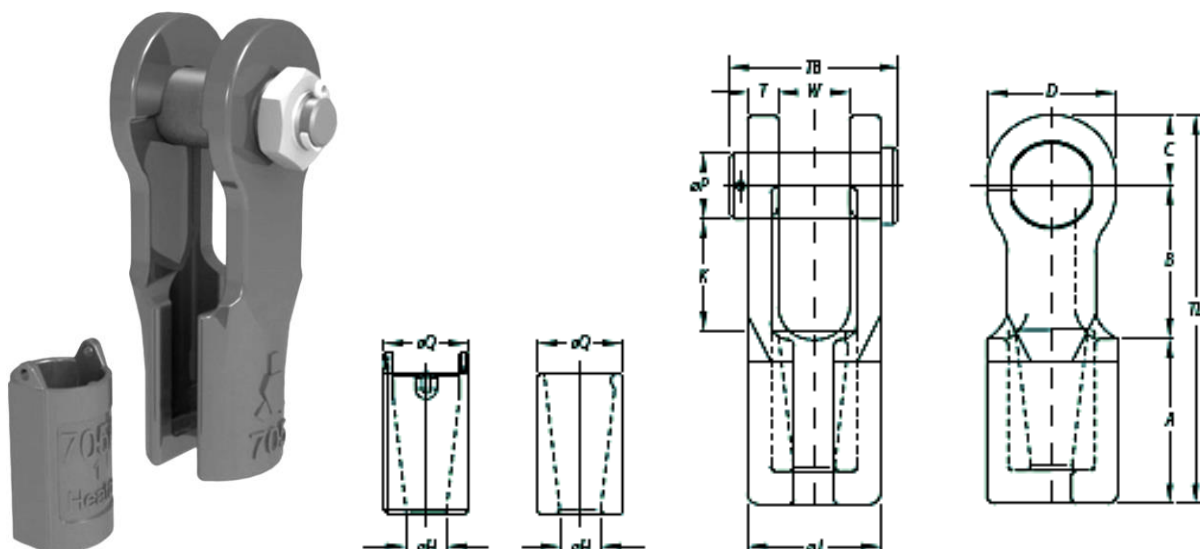

Art. No.	Model No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	ØH mm	ØP mm	ØQ mm	ØJ mm	T mm	W mm	K mm	TB mm	TL mm	Weight kg
01 69 0001	FCS 701 B	11-13	20	62	61	27	50	15	25	33	49	12	25	46	80	150	1,6
01 69 0002	FCS 702 B	13-16	25	72	78	32	58	18	30	38	60	14	32	59	96	182	2,6
01 69 0003	FCS 703 B	16-19	40	85	93	40	70	21	35	45	70	16	38	69	107	218	4,5
01 69 0004	FCS 704 B	20-22	55	102	106	45	80	24	41	50	82	19	44	81	123	253	6,5
01 69 0005	FCS 705 B	23-26	75	115	123	60	104	28	51	60	95	22	51	90	138	298	11
01 69 0006	FCS 706 B	27-29	90	140	152	65	114	32	57	70	107	25	57	116	160	357	16

Spin Resistant Connector

Rotationsfri Connector

Art. No.	Model No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	ØH mm	ØP mm	ØQ mm	ØJ mm	T mm	W mm	K mm	TB mm	TL mm	Weight kg
01 69 0101	FCS 705 B.SR	23-26	75	115	123	60	104	28	51	60	95	22	51	90	138	298	11
01 69 0102	FCS 706 B.SR	27-29	90	140	152	65	114	32	57	70	107	25	57	116	160	357	16
01 69 0103	FCS 707 B.SR	30-32	125	150	159	73	126	36	63	80	119	28	63	120	165	382	18
01 69 0104	FCS 708 B.SR	33-36	125	160	171	73	126	39	64	85	125	28	69	130	185	404	23
01 69 0105	FCS 709 B.SR	37-39	150	176	187	80	142	42	70	90	136	30	76	142	201	443	29
01 69 0106	FCS 710 B.SR	40-42	170	188	198	88	156	45	76	95	142	33	76	150	209	474	36
01 69 0107	FCS 711 B.SR	43-48	225	210	232	100	176	52	89	110	167	39	89	175	237	542	58




STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

SUPER REEVE CONNECTOR SOCKETS

W/ PIN


- Painted Blue (Hot Dip Galvanized is Optional)

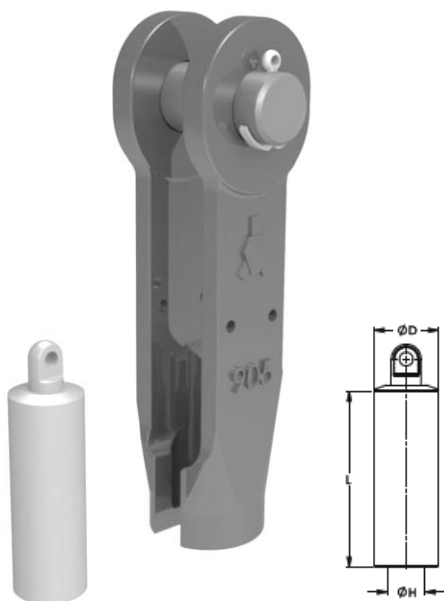

SUPER WIRESKO FOR MOBILKRAN

M. PIN

- Malet Blå (Varme Galvaniseret som Option)

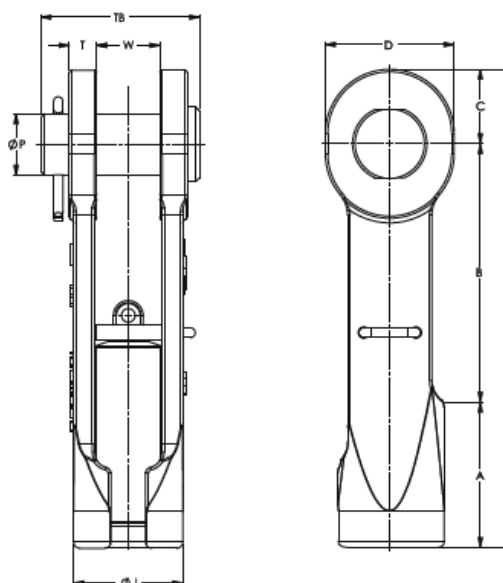

Art. No.	Model No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	TL mm	ØP mm	T mm	W mm	ØJ mm	TB mm	ØD mm	ØH mm	L mm	Weight kg
01 70 0001	SCS 902 P	13-16	25	85	133	32	57	250	30	14	32	56	85	32	19	98	3,1
01 70 0002	SCS 903 P	16-19	40	90	160	40	70	290	35	16	38	65	95	40	22	114	4,8
01 70 0003	SCS 904 P	20-22	55	107	184	45	80	336	41	19	44	77	110	44	26	130	8
01 70 0004	SCS 905 P	23-26	75	115	211	60	104	386	50	22	51	88	128	52	31	142	12
01 70 0005	SCS 906 P	27-29	90	140	215	65	114	420	57	25	57	96	142	58	34	159	16
01 70 0006	SCS 907 P	30-32	125	150	260	73	126	483	63	28	63	110	155	64	36	177	23
01 70 0007	SCS 908 P	33-36	125	170	260	73	126	503	64	28	69	114	160	68	40	197	25

Spin Resistant Connector

Rotationsfri Connector

Art. No.	Model No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	TL mm	ØP mm	T mm	W mm	ØJ mm	TB mm	ØD mm	ØH mm	L mm	Weight kg
01 70 0101	SCS 902 P.SR	13-16	25	85	133	32	57	250	30	14	32	56	85	32	19	98	3,1
01 70 0102	SCS 903 P.SR	16-19	40	90	160	40	70	290	35	16	38	65	95	40	22	114	4,8
01 70 0103	SCS 904 P.SR	20-22	55	107	184	45	80	336	41	19	44	77	110	44	26	130	8
01 70 0104	SCS 905 P.SR	23-26	75	115	211	60	104	386	50	22	51	88	128	52	31	142	12
01 70 0105	SCS 906 P.SR	27-29	90	140	215	65	114	420	57	25	57	96	142	58	34	159	16
01 70 0106	SCS 907 P.SR	30-32	125	150	260	73	126	483	63	28	63	110	155	64	36	177	23
01 70 0107	SCS 908 P.SR	33-36	125	170	260	73	126	503	64	28	69	114	160	68	40	197	25




STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

SUPER REEVE CONNECTOR SOCKETS

W/ BOLT


- Painted Blue (Hot Dip Galvanized is Optional)

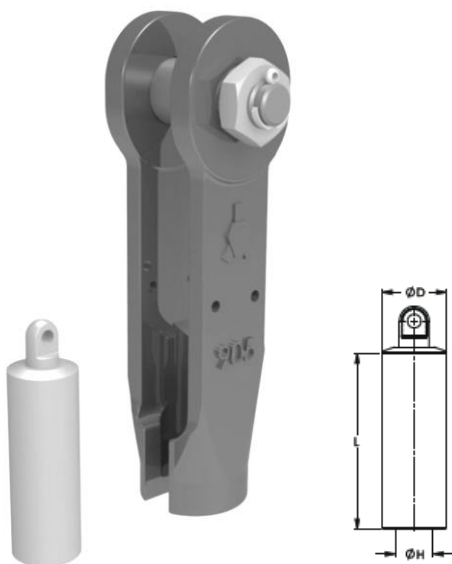

SUPER WIRESKO FOR MOBILKRAN

M. BOLT

- Malet Blå (Varme Galvaniseret som Option)

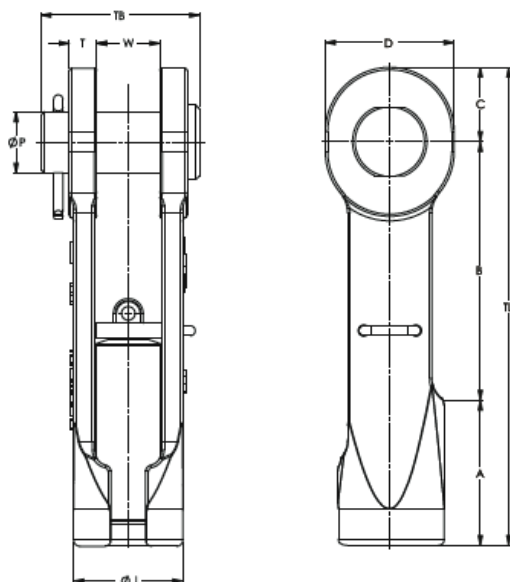

Art. No.	Model No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	TL mm	ØP mm	T mm	W mm	ØJ mm	TB mm	ØD mm	ØH mm	L mm	Weight kg
01 71 0001	SCS 902 B	13-16	25	85	133	32	57	250	30	14	32	56	96	32	19	98	3,1
01 71 0002	SCS 903 B	16-19	40	90	160	40	70	290	35	16	38	65	107	40	22	114	4,8
01 71 0003	SCS 904 B	20-22	55	107	184	45	80	336	41	19	44	77	123	44	26	130	8
01 71 0004	SCS 905 B	23-26	75	115	211	60	104	386	50	22	51	88	138	52	31	142	12
01 71 0005	SCS 906 B	27-29	90	140	215	65	114	420	57	25	57	96	160	58	34	159	16
01 71 0006	SCS 907 B	30-32	125	150	260	73	126	483	63	28	63	110	165	64	36	177	23
01 71 0007	SCS 908 B	33-36	125	170	260	73	126	503	64	28	69	114	185	68	40	197	25

Spin Resistant Connector

Rotationsfri Connector

Art. No.	Model No.	Wire dia. mm	MBL ton	A mm	B mm	C mm	D mm	TL mm	ØP mm	T mm	W mm	ØJ mm	TB mm	ØD mm	ØH mm	L mm	Weight kg
01 71 0101	SCS 902 B.SR	13-16	25	85	133	32	57	250	30	14	32	56	96	32	19	98	3,1
01 71 0102	SCS 903 B.SR	16-19	40	90	160	40	70	290	35	16	38	65	107	40	22	114	4,8
01 71 0103	SCS 904 B.SR	20-22	55	107	184	45	80	336	41	19	44	77	123	44	26	130	8
01 71 0104	SCS 905 B.SR	23-26	75	115	211	60	104	386	50	22	51	88	138	52	31	142	12
01 71 0105	SCS 906 B.SR	27-29	90	140	215	65	114	420	57	25	57	96	160	58	34	159	16
01 71 0106	SCS 907 B.SR	30-32	125	150	260	73	126	483	63	28	63	110	165	64	36	177	23
01 71 0107	SCS 908 B.SR	33-36	125	170	260	73	126	503	64	28	69	114	185	68	40	197	25



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

WIRE ROPE SWIVEL


- High alloy steel
- Painted

Art. No	Rope Dia. mm	MBL ton	PL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Weight kg
01 43 0001	22 to 26	75	30	340	40	40	128	110	47	110	90	
01 43 0002	28 to 34	125	50	440	45	45	36	140	60	140	105	
01 43 0003	35 to 39	200	80	540	50	48	42	160	80	160	130	
01 43 0004	40 to 54	250	100	625	55	50	57	220	115	220	165	
01 43 0005	55 to 60	300	120	690	65	57	63	230	135	230	195	
01 43 0006	62 to 72	400	160	720	75	65	73	270	150	270	205	
01 43 0007	73 to 84	600	240	835	85	75	89	342	175	342	240	
01 43 0008	85 to 93	800	320	965	105	95	99	360	205	360	285	
01 43 0009	94 to 105	900	360	1055	110	100	108	380	225	380	320	

Tolerance ±5%

STÅLWIRE SVIRVEL

- Højlegeret stål
- Malet

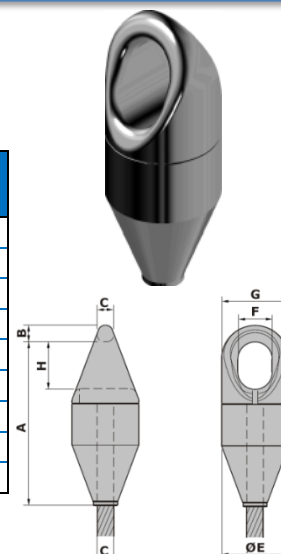

WIRE BLOCK - SINGLE SHEAVED

- Galvanized
- 1 & 2 ton = Sealed Ball Bearings
- 3, 4 & 6 ton = Greaseable Ball Bearings
- Top fitting = Swivel Eye

Art. No.	SWL ton	WLL top fit. ton	Test Load ton	A mm	B mm	C mm	D mm	Max Wire mm	Weight kg
01 61 0001	1	2	4	163	22	16	80	16	1,7
01 61 0002	2	4	8	195	24	22	110	18	3,1
01 61 0003	3	6	8	257	28	31	150	20	6,4
01 61 0004	4	8	16	330	35	40	185	22	11,1
01 61 0005	6	12	24	365	42	40	210	24	17

WIRE BLOK - ENKELT SKIVET

- Galvaniseret
- 1 & 2 ton = Lukkede kuglelejer
- 3, 4 & 6 ton = Smørbare kuglelejer
- Top fitting = Svirvel Øje

WIRE BLOCK - DOUBLE SHEAVED

- Galvanized
- 1 & 2 ton = Sealed Ball Bearings
- 3, 4 & 6 ton = Greaseable Ball Bearings
- Top fitting = Swivel Eye

Art. No.	SWL ton	WLL top fit. ton	Test Load ton	A mm	B mm	C mm	D mm	Max Wire mm	Weight kg
01 62 0001	1	2	4	187	22	16	80	16	3,1
01 62 0002	2	4	8	224	24	22	110	18	5,2
01 62 0003	3	6	8	296	28	31	150	20	11
01 62 0004	4	8	16	385	35	40	185	22	19
01 62 0005	6	12	24	425	42	40	210	24	27,8

WIRE BLOK - DOBBELT SKIVET

- Galvaniseret
- 1 & 2 ton = Lukkede kuglelejer
- 3, 4 & 6 ton = Smørbare kuglelejer
- Top fitting = Svirvel Øje



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

WIRE BLOCK - TRIPLE SHEAVED

- Galvanized
- 1 & 2 ton = Sealed Ball Bearings
- 3, 4 & 6 ton = Greaseable Ball Bearings
- Top fitting = Swivel Eye

Art. No.	SWL ton	WLL top fit. ton	Test Load ton	A mm	B mm	C mm	D mm	Max Wire mm	Weight kg
01 63 0001	1	2	4	187	22	16	80	16	4,5
01 63 0002	2	4	8	224	24	22	110	18	7,5
01 63 0003	3	6	8	296	28	31	150	20	15,8
01 63 0004	4	8	16	385	35	40	185	22	27,4
01 63 0005	6	12	24	425	42	40	210	24	40

WIRE BLOK - TREDOBBELT SKIVET

- Galvaniseret
- 1 & 2 ton = Lukkede kuglelejer
- 3, 4 & 6 ton = Smørbare kuglelejer
- Top fitting = Svirvel Øje

Snatch Block S Series WITH HOOK

- Steel
- Painted
- Sheave with bronze bushing or roller bearing


KASTEBLOK S SERIE MED KROG

- Stål
- Malet
- Skive med bronze bøsning eller kugleleje

Art. No.	WLL ton	Wire dia. mm	Bearing/leje type	Dimension mm					Weight kg
				A	B	C	D	E	
01 44 0001	2	7-9	BB	75	60	82	70	292	4
01 44 0002	4	10-12	BB	115	90	120	70	358	6
01 44 0003	4	16-19	BB	150	120	160	70	412	14
01 44 0004	8	19-22	RB	150	120	160	93	498	15
01 44 0005	8	19-22	RB	200	165	210	93	549	16
01 44 0006	10	24-26	RB	250	205	260	115	695	38
01 44 0007	12	24-26	RB	250	205	260	115	701	42
01 44 0008	12	24-26	RB	300	255	310	133	797	56
01 44 0009	15	22-24	RB	200	160	210	102	672	24
01 44 0010	15	24-26	RB	300	255	310	133	797	65
01 44 0011	22	28-32	RB	355	300	365	140	960	90
01 44 0012	22	28-32	RB	400	350	415	140	1027	108
01 44 0013	22	28-32	RB	450	380	465	180	1058	120
01 44 0014	30	28-30	RB	300	245	310	193	993	125
01 44 0015	30	32-35	RB	400	300	415	155	1085	135
01 44 0016	30	32-35	RB	500	440	514	162	1177	210
01 44 0017	35	32-35	RB	350	280	365	193	1028	130
01 44 0018	50	46-50	RB	600	500	625	275	1495	418

BB = Bronze bushing
RB = Roller bearing
Safety factor 4:1

BB = Bronze bøsning
RB = Kugleleje
Sikkerhedsfaktor 4:1

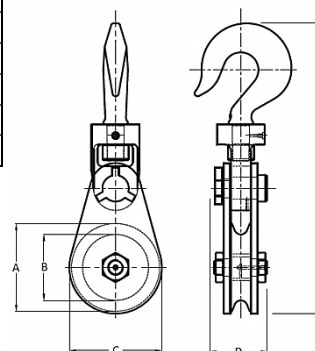



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

SNATCH BLOCK S SERIES WITH SHACKLE


- Steel
- Painted
- Sheave with bronze bushing or roller bearing

Art. No.	WLL ton	Wire dia. mm	Bearing/leje type	Dimension mm					Weight kg
				A	B	C	D	E	
01 45 0001	2	7-9	BB	75	60	82	70	286	4
01 45 0002	4	10-12	BB	115	90	120	70	345	6
01 45 0003	4	16-19	BB	150	120	160	70	399	14
01 45 0004	8	19-22	RB	150	120	160	93	475	15
01 45 0005	8	19-22	RB	200	165	210	93	528	16
01 45 0006	10	24-26	RB	250	205	260	115	679	38
01 45 0007	12	24-26	RB	250	205	260	115	679	42
01 45 0008	12	24-26	RB	300	255	310	133	767	56
01 45 0009	15	22-24	RB	200	160	210	102	663	24
01 45 0010	15	24-26	RB	300	255	310	133	884	65
01 45 0011	22	28-32	RB	355	300	365	140	952	90
01 45 0012	22	28-32	RB	400	350	415	140	1019	108
01 45 0013	22	28-32	RB	450	380	465	180	1088	120
01 45 0014	30	28-30	RB	300	245	310	193	1023	125
01 45 0015	30	32-35	RB	400	300	415	155	1126	135
01 45 0016	30	32-35	RB	500	440	514	162	1256	210
01 45 0017	35	32-35	RB	350	280	365	193	1058	130
01 45 0018	50	46-50	RB	600	500	625	275	1525	418

BB = Bronze bushing
RB = Roller bearing
Safety factor 4:1

KASTEBLOK S SERIE MED SJÆKEL

- Stål
- Malet
- Skive med bronze bøsning eller rulleleje

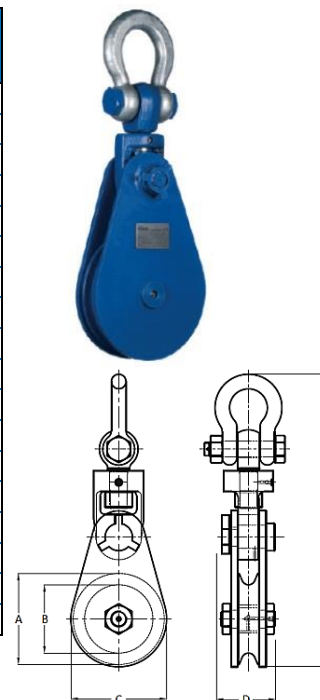

BB = Bronze bøsning
RB = Kugleleje
Sikkerhedsfaktor 4:1

SNATCH BLOCK FOR SHACKLE LIFTING


- Steel
- Painted
- Sheave with bronze bearing

Art. No.	SWL Eye pull ton	SWL Line pull Ton	Rope size mm	A mm	B m	C mm	D mm	E mm	F mm	Approx. weight kg
01 47 0001	17	8.5	22-25	490	160	44	57	110	150	49
01 47 0002	25	12.5	25-28	602	220	53	70	150	200	80
01 47 0003	25	12.5	28-32	632	270	53	70	190	250	93
01 47 0004	25	12.5	28-32	662	320	53	70	240	300	109
01 47 0005	25	12.5	28-32	692	370	53	70	290	350	116
01 47 0006	35	17.5	32-38	835	470	60	80	380	450	211
01 47 0007	35	17.5	32-38	865	520	60	80	430	500	238
01 47 0008	35	17.5	32-38	925	625	60	80	535	605	284
01 47 0009	55	27.5	38-42	1040	770	73	100	520	605	460
01 47 0010	85	42.5	44-48	1212	780	85	120	630	750	890
01 47 0011	120	60	50-55	1327	880	100	140	740	860	1200
01 47 0012	150	75	60-70	1427	930	113	160	760	910	1530
01 47 0013	200	100	75-85	1630	1080	135	170	870	1060	2285
01 47 0014	250	125	88-93	1785	1190	145	190	970	1170	3015

Tolerance ±5%

KASTEBLOK FOR SJÆKEL LØFT

- Stål
- Malet
- Skive med bronze leje

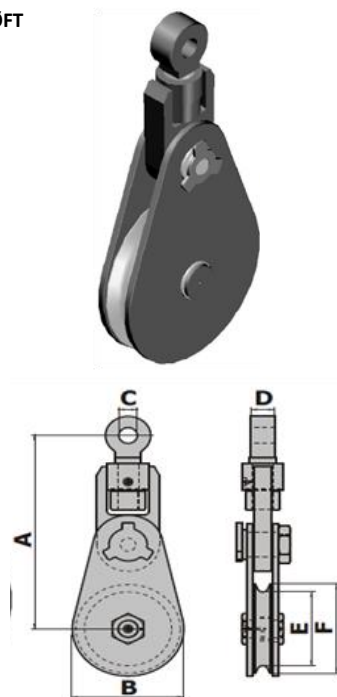




STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE – PULLY
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER – WIRESKIVE


PULLEY BLOCK

- Galvanized
- Optional: With Ball or Cylindrical Roller Bearing



WIRESKIVE


- Galvaniseret
- Option: Med Kugle eller Cylindriske rullelejer

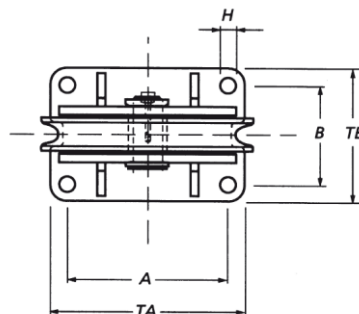

Art. No.	WLL kg	Dimension mm												Weight kg
		D1	D2	A	B	C	F	G	H	T	R	TA	TB	
01 48 0001	1	125	105	90	70	83	27	22	9	8	5,5	115	95	3
01 48 0002	2	150	120	115	85	95	40	30	11	10	6,5	140	110	5
01 48 0003	3	200	165	150	95	122	40	30	13,5	12	7,5	180	125	8
01 48 0004	4	250	210	190	120	155	45	35	17,5	15	9,5	230	160	17
01 48 0005	6	300	255	220	150	185	50	40	22	20	11	270	200	26
01 48 0006	8	350	305	270	160	220	50	45	26	25	12	330	220	41
01 48 0007	10	400	345	300	190	255	60	50	32	30	13	370	260	64


PULLEY BLOCK WITH SWIVEL JOINT

- Galvanized
- Optional: With Ball or Cylindrical Roller Bearing

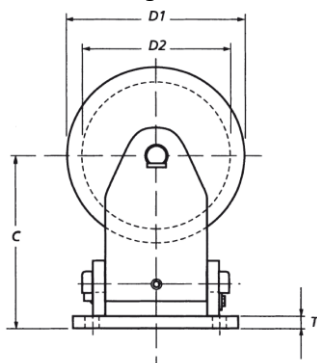

WIRESKIVE MED DREJELED

- Galvaniseret
- Option: Med Kugle eller Cylindriske rullelejer

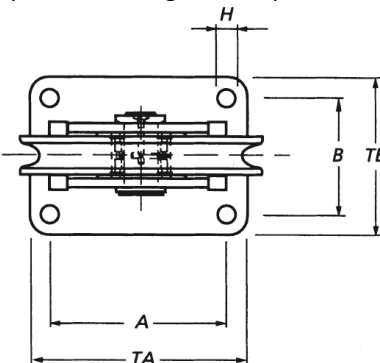

Art. No.	WLL kg	Dimension in mm												Weight kg
		D1	D2	A	B	C	F	G	H	T	R	TA	TB	
01 49 0001	1	125	105	90	70	128	27	22	9	8	5,5	115	95	3,5
01 49 0002	2	150	120	115	85	160	40	30	11	10	6,5	140	110	6,5
01 49 0003	3	200	165	150	95	197	40	30	13,5	12	7,5	180	125	11
01 49 0004	4	250	210	190	120	240	45	35	17,5	15	9,5	230	160	21
01 49 0005	6	300	255	220	150	295	50	40	22	20	11	270	200	33
01 49 0006	8	350	305	270	160	350	50	45	26	25	12	330	220	52
01 49 0007	10	400	345	300	190	400	60	50	32	30	13	370	260	80



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE - WIRECLIPS
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER


SECU WIRE GRIP

- Galvanized
- Approved for lifting

Art. No.	Rope size mm	A mm	B mm	C mm	D mm	Weight kg	Antal låse pr. øje
01 50 0001	6	6	33	32	33	0,1	3
01 50 0002	8	8	33,5	34	34	0,15	3
01 50 0003	10	10	36	46	36	0,19	4
01 50 0004	12	12	47	56	47	0,34	4
01 50 0005	16	16	55	67	55	0,57	4
01 50 0006	20	20	63	89	63	0,8	5
01 50 0007	25	25	72	110	72	1,35	6
01 50 0008	35	35	94	160	94	4,1	7

SECU WIRELÅS

- Galvaniseret
- Godkendt til løft

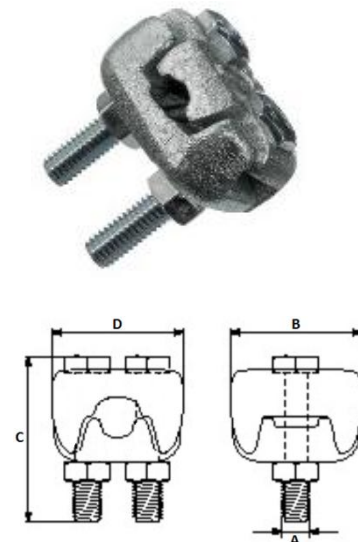


WIRE ROPE GRIP DIN 741

- Galvanized

Art. No.	Size/str. mm	A mm	B mm	C mm	kg
01 51 0001	3	3	20	4	0,014
01 51 0002	5	5	24	5	0,015
01 51 0003	6	6	28	5	0,021
01 51 0004	8	8	34	6	0,041
01 51 0005	10	10	42	8	0,068
01 51 0006	11	11	44	8	0,072
01 51 0007	13	13	55	10	0,13
01 51 0008	14	14	57	10	0,135
01 51 0009	16	16	63	12	0,21
01 51 0010	19	19	75	12	0,28
01 51 0011	22	22	85	14	0,4
01 51 0012	25	25	95	14	0,44
01 51 0013	28	28	110	16	0,66
01 51 0014	32	32	120	16	0,385
01 51 0015	38	38	140	16	1,04

WIRELÅS DIN 741

- Galvaniseret

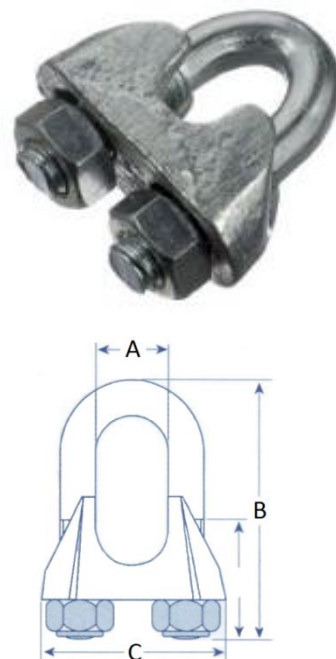



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE – CHINESE FINGER
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

CABLE GRIPS

- Galvanized
- Optional with thimble (soft-eye model)

Soft-eye / Blødt-øje model:

Art. No.	Cable dia. mm	Lattice weave	Lattice length mm	Overall length mm	Break load ton
01 53 0001	10-13	Single	230	305	0,75
01 53 0002	13-19	Single	355	430	1,00
01 53 0003	19-25	Single	405	510	2,50
01 53 0004	25-38	Single	455	610	3,50
01 53 0005	38-50	Double	535	735	5,00
01 53 0006	50-63	Double	610	865	5,00
01 53 0007	63-89	Double	685	990	6,00
01 53 0008	89-115	Double	685	990	7,00
01 53 0009	115-130	Double	685	990	7,00
01 53 0010	180-240	Double		2000	20,00
01 53 0011	200-250	Triple		2000	40,00



Open ended / Åbne ender:

Art. No.	Cable dia. mm	Lattice weave	Lattice length mm	Break load ton
01 53 0101	10-13	Single	380	0,75
01 53 0102	13-19	Single	610	1,00
01 53 0103	19-25	Single	710	2,50
01 53 0104	25-38	Single	815	3,50
01 53 0105	38-50	Double	915	5,00
01 53 0106	50-63	Double	1065	5,00
01 53 0107	63-89	Double	1220	6,00
01 53 0108	89-115	Double	1370	7,00
01 53 0109	115-130	Double	1370	7,00



Double Eye - Sizes up to 375mm on request / Dobbelt øje - Str. op til 375mm på forespørgelse:

Art. No.	Cable dia. mm	Lattice weave	Lattice length mm	Overall length mm	Break load ton
01 53 0201	10-13	Single	230	305	0,75
01 53 0202	13-19	Single	355	430	1,00
01 53 0203	19-25	Single	405	510	2,50
01 53 0204	25-38	Single	455	610	3,50
01 53 0205	38-50	Double	535	735	5,00
01 53 0206	50-63	Double	610	865	5,00
01 53 0207	63-89	Double	685	990	6,00
01 53 0208	89-115	Double	685	990	7,00
01 53 0209	115-130	Double	685	990	7,00



Lace Up - Sizes up to 375mm on request / Snøre/Flette - Str. op til 375mm på forespørgelse:

Art. No.	Cable dia. mm	Lattice weave	Lattice length mm	Overall length mm	Break load ton
01 53 0201	10-13	Single	230	305	0,75
01 53 0202	13-19	Single	355	430	1,00
01 53 0203	19-25	Single	405	510	2,50
01 53 0204	25-38	Single	455	610	3,50
01 53 0205	38-50	Double	535	735	5,00
01 53 0206	50-63	Double	610	865	5,00
01 53 0207	63-89	Double	685	990	6,00
01 53 0208	89-115	Double	685	990	7,00
01 53 0209	115-130	Double	685	990	7,00





STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE – CHINESE FINGER
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

WIRELOCK

- 2 component cold hardening product
- Approved by AT, Lloyd's etc.
- Handles shocks and impacts

Art. No.	Content in Liter
01 60 0001	0,25
01 60 0002	0,50
01 60 0003	1,00
01 60 0004	2,00
01 60 0005	3,00

* Also available as Paralock!

WIRELOCK

- 2 komponent koldhærtningsprodukt
- Godkendt af Arbejdstilsynet, Lloyd's osv.
- Håndtere slag og stød



* Muligt som Paralock!

WIRE ROPE GREASE - FLUID

- EP additives
- High corrosion and wear protection
- Very good saltwater and weather resistance
- Extends the life span of the wire rope
- Service temperature -25 °C to +80 °C

Art. No.	Content in Liter
01 66 0002	20

Other applications:

Open gears, wire winches, screws, roller- and gliding bearings, ship cranes, offshore constructions, lifts, construction parts for shipbuilding, excavators etc.

Andre applikationer:

Åbne gear, wirespil. Skruer, rulle- og glidelejer, skib- kraner, offshore konstruktioner, lifte, konstruktionsdele til skibsbygning, gravemaskiner osv.



WIRE OIL

- Excellent wetting and penetration properties
- Conserves and protects against corrosion
- Outstanding for use in dusty environments
- Service temperature -20 °C to +100 °C

Art. No.	Content in Liter
01 67 0001	20

Application:

Protection of all kinds of wire ropes, gears, springs, tools, screws, bolts etc. against corrosion.

WIREOLIE

- Fremragende vædnings- og indtrængningsevne
- Konserverer og beskytter mod korrosion
- Fremragende til brug i støvholdige miljøer
- Service temperature -20 °C til +100 °C



Applikation:

Beskyttelse af alle type wirer, gear, fjedre, værktøj, skruer, bolte osv. mod korrosion.



STEEL WIRE ROPES – CRANE WIRE ROPES – MOORING WIRE – TOWING WIRE – CHINESE FINGER
STÅLWIRER – KRANWIRER – FORTØJNINGSWIRER – SLÆBEWIRER

NORDIC TOWING SLEEVE

Made of a hard wearing material, to protect steel wire ropes in operation, with towing winches.

NORDIC TOWING SLEEVE

Lavet af et slidstærkt materiale, for at beskytte en stålwire i brug, med trækspil.

Art. No.	Wire dia. - mm	Height x width / højde x bredde - mm	Length/længde - m
01 52 0001	44	100x125	From 2 to 3m
01 52 0002	52	100x125	From 2 to 3m
01 52 0003	54	100x125	From 2 to 3m
01 52 0004	58	100x125	From 2 to 3m
01 52 0005	60	100x125	From 2 to 3m
01 52 0006	64	140x150	From 2 to 3m
01 52 0007	67	140x150	From 2 to 3m
01 52 0008	71	140x150	From 2 to 3m
01 52 0009	74	140x150	From 2 to 3m
01 52 0010	77	140x150	From 2 to 3m
01 52 0011	80	140x150	From 2 to 3m
01 52 0012	83	140x150	From 2 to 3m
01 52 0013	87	150x175	From 2 to 3m
01 52 0014	90	150x175	From 2 to 3m
01 52 0015	96	150x175	From 2 to 3m
01 52 0016	103	150x175	From 2 to 3m
01 52 0017	109	150x175	From 2 to 3m

