

record MINIROLL

Automatic roller door for convenient safety and security



record MINIROLL

record MINIROLL

Automatic roller door for convenient safety and security

Brief description

The record MINIROLL is an automatic roller door that ensures effective burglar protection for windows, entrances and passageways. The standard design features steel slats, achieving protection class RC2 and the French standard A2P (still in preparation as of November 2015). The record MINIROLL is easy to install, and as its drive unit is fully integrated into the housing, the convenience of operation and level of security have been strikingly enhanced.

Night-time closing for shops and stores


The roller door achieves high stability thanks to the flat design of the slats, which also ensures its highly compact dimensions when unextended. The rolled-up curtain of doors up to 3000 mm high can easily be accommodated in console covers just 250 x 250 mm in size. The record MINIROLL is equally suitable for shops, private homes and, thanks to its maximum width of 4000 mm, as a navigable passage for industrial applications. The minimal dimensions of 700 mm in height and 910 mm in width also enable this model to provide effective security for windows.

The record anti-graffiti treatment provides effective protection against vandalism. As the door surface is treated with a protective finish, traces of felt pens, markers and spray paints can be effortlessly removed. Anti-graffiti treatment by record is officially endorsed by RATP, the Parisian transport system. It is guaranteed to withstand 50 cleaning cycles without affecting the protective finish.

Perforated or full-area slats

Like the larger roller doors and shutters featured in the record GATES series, the record MINIROLL "Rubis" model features micro-perforated slats, enabling light and ventilation with the door or shutter in the closed position.

With micro perforations, the slats have holes over a large area; around the hinges, however, the area remains hole-free to prevent deformation or cracking. Micro-perforations may be only partly distributed, for example to trace a logo, or in sections where individual slats have been replaced.

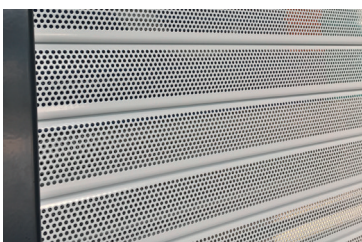


Benefits

- Perfectly complements entrances and doors in shops, offices and industrial buildings, as well as private homes.
- Can be fitted with a steel shutters for high security protection against attempted break-ins (RC2 and A2P certificates currently in preparation)
- Available in a range of RAL paint finishes; galvanized shutters are also available
- Easy-to-install with pre-assembled drive unit
- Console can be mounted inside or outside
- Manual emergency operation mounted inside or outside door also available
- Integrated safety brake

Options

- Key-operated switch; flush or surface mounted
- Push button; surface mounted
- Additional locking
- Micro-perforation of slats for "Rubis" model available partially or in sections
- Surface sealed with record anti-graffiti treatment

Drawings

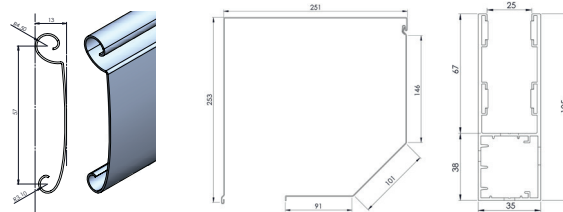

Technical Specifications

Minimum dimensions (w x h)	910 x 700 mm
Maximum dimensions (w x h)	4000 x 3000 mm
Weight per m ²	11 kg
Power supply	230 VAC / 50 Hz
Power output	465 W
Power consumption	2.12 A
Protection class	IP 44
Ambient temperature	-15°C to +60°C