


PLASTIC FILTER HOUSING

3M 1N

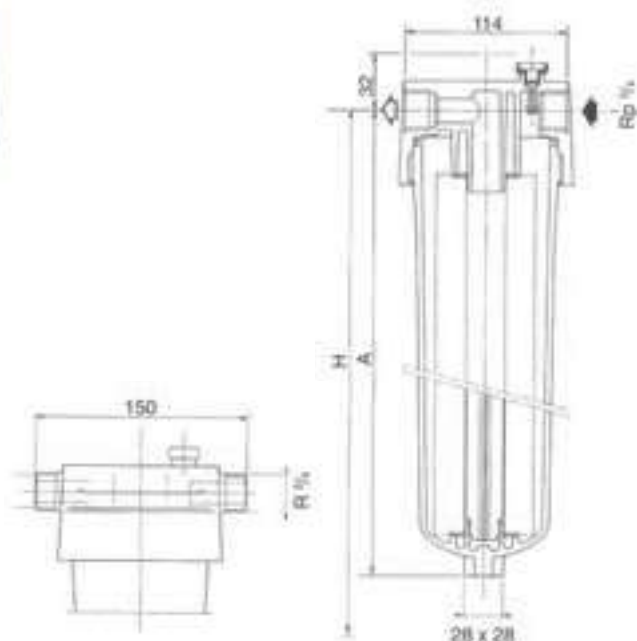

Technical Data

- Polypropylene or Polycarbonate
- 25-50 l/min
- 10 bar
- R 3/4" or Rp 3/4"
- 80°C
- 9 3/4" or 19 1/2"
- DOE
- Nitrile (others available)
- PED FDA

The model 1N plastic housing is manufactured from a high impact plastic for added strength and has been specifically designed to meet most industrial application requirements for liquid filtration.

- The model 1N is available with R 3/4 or Rp 3/4 inlet and outlet connections.
- The model 1N may be fixed with a mounting bracket (optional).
- Double sump length allows extended cartridge change-out and reduces maintenance costs.
- No tool is needed for the threaded sump connection.

Model	Flow l/min	Connection in/out	Max. Temperature	Element Connection	Dimensions	
					A	H
1N1	25	R 3/4" / Rp 3/4"	80°C	DOE	318	360
1N2	50	R 3/4" / Rp 3/4"	80°C	DOE	568	610