



PACKAGE SAWS

WITH ARCH GUIDE FRAME

WOOD

PRINZ PACKAGE SAWS WITH A


MOBILCUT STATE LINE

The MOBILCUT STATE LINE is a positioning saw with a package frame to cut stationary packages. The saw positioning is manual, the guide bar moves along a robust guide arch for high cut accuracy. The saw stands out due to easy operation, a sturdy design and excellent stability. With a maximum frame length of 7,6 m, it can also be installed where space requirement is limited.



TECHNICAL DATA


Saw motor power 7,5 kW \bullet manual feed for cut \bullet to process packages up to 600 x 130 x 130 cm (L x W x H) \bullet digital readout \bullet operation on control pedestal, access via ladder \bullet robust guide arch \bullet +/- 2 mm cut accuracy

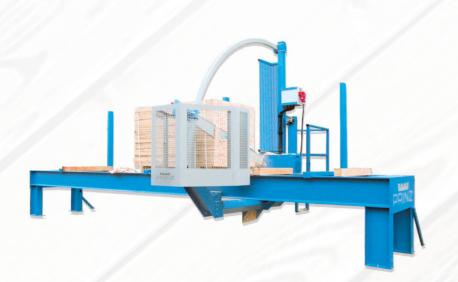







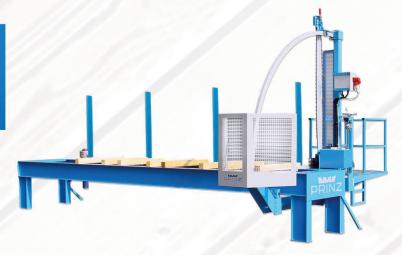

RCH GUIDE FRAME

MOBILCUT HIGH LINE

Additionally to the MOBILCUT STATE LINE version, the MOBILCUT HIGH LINE is equipped with an electric feed for cut and is even more efficient through the motor of 11 kW.



TECHNICAL DATA

Saw motor power 11 kW • electric feed for cut • to process packages up to 600 x 130 x 130 cm (L x W x H) • digital readout • operation standing behind the machine, 74 cm height of steering wheel • manual positioning







MOBILCUT TOP LINE

The Mobilcut TOP LINE offers automatic positioning via a length measuring system.



TECHNICAL DATA

Saw motor power 11 kW • electric feed for cut • to process packages up to 600 x 130 x 130 cm (L x W x H) • touchscreen with digital readout, 8 lengths can be memorized • robust guide arch • automatic saw positioning left/right via gear motor • +/- 2 mm cut accuracy











OPTIONS
















CROSSCUT

The CROSSCUT complements the range of PRINZ crosscut saws with arch guide frame. In this model, the saw is fixed to the loading frame and a travelling carriage positions the stacks. Available with manual cut function and PLC control. Many options are available: kerf opening, strapping systems and much more.



TECHNICAL DATA

Saw motor power 11 kW \bullet electric feed for cut \bullet for packages up to 600 x 130 x 130 cm (L x W x H) \bullet +/- 2 mm cut accuracy \bullet robust guide arch

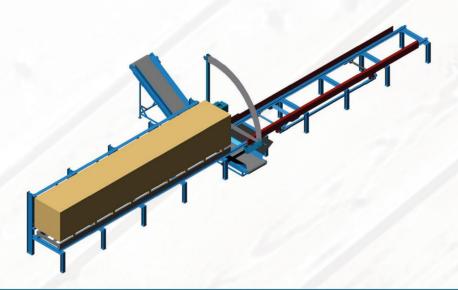

V1-22 | Errors and misprints excepte



