

## I Application

The INNOVA D-type valve is a pneumatic shut-off single seat valve with two seals that, by means of a leakage chamber under atmospheric pressure formed between the two seals, enables a safe separation of two different products, one of which is usually CIP (cleaning medium).

Compressed air is simultaneously applied to the actuator and to the leakage valves to prevent leakage through the leakage valve when the valve opens. Valve open - leakage valves closed / valve closed - leakage valves open.

The leakage chamber can be cleaned through one of the two available leakage valves.

## I Design and features

Specific profile seat seals, conical upper seal, radial lower seal.

Main valve with single acting actuator (NC) and normally open leakage valves (NO).

Easy assembly/disassembly of internal parts by loosening a clamp fastener.

Open lantern allows visual inspection of shaft sealing.

360° adjustable body.

## I Technical specifications

### Materials:

Parts in contact with the product

Stainless steel AISI 316L (1.4404)

Other stainless steel parts

Stainless steel AISI 304 (1.4301)

Gasket

EPDM

### Surface finish:

Internal

Bright polish  $Ra \leq 0,8 \mu m$

External

Matt

### Available sizes:

DIN 11850

DN 25 – DN 100

ASME BPE

OD 1" – OD 4"

### Connections:

Weld

### Operating limits:

Temperature range (EPDM)

-10 °C to +121 °C    14 °F to 250 °F

SIP temperature, max. 30 min.

140°C    284°F

Maximum working pressure

10 bar    145 PSI

Minimum working pressure

Vacuum    Vacuum

Compressed air pressure

6-8 bar    87-116 PSI

## I Options

Double-acting pneumatic actuator.



Gaskets: FPM, HNBR.

Other connection types.


C-TOP+ control unit.

External position sensors.

Surface finish:  $Ra \leq 0,5 \mu m$ .

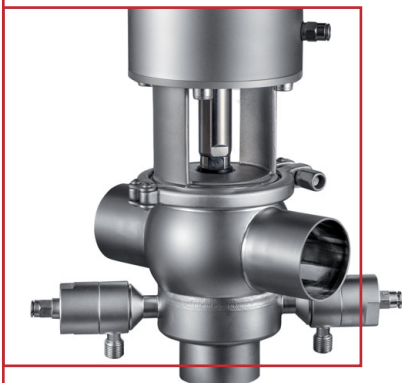


Valve open.  
Leakage valves closed.




Valve closed.  
Leakage valves open for draining or  
cleaning of the leakage chamber.



### I Housing combinations




### I Dimensions

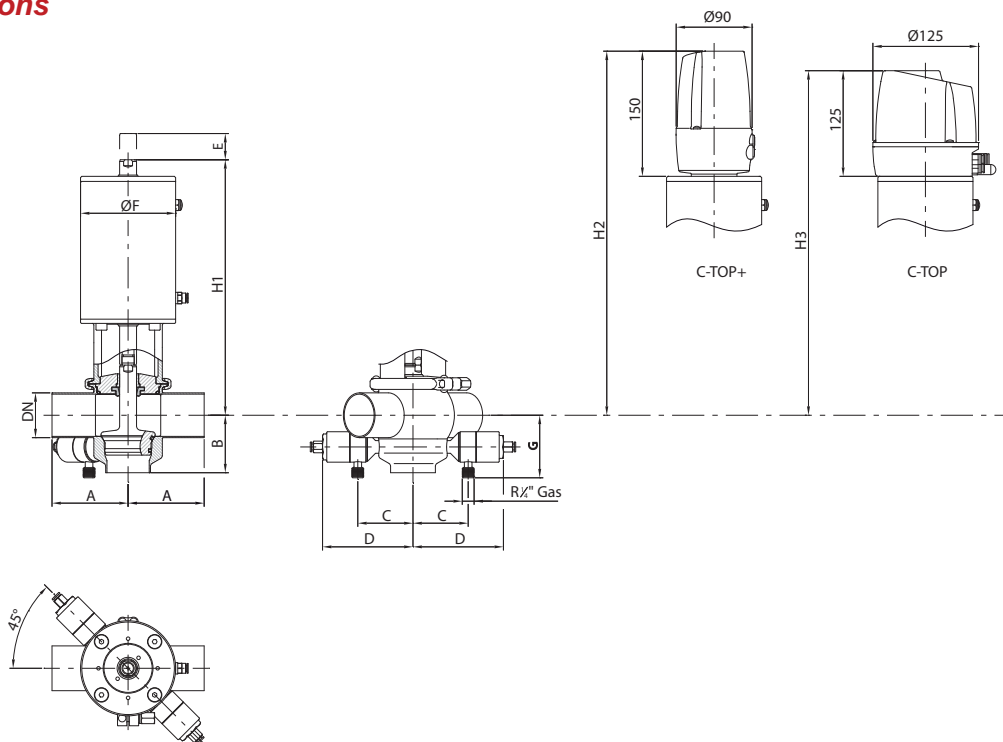


	DN	Pipe Ø	A	B	C	D	E	Ø F	G	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	kg
<b>DIN</b>	25	29 x 1,5	50	50	50,3	92	15	87	61,5	239	367	342	5,1
	40	41 x 1,5	85	60	58,8	101	24	87	68	240	377	352	6,1
	50	53 x 1,5	90	68	65,3	107	31	112	74	302	433	408	10
	65	70 x 2,0	110	78	77,3	119	37	143	81,9	348	485	460	17
	80	85 x 2,0	125	94,1	83,3	125	37	143	89,5	355	492	467	19
	100	104 x 2,0	150	120	95,3	137	34	216	99,5	383	516	491	34
<b>OD</b>	1"	25,4 x 1,65	50	50	50,3	92	15	87	59,6	241	369	344	5,1
	1½"	38,1 x 1,65	85	60	58,8	101	24	87	66,5	242	379	354	6,1
	2"	50,8 x 1,65	90	68	65,3	107	31	112	72,5	304	434	409	10
	2½"	63,5 x 1,65	110	81	77,3	119	37	143	79	351	488	463	17
	3"	76,2 x 1,65	125	90	83,3	125	37	143	85,5	359	496	471	18
	4"	101,6 x 2,11	150	120	95,3	137	34	216	98,5	384	517	492	34

Maximum pressure in bar / PSI without leakage at the valve seat.

Actuator/valve body combination and direction of pressure	Air pressure	Plug position	OD 1" DN 25	OD 1½" DN 40	OD 2" DN 50	OD 2½" DN 65	OD 3" DN 80	OD 4" DN 100
	[bar] / [PSI]		[bar] / [PSI]					
	6 / 87	NC	10 / 145	6 / 87	5,5 / 79	5,5 / 79	4,5 / 65	5 / 72

Maximum pressure in bar / PSI against which the valve can open.

Actuator/valve body combination and direction of pressure	Air pressure	Plug position	OD 1" DN 25	OD 1½" DN 40	OD 2" DN 50	OD 2½" DN 65	OD 3" DN 80	OD 4" DN 100
	[bar] / [PSI]		[bar] / [PSI]					
	6 / 87	NC	10 / 145	10 / 145	10 / 145	9,5 / 137	8,5 / 123	10 / 145

A = Air

P = Product pressure

NC = Normally closed

Note: Values for standard actuators.

For other pressures, bigger actuators can be assembled.