



aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



## E0-Tubes and Pipes for fittings and flanges

Industrial and Mobile Applications  
Marine and Offshore Applications



ENGINEERING YOUR SUCCESS.



### **For your safety!**

Under certain circumstances, tubes, fittings and flanges can be subjected to extreme loadings such as vibration and uncontrolled pressure peaks.

Only by using genuine Parker components and following Parker assembly instructions you can be assured of the reliability and safety of the products and their conformity to the applicable standards.

Failure to follow this rule can adversely affect the functional safety and reliability of products, cause personal injury, property damage, and result in loss of your guarantee rights.

Subject to alteration

© Copyright 2013, Parker Hannifin Corporation. All Rights Reserved.



	Page
<b>Introduction</b> .....	04
<b>Technical properties, calculation rules and standards</b> .....	06
<b>Tubes &amp; Pipes: Dimensions and pressure rates</b>	
<b>EO-Tubes for fittings, Industrial and Mobile Applications</b>	
EO steel tubes, seamless, metric sizes, material E235+N.....	12
EO stainless steel tubes, metric sizes, material 316Ti.....	14
EO steel tubes, imperial sizes, E235+N .....	15
<b>Tubes and pipes for piping business</b>	
EO steel tubes, seamless, metric sizes, material E235+N for marine and offshore applications.....	18
EO steel tubes, seamless, metric sizes, material E235+N for landbased and industrial applications.....	19
EO steel tubes, seamless, metric sizes, material E355+N for marine and offshore applications.....	20
EO steel tubes, seamless, metric sizes, material E355+N for landbased and industrial applications.....	21
EO stainless steel tubes, metric sizes, ASTM A269, material 316L for marine and offshore applications.....	22
EO stainless steel tubes, metric sizes, ASTM A269, material 316L for landbased and industrial applications.....	23
EO stainless steel pipes, scheduled sizes, ASTM A312, material 316L for marine and offshore applications.....	24

# Tubes for fluid, hydraulic and pneumatic Applications

## The world of tubes

### Your choice for high pressure.

The tube programme from Parker Hannifin gives all possibilities for usage in hydraulic applications. Tubes for fitting- and flange-systems, tubes for mobile and stationary systems. Different dimensions, carbon- and stainless-steel tubes as well as different surfaces are available.

### Approved quality.

Parker tubes are designed for the special requirements in several markets. Continuous tests in laboratories and on test benches ensure the high quality level of the material. Certifications from independent institutes such as ABS, LR or DNV confirm the adherence to high standards. This opens into reliability and longevity of the hydraulic application.



### Worldwide connections.

The Parker Hannifin tube-warehouse with its worldwide network provides a close and prompt supply of high precision tubes; thus, international customers can also rely on us. Efficient, reliable, environmentally friendly and on-time deliveries are available in almost every country in the world.

### All around tubes.

This brochure provides all relevant information regarding hydraulic lines in a structured and clear way. Which parameters are important, what kind of tubes and dimensions fit the construction and specifications, and which materials are in use in special applications. With Parker order codes you can start right away...



### Certificates

On request our tubes & pipes have the relevant certificates for your markets. The suppliers are approved e.g. by ISO 9001, ISO/TS 16949, ISO 14001. Please ask for details.



# Complete Piping Solutions and System Supplier

## Added Value maximizes your performance

### CPS - Complete Piping Solutions.


Just tubes! But it gets even better. Many customers like to have the complete Parker programme, and that's what we deliver worldwide based on our „Complete Piping Solutions“-concept. Technical support, reengineering, pre-fabrication, delivery and installation. These five steps give an effective and environmentally friendly solution from one source.

Our integrated knowledge, quality products, contemporary production methods and installation-experience guarantee perfect complete solutions for hydraulic systems. Integration in existing systems is also available. We help our customers right from their project start to highest productivity and timeliness.

### Advantages as a system supplier.

Parker Hannifin is the world's leading diversified manufacturer of motion and control technology. The company offers a product portfolio that is exemplary in the breadth and depth, and in constantly keeping quality. Through an international distribution network, the components are delivered quickly.

System solutions are tailored to the customer's situation. Whether DIN or SAE and available anywhere in the world. It will match everything together with a system, and the global design production is nothing in the way to the last detail. Efficient, sustainable and progressive.

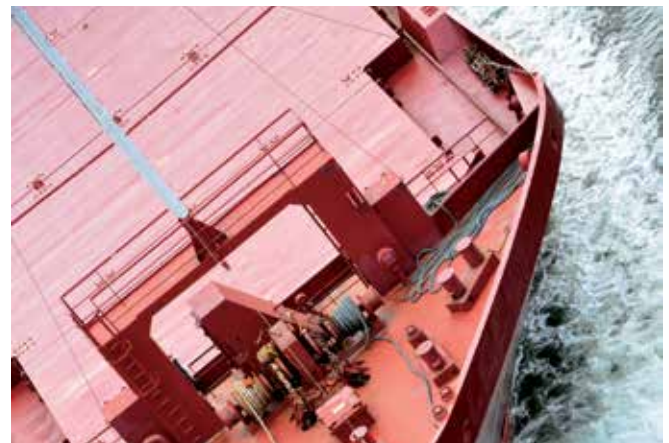

ENGINEERING YOUR SUCCESS.

### Tube and pipe specification

#### Recommended carbon steel tubes and pipes

Parker recommends the use of cold drawn seamless hydraulic tubes and pipes acc. to DIN EN 10305-4.

E 355N (St. 52.4 NBK) or E 235N (St. 37.4 NBK).

+ precision dimension/shape + clean inside (no scale)  
 + high pressure capability + excellent scaling surface after roll flaring

#### Recommended stainless steel tubes and pipes

Parker recommends the use of seamless cold drawn stainless steel tubes and pipes acc. to

DIN EN 10216-5

ASTM A269/A213

ASTM A312

+ precision dimension/shape + excellent scaling surface after roll flaring  
 + high pressure capability

#### Welded tubes and pipes

Tubes and pipes acc. to above specification but welded and cold redrawn instead of seamless drawn are usually suitable. Pressure capability might be reduced due to the welding seam zone.

Welding seam quality might effect roll flaring surface results.

#### Hot rolled pipes

Hot rolled pipes are not recommended for the following reasons:

Hot rolled pipes do not have precision dimensions and may slip in machine dies.

They have scales inside and outside. The inside scales effect the cleanliness level of the fluid and reduces fatigue levels.

Used in roll flaring process the scales will contaminate the flaring tools (high cleaning effort) and cause poor flare surface quality.

**The required maximum working pressure is calculated either acc. to DNV, DIN or ANSI.**

### Material Specifications & Values

#### 1.0308 (E235/St.35.4) acc. to DIN EN 10305-4

Tensile strength	min 340 N/mm <sup>2</sup>
Yield strength	min 235 N/mm <sup>2</sup>
Fatigue strength	225 N/mm <sup>2</sup> <sup>1)</sup>
Elongation at break	min. 25%

#### 1.0508 (E355/St.52.4) acc. to DIN EN 10305-4

Tensile strength	min 490 N/mm <sup>2</sup>
Yield strength	min 355 N/mm <sup>2</sup>
Fatigue strength	265 N/mm <sup>2</sup>
Elongation at break	min. 22 %

#### 1.4571 (316 Ti) cold drawn (CFA)<sup>3)</sup> acc. to DIN EN 10216-5

Tensile strength	min 500 N/mm <sup>2</sup>
0.2 % proof stress	min 210 N/mm <sup>2</sup>
1 % proof stress	min 245 N/mm <sup>2</sup>
Fatigue strength	220 N/mm <sup>2</sup>
Elongation at break	min. 35 %

#### 1.4404 (316L) cold drawn (CFA)<sup>3)</sup> acc. to DIN EN 10216-5

Tensile strength	min 500 N/mm <sup>2</sup>
0.2 % proof stress	min 210 N/mm <sup>2</sup>
1 % proof stress	min 245 N/mm <sup>2</sup>
Elongation at break	min. 35 %

#### 1.4401 (316) acc. to DIN EN 10216-5

Tensile strength	min 510 N/mm <sup>2</sup>
0.2 % proof stress	min 205 N/mm <sup>2</sup>
1 % proof stress	min 240 N/mm <sup>2</sup>
Elongation at break	min. 40 %

#### 1.4301 (304) acc. to DIN EN 10216-5

Tensile strength	min 500 N/mm <sup>2</sup>
0.2 % proof stress	min 195 N/mm <sup>2</sup>
1 % proof stress	min 230 N/mm <sup>2</sup>
Fatigue strength	195 N/mm <sup>2</sup> <sup>2)</sup>
Elongation at break	min. 40 %

#### 1.4404 (316L) ASTM A269 / A213

Tensile strength	min 530 N/mm <sup>2</sup>
Yield strength	min 276 N/mm <sup>2</sup>
0.2 % proof stress / 1.6 <sup>4)</sup>	172.5 N/mm <sup>2</sup>

#### 1.4404 (316L) ASTM A312 / A530

Tensile strength	min 515 N/mm <sup>2</sup>
Yield strength	min 234 N/mm <sup>2</sup>
0.2 % proof stress / 1.6 <sup>4)</sup>	146 N/mm <sup>2</sup>

<sup>1)</sup> DIN 2413 Template, Tab. 4

<sup>2)</sup> Rollof/Matek ME Ausg. 14, (no standard value)

<sup>3)</sup> Strength increase due to cold forming following 1.4571

<sup>4)</sup> Pressure rating calculation based on this mechanical properties require certification according to 3.1 - EN 10204 that confirms the mechanical properties.

## Tube calculation for marine and offshore acc. to DNV rules

Calculation of working pressure of steel and stainless steel tubes for ship building acc. to DNV Part 4, Chapter 6, Section 6.

$$P = \frac{20 \cdot \sigma_t \cdot e \cdot t_0}{D - t_0}$$

P = permissible working pressure [bar]  
 $\sigma_t$  = permissible stress [N/mm<sup>2</sup>]  
 calculated from the lower value off:

stainless steel:	carbon steel:
$\sigma_t = \frac{R_m}{2.7}$ or $\frac{K}{1.6}$	$\sigma_t = \frac{R_m}{2.7}$ or $\frac{K}{1.8}$

$t_0$  = tube wall thickness without allowances [mm]

$$t_0 = t_n \cdot a - c - b$$

$t_n$  = tube wall thickness nominal [mm]  
 a = factor for wall thickness allowance [mm]  
 = 0.8 for Tube-OD 4-5, 0.85 for Tube-OD 6-8, 0.9 for Tube OD  $\geq 10$   
 = 0.9 for all stainless steel tubes  
 b = bending allowance

$$b = 0.1333 \cdot t_0 \text{ (at } R/D=3) \rightarrow t_0 = \frac{t_n \cdot a - c}{1.1333}$$

c = corrosion tolerance, c = 0.3 mm for hydraulic steel tube, c = 0 mm for SS tubes  
 e = strength ratio: for seamless tubes e = 1  
 D = tube outside diameter [mm]  
 $R_m$  = min. tensile strength [N/mm<sup>2</sup>]  
 $K$  = min. yield strength or min 0.2% proof stress [N/mm<sup>2</sup>]

## Tube calculation for landbased and industrial applications acc. to DIN rules

### DIN 2413 I, only for static load

Calculation of working pressure of steel tubes for static stress up to 120°C. Corrosion - additional allowances are not considered for the calculation of pressures. Tubes with a diameter of OD/ID > 2 are calculated for static stress in accordance with DIN 2413 III, but with K = yield strength.

$$P = \frac{20 \cdot K \cdot s \cdot c}{S \cdot D}$$

P = permissible working pressure [bar]  
 K = yield strength [N/mm<sup>2</sup>]  
 s = tube wall thickness [mm]  
 c = factor for wall thickness allowance  
 = 0.8 for Tube-OD 4-5, 0.85 for Tube-OD 6-8,  
 0.9 for Tube-OD 10  
 = 0.9 for all stainless steel tubes  
 S = Safety factor = 1.5  
 D = tube outside diameter [mm]

### DIN 2413 III, for dynamic load

Calculation of working pressure of steel tubes for dynamic stress up to 120°C. Corrosion - additional allowances are not considered for the calculation of pressures.

$$P = \frac{20 \cdot K \cdot s \cdot c}{S \cdot (D + s \cdot c)}$$

P = permissible working pressure [bar]  
 K = fatigue strength [N/mm<sup>2</sup>]  
 s = tube wall thickness [mm]  
 c = factor for wall thickness allowance  
 = 0.8 for Tube-OD 4-5, 0.85 for Tube-OD 6-8,  
 0.9 for Tube-OD 10-80  
 = 0.9 for all stainless steel tubes  
 S = Safety factor = 1.5  
 D = tube outside diameter [mm]

### Burst Pressure calculation

Calculation acc. to Formula of DIN 2413 but without safety

BP = Burst Pressure  
 $R_m$  = min tensile strength  
 s = tube wall thickness  
 c = factor for wall thickness allowance  
 = 0.8 for Tube-OD 4-5,  
 0.85 for Tube-OD 6-8,  
 0.9 for Tube-OD 10  
 0.9 for all stainless steel tubes  
 D = tube outside diameter [mm]




$$BP = \frac{20 \cdot R_m \cdot s \cdot c}{D}$$

### Pressure reductions and temperatures

Required pressure reductions (depending on the material) with reference to the catalogue pressures for higher temperatures. Both metal fitting material and elastomeric sealing compound have to be selected according to the temperature range of the system.

DNV may require different pressure reduction based on application

Material	Pressure reduction of permissible operating temperatures TB in °C														
	-60	-54	-40	-35	-25	+20	+50	+100	+120	+150	+175	+200	+250	+300	+400
Steel components			10%			0%			11%	19%					
Steel, tubes			10%			0%			19%		27%				
Stainless steel components	0%				5%	15%	23%		29%		33%	37%	42%		
Stainless steel, tubes	0%				5.5%	11.5%	21.5%		29%		34%				
Sealing material NBR (e.g. Perbunan)															
Sealing material FKM															
Sealing material Polyurethan (P5008)															

	Permissible operating temperature
	Ambient temperature of hydraulic and pneumatic applications
	Temperature not permissible

Calculation example:

Temperature = 200°C

Material = Stainless steel

Pressure reduction = 29%

Pressure reduction tubes = 21.5%

PN tube 16x2.5/71. DIN2413 III = 362 bar

Formula:

$$PN_{200^{\circ}\text{C}} = \frac{400 \text{ bar}}{100\%} \times (100\% - 29\%) = 284 \text{ bar}$$

$$PN_{\text{tube } 200^{\circ}\text{C}} = \frac{362 \text{ bar}}{100\%} \times (100\% - 21.5\%) = 284 \text{ bar}$$

### Flow diameter of tube lines

#### Determining tube sizes for hydraulic systems

Proper tube material, type and size for a given application and type of fitting are critical for efficient and trouble-free operation of the fluid system. Selection of proper tubing involves choosing the right tube material, and determining the optimum tube size (O.D. and wall thickness).

Proper sizing of the tube for various parts of a hydraulic system results in an optimum combination of efficient and cost effective performance.

A tube that is too small causes high fluid velocity, which has many detrimental effects. In pressure lines, it causes high friction losses and turbulence, both resulting in high pressure drops and heat generation. High heat accelerates wear in moving parts and rapid aging of seals and hoses, all resulting in reduced component life. High heat generation also means wasted energy, and hence, low efficiency.

Too large tubes increase system cost. Thus, optimum tube sizing is very critical. The following is a simple procedure for sizing tubes.

#### Determine required flow diameter

Use table to determine recommended flow diameter for the required flow rate and type of line.

The table is based on the following recommended flow rates that are common in the shipbuilding and offshore engineering:

Pressure lines	- 3	→ 7.2	$\left[ \frac{\text{m}}{\text{s}} \right]$
Return lines	- 2	→ 4.5	$\left[ \frac{\text{m}}{\text{s}} \right]$
Suction lines	- 1	→ 1.8	$\left[ \frac{\text{m}}{\text{s}} \right]$

Avoid flow rates > 8 m/s!

The resulting forces are high and can destroy the tube lines.

If you desire to use different velocities than the above, use the following formula to determine the required flow diameter.

$$\text{Tube - I.D. [mm]} = 4,61 \times \sqrt{\frac{\text{Flow} \left[ \frac{\text{ltr.}}{\text{min}} \right]}{\text{Velocity} \left[ \frac{\text{m}}{\text{s}} \right]}}$$

#### Determine required wall thickness

Use tube/pressure calculation tables shown in the tube chapter to determine recommended wall thickness for the required working pressure and flow diameter of the line. Therefore choose a working pressure which is equal or higher than the required working pressure.





## Flow characteristics

Hydraulic systems are in most cases only rated with a flow velocity defined on the basis of experience. The pressure losses in lines are not taken into account, or measured later on when testing the system. As the pressure losses increase proportionally greater than the flow resistance, it is important to achieve the best rating of the system, so that they are already taken into account when planning the tube connections. Calculation is not as difficult as it is often thought, and this chapter is intended to provide a guideline. Besides, it provides information on how excessive pressure losses can be avoided, because pressure losses result in losses in performance and excessive heat. Noise occurs and possibly cavitation in suction lines.

### Medium

All indication given with regard to flow restrictions and to flow properties refer exclusively to liquids. For gaseous media, the variable density of the gas must additionally be taken into account.

### Units

$$c = \text{Flow velocity} \left[ \frac{\text{m}}{\text{s}} \right]$$

$$d = \text{Pipe inside diameter [m]}$$

$$L = \text{Pipe length [m]}$$

$$p = \text{Pressure [Pa], } 1 \text{ bar} = 100000 \text{ Pa}$$

$$\dot{V} = \text{Flow rate} \left[ \frac{\text{m}^3}{\text{s}} \right], 1 \frac{\text{m}^3}{\text{s}} = 6000 \frac{\text{l}}{\text{min}}$$

$$\lambda = \text{Pipe friction factor}$$

$$v(T) = \text{Kinematic viscosity of the medium depending on temperature} \left[ \frac{\text{m}^2}{\text{s}} \right]$$


$$\rho(T) = \text{Density of the medium depending on temperature} \left[ \frac{\text{kg}}{\text{m}^3} \right]$$

$$\zeta = \text{Individual pressure loss coefficient}$$


Only base units have been used. This has the advantage that the formula do not contain correction factors and there is no danger of confusion, e.g. that values are used with the wrong unit. In case values are given in other units – the flow rate is e.g. often given in l/min – it is advisable to convert them into the base units before starting calculation.

### Pressure losses in pipe lines

To calculate pressure losses in pipe lines, it must first be determined whether there is a laminar or a turbulent flow. Laminar flow is homogenous and without turbulence. In case of turbulent flow, the losses increase much more quickly.



Flow profile with laminar flow



Flow profile with turbulent flow

The kind of flow is defined by the Reynolds' number. With a Reynolds' number of more than 2320, the flow changes to turbulent. The Reynolds' number is calculated according to the formula:

$$Re = \frac{c \cdot d}{v(T)}$$

The Reynolds' number is a non-dimensional number. The critical fluid velocity at which the flow regime can change, is thus calculated from:

$$c_{cr} = 2320 \cdot \frac{v(T)}{d} \left[ \frac{\text{m}}{\text{s}} \right]$$

With a given flow rate, the fluid velocity can be calculated according to the formula:

$$c = \frac{\dot{V} \cdot 4}{d^2 \cdot \pi} \left[ \frac{\text{m}}{\text{s}} \right]$$

Subsequently, the pipe friction factor  $\lambda$  can be calculated. The pipe friction factor  $\lambda$  is a function of the Reynolds' number and also depends on the roughness of the pipe. As hydraulically smooth pipes can generally be assumed in hydraulic applications, the pipe friction factor  $\lambda$  is calculated according to the following formula:

$$\text{laminar flow, } (Re < 2320): \lambda = \frac{64}{Re}$$

$$\text{turbulent flow, } (Re > 2320): \lambda = \frac{0.3164}{\sqrt[4]{Re}}$$

Finally, if all factors are known, the pressure loss in a certain pipe line can be calculated according to the formula:

$$\Delta p = \lambda \cdot \frac{L}{d} \cdot \frac{\rho(T) \cdot c^2}{2} \text{ [Pa]}$$

### Calculation of individual losses

A hydraulic system does not only incorporate pipes, but also valves, fittings, pipe bends etc. that cause flow losses. These individual losses are often much higher than the pipe losses and are calculated according to the following formula:

$$\Delta p = \zeta \cdot \rho(T) \cdot \frac{c^2}{2} \text{ [Pa]}$$

## Technical Properties, calculation rules and norms

### Oil flow and pressure loss

All calculations based on Tube acc. to EN 10305-4, viscosity 37cst. specific gravity 0.860.  
Following formula used and to determine other required tube or pipe sizes:

$$\text{Tube/Pipe I.D.} = 4.61 \times \sqrt{\frac{\text{flow/min}}{\text{velocity m/s}}}$$

Tube	Oil flow capacity l/min			Pressure loss in tube bar/m		
	1.8 m/s	4.5 m/s	7.2 m/s	1.8 m/s	4.5 m/s	7.2 m/s
6x1.0		3.4	5.4		1.90	4.10
6x1.5		1.9	3.1		2.80	5.90
8x1.0		7.6	12.2		1.10	2.30
8x1.5		5.3	8.5		1.40	3.00
8x2.0		3.4	5.4		1.90	4.10
8x2.5		1.9	3.1		2.80	5.90
10x1.0		13.6	21.7		0.70	1.60
10x1.5		10.4	16.6		0.90	1.90
10x2.0		7.6	12.2		1.10	2.30
10x2.5		5.3	8.5		1.40	3.00
12x1.0		21.2	33.9		0.50	1.20
12x1.5		17.2	27.4		0.60	1.30
12x2.0		13.6	21.7		0.70	1.60
12x2.5		10.4	16.6		0.90	1.90
14x1.5		25.6	41.0		0.50	1.00
14x2.0		21.2	33.9		0.50	1.20
15x1.5		30.5	48.8		0.40	0.90
15x2.0		25.6	41.0		0.50	1.00
16x1.5		35.8	57.3		0.40	0.80
16x2.0		30.5	48.8		0.40	0.09
16x2.5		25.6	41.0		0.50	1.00
16x3.0		21.2	33.9		0.50	1.20
18x1.5		47.6	76.2		0.30	0.70
18x2.0		41.5	66.4		0.30	0.70
20x2.0		54.2	86.7		0.30	0.70
20x2.5		47.6	76.2		0.30	0.70
20x3.0		41.5	66.4		0.30	0.70
20x4.0		30.5	48.8		0.40	0.90
22x1.5		76.4	122.3		0.20	0.50
22x2.0		68.6	109.8		0.20	0.05
22x2.5		61.2	97.9		0.30	0.60
25x2.0		93.4	149.4		0.20	0.40
25x2.5		84.7	135.5		0.20	0.50
25x3.0		76.4	122.3		0.20	0.50
25x4.0		61.2	97.9		3.00	0.06
28x2.0		122.0	195.1		0.20	0.40
28x2.5		112.0	179.2		0.20	0.40
28x3.0		102.5	164.0		0.20	0.40

Tube	Oil flow capacity l/min			Pressure loss in tube bar/m		
	1.8 m/s	4.5 m/s	7.2 m/s	1.8 m/s	4.5 m/s	7.2 m/s
30x2.0		143.1	229.0		0.10	0.30
30x3.0		122.0	195.1		0.10	0.40
30x4.0		102.5	164.0		0.10	0.40
35x2.0	81.4	203.5	325.6	0.024	0.10	0.30
35x3.0		178.1	284.9		0.10	0.30
38x2.5		230.6	368.9		0.10	0.20
38x3.0		216.8	346.9		0.10	0.30
38x4.0		190.6	304.9		0.10	0.30
38x5.0		166.0	265.6		0.10	0.30
42x2.0	122.3	305.8	489.2	0.018	0.09	0.20
42x3.0		274.4	439.1		0.10	0.20
42x4.0		244.8	391.6		0.10	0.20
46x8.5		178.1	284.9		0.06	0.14
50x3.0	164.0	410.0	656.0	0.012	0.07	0.17
50x5.0		338.8	542.1		0.08	0.19
50x6.0		305.8	489.2		0.09	0.19
56x8.5		322.1	515.3		0.09	0.19
60x3.0		617.4	987.9	0.012	0.06	0.13
60x5.0		529.4	847.0		0.06	0.14
65x8.0		508.4	813.4		0.06	0.14
66x8.5		508.4	813.4		0.06	0.14
73x7.0		737.1	1179.3		0.05	0.11
75x3.0		1008.1	1613.0	0.008	0.04	0.09
75x5.0		894.6	1431.4		0.03	0.10
80x10.0		762.3	1219.6		0.05	0.11
90x3.5		1458.7	2333.9	0.006	0.03	0.07
90x5.0		1355.2	2168.3		0.03	0.08
90x9.0		1097.7	1756.3		0.04	0.09
97x12.0		1128.4	1805.4		0.04	0.09
115x4.0		2424.3	3878.8	0.004	0.03	0.05
115x15.0		1529.8	2447.8		0.03	0.07
125x4.0		2898.6	4637.7		0.03	0.05
130x15.0		2117.4	3387.9		0.03	0.06
140x4.5	1453.5	3633.7	5814.0	0.004	0.02	0.04
165x5.0	1931.3	5087.0	7725.0			
220x6.0	3664.5	9160.5	14658.0			
273x6.0	5769.5	14424.0	23079.0			





## **E0-Tubes for fittings**

Industrial and Mobile Applications

ENGINEERING YOUR SUCCESS.

## EO-Tubes for fittings, Industrial and Mobile Applications

### Seamless EO steel tubes | Material E235N (St. 37.4)

Tolerance DIN EN 10305-4

1 Design pressure bar Values calculated for straight length.

Tubes with a diameter of OD/ID>2 are calculated for static stress in accordance with DIN 2413 III but with K=yield strength.

2 Evaluated in Parker Lab and Test Field.

Order code		Tube O.D. (mm)	Tolerance	Wall thickness (mm)	Tube I.D. (mm)	1 Design pressure bar		2 Burst pressure bar	Weight kg/m
Phosphated and oiled	Cr(VI)-free					DIN 2413 I Static	DIN 2413 III Dynamic		
R04X0.5	R04X0.5CF	4	±0.08	0.50	3.0	313	273	1160	0.047
	R04X0.75CF	4		0.75	2.5	470	391	1820	0.063
R04X1	R04X1CF	4	±0.08	1.00	2.0	627	500	2700	0.074
	R05X1CF	5		1.00	3.0	501	416	2120	0.099
R06X1 R06X1.5	R06X0.75CF	6	±0.08	0.75	4.5	333	288	1150	0.103
	R06X1CF	6		1.00	4.0	444	372	1650	0.123
	R06X1.5CF	6		1.50	3.0	666	526	2550	0.166
	R06X2CF	6		2.00	2.0	692	662	>3500	0.197
	R06X2.25CF	6		2.25	1.5	757	725	>3500	0.208
R08X1 R08X1.5 R08X2	R08X1CF	8	±0.08	1.00	6.0	333	288	1175	0.173
	R08X1.5CF	8		1.50	5.0	499	412	1925	0.240
	R08X2CF	8		2.00	4.0	666	526	2500	0.296
	R08X2.5CF	8		2.50	3.0	658	630	2650	0.339
R10X1 R10X1.5 R10X2	R10X1CF	10	±0.08	1.00	8.0	282	248	900	0.222
	R10X1.5CF	10		1.50	7.0	423	357	1450	0.314
	R10X2CF	10		2.00	6.0	564	458	2025	0.395
	R10X2.5CF	10		2.50	5.0	705	551	2675	0.462
	R10X3CF	10		3.00	4.0	666	638	>3500	0.518
R12X1 R12X1.5 R12X2	R12X1CF	12	±0.08	1.00	10.0	235	209	750	0.271
	R12X1.5CF	12		1.50	9.0	353	303	1150	0.388
	R12X2CF	12		2.00	8.0	470	391	1600	0.493
	R12X2.5CF	12		2.50	7.0	588	474	2025	0.586
	R12X3CF	12		3.00	6.0	705	551	2600	0.666
	R12X3.5CF	12		3.50	5.0	651	624		0.734
R14X2  R14X3	R14X1.5CF	14	±0.08	1.50	11.0	302	264	975	0.462
	R14X2CF	14		2.00	10.0	403	342	1325	0.592
	R14X2.5CF	14		2.50	9.0	504	415	1650	0.709
	R14X3CF	14		3.00	8.0	604	485	2200	0.814
		14		3.50	7.0	705	551	2625	0.906
R15X1 R15X1.5 R15X2	R15X1CF	15	±0.08	1.00	13.0	188	170	575	0.345
	R15X1.5CF	15		1.50	12.0	282	248	950	0.499
	R15X2CF	15		2.00	11.0	376	321	1275	0.641
		15		3.00	9.0	564	458	2000	0.888
R16X1.5 R16X2 R16X2.5 R16X3	R16X1.5CF	16	±0.08	1.50	13.0	264	233	850	0.536
	R16X2CF	16		2.00	12.0	353	303	1175	0.691
	R16X2.5CF	16		2.50	11.0	441	370	1500	0.832
	R16X3CF	16		3.00	10.0	529	433	1850	0.962
R18X1 R18X1.5 R18X2 R18X2.5	R18X1CF	18	±0.08	1.00	16.0	157	143	450	0.419
	R18X1.5CF	18		1.50	15.0	235	209	700	0.610
	R18X2CF	18		2.00	14.0	313	273	975	0.789
	R18X2.5CF	18		2.50	13.0	392	333	1300	0.956
	R18X3CF	18		3.00	12.0	470	391	1575	1.111



**Seamless EO steel tubes (continued) | Material E235N (St. 37.4)**

Tolerance DIN EN 10305-4

1 Design pressure bar Values calculated for straight length.

Tubes with a diameter of OD/ID>2 are calculated for static stress in accordance with DIN 2413 III but with K=yield strength.

2 Evaluated in Parker Lab and Test Field.

Order code		Tube O.D. (mm)	Tolerance	Wall thickness (mm)	Tube I.D. (mm)	1 Design pressure bar		2 Burst pressure bar	Weight kg/m
Phosphated and oiled	Cr(VI)-free					DIN 2413 I Static	DIN 2413 III Dynamic		
<b>R20X2</b> <b>R20X2.5</b> <b>R20X3</b>	<b>R20X1.5CF</b>	20	±0.08	1.50	17.0	212	190	675	0.684
	<b>R20X2CF</b>	20		2.00	16.0	282	248	900	0.888
	<b>R20X2.5CF</b>	20		2.50	15.0	353	303	1100	1.079
	<b>R20X3CF</b>	20		3.00	14.0	423	357	1400	1.258
	<b>R20X3.5CF</b>	20		3.50	13.0	494	408	1650	1.424
	<b>R20X4CF</b>	20		4.00	12.0	564	458	2000	1.578
<b>R22X1.5</b> <b>R22X2</b> <b>R22X2.5</b>	<b>R22X1.5CF</b>	22	±0.08	1.50	19.0	192	173	550	0.758
	<b>R22X2CF</b>	22		2.00	18.0	256	227	775	0.986
	<b>R22X2.5CF</b>	22		2.50	17.0	320	278	1025	1.202
	<b>R22X3CF</b>	22		3.00	16.0	385	328	1175	1.406
<b>R25X2</b> <b>R25X2.5</b> <b>R25X3</b> <b>R25X4</b> <b>R25X4.5</b>	<b>R25X2CF</b>	25	±0.08	2.00	21.0	226	201	725	1.134
	<b>R25X2.5CF</b>	25		2.50	20.0	282	248	850	1.387
	<b>R25X3CF</b>	25		3.00	19.0	338	292	1025	1.628
	<b>R25X4CF</b>	25		4.00	17.0	451	378	1500	2.072
	<b>R25X4.5CF</b>	25		4.50	16.0	508	418	1625	2.275
<b>R28X1.5</b> <b>R28X2</b> <b>R28X2.5</b> <b>R28X3</b>	<b>R28X1.5CF</b>	28	±0.08	1.50	25.0	151	138	425	0.980
	<b>R28X2CF</b>	28		2.00	24.0	201	181	600	1.282
	<b>R28X2.5CF</b>	28		2.50	23.0	252	223	750	1.572
	<b>R28X3CF</b>	28		3.00	22.0	302	264	900	1.850
<b>R30X2.5</b> <b>R30X3</b> <b>R30X4</b> <b>R30X5</b>	<b>R30X2CF</b>	30	±0.08	2.00	26.0	188	170	575	1.381
	<b>R30X2.5CF</b>	30		2.50	25.0	235	209	725	1.695
	<b>R30X3CF</b>	30		3.00	24.0	282	248	850	1.998
	<b>R30X4CF</b>	30		4.00	22.0	376	321	1175	2.565
	<b>R30X5CF</b>	30		5.00	20.0	470	391	1600	3.083
<b>R35X2</b> <b>R35X2.5</b> <b>R35X3</b>	<b>R35X2CF</b>	35	±0.15	2.00	31.0	161	147	450	1.628
	<b>R35X2.5CF</b>	35		2.50	30.0	201	181	600	2.004
	<b>R35X3CF</b>	35		3.00	29.0	242	215	700	2.367
	<b>R35X4CF</b>	35		4.00	27.0	322	280	960	3.058
<b>R38X3</b> <b>R38X4</b> <b>R38X5</b>	<b>R38X2.5CF</b>	38	±0.15	2.50	33.0	186	168	550	2.189
	<b>R38X3CF</b>	38		3.00	32.0	223	199	675	2.589
	<b>R38X4CF</b>	38		4.00	30.0	297	260	900	3.354
	<b>R38X5CF</b>	38		5.00	28.0	371	318	1150	4.069
	<b>R38X6CF</b>	38		6.00	26.0	445	373	1425	4.735
	<b>R38X7CF</b>	38		7.00	24.0	519	427	1700	5.352
<b>R42X2</b> <b>R42X3</b> <b>R42X4</b>	<b>R42X2CF</b>	42	±0.2	2.00	38.0	134	123	375	1.973
	<b>R42X3CF</b>	42		3.00	36.0	201	181	575	2.885
	<b>R42X4CF</b>	42		4.00	34.0	269	237	850	3.749
<b>R50X6</b>		50	±0.2	6.00	38.0	338	292		6.511
<b>R65X8</b>		65	±0.3	8.00	49.0	347	299		11.246

Surface finish:

- Phosphated and oiled:
- Tubes with I.D. 1.5–5 mm: outside and inside oiled.
- Tubes from 6 mm I.D.: outside and inside phosphated and oiled.

• Cr(VI)-free:

These dimensions are externally thick coat passivated (thickness of coat 8–12 µm), inside oiled.

## EO-Tubes for fittings, Industrial and Mobile Applications

### Seamless EO stainless steel tubes | Material-No.: 1.4571

#### Tolerance DIN EN 10305-1

1 Design pressure bar Values calculated for straight length.

Tubes with a diameter of OD/ID>2 are calculated for static stress in accordance with DIN 2413 III but with K=yield strength.

2 Evaluated in Parker Lab and Test Field.

Order code					1 1.4571 Design pressure bar DIN 2413 I Static	2 1.4571 burst pressure bar	
1.4571	Tube O.D. (mm)	Tolerance	Wall thickness (mm)	Tube I.D. (mm)			Weight kg/m
<b>R04X171</b>	4	±0.08	1.0	2	735		0.075
<b>R06X171</b>	6	±0.08	1.0	4	490	1850	0.125
<b>R06X1.571</b>	6	±0.08	1.5	3	735	2900	0.169
<b>R08X171</b>	8	±0.08	1.0	6	368	1300	0.175
<b>R08X1.571</b>	8		1.5	5	551	2050	0.244
<b>R10X171</b>	10		1.0	8	294	950	0.225
<b>R10X1.571</b>	10	±0.08	1.5	7	441	1750	0.319
<b>R10X271</b>	10		2.0	6	588	2400	0.401
<b>R12X171</b>	12		1.0	10	245	850	0.275
<b>R12X1.571</b>	12	±0.08	1.5	9	368	1400	0.394
<b>R12X271</b>	12		2.0	8	490	1900	0.501
<b>R14X1.571</b>	14		1.5	11	315	1200	0.469
<b>R14X271</b>	14	±0.08	2.0	10	420	1550	0.601
<b>R14X2.571</b>	14		2.5	9	525	2100	0.720
<b>R15X171</b>	15		1.0	13	196	675	0.351
<b>R15X1.571</b>	15	±0.08	1.5	12	294	1100	0.507
<b>R15X271</b>	15		2.0	11	392	1400	0.651
<b>R16X1.571</b>	16	±0.08	1.5	13	276	950	0.545
<b>R16X271</b>	16		2.0	12	368	1300	0.701
<b>R16X2.571</b>	16	±0.08	2.5	11	459	1850	0.845
<b>R16X371</b>	16		3.0	10	551	2400	0.977
<b>R18X1.571</b>	18	±0.08	1.5	15	245	800	0.620
<b>R18X271</b>	18		2.0	14	327	1150	0.801
<b>R20X271</b>	20		2.0	16	294	1050	0.901
<b>R20X2.571</b>	20	±0.08	2.5	15	368	1400	1.095
<b>R20X371</b>	20		3.0	14	441	1800	1.277
<b>R22X1.571</b>	22	±0.08	1.5	19	200	650	0.770
<b>R22X271</b>	22		2.0	18	267	900	1.002
<b>R25X2.571</b>	25	±0.08	2.5	20	294	1050	1.408
<b>R25X371</b>	25		3.0	19	353	1275	1.653
<b>R28X1.571</b>	28	±0.08	1.5	25	158	550	0.995
<b>R28X271</b>	28		2.0	24	210	700	1.302
<b>R30X2.571</b>	30	±0.08	2.5	25	245	850	1.722
<b>R30X371</b>	30	±0.08	3.0	24	294	1150	2.028
<b>R30X471</b>	30		4.0	22	392	1500	2.605
<b>R35X271</b>	35	±0.15	2.0	31	168	550	1.653
<b>R38X471</b>	38	±0.15	4.0	30	309	1150	3.405
<b>R42X271</b>	42	±0.2	2.0	38	140	475	2.003
<b>R42X371</b>	42		3.0	36	210	750	2.930



## Seamless EO steel tubes | Material Carbon-Steel

for hydraulic and pneumatic pressure lines.

SAE J 524. C-Steel, surface phosphated and oiled.

Test according ASTM A 179-90 A/ASME SA 179.

Quality and leak tested.

1 Design pressure bar Values calculated for straight length.

Tubes with a diameter of OD/ID>2 are calculated for static stress in accordance with DIN 2413 III but with K=yield strength.

2 Evaluated in Parker Lab and Test Field.

Order code (With Tube O.D. and wall thickness Inch)	Tube O.D. (mm)	Tolerance	Wall thickness (mm)	1 Design pressure bar		2 burst pressure bar	Weight kg/m
				DIN 2413 I Static	DIN 2413 III Dynamic		
<b>R1/4X0.049</b>	6.35	±0.08	1.24	553	450	–	0.157
<b>R3/8X0.049PHR</b>	9.53	±0.08	1.24	368	316	–	0.254
<b>R3/8X0.065PHR</b>	9.53	±0.08	1.65	489	405	–	0.321
<b>R1/2X0.049PHR</b>	12.70	±0.08	1.24	276	243	–	0.352
<b>R1/2X0.065PHR</b>	12.70	±0.08	1.65	367	314	–	0.450
<b>R5/8X0.083PHR</b>	16.00	±0.08	2.11	374	320	–	0.716
<b>R3/4X0.095PHR</b>	19.05	±0.08	2.41	357	307	–	0.990
<b>R3/4X0.109PHR</b>	19.05	±0.08	2.67	410	347	–	1.112
<b>R1X0.095PHR</b>	25.40	±0.08	2.41	268	236	–	1.368
<b>R1X0.120PHR</b>	25.40	±0.08	3.05	338	292	–	1.680
<b>R11/4X0.120PHR</b>	31.75	±0.08	3.05	271	239	–	2.157
<b>R11/2X0.156PHR</b>	38.10	±0.15	3.96	293	257	–	3.336







## **Tubes and pipes for piping business**

ENGINEERING YOUR SUCCESS.

## Tubes and pipes for piping business

### Tubes – Marine and offshore applications (DNV Rules)

- 1 DNV Bended pipe including manufacturing and corrosion tolerances  
 2 DNV Straight pipe including manufacturing and corrosion tolerances  
 3 Burst pressure (B.P.) calculation including manufacturing tolerance

#### Tube E 235N /St. 37.4 NBK - Cr(VI)-free plated or phosphated and oiled

Tube O.D. x W.T.	1 DNV W.P. bar	2 DNV W.P. bar	3 B.P. bar	Weight kg/mtr.	Phosphated and oiled Order code	Cr(VI)-free Order code
06x1.0	230	373	1105	0.07	<b>R06x1</b>	<b>R06x1CF</b>
06X1.5	437	506	1658	0.17	<b>R06X1.5</b>	<b>R06X1.5CF</b>
08X1.0	169	193	829	0.17	<b>R08X1</b>	<b>R08X1CF</b>
08X1.5	315	362	1243	0.24	<b>R08X1.5</b>	<b>R08X1.5CF</b>
10X1.0	146	167	702	0.22	<b>R10X1</b>	<b>R10X1CF</b>
10X1.5	267	306	1053	0.31	<b>R10X1.5</b>	<b>R10X1.5CF</b>
12X1.5	218	250	878	0.39	<b>R12X1.5</b>	<b>R12X1.5CF</b>
12X2.0	324	373	1170	0.49	<b>R12X2</b>	<b>R12X2CF</b>
14X2.0	273	313	1003	0.59	<b>R14X2</b>	<b>R14X2CF</b>
15X1.5	172	196	702	0.50	<b>R15X1.5</b>	<b>R15X1.5CF</b>
15X2.0	253	290	936	0.64	<b>R15X2</b>	<b>R15X2CF</b>
16X1.5	160	183	658	0.54	<b>R16X1.5</b>	<b>R16X1.5CF</b>
16X2.0	235	270	878	0.69	<b>R16X2</b>	<b>R16X2CF</b>
16X2.5	315	362	1097	0.83	<b>R16X2.5</b>	<b>R16X2.5CF</b>
18X1.5	142	162	585	0.61	<b>R18X1.5</b>	<b>R18X1.5CF</b>
18X2.0	207	237	780	0.79	<b>R18X2</b>	<b>R18X2CF</b>
20X2.0	185	212	702	0.89	<b>R20X2</b>	<b>R20X2CF</b>
20X2.5	246	282	878	1.08	<b>R20X2.5</b>	<b>R20X2.5CF</b>
20X3.0	309	356	1053	1.26	<b>R20X3</b>	<b>R20X3CF</b>
20X4.0	445	516	1404	1.58		<b>R20X4CF</b>
22X1.5	115	131	479	0.76	<b>R22X1.5</b>	<b>R22X1.5CF</b>
22X2.0	167	191	638	0.99	<b>R22X2</b>	<b>R22X2CF</b>
22X2.5	221	254	798	1.20	<b>R22x2.5</b>	<b>R22X2.5CF</b>
25X2.0	146	167	562	1.13	<b>R25X2</b>	<b>R25X2CF</b>
25X2.5	193	221	702	1.39	<b>R25X2.5</b>	<b>R25X2.5CF</b>
25X3.0	242	277	842	1.63	<b>R25X3</b>	<b>R25X3CF</b>
25X4.0	344	397	1123	2.07	<b>R25X4</b>	<b>R25X4CF</b>
28X2.0	129	148	501	1.28	<b>R28X2</b>	<b>R28X2CF</b>
28X3.0	214	245	752	1.85	<b>R28X3</b>	<b>R28X3CF</b>
30X2.0	120	137	468	1.38		<b>R30X2CF</b>
30X3.0	198	227	702	2.00	<b>R30X3</b>	<b>R30X3CF</b>
30X4.0	281	323	936	2.56	<b>R30X4</b>	<b>R30X4CF</b>
30X5.0	368	425	1170	3.08	<b>R30X5</b>	<b>R30X5CF</b>
35X2.0	103	117	401	1.63	<b>R35X2</b>	<b>R35X2CF</b>
35X3.0	168	192	602	2.37	<b>R35X3</b>	<b>R35X3CF</b>
38X2.5	124	141	462	2.19		<b>R38X2.5CF</b>
38X3.0	154	176	554	2.59	<b>R38X3</b>	<b>R38X3CF</b>
38X4.0	217	248	739	3.35	<b>R38X4</b>	<b>R38X4CF</b>
38X5.0	282	324	924	4.07	<b>R38X5</b>	<b>R38X5CF</b>
42X2.0	85	97	334	1.97	<b>R42X2</b>	<b>R42X2CF</b>
42X3.0	139	158	501	2.89	<b>R42X3</b>	<b>R42X3CF</b>
42X4.0	194	223	669	3.75	<b>R42X4</b>	<b>R42X4CF</b>
50X3.0	115	132	421	3.48	<b>R50X3</b>	<b>R50X3CF</b>
60X3.0	95	109	351	4.22	<b>R60X3</b>	<b>R60X3CF</b>
75X3.0	76	86	281	5.32	<b>R75X3</b>	<b>R75X3CF</b>
90X3.5	75	85	273	7.47	<b>R90X3.5</b>	<b>R90X3.5CF</b>
100X4.0	78	89	281	9.47	<b>R100X4</b>	
115X4.0	68	77	244	10.98	<b>R115X4</b>	
140X4.5	63	72	226	15.04	<b>R140X4.5</b>	
165X5.0	60	68	213	19.73	<b>R165X5</b>	
220X6.0	55	62	191	31.66	<b>R220X6</b>	
273X6.0	44	50	154	39.51	<b>R273X6</b>	

Other sizes on request



## Tubes – Landbased and industrial applications (DIN Rules)

- 1 DIN 2413 I static pressure (W.P.) capability for straight pipe including manufacturing tolerance  
 2 DIN 2413 III dynamic pressure (W.P.) capability for straight pipe including manufacturing tolerance  
 3 Burst pressure (B.P.) calculation including manufacturing tolerance

### Tube E 235N /St. 37.4 NBK - Cr(VI)-free plated or phosphated and oiled

Tube O.D. x W.T.	1 DIN 2413 I W.P. bar	2 DIN 2413 III W.P. bar	3 B.P. bar	Weight kg/mtr.	Phosphated and oiled Order code	Cr(VI)-free Order code
06x1.0	444	372	1105	0.07	<b>R06x1</b>	<b>R06x1CF</b>
06X1.5	666	526	1658	0.17	<b>R06X1.5</b>	<b>R06X1.5CF</b>
08X1.0	333	288	829	0.17	<b>R08X1</b>	<b>R08X1CF</b>
08X1.5	499	412	1243	0.24	<b>R08X1.5</b>	<b>R08X1.5CF</b>
10X1.0	282	248	702	0.22	<b>R10X1</b>	<b>R10X1CF</b>
10X1.5	423	357	1053	0.31	<b>R10X1.5</b>	<b>R10X1.5CF</b>
12X1.5	353	303	878	0.39	<b>R12X1.5</b>	<b>R12X1.5CF</b>
12X2.0	470	391	1170	0.49	<b>R12X2</b>	<b>R12X2CF</b>
14X2.0	403	342	1003	0.59	<b>R14X2</b>	<b>R14X2CF</b>
15X1.5	282	248	702	0.50	<b>R15X1.5</b>	<b>R15X1.5CF</b>
15X2.0	376	321	936	0.64	<b>R15X2</b>	<b>R15X2CF</b>
16X1.5	264	233	658	0.54	<b>R16X1.5</b>	<b>R16X1.5CF</b>
16X2.0	353	303	878	0.69	<b>R16X2</b>	<b>R16X2CF</b>
16X2.5	441	370	1097	0.83	<b>R16X2.5</b>	<b>R16X2.5CF</b>
18X1.5	235	209	585	0.61	<b>R18X1.5</b>	<b>R18X1.5CF</b>
18X2.0	313	273	780	0.79	<b>R18X2</b>	<b>R18X2CF</b>
20X2.0	282	248	702	0.89	<b>R20X2</b>	<b>R20X2CF</b>
20X2.5	353	303	878	1.08	<b>R20X2.5</b>	<b>R20X2.5CF</b>
20X3.0	423	357	1053	1.26	<b>R20X3</b>	<b>R20X3CF</b>
20X4.0	564	458	1404	1.58		<b>R20X4CF</b>
22X1.5	192	173	479	0.76	<b>R22X1.5</b>	<b>R22X1.5CF</b>
22X2.0	256	227	638	0.99	<b>R22X2</b>	<b>R22X2CF</b>
22X2.5	320	278	798	1.20	<b>R22x2.5</b>	<b>R22X2.5CF</b>
25X2.0	226	201	562	1.13	<b>R25X2</b>	<b>R25X2CF</b>
25X2.5	282	248	702	1.39	<b>R25X2.5</b>	<b>R25X2.5CF</b>
25X3.0	338	292	842	1.63	<b>R25X3</b>	<b>R25X3CF</b>
25X4.0	451	378	1123	2.07	<b>R25X4</b>	<b>R25X4CF</b>
28X2.0	201	181	501	1.28	<b>R28X2</b>	<b>R28X2CF</b>
28X3.0	302	264	752	1.85	<b>R28X3</b>	<b>R28X3CF</b>
30X2.0	188	170	468	1.38		<b>R30X2CF</b>
30X3.0	282	248	702	2.00	<b>R30X3</b>	<b>R30X3CF</b>
30X4.0	376	321	936	2.56	<b>R30X4</b>	<b>R30X4CF</b>
30X5.0	470	391	1170	3.08	<b>R30X5</b>	<b>R30X5CF</b>
35X2.0	161	147	401	1.63	<b>R35X2</b>	<b>R35X2CF</b>
35X3.0	242	215	602	2.37	<b>R35X3</b>	<b>R35X3CF</b>
38X2.5	186	168	462	2.19		<b>R38X2.5CF</b>
38X3.0	223	199	554	2.59	<b>R38X3</b>	<b>R38X3CF</b>
38X4.0	297	260	739	3.35	<b>R38X4</b>	<b>R38X4CF</b>
38X5.0	371	318	924	4.07	<b>R38X5</b>	<b>R38X5CF</b>
42X2.0	134	123	334	1.97	<b>R42X2</b>	<b>R42X2CF</b>
42X3.0	201	181	501	2.89	<b>R42X3</b>	<b>R42X3CF</b>
42X4.0	269	237	669	3.75	<b>R42X4</b>	<b>R42X4CF</b>
50X3.0	169	154	421	3.48	<b>R50X3</b>	<b>R50X3CF</b>
60X3.0	141	129	351	4.22	<b>R60X3</b>	<b>R60X3CF</b>
75X3.0	113	104	281	5.32	<b>R75X3</b>	<b>R75X3CF</b>
90X3.5	110	101	273	7.47	<b>R90X3.5</b>	<b>R90X3.5CF</b>
100X4.0	113	104	281	9.47	<b>R100X4</b>	
115X4.0	98	91	244	10.98	<b>R115X4</b>	
140X4.5	91	84	226	15.04	<b>R140X4.5</b>	
165X5.0	85	80	213	19.73	<b>R165X5</b>	
220X6.0	77	72	191	31.66	<b>R220X6</b>	
273X6.0	62	58	154	39.51	<b>R273X6</b>	

Other sizes on request

## Tubes and pipes for piping business

### Tubes – Marine and Offshore applications (DNV Rules)

1 DNV Bended pipe including manufacturing and corrosion tolerances

2 DNV Straight pipe including manufacturing and corrosion tolerances

3 Burst pressure (B.P.) calculation including manufacturing tolerance

#### Tube E 355N /St.52.4 NBK - Cr(VI)-free plated or phosphated and oiled

Tube O.D. x W.T.	1 DNV W.P. bar	2 DNV W.P. bar	3 B.P. bar	Weight kg/mtr.	Phosphated and oiled Order code	Cr(VI)-free Order code
15X1.5	259	297	959	0.50		R15X1.5ST52CF
15X2.0	381	438	1279	0.61		R15X2ST52CF
16X2.0	355	408	1199	0.69		R16X2ST52CF
16X2.5	475	547	1499	0.83		R16X2.5ST52CF
18X1.5	214	244	800	0.61		R18X1.5ST52CF
18X2.0	313	358	1066	0.79		R18X2ST52CF
20X2.0	279	319	959	0.89		R20X2ST52CF
20X2.5	371	426	1199	1.08		R20X2.5ST52CF
20X3.0	467	537	1439	1.25		R20X3ST52CF
22X1.5	173	197	654	0.76		R22X1.5ST52CF
22X2.0	252	288	872	0.99		R22X2ST52CF
25X2.5	291	333	959	1.39		R25X2.5ST52CF
25X3.0	365	418	1151	1.63		R25X3ST52CF
25X4.0	519	599	1535	2.07		R25X4ST52CF
28X2.0	195	223	685	1.28		R28X2ST52CF
30X3.0	299	343	959	2.00		R30X3ST52CF
30X4.0	424	487	1279	2.56		R30X4ST52CF
30X5.0	555	641	1599	3.08		R30X5ST52CF
35X3.0	254	290	822	2.37		R35X3ST52CF
38X3.0	233	266	757	2.37		R38X3ST52CF
38X4.0	327	375	1010	3.35		R38X4ST52CF
38X5.0	426	490	1262	4.07		R38X5ST52CF
39X7.5	673	781	1845	8.53		R39X7.5ST52CF
42X3.0	209	239	685	2.89		R42X3ST52CF
42X4.0	294	336	914	3.75		R42X4ST52CF
46X8.0	601	695	1669	7.50		R46X8ST52CF
50X5.0	315	361	959	5.55	R50X5ST52	R50X5ST52CF
50X6.0	390	448	1151	6.50	R50X6ST52	R50X6ST52CF
56X8.5	516	595	1456	9.96	R56X8.5ST52	
60X5.0	259	297	800	6.78		R60X5ST52CF
60X6.0	319	366	959	7.97	R60X6ST52	R60X6ST52CF
65X8.0	407	468	1121	11.25		R65X8ST52CF
66X8.5	429	494	1236	12.05	R66X8.5ST52	
73X7.0	309	353	920	11.22	R73X7ST52	R73X7ST52CF
75X5.0	205	234	640	8.63	R75X5ST52	R75X5ST52CF
80X10	418	481	1199	17.21	R80X10ST52	
90X5.0	169	193	533	10.48	R90X5ST52	R90X5ST52CF
90X9.0	326	374	959	17.98	R90X9ST52	R90X9ST52CF
97X12	416	478	1187	25.15	R97X12ST52	
115X15	444	511	1251	36.95	R115X15ST52	
130X15	388	445	1107	42.54	R130X15ST52	
150X15	332	380	959	49.94	R150X15ST52	
190X20	353	405	1010	83.84	R190X20ST52	
250X25	335	384	959	138.72	R250X25ST52	

Other sizes on request



## Tubes – Landbased and industrial applications (DIN Rules)

- 1 DIN 2413 I static pressure (W.P.) capability for straight pipe including manufacturing tolerance  
 2 DIN 2413 III dynamic pressure (W.P.) capability for straight pipe including manufacturing tolerance  
 3 Burst pressure (B.P.) calculation including manufacturing tolerance

### Tube E 355N /St.52.4 NBK - Cr(VI)-free plated or phosphated and oiled

Tube O.D. x W.T.	1 DIN 2413 I W.P. bar	2 DIN 2413 III W.P. bar	3 B.P. bar	Weight kg/mtr.	Phosphated and oiled Order code	Cr(VI)-free Order code
15X1.5	426	292	959	0.50		R15X1.5ST52CF
15X2.0	568	379	1279	0.61		R15X2ST52CF
16X2.0	533	357	1199	0.69		R16X2ST52CF
16X2.5	666	436	1499	0.83		R16X2.5ST52CF
18X1.5	355	247	800	0.61		R18X1.5ST52CF
18X2.0	473	321	1066	0.79		R18X2ST52CF
20X2.0	426	292	959	0.89		R20X2ST52CF
20X2.5	533	357	1199	1.08		R20X2.5ST52CF
20X3.0	639	420	1439	1.25		R20X3ST52CF
22X1.5	290	204	654	0.76		R22X1.5ST52CF
22X2.0	387	267	872	0.99		R22X2ST52CF
25X2.5	426	292	959	1.39		R25X2.5ST52CF
25X3.0	511	344	1151	1.63		R25X3ST52CF
25X4.0	682	445	1535	2.07		R25X4ST52CF
28X2.0	304	213	685	1.28		R28X2ST52CF
30X3.0	426	292	959	2.00		R30X3ST52CF
30X4.0	568	379	1279	2.56		R30X4ST52CF
30X5.0	710	461	1599	3.08		R30X5ST52CF
35X3.0	365	253	822	2.37		R35X3ST52CF
38X3.0	336	234	757	2.37		R38X3ST52CF
38X4.0	448	306	1010	3.35		R38X4ST52CF
38X5.0	561	374	1262	4.07		R38X5ST52CF
39X7.5	819	521	1845	8.53		R39X7.5ST52CF
42X3.0	304	213	685	2.89		R42X3ST52CF
42X4.0	406	279	914	3.75		R42X4ST52CF
46X8.0	741	478	1669	7.50		R46X8ST52CF
50X5.0	426	292	959	5.55	R50X5ST52	R50X5ST52CF
50X6.0	511	344	1151	6.50	R50X6ST52	R50X6ST52CF
56X8.5	647	425	1456	9.96	R56X8.5ST52	
60X5.0	355	247	800	6.78		R60X5ST52CF
60X6.0	426	292	959	7.97	R60X6ST52	R60X6ST52CF
65X8.0	524	352	1121	11.25		R65X8ST52CF
66X8.5	549	367	1236	12.05	R66X8.5ST52	
73X7.0	408	281	920	11.22	R73X7ST52	R73X7ST52CF
75X5.0	284	200	640	8.63	R75X5ST52	R75X5ST52CF
80X10	533	357	1199	17.21	R80X10ST52	
90X5.0	237	168	533	10.48	R90X5ST52	R90X5ST52CF
90x9.0	426	292	959	17.98	R90X9ST52	R90X9ST52CF
97X12	527	354	1187	25.15	R97X12ST52	
115X15	556	371	1251	36.95	R115X15ST52	
130X15	492	332	1107	42.54	R130X15ST52	
150X15	426	292	959	49.94	R150X15ST52	
190X20	448	306	1010	83.84	R190X20ST52	
250X25	426	292	959	138.72	R250X25ST52	

Other sizes on request

## Tubes and pipes for piping business

### Tubes – Marine and Offshore applications (DNV Rules)

1 DNV: Bended pipe including manufacturing and corrosion tolerances

2 Burst pressure (B.P.) calculation including manufacturing tolerance

#### Seamless cold drawn Stainless Steel Tube ASTM A269/A213 - AISI 316L

Tube O.D. x W.T.	1 DNV W.P. bar	2 B.P. bar	Weight kg/mtr.	AISI 316L Order code
06X1	493	1590	0.13	<b>R06X1-316</b>
08X1	357	1193	0.18	<b>R08X1-316</b>
10X1	298	954	0.23	<b>R10X1-316</b>
10X1.5	467	1431	0.32	<b>R10X1.5-316</b>
12X1	244	795	0.28	<b>R12X1-316</b>
12X1.5	380	1193	0.39	<b>R12X1.5-316</b>
12X2	526	1590	0.50	<b>R12X2-316</b>
15X1.5	298	954	0.51	<b>R15X1.5-316</b>
16X2	380	1193	0.70	<b>R16X2-316</b>
16X2.5	489	1491	0.85	<b>R16X2.5-316</b>
18X1.5	244	795	0.62	<b>R18X1.5-316</b>
18X2	334	1060	0.80	<b>R18X2-316</b>
20X2	298	954	0.90	<b>R20X2-316</b>
20X2.5	380	1193	1.10	<b>R20X2.5-316</b>
20X3	467	1431	1.28	<b>R20X3-316</b>
22X2	268	867	1.00	<b>R22X2-316</b>
25X2	234	763	1.13	<b>R25X2-316</b>
25X2.5	298	954	1.41	<b>R25X2.5-316</b>
25X3	363	1145	1.65	<b>R25X3-316</b>
28X2	207	681	1.30	<b>R28X2-316</b>
30X2.5	244	795	1.70	<b>R30X2.5-316</b>
30X3	298	954	2.03	<b>R30X3-316</b>
30X4	409	1272	2.60	<b>R30X4-316</b>
35X2	164	545	1.65	<b>R35X2-316</b>
35X3	252	818	2.40	<b>R35X3-316</b>
38X3	231	753	2.63	<b>R38X3-316</b>
38X4	315	1004	3.41	<b>R38X4-316</b>
38X5	403	1255	4.12	<b>R38X5-316</b>
38X6	495	1506	4.81	<b>R38X6-316</b>
42X2	136	454	1.97	<b>R42X2-316</b>
42X3	207	681	2.93	<b>R42X3-316</b>
50X3	173	572	3.53	<b>R50X3-316</b>
50X5	298	954	5.63	<b>R50X5-316</b>
50X6	363	1145	6.61	<b>R50X6-316</b>
60X3	143	477	4.28	<b>R60X3-316</b>
60X5	244	795	6.89	<b>R60X5-316</b>
66X8.5	393	1229	12.24	<b>R66X8.5-316</b>
73X7	284	915	11.57	<b>R73X7-316</b>
75X3	113	382	5.41	<b>R75X3-316</b>
75X5	193	636	8.76	<b>R75X5-316</b>
80X10	380	1193	17.53	<b>R80X10-316</b>
97X12	376	1180	25.54	<b>R97X12X5000-316</b>

Other sizes on request



## Tubes - Landbased and industrial applications (DIN Rules)

1 DIN 2413 I static pressure (W.P.) capability for straight pipe including manufacturing tolerance  
 2 Burst pressure (B.P.) calculation including manufacturing tolerance

### Seamless cold drawn Stainless Steel Tube ASTM A269/A213 - AISI 316L

Tube O.D. x W.T.	1 DIN 2413 I W.P. bar	2 B.P. bar	Weight kg/mtr.	AISI 316L Order code
06X1	490	1590	0.13	<b>R06X1-316</b>
08X1	368	1193	0.18	<b>R08X1-316</b>
10X1	294	954	0.23	<b>R10X1-316</b>
10X1.5	441	1431	0.32	<b>R10X1.5-316</b>
12X1	245	795	0.28	<b>R12X1-316</b>
12X1.5	368	1193	0.39	<b>R12X1.5-316</b>
12X2	490	1590	0.50	<b>R12X2-316</b>
15X1.5	294	954	0.51	<b>R15X1.5-316</b>
16X2	368	1193	0.70	<b>R16X2-316</b>
16X2.5	459	1491	0.85	<b>R16X2.5-316</b>
18X1.5	245	795	0.62	<b>R18X1.5-316</b>
18X2	327	1060	0.80	<b>R18X2-316</b>
20X2	294	954	0.90	<b>R20X2-316</b>
20X2.5	368	1193	1.10	<b>R20X2.5-316</b>
20X3	441	1431	1.28	<b>R20X3-316</b>
22X2	267	867	1.00	<b>R22X2-316</b>
25X2	235	763	1.13	<b>R25X2-316</b>
25X2.5	294	954	1.41	<b>R25X2.5-316</b>
25X3	353	1145	1.65	<b>R25X3-316</b>
28X2	210	681	1.30	<b>R28X2-316</b>
30X2.5	245	795	1.70	<b>R30X2.5-316</b>
30X3	294	954	2.03	<b>R30X3-316</b>
30X4	392	1272	2.60	<b>R30X4-316</b>
35X2	168	545	1.65	<b>R35X2-316</b>
35X3	252	818	2.40	<b>R35X3-316</b>
38X3	232	753	2.63	<b>R38X3-316</b>
38X4	309	1004	3.41	<b>R38X4-316</b>
38X5	387	1255	4.12	<b>R38X5-316</b>
38X6	464	1506	4.81	<b>R38X6-316</b>
42X2	140	454	1.97	<b>R42X2-316</b>
42X3	210	681	2.93	<b>R42X3-316</b>
50X3	176	572	3.53	<b>R50X3-316</b>
50X5	294	954	5.63	<b>R50X5-316</b>
50X6	353	1145	6.61	<b>R50X6-316</b>
60X3	147	477	4.28	<b>R60X3-316</b>
60X5	245	795	6.89	<b>R60X5-316</b>
66X8.5	379	1229	12.24	<b>R66X8.5-316</b>
73X7	282	915	11.57	<b>R73X7-316</b>
75X3	118	382	5.41	<b>R75X3-316</b>
75X5	196	636	8.76	<b>R75X5-316</b>
80X10	368	1193	17.53	<b>R80X10-316</b>
97X12	364	1180	25.54	<b>R97X12X5000-316</b>

Other sizes on request

## Tubes and pipes for piping business

### Pipe according to ANSI B36.19 ASTM - A - 312 - TP - 316L

Pressure table acc. to DNV Rules for Classification of Ships Newbuilding and Mobile Offshore Units Drilling Plants.

1 ANSI B313 pipe including manufacturing tolerance, bending and corrosion considered

2 Burst pressure (B.P.) including manufacturing tolerance

Nom. Pipe Size SCH size	Tube/Pipe O.D-x W.T.	1 W.P. bar	2 B.P. bar	Weight kg/mtr.	Order code
1/2" SCH 10	21.34x2.11	249	917	1.02	on request
1/2" SCH 40	21.34x2.77	336	1203	1.29	on request
1/2" SCH 80	21.34x3.73	471	1620	1.65	on request
1/2" SCH 160	21.34x4.78	632	2076	1.98	on request
1/2" SCH xxs	21.34x7.47	1124	3245	2.55	on request
3/4" SCH 10	26.67x2.11	196	733	1.30	on request
3/4" SCH 40	26.67x2.81	267	977	1.71	on request
3/4" SCH 80	26.67x3.91	385	1359	2.33	on request
3/4" SCH 160	26.67x5.56	579	1933	2.94	on request
3/4" SCH xxs	26.67x7.82	886	2718	3.64	on request
1" SCH 10	33.40x2.77	206	769	2.13	on request
1" SCH 40	33.40x3.38	255	938	2.54	on request
1" SCH 80	33.40x4.55	354	1263	3.29	on request
1" SCH 160	33.40x6.35	805	1762	4.30	on request
1" SCH xxs	33.40x9.09	805	2523	5.45	on request
1 1/4" SCH 10	42.16x2.77	161	609	2.73	on request
1 1/4" SCH 40	42.16x3.56	210	783	3.44	on request
1 1/4" SCH 80	42.16x4.85	294	1066	4.53	on request
1 1/4" SCH 160	42.16x6.35	397	1396	5.69	on request
1 1/4" SCH xxs	42.16x9.70	653	2133	7.76	on request
1 1/2" SCH 10	48.26x2.77	139	532	3.16	on request
1 1/2" SCH 40	48.26x3.68	188	707	4.11	on request
1 1/2" SCH 80	48.26x5.08	266	976	5.49	on request
1 1/2" SCH 160	48.26x7.14	389	1371	7.35	on request
1 1/2" SCH xxs	48.26x10.16	586	1952	9.55	on request
2" SCH 10	60.30x2.77	111	426	3.99	on request
2" SCH 40	60.30x3.91	159	601	5.52	on request
2" SCH 80	60.30x5.54	230	852	7.60	on request
2" SCH 160	60.30x8.74	380	1344	11.28	on request
2" SCH xxs	60.30x11.07	498	1702	13.44	on request
2 1/2" SCH 5	73.00x2.11	69	268	3.76	on request
2 1/2" SCH 10	73.00x3.05	100	387	5.37	on request
2 1/2" SCH 40	73.00x5.16	174	655	8.80	on request
2 1/2" SCH 80	73.00x7.01	241	890	11.64	on request
2 1/2" SCH 160	73.00x9.53	338	1210	15.15	on request
2 1/2" SCH xxs	73.00x14.02	526	1780	20.50	on request
3" SCH 5	88.90x2.11	56	220	4.59	on request
3" SCH 10	88.90x3.05	82	318	6.45	on request
3" SCH 40	88.90x5.49	151	572	11.64	on request
3" SCH 80	88.90x7.67	215	800	15.51	on request
3" SCH 160	88.90x11.13	322	1161	21.67	on request
3" SCH xxs	88.90x15.24	460	1589	27.68	on request
4" SCH 5	114.30x2.11	43	171	5.93	on request
4" SCH 10	114.30x3.05	63	247	8.50	on request
4" SCH 40	114.30x6.07	129	492	16.32	on request
4" SCH 80	114.30x8.56	185	694	22.67	on request
4" SCH 160	114.30x13.49	302	1094	34.05	on request
4" SCH xxs	114.30x17.12	394	1388	41.03	on request
5" SCH 10	141.30x3.40	57	233	41.03	on request
5" SCH 40	141.30x6.55	112	430	41.03	on request
5" SCH 80	141.30x9.53	165	625	41.03	on request
5" SCH 160	141.30x15.88	286	1042	41.03	on request
5" SCH xxs	141.30x19.05	350	1250	41.03	on request
6" SCH 40	168.30x7.11	101	392	28.69	on request
6" SCH 160	168.30x18.26	275	1006	67.56	on request
6" SCH xxs	168.30x21.95	337	1209	79.21	on request
8" SCH 40	219.10x8.18	89	346	43.20	on request
8" SCH 160	219.10x23.01	266	974	111.30	on request
8" SCH xxs	219.10x22.00	253	931	106.88	on request
10" SCH xxs	273.00x25.40	233	862	101.90	on request

Other sizes on request





**Temperature conversion table**

**Celsius to Fahrenheit**

°C	°F
150	302
145	293
140	284
135	275
130	266
125	257
120	248
115	239
110	230
105	221
100	212
95	203
90	194
85	185
80	176
75	167
70	158
65	149
60	140
55	131
50	122
45	113
40	104
35	95
30	86
25	77
20	68
15	59
10	50
5	41
0	32
-5	23
-10	14
-15	5
-20	-4
-25	-13
-30	-22
-35	-31
-40	-40
-45	-49
-50	-58

**Fahrenheit to Celsius**

°F	°C
340	171
330	166
320	160
310	154
300	149
290	143
280	138
270	132
260	127
250	121
240	116
230	110
220	104
210	99
200	93
190	88
180	82
170	77
160	71
150	66
140	60
130	54
120	49
110	43
100	38
90	32
80	27
70	21
60	16
50	10
40	4
30	-1
20	-7
10	-12
0	-18
-10	-23
-20	-29
-30	-34
-40	-40
-50	-46
-60	-51

**Pressure conversion table**

**bar to psi**

bar	psi
1000	14505
800	11604
600	8703
500	7253
400	5802
250	3626
160	2321
100	1451
60	870
40	580
35	508
25	363
16	232
10	145
6	87
4	58
2.5	36
1.6	23
1	15

**psi to bar**

psi	bar
10000	689
9000	620
7000	483
6000	414
4000	276
3000	207
2500	172
1000	69
900	62
600	41
500	34
400	28
250	17
150	10.3
100	6.9
90	6.2
60	4.1
40	2.8
25	1.7
10	0.7


**Examples**

**Temperature conversion**

Initial value: 100  
 °C in °F: 212 °F  
 °F in °C: 37.78 °C

**Pressure conversion**

Initial value: 35  
 bar in psi: 507.675 psi  
 psi in bar: 2.41296 bar

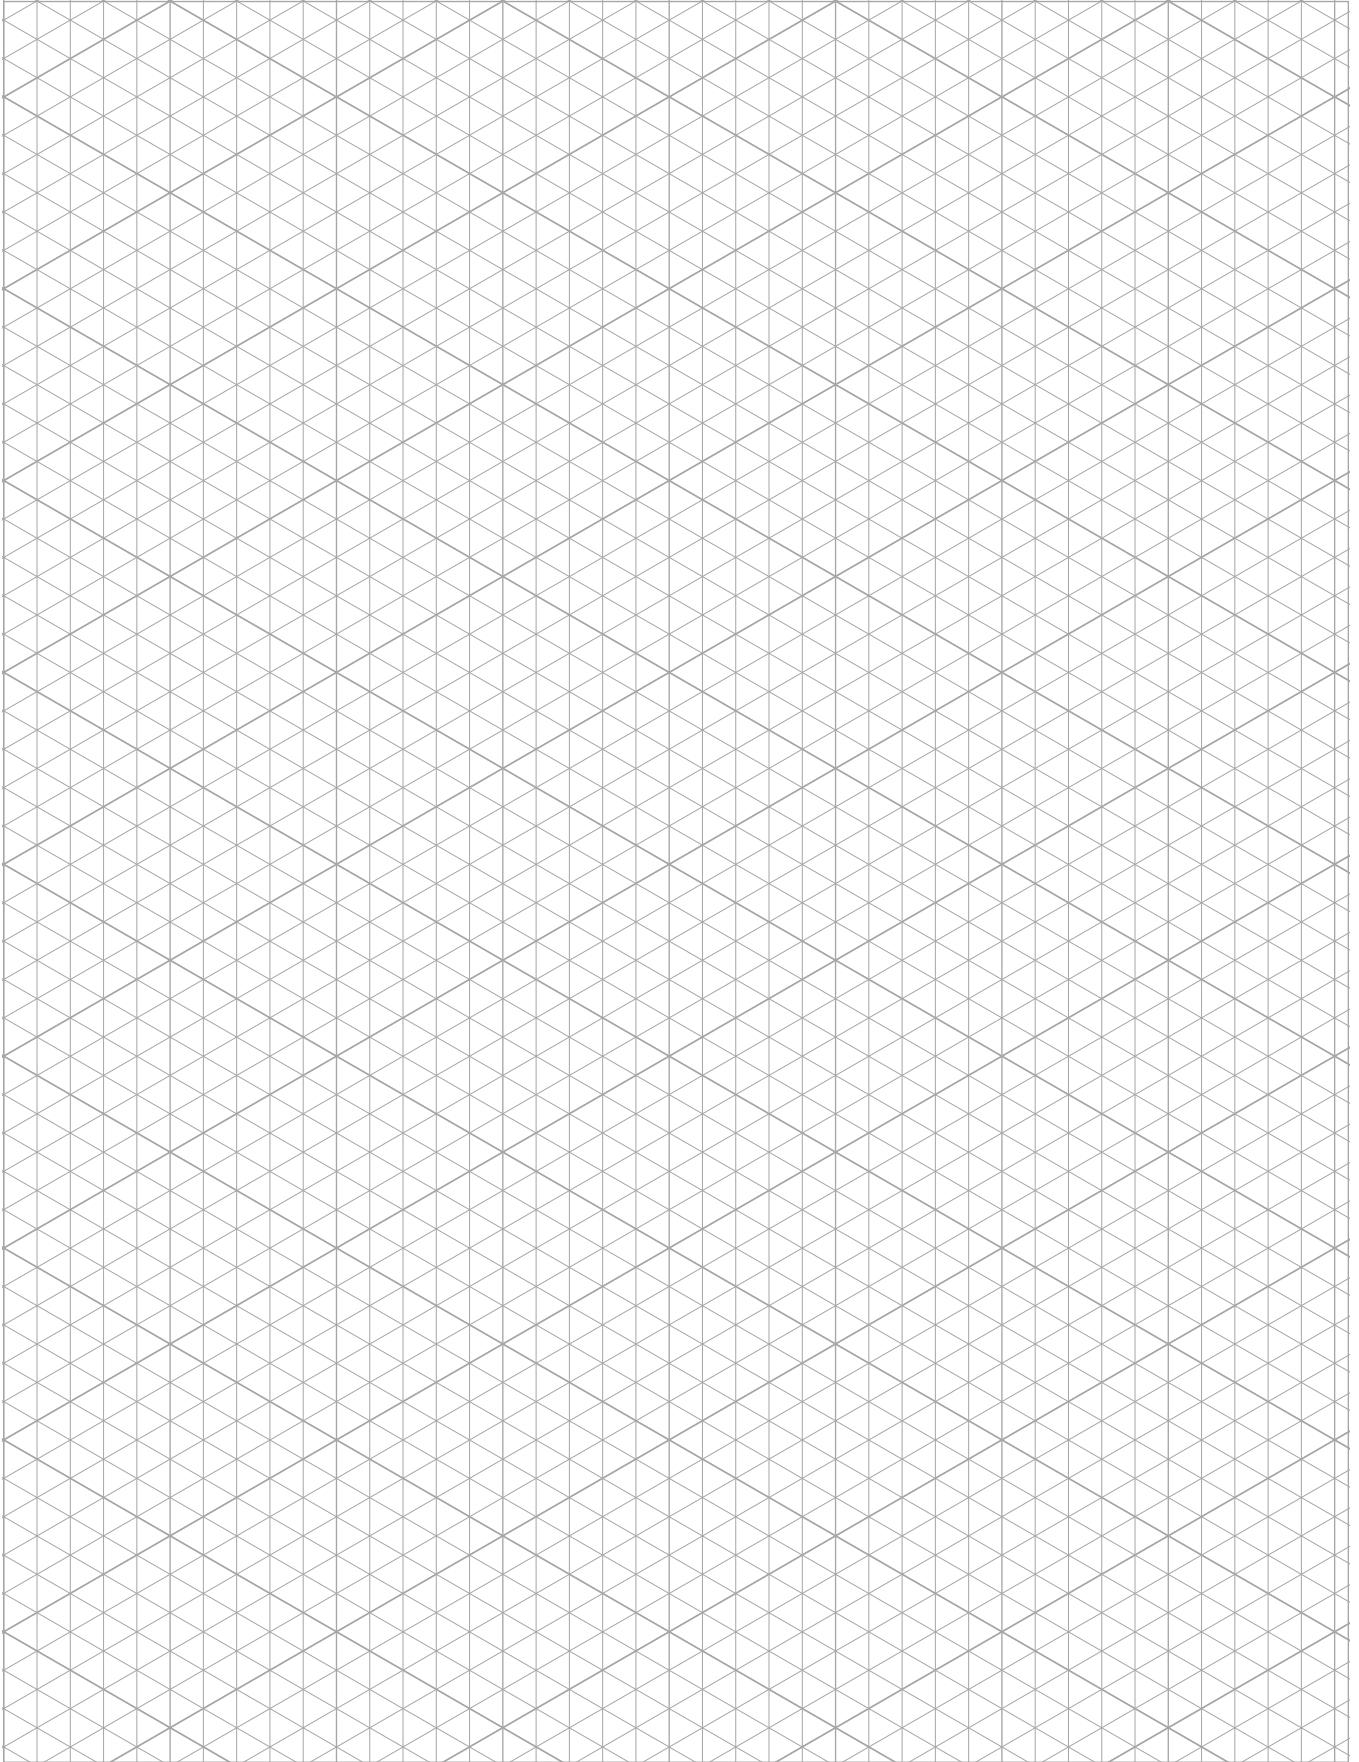



# Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 00800 27 27 5374



## Aerospace

### Key Markets

- Aftermarket services
- Commercial transports
- Engines
- General & business aviation
- Helicopters
- Launch vehicles
- Military aircraft
- Missiles
- Power generation
- Regional transports
- Unmanned aerial vehicles

### Key Products

- Control systems & actuation products
- Engine systems & components
- Fluid conveyance systems & components
- Fluid metering, delivery & atomization devices
- Fuel systems & components
- Fuel tank inerting systems
- Hydraulic systems & components
- Thermal management
- Wheels & brakes



## Climate Control

### Key Markets

- Agriculture
- Air conditioning
- Construction Machinery
- Food & beverage
- Industrial machinery
- Life sciences
- Oil & gas
- Precision cooling
- Process
- Refrigeration
- Transportation

### Key Products

- Accumulators
- Advanced actuators
- CO<sub>2</sub> controls
- Electronic controllers
- Filter driers
- Hand shut-off valves
- Heat exchangers
- Hose & fittings
- Pressure regulating valves
- Refrigerant distributors
- Safety relief valves
- Smart pumps
- Solenoid valves
- Thermostatic expansion valves



## Electromechanical

### Key Markets

- Aerospace
- Factory automation
- Life science & medical
- Machine tools
- Packaging machinery
- Paper machinery
- Plastics machinery & converting
- Primary metals
- Semiconductor & electronics
- Textile
- Wire & cable

### Key Products

- AC/DC drives & systems
- Electric actuators, gantry robots & slides
- Electrohydraulic actuation systems
- Electromechanical actuation systems
- Human machine interface
- Linear motors
- Stepper motors, servo motors, drives & controls
- Structural extrusions



## Filtration

### Key Markets

- Aerospace
- Food & beverage
- Industrial plant & equipment
- Life sciences
- Marine
- Mobile equipment
- Oil & gas
- Power generation & renewable energy
- Process
- Transportation
- Water Purification

### Key Products

- Analytical gas generators
- Compressed air filters & dryers
- Engine air, coolant, fuel & oil filtration systems
- Fluid condition monitoring systems
- Hydraulic & lubrication filters
- Hydrogen, nitrogen & zero air generators
- Instrumentation filters
- Membrane & fiber filters
- Microfiltration
- Sterile air filtration
- Water desalination & purification filters & systems



## Fluid & Gas Handling

### Key Markets

- Aerial lift
- Agriculture
- Bulk chemical handling
- Construction machinery
- Food & beverage
- Fuel & gas delivery
- Industrial machinery
- Life sciences
- Marine
- Mining
- Mobile
- Oil & gas
- Renewable energy
- Transportation

### Key Products

- Check valves
- Connectors for low pressure fluid conveyance
- Deep sea umbilicals
- Diagnostic equipment
- Hose couplings
- Industrial hose
- Mooring systems & power cables
- PTFE hose & tubing
- Quick couplings
- Rubber & thermoplastic hose
- Tube fittings & adapters
- Tubing & plastic fittings



## Hydraulics

### Key Markets

- Aerial lift
- Agriculture
- Alternative energy
- Construction machinery
- Forestry
- Industrial machinery
- Machine tools
- Marine
- Material handling
- Mining
- Oil & gas
- Power generation
- Refuse vehicles
- Renewable energy
- Truck hydraulics
- Turf equipment

### Key Products

- Accumulators
- Cartridge valves
- Electrohydraulic actuators
- Human machine interfaces
- Hybrid drives
- Hydraulic cylinders
- Hydraulic motors & pumps
- Hydraulic systems
- Hydraulic valves & controls
- Hydrostatic steering
- Integrated hydraulic circuits
- Power take-offs
- Power units
- Rotary actuators
- Sensors



## Pneumatics

### Key Markets

- Aerospace
- Conveyor & material handling
- Factory automation
- Life science & medical
- Machine tools
- Packaging machinery
- Transportation & automotive

### Key Products

- Air preparation
- Brass fittings & valves
- Manifolds
- Pneumatic accessories
- Pneumatic actuators & grippers
- Pneumatic valves & controls
- Quick disconnects
- Rotary actuators
- Rubber & thermoplastic hose & couplings
- Structural extrusions
- Thermoplastic tubing & fittings
- Vacuum generators, cups & sensors



## Process Control

### Key Markets

- Alternative fuels
- Biopharmaceuticals
- Chemical & refining
- Food & beverage
- Marine & shipbuilding
- Medical & dental
- Microelectronics
- Nuclear Power
- Offshore oil exploration
- Oil & gas
- Pharmaceuticals
- Power generation
- Pulp & paper
- Steel
- Water/wastewater

### Key Products

- Analytical Instruments
- Analytical sample conditioning products & systems
- Chemical injection fittings & valves
- Fluoropolymer chemical delivery fittings, valves & pumps
- High purity gas delivery fittings, valves, regulators & digital flow controllers
- Industrial mass flow meters/ controllers
- Permanent no-weld tube fittings
- Precision industrial regulators & flow controllers
- Process control double block & bleeds
- Process control fittings, valves, regulators & manifold valves



## Sealing & Shielding

### Key Markets

- Aerospace
- Chemical processing
- Consumer
- Fluid power
- General industrial
- Information technology
- Life sciences
- Microelectronics
- Military
- Oil & gas
- Power generation
- Renewable energy
- Telecommunications
- Transportation

### Key Products

- Dynamic seals
- Elastomeric o-rings
- Electro-medical instrument design & assembly
- EMI shielding
- Extruded & precision-cut, fabricated elastomeric seals
- High temperature metal seals
- Homogeneous & inserted elastomeric shapes
- Medical device fabrication & assembly
- Metal & plastic retained composite seals
- Shielded optical windows
- Silicone tubing & extrusions
- Thermal management
- Vibration dampening

ENGINEERING YOUR SUCCESS.

# Parker Worldwide

## Europe, Middle East, Africa

**AE – United Arab Emirates,**  
Dubai

Tel: +971 4 8127100  
parker.me@parker.com

**AT – Austria,** Wiener Neustadt  
Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe,** Wiener  
Neustadt  
Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AZ – Azerbaijan,** Baku  
Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium,** Nivelles  
Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BG – Bulgaria,** Sofia  
Tel: +359 2 980 1344  
parker.bulgaria@parker.com

**BY – Belarus,** Minsk  
Tel: +375 17 209 9399  
parker.belarus@parker.com

**CH – Switzerland,** Etoy  
Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CZ – Czech Republic,** Klecany  
Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany,** Kaarst  
Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark,** Ballerup  
Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain,** Madrid  
Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland,** Vantaa  
Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France,** Contamine s/Arve  
Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece,** Athens  
Tel: +30 210 933 6450  
parker.greece@parker.com

**HU – Hungary,** Budaörs  
Tel: +36 23 885 470  
parker.hungary@parker.com

**IE – Ireland,** Dublin  
Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IT – Italy,** Corsico (MI)  
Tel: +39 02 45 19 21  
parker.italy@parker.com

**KZ – Kazakhstan,** Almaty  
Tel: +7 7273 561 000  
parker.easteurope@parker.com

**NL – The Netherlands,** Oldenzaal  
Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway,** Asker  
Tel: +47 66 75 34 00  
parker.norway@parker.com

**PL – Poland,** Warsaw  
Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal,** Leca da Palmeira  
Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania,** Bucharest  
Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia,** Moscow  
Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden,** Spånga  
Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SK – Slovakia,** Banská Bystrica  
Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia,** Novo Mesto  
Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TR – Turkey,** Istanbul  
Tel: +90 216 4997081  
parker.turkey@parker.com

**UA – Ukraine,** Kiev  
Tel: +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom,** Warwick  
Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**ZA – South Africa,** Kempton Park  
Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com

## North America

**CA – Canada,** Milton, Ontario  
Tel: +1 905 693 3000

**US – USA,** Cleveland  
Tel: +1 216 896 3000

## Asia Pacific

**AU – Australia,** Castle Hill  
Tel: +61 (0)2-9634 7777

**CN – China,** Shanghai  
Tel: +86 21 2899 5000

**HK – Hong Kong**  
Tel: +852 2428 8008

**IN – India,** Mumbai  
Tel: +91 22 6513 7081-85

**JP – Japan,** Tokyo  
Tel: +81 (0)3 6408 3901

**KR – South Korea,** Seoul  
Tel: +82 2 559 0400

**MY – Malaysia,** Shah Alam  
Tel: +60 3 7849 0800

**NZ – New Zealand,** Mt Wellington  
Tel: +64 9 574 1744

**SG – Singapore**  
Tel: +65 6887 6300

**TH – Thailand,** Bangkok  
Tel: +662 186 7000-99

**TW – Taiwan,** Taipei  
Tel: +886 2 2298 8987

## South America

**AR – Argentina,** Buenos Aires  
Tel: +54 3327 44 4129

**BR – Brazil,** Sao Jose dos Campos  
Tel: +55 800 727 5374

**CL – Chile,** Santiago  
Tel: +56 2 623 1216

**MX – Mexico,** Toluca  
Tel: +52 72 2275 4200

### EMEA Product Information Centre

Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL,  
IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

### US Product Information Centre

Toll-free number: 1-800-27 27 537

www.parker.com

