209540
ST 7PNG
Sensor testers

- Teach output for remote teach
- Automatic pnp/ npn/push-pull detection
- Visual and acoustic signal
- Buzzer can be switched off
- Operation via batteries and external power supply
- Quick-action sockets
- Automatic switch-off
- Compact design and low weight
- Shock protection via a silicone casing



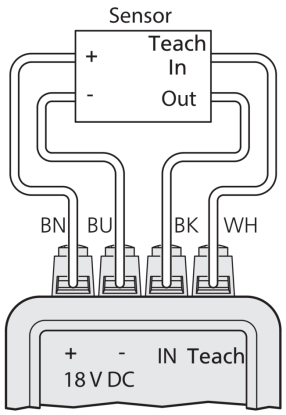

BK: black BN: brown BU: blue WH: white

Function

Technical data (typ.)	+20°C, 24 V DC
No-load current (max.)	40 mA
Current limiting	60 mA in battery operation, 240 mA in operation with external power supply unit
Power supply	1.5 V batteries type AA (3x), External 12 V DC power supply unit (optional)
Housing dimensions	141 x 82 x 34 mm
Housing material	Plastic (ABS, Black)
Material	Silicone (Protective casing)
Component	Sensor testers
To be used for	pnp, npn and push-pull sensors
Application	pnp, npn and push-pull sensors
Scope of delivery	3 x 1.5 V alkaline batteries type AA
Output voltage	18 V DC
Display	LED Green - Operation, yellow - Switching outputs
Protection type	IP 21
Connection	Quick-action socket

More information / accessories	https://www.di-soric.com/209540

© di-soric . Right to change reserved . 10.08.2022 . Page 1 (1)