


KAV series

NEW

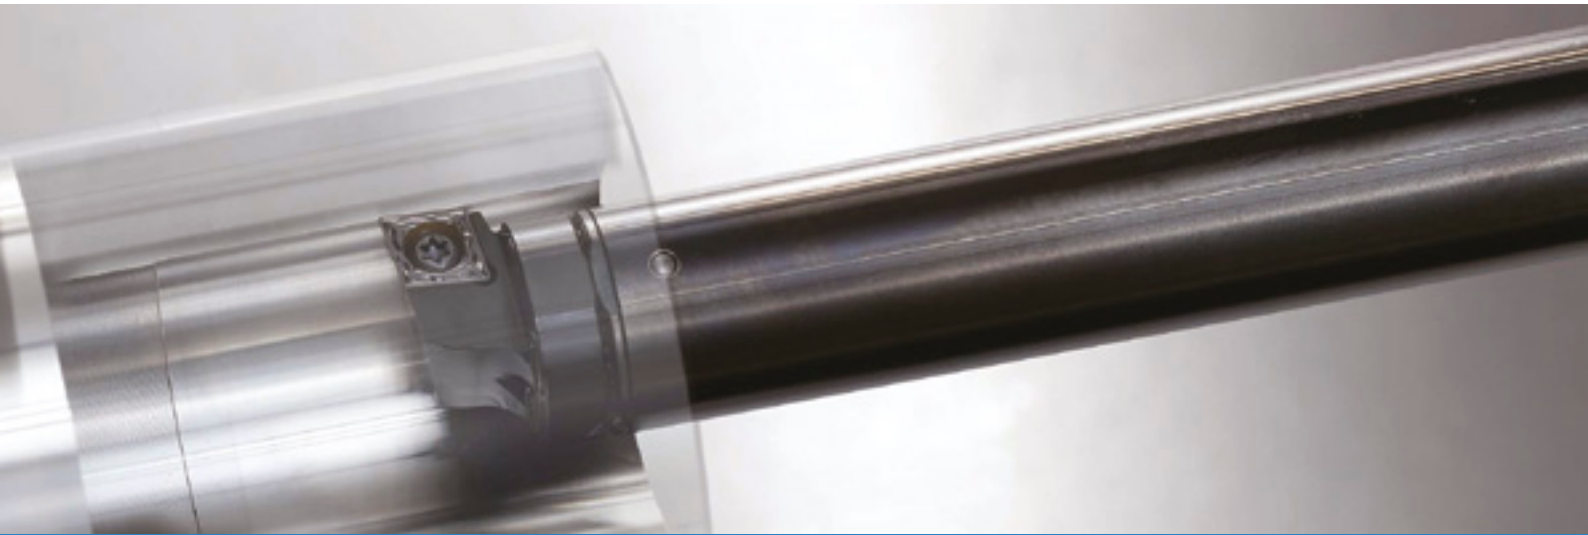

»Max L/D = 10« solves deep-boring challenges with superior chatter resistance

Unique anti-vibration mechanism provides superior anti-chatter performance

Shank diameters from 16 mm to 40 mm (Max L/D = 7, 10)

Variety of internal machining processes possible with interchangeable heads

Strong hold with serrated joint structure

Easy cutting edge adjustment with E-sleeve design

Easy machining setup.



**KEEPS YOU
AHEAD**



Interchangeable head boring bars with anti-vibration dampener system

KAV Series

"Max L/D = 10" solves deep-boring challenges

Excellent anti-chatter performance due to unique anti-vibration design and available for a wide range of machining operations

Anti-vibration Controlled deep boring



Shank line-up

Shank diameters, from 16 mm to 40 mm with L/D = 7 and 10, are available. Carbide reinforced style also available.

Shank diameter	Available overhang length range	Type
ø16 ø20	 L/D = 4 ~ 7	Steel
	 L/D = 7 ~ 10	Carbide reinforcement
ø25 ø32 ø40	 L/D = 4 ~ 7	Steel
	 L/D = 7 ~ 10	Steel



Unique anti-vibration mechanism

Built-in proprietary damper technology dampens vibration. Superior anti-chatter performance over carbide.



Interchangeable head type

Interchangeable heads for a variety of machining applications. Strong fastening with serrated joint structure.

1 Unique anti-vibration mechanism provides superior chatter resistance


Unique vibration isolation mechanism that ensures rigidity with high dampening performance

Built-in damper technology


Absorbs vibrational energy with braking effect

High rigidity

Using heavy and short dampers. The cavity diameter is also reduced to ensure rigidity.

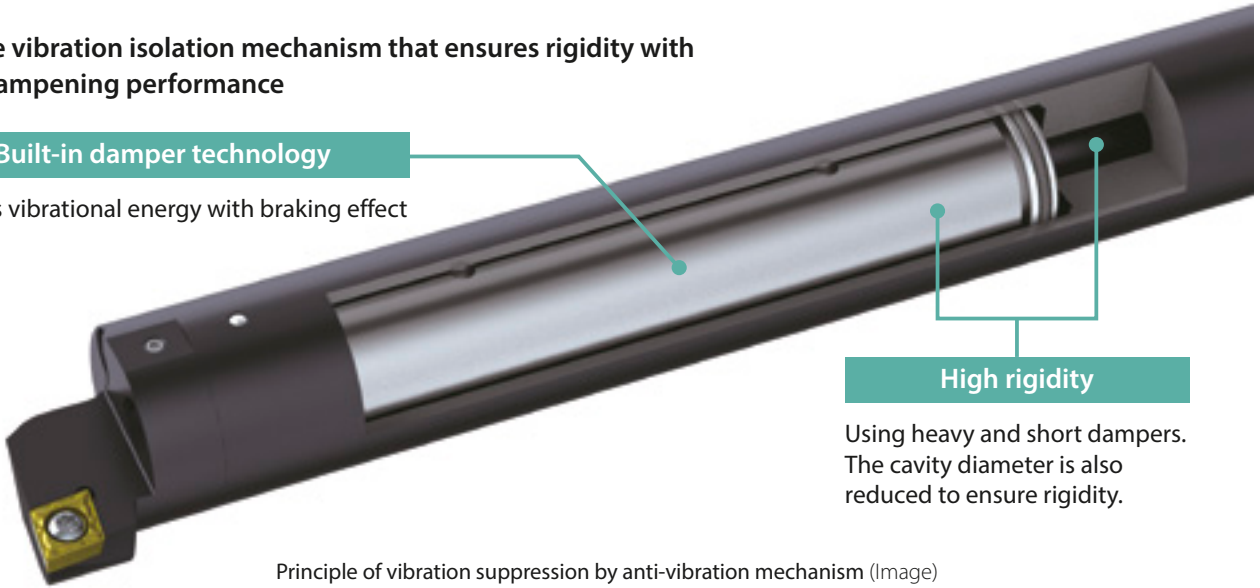

Principle of vibration suppression by anti-vibration mechanism (Image)

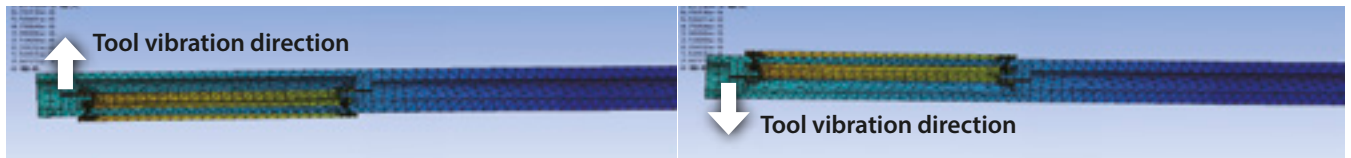

The damper vibrates late against the shank. Effective for vibration damping



Video



Available up to L/D = 10. Excellent anti-vibration performance over conventional carbide shanks

Hammering test (Internal evaluation)

Hammer impacts to the head of the tool (ø20, Overhang length 10D)

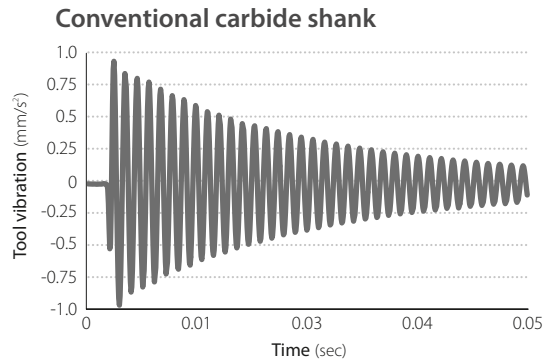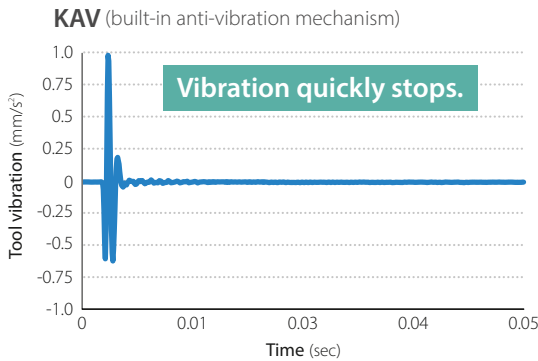


10D Shank Anti-vibration performance (Internal evaluation)

KAV maintains stable machining




Image
KAV-G20-10D / KAVH20-SCLCR09
CCMT09T304PP
Overhang length: 140 mm (7D) / 200 mm (10D)
Workpiece: SCM435

Stable machining area map (Overhang length 10D, ap = 0.4 mm)

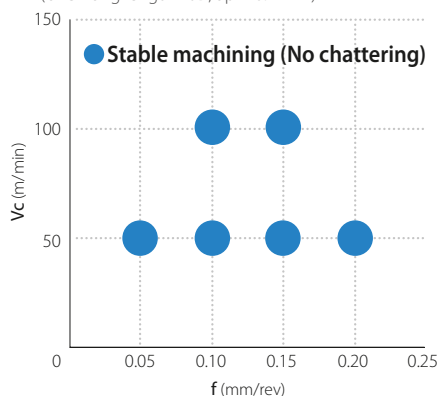

Stable machining area map (Cutting speed Vc = 100 m/min)

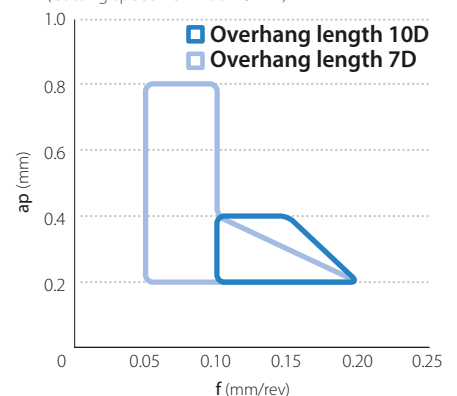


Unique anti-vibration mechanism provides superior anti-chatter performance against competitors

Anti-vibration performance comparison (Internal evaluation)


Competitors produced chattering. KAV maintains stable machining.



KAV

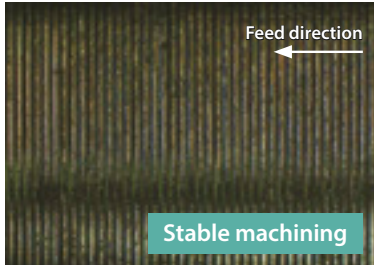




Competitor A (anti-vibration type)

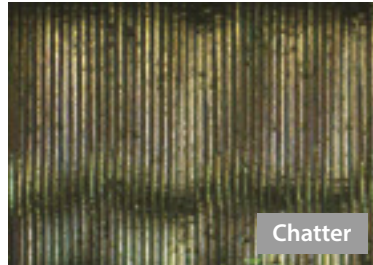

Competitor B (anti-vibration type)



Surface roughness

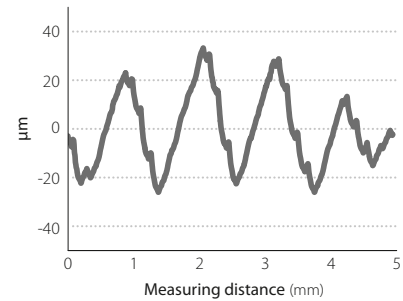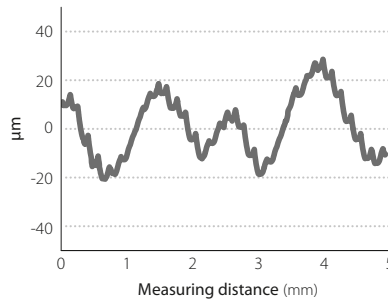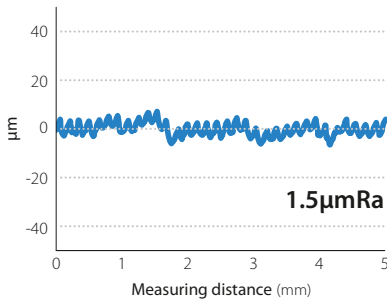

Cutting conditions: $V_c = 150$ m/min, $a_p = 0.4$ mm, $f = 0.15$ mm/rev Workpiece: SCM435 Overhang length 320 mm

Case studies

1 Mechanical parts (Worm gears) S45C

Shank: KAV-G16-10D
Head: KAVH16-SDUCR07
Insert: DCGT070202EL-U (PV720)

$V_c = 50$ m/min
 $A_p = 0.05$ mm
 $f = 0.2$ mm/rev Wet

Overhang length: ø16-160 mm (10D)



(User evaluation)

2 Mechanical parts (Worm gears) SCM435

Shank: KAV-D32-10D
Head: KAVH32-PDUNR11
Insert: DNMG110404HQ (CA515)

$V_c = 180$ m/min
 $A_p = 0.15$ mm
 $f = 0.2$ mm/rev Wet

Overhang length: ø32-200 mm (6.2D)



(User evaluation)

3 Auto parts (Differential case) FCD700

Shank: KAV-G20-10D
Head: KAVH20-STLPR11
Insert: TPGB110308 (PV7005)

$V_c = 140$ m/min
 $A_p = 0.2$ mm
 $f = 0.12$ mm/rev Wet

Overhang length: ø20-160 mm (8D)



(User evaluation)

2

Interchangeable heads for a variety of machining applications Strong fastening with serrated joint structure

Serrated structure

Securely fastens head and shank



Internal coolant recommended

Internal coolant recommended to prevent damage to anti-vibration mechanism

When using our plumbing parts:
Supports pressures up to 7 MPa
(some items are only recommended up to 1 MPa)



Coolant pipe connections: See page 11

Head line-up

Shank diameter	Positive type (Screw clamp)				Negative type (Lever lock)		
	SCLC	SDUC	STLP	SVUB	PCLN	PDUN	PTFN
ø16	●	●	●				
ø20	●	●	●	●			
ø25	●	●	●	●			
ø32	●	●	●	●	●	●	●
ø40	●	●	●	●	●	●	●


3

Easy cutting edge adjustment with E-sleeve Smooth machining setup

E-sleeve (Sold separately)

Separated structure with printed reference lines
Easy adjustment reduces setup time

Reference line

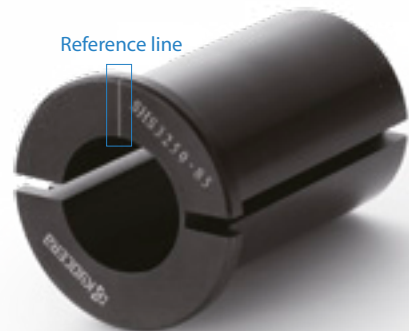

Adjusting the cutting edge position

Exclusive sleeve (E-sleeve)

Adjusting the cutting edge position with a reference line




Instruction video

Adjusting the cutting edge position is easy by simply aligning the reference line between the shank and the sleeve.

Conventional sleeve


Adjusting the cutting edge position with the flat cut part of the head

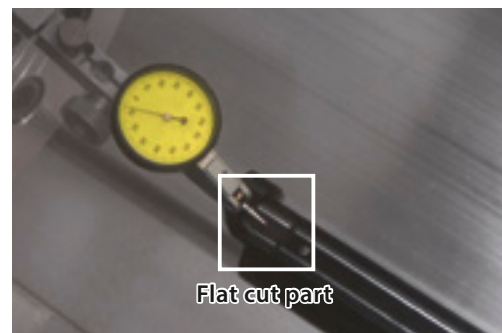


Instruction video

Adjust the flat cut part of the head by moving the tool while applying a dial gauge, etc.

Replaceable boring bar head identification system

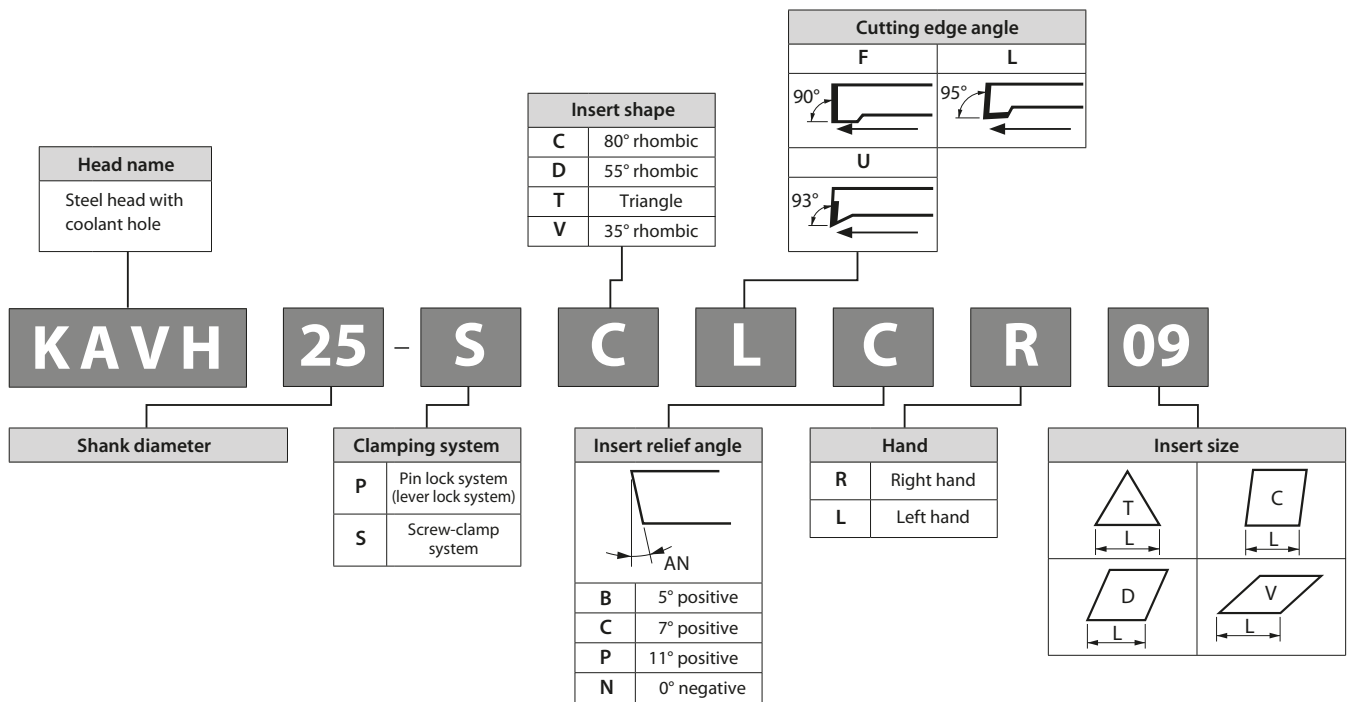

Sleeve for KAV (E-sleeve)

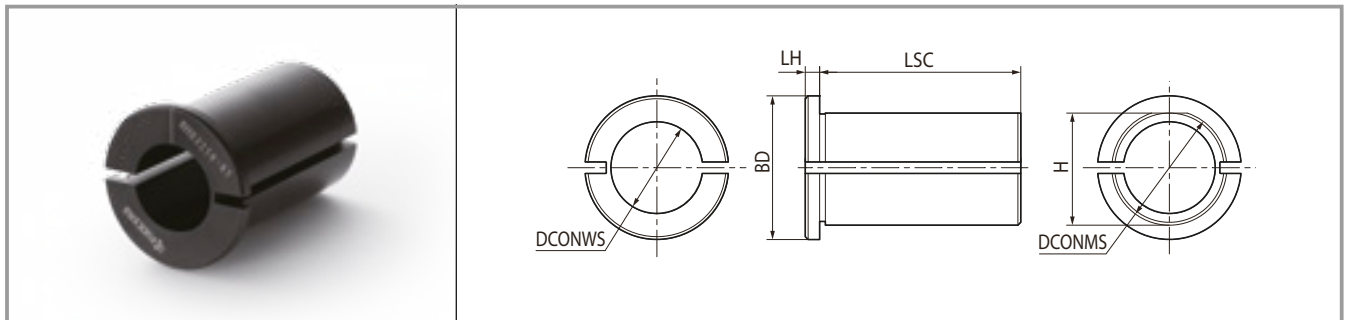


Sleeve dimensions

Description	Availability	Dimensions (mm)						Applicable shank
		DCONMS	DCONWS	BD	LSC	LH	H	
SHS 1640-75	●	40	16	50	70	5	39	KAV-D16-7D/10D
	●		20					KAV-D20-7D/10D
	●		25					KAV-G20-10D
	●		32					KAV-D25-7D/10D
SHS 2550-85	●	50	25	60	80	5	48.5	KAV-D25-7D/10D
	●		32					KAV-D32-7D/10D
	●		40					KAV-D40-7D/10D



Choose the sleeve DCONWS together with the shank DCONMS.

●: Available

KAVH-SCLC (Internal/internal facing, screw clamp)

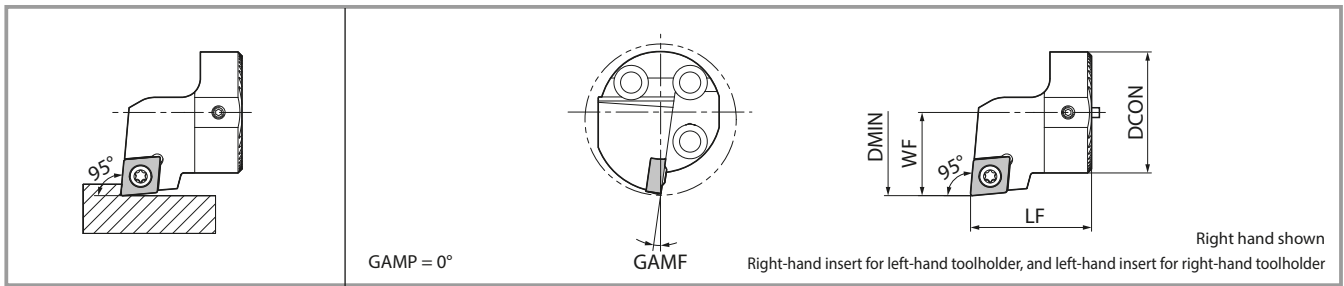


Toolholder dimensions

Description	Availability		Dimensions (mm)				LAMS (°)	Std. Corner R (RE)	Spare parts		Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Clamp screw	Wrench		
												
KAVH 16-SCLC 95/06	●	●	20	16	20	11	-7	0.4	SB-2545TR	FT-8	KAV-D16/G16...	CC <input type="checkbox"/> T0602... CC <input type="checkbox"/> W0602...
KAVH 20-SCLC 95/09	●	●	25	20	20	13	-8	0.4	SB-4065TR	FT-15	KAV-D20/G20...	CC <input type="checkbox"/> T09T3... CC <input type="checkbox"/> W09T3...
25-SCLC 95/09	●	●	32	25		17						
32-SCLC 95/09	●	●	40	32		22						
40-SCLC 95/09	●	●	50	40	32	27	-7				KAV-D40...	



When using the P chipbreaker, use right-hand insert for right-hand toolholder and left-hand insert for left-hand toolholder.

● Available

KAVH-SDUC (Copying, screw clamp)

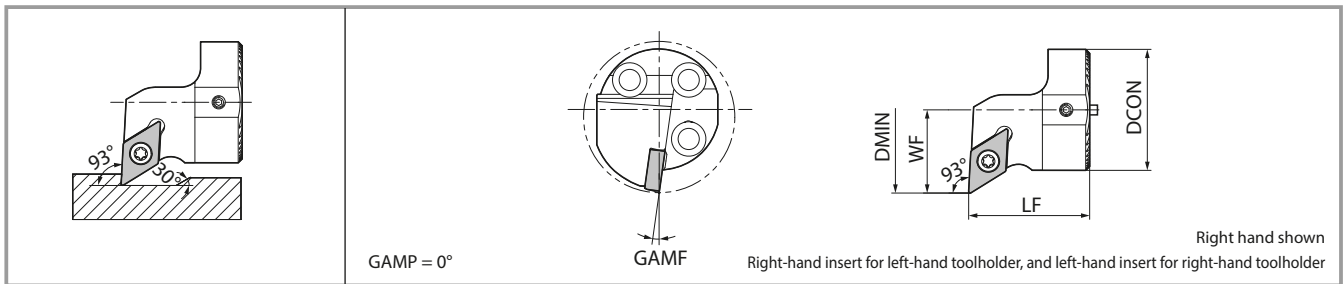


Toolholder dimensions

Description	Availability		Dimensions (mm)				LAMS (°)	Std. corner R (RE)	Spare parts		Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Clamp screw	Wrench		
												
KAVH 16-SDUC 95/07	●	●	20	16	20	11	-7	0.4	SB-2545TR	FT-8	KAV-D16/G16...	DC <input type="checkbox"/> T0702... DC <input type="checkbox"/> W0702... DC <input type="checkbox"/> X0702...
KAVH 20-SDUC 95/11	●	●	25	20	20	13	-8	0.4	SB-4065TR	FT-15	KAV-D20/G20...	DC <input type="checkbox"/> T11T3... DC <input type="checkbox"/> W11T3... DC <input type="checkbox"/> X11T3...
25-SDUC 95/11	●	●	32	25		17						
32-SDUC 95/11	●	●	40	32		22						
40-SDUC 95/11	●	●	50	40	32	27	-7				KAV-D40...	



When using a WP chipbreaker, you need to correct the cutting edge position or the machining program.

● Available

KAVH-STLP (Internal/internal facing, screw Ccamp)

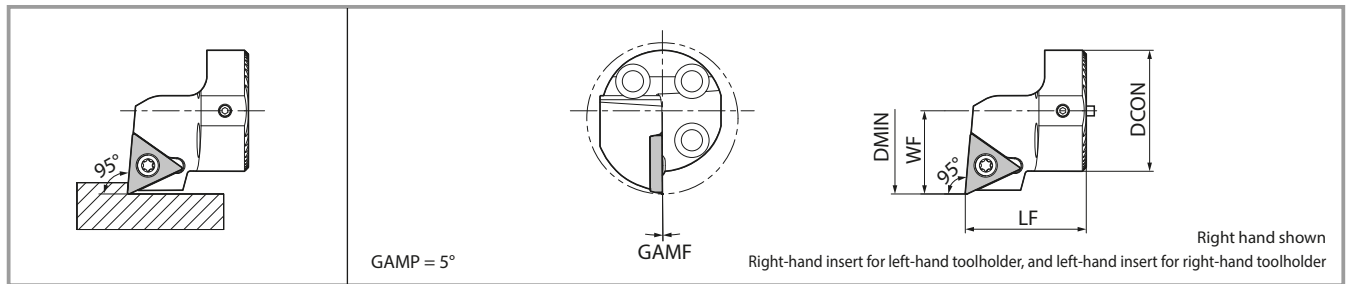


Toolholder dimensions

Description	Availability		Dimensions (mm)				LAMS (°)	Std. corner R (RE)	Spare parts		Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Clamp screw	Wrench		
												
KAVH 16-STLP $\frac{R}{L}$ 11	●	●	20	16	20	11	-3.5	0.4	SB-3060TR	FT-10	KAV-D16/G16...	TP <input type="checkbox"/> T1103...
20-STLP $\frac{R}{L}$ 11	●	●	25	20		13			-2		KAV-D20/G20...	TP <input type="checkbox"/> H1103...
25-STLP $\frac{R}{L}$ 11	●	●	32	25		17			0		KAV-D25...	TP <input type="checkbox"/> X1103...
KAVH 32-STLP $\frac{R}{L}$ 16	●	●	40	32	32	22	0	0.4	SB-4065TR	FT-15	KAV-D32...	TP <input type="checkbox"/> T1603...
40-STLP $\frac{R}{L}$ 16	●	●	50	40		27						KAV-D40...






When using a WP chipbreaker insert, you need to correct the cutting edge position or the machining program.
When using the P chipbreaker, use right-hand insert for right-hand toolholder and left-hand insert for left-hand toolholder.

●: Available

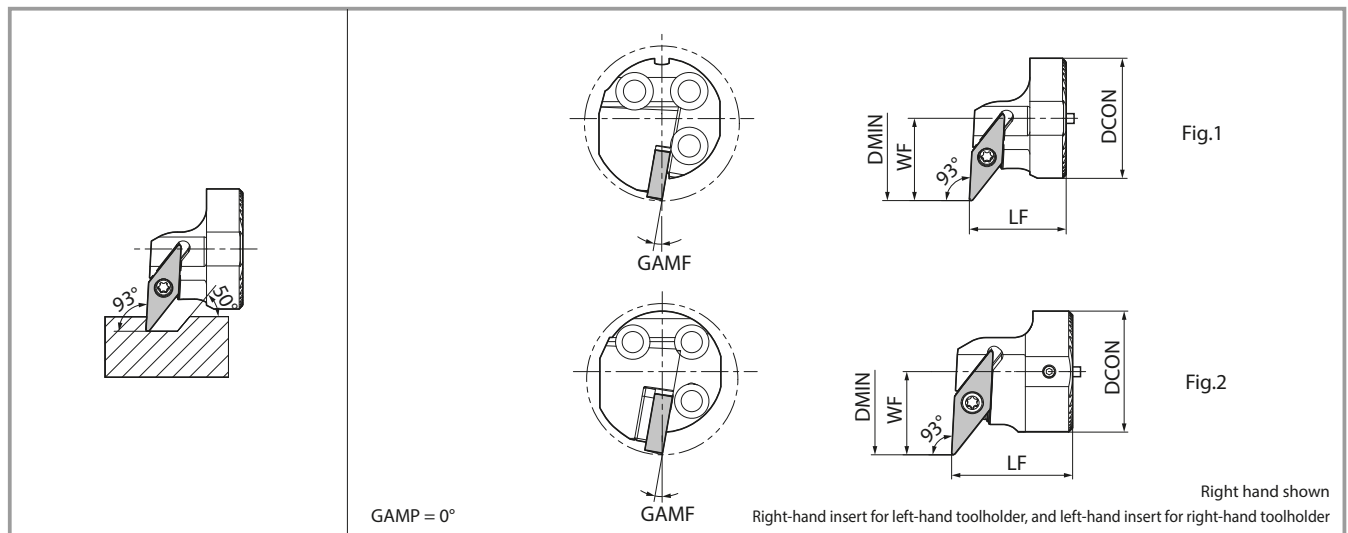KAVH-SVUB (Copying, screw clamp)




Toolholder dimensions

Description	Availability		Dimensions (mm)				LAMS (°)	Std. corner R (RE)	Spare parts					Shape	Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Clamp screw	Wrench	Sheet	Shim screw	Wrench (for shim screws)			
																
KAVH 20-SVUB $\frac{R}{L}$ 11	●	●	25	20	20	13	-10	0.4	SB-2570TR	FT-8	-	-	-	Fig.1	KAV-D20/G20...	VB <input type="checkbox"/> T1103...
25-SVUB $\frac{R}{L}$ 11	●	●	32	25		17										
KAVH 32-SVUB $\frac{R}{L}$ 16	●	●	40	32	32	22	-10	0.4	SB-40125TRN	FT-15	SVN-32N *(SVN-32S)	SS-4N	LW-4	Fig.2	KAV-D32...	VB <input type="checkbox"/> T1604...
40-SVUB $\frac{R}{L}$ 16	●	●	50	40		27									-9	

When using a corner R (RE) = 0.2 or 0.4 mm insert, we recommend using a sheet marked with * (sold separately).

●: Available

KAVH-PCLN (Internal/internal facing, lever lock)

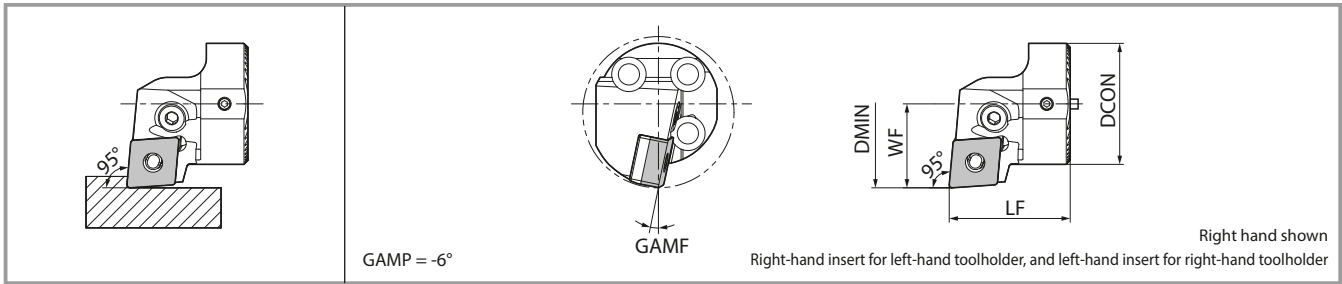


Toolholder dimensions

Description	Availability		Dimensions (mm)				LAMS (°)	Std. corner R (RE)	Spare parts						Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Lever	Lock screw	Sheet	Shim pin	Punch	Wrench		
KAVH 32-PCLN %/L12	●	●	40	32	32	22.2	-11.5	0.8							KAV-D32...	CN <input type="checkbox"/> A1204...
	●	●	50	40		27	-10		LL-2N	LS-2N	LC-42N %/L	LSP-2	PC-2	LW-3		KAV-D40...
40-PCLN %/L12	●	●	50	40												CN <input type="checkbox"/> M1204...

Sheet: LC-42NR for right-hand toolholder, LC-42NL for left-hand toolholder

● Available

KAVH-PDUN (Copying, lever lock)

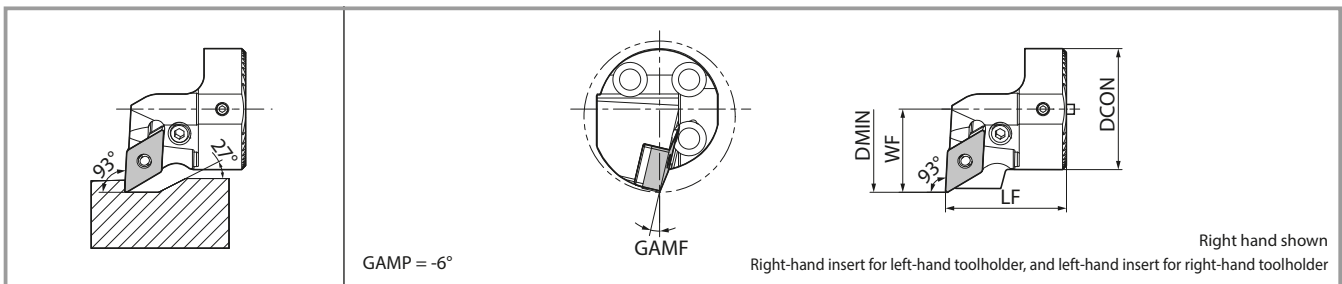

Toolholder dimensions

Description	Availability		Dimensions (mm)				LAMS (°)	Std. corner R (RE)	Spare parts						Applicable Shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Lever	Lock screw	Sheet	Shim pin	Punch	Wrench		
KAVH 32-PDUN %/L11	●	●	40	32	32	22	-13	0.4							KAV-D32...	DN <input type="checkbox"/> G1104...

● Available


Description	Availability		Dimensions (mm)				LAMS (°)	Std. Corner R (RE)	Spare parts					Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF			Wrench	Locking pin	Sheet	Clamp screw	Wrench (for clamp screws)		
KAVH 32-PDUN %/L15	●	●	40	32	32	22	-12.5	0.8						KAV-D32...	DN <input type="checkbox"/> A1504...
	●	●	50	40		27			LW-3	PP-4	PD-42	SB-2050TR	FT-6		KAV-D40...
40-PDUN %/L15	●	●	50	40											DN <input type="checkbox"/> M1504...
															DN <input type="checkbox"/> X1504...

● Available

When using a WF chipbreaker insert, you need to correct the cutting edge position or machining program.

When using inserts with corner-R (RE) greater than 1.6 mm, additional modifications to the sheet are necessary to prevent workpiece and sheet from interfering with each other.

KAVH-PTFN (Internal, lever lock)

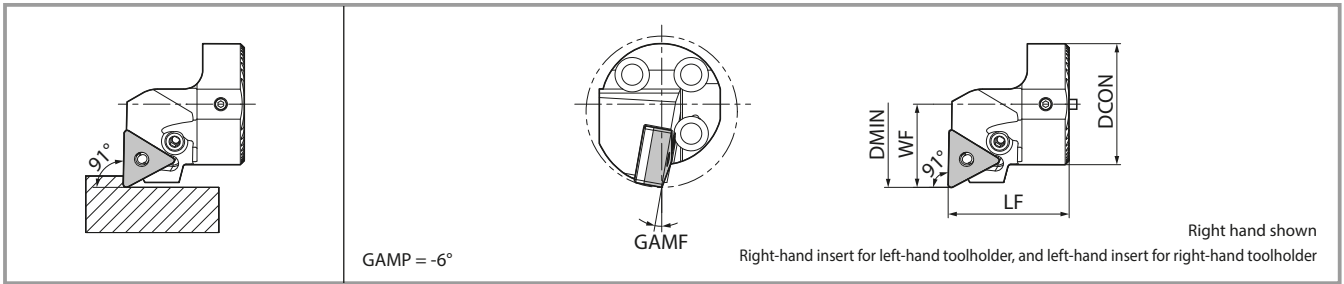


Toolholder dimensions

Description	Availability		Dimensions (mm)						Std. Corner R (RE)	Spare parts						Applicable shank	Applicable insert
	R	L	DMIN	DCON	LF	WF	LAMS (°)	Lever		Lock screw	Sheet	Shim pin	Punch	Wrench			
KAVH	32-PTFN 9/16	●	●	40	32	32	22	-10	0.8							KAV-D32...	TN <input type="checkbox"/> A1604...
	40-PTFN 9/16	●	●	50	40		27	-9								KAV-D40...	TN <input type="checkbox"/> G1604...

* When using inserts with a corner-R (RE) greater than 1.6 mm, purchase a sheet marked with * (sold separately) to prevent workpiece and sheet from interfering with each other.

●: Available

Shank

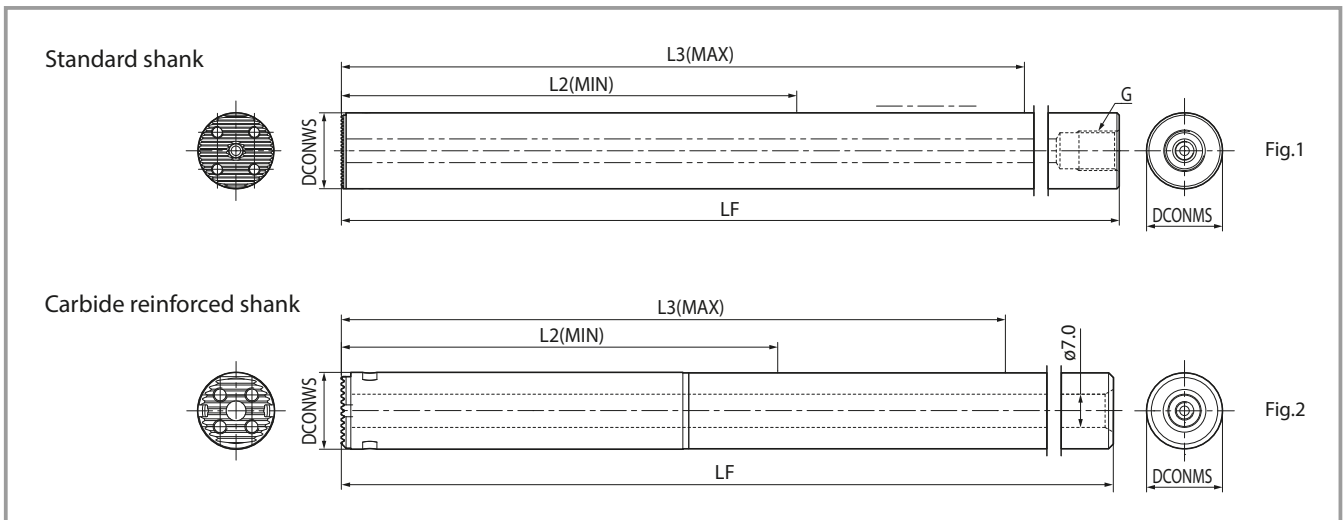

Toolholder dimensions

Description	Availability	Dimensions (mm)							Spare parts			Shape
		DCONWS	DCONMS	LF	L2(MIN) Minimum overhang length	L3(MAX) Maximum overhang length	G	Head fastening bolts (3)	Wrench	O-ring		
Standard shank	KAV- D16-7D	●	16	16	157.5	44	92	G1/8	HH3X10S	LW-2.5	GR-006-2	Fig. 1
	D20-7D	●	20	20	201.5	60	120	G1/4	HH3.5X10S			
	D25-7D	●	25	25	256.5	80	155		G3/8	HH4X12S		
	D25-10D	●			321.5	155	230	G1/2		HH5X12		
	D32-7D	●	32	32	321.5	96	192		G1/2	HHX6X12		
	D32-10D	●			417.5	192	288	-		HH3X10S		
	D40-7D	●	40	40	409.5	128	248		-	HH3.5X10S		
D40-10D	●	529.5			248	368	-	HH3.5X10S				
Carbide reinforced shank	KAV- G16-10D	●	16.2	16	205.5	92		140	-	HH3X10S	LW-2.5	-
	G20-10D	●	20.2	20	261.5	120	180	HH3.5X10S				

When cutting the back end, consider the length of the shank grip in addition to the amount of overhang length: See page 14.

●: Available

Head fastening bolt

Shape	Description	Availability	Dimensions (mm)				
			A	B	C	D	E
	HH3X10S	●	M3X0.5	10	5	3	2.5
	HH3.5X10S	●	M3.5X0.6	10	5.5	3	2.5
	HH4X12S	●	M4X0.7	12	7	4	3
	HH5X12	●	M5X0.8	12	8.5	5	4
	HH6X12	●	M6X1.0	12	10	6	5

● Available

Recommended tightening torque

Shank diameter	Tightening torque
ø16	2.2 [N·m]
ø20	2.2 [N·m]
ø25	3.0 [N·m]
ø32	5.0 [N·m]
ø40	8.5 [N·m]

Internal coolant: Piping connections

1 Screw standard for shank back end (pipe connection)

- The thread standard depends on the description. Please refer to the dimension chart "G" on page 10 when using commercially available piping parts.
- When using our piping components, they must be converted to "UNF3/8" or "G1/8." Check the table below and select the required joint parts (sold separately).

● Steel shank (Pressure ~ 7MPa)

Type	Thread standards and conversion joints
ø16-7D	G1/8
ø20-7D ø25-7D/10D	G1/8 ⇐ G1/4 J-ST-G1/4-G1/8
ø32-7D/10D	G1/8 ⇐ G1/4 ⇐ G3/8 J-ST-G3/8-G1/4 J-ST-G1/4-G1/8
ø40-7D/10D	G1/8 ⇐ G1/4 ⇐ G3/8 ⇐ G1/2 J-ST-G1/2-G3/8 J-ST-G3/8-G1/4 J-ST-G1/4-G1/8

If a leak occurs, use a commercially available washer.

Joint

Shape	Description	Availability	M1	M2	L1	L2
	J-ST-G1/4-G1/8	●	G1/8	G1/4	27	12
	J-ST-G3/8-G1/4	●	G1/4	G3/8	33	13
	J-ST-G1/2-G3/8	●	G3/8	G1/2	37	17

● Available

● Carbide reinforced shank (Pressure ~ 1MPa)

Type	Thread standards and conversion joints
ø16-10D ø20-10D	 UNF3/8 ⇐ ø7 Straight hole *The shank side is not threaded.

Resin joint (with O-ring)

Shape	Description	Availability	Thread standard
	PRO7-ST-UNF3/8	●	UNF3/8

You can order only the included O-ring (GR-004-2).


● Available

2 How to connect when using our plumbing parts

Easy to use with high pressure capable hoses and joints

- Can be used as internal coolant at normal pressure without a high-pressure pump unit
- Banjo bolts for angle hoses available. Supports a wide variety of machines

Piping installation guide

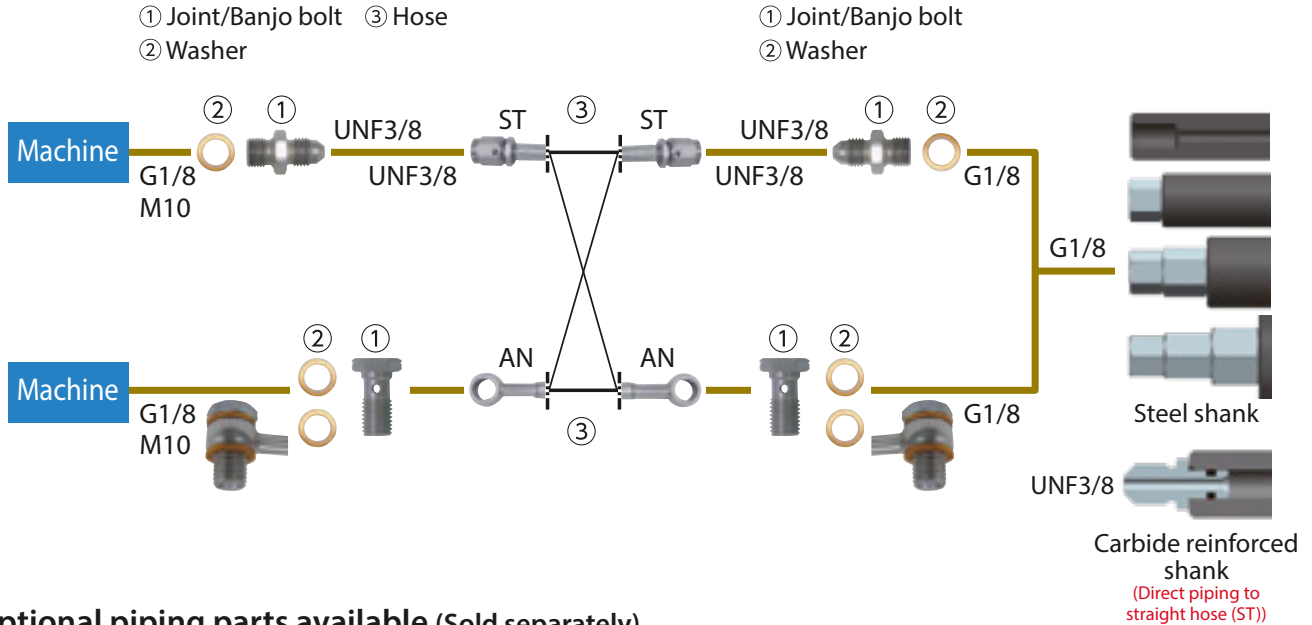

Optional piping parts available (Sold separately)

Choose from parts below to match your machine specifications and piping method.

① Joint or banjo bolt × 2, ② 2 ~ 4 washers, ③ 1 hose

① Joint/ Banjo bolt

Pressure: ~ 30 MPa

Shape	Description	Availability	Thread Standard	
			Thread	Thread connection to the machine
	J-G1/8-UNF3/8	●	G1/8	UNF3/8
	J-M10X1.5-UNF3/8	●	M10X1.5	UNF3/8
Banjo bolt available for angled hose connection	BB-G1/8	●	G1/8	G1/8 (M10)
	BB-M10X1.5	●	M10X1.5	G1/8 (M10)

●: Available

② Washer

Pressure: ~ 30 MPa

Shape	Description	Availability
	WS-10	●

*Two washers are required when using banjo bolts

●: Available

③ Hose

Pressure: ~ 30 MPa

Shape	Description	Availability	Thread Standard		Dimensions (mm)
			Thread	Thread	L
Straight/straight	HS-ST-ST-200	●	UNF3/8	UNF3/8	200
	HS-ST-ST-250	●			250
Straight/angle	HS-ST-AN-200	●	UNF3/8	(Banjo Bolt)	200
	HS-ST-AN-250	●			250
Angle/angle	HS-AN-AN-200	●	(Banjo Bolt)	(Banjo Bolt)	200
	HS-AN-AN-250	●			250

●: Available

Precautions

1. Make sure machine door is completely closed before use of these parts.
2. Use appropriate seal for the male thread of the piping parts and make sure the connection is secure. Use plugs to seal off unused coolant holes.
3. Connect and fasten the coolant hose firmly.
4. The use of copper washers may cause leakage but will have no effect on the performance.
5. Commercial piping parts can be used if the thread standards are same. Check the pressure resistance before use.
6. Regularly changing the coolant filter is recommended.

Precautions

About the dedicated E-sleeve

The shank does not have a flat cut. In order to ensure vibration-proof performance, we recommend using a special sleeve (SHS ****_**) that is sold separately.




Use the entire sleeve to grasp the shank area.

How to adjust cutting edge position

When using a head flat cut part


After attaching the tool to the machine, move the tool turret against the flat cut part of the head with a dial gauge, etc., and make sure that it is parallel to the sliding surface (X axis).

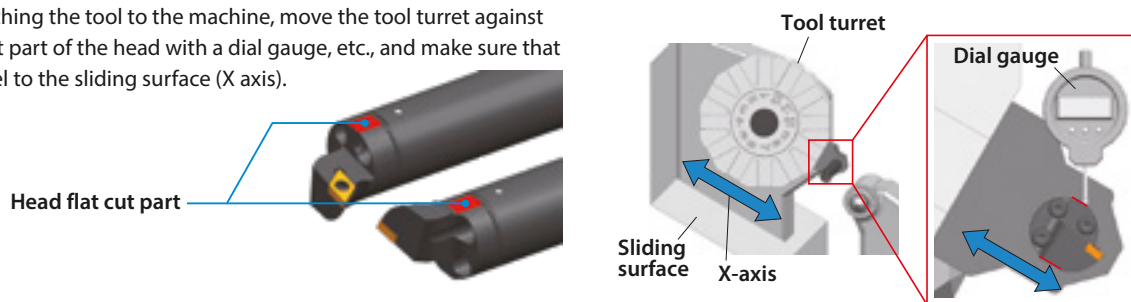

When using the reference lines of the shank/dedicated sleeve (E-sleeve)

Align the reference lines printed on the shank and the dedicated sleeve (SHS ****_**).

It is possible to more easily adjust the cutting edge position than using the head flat cut part.

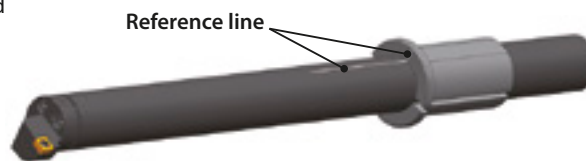

Recommendations for internal coolant

Under high temperatures, the anti-vibration mechanism may deteriorate or be damaged.

Please use with **internal coolant**.

The coolant pressure resistance of the shank is 7 MPa. However, when using coolant parts (PR07-ST-UNF 3/8) for internal coolant in the carbide reinforced shank (KAV-G ***), the coolant pressure is 1 MPa. Please be careful.




Available overhang length range

Available overhang length is set for this tool.


To adjust the overhang length, please use the reference line printed on the shank.

Available overhang length range		
Description	Minimum overhang length	Maximum overhang length
KAV-***-10D	Shank diameter × 7	Shank diameter × 10
KAV-***-7D	Shank diameter × 4	Shank diameter × 7

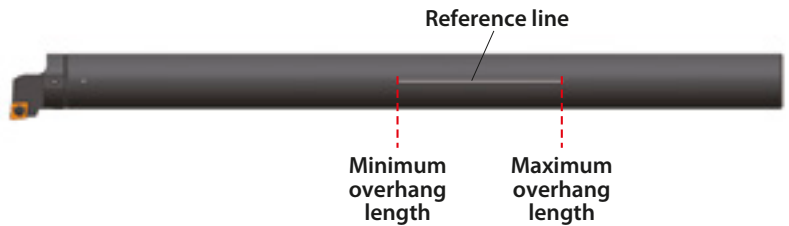

Shank cut

If the shank needs to be cut or modified, do so within the cutting range and do not clamp the built-in damping mechanism.

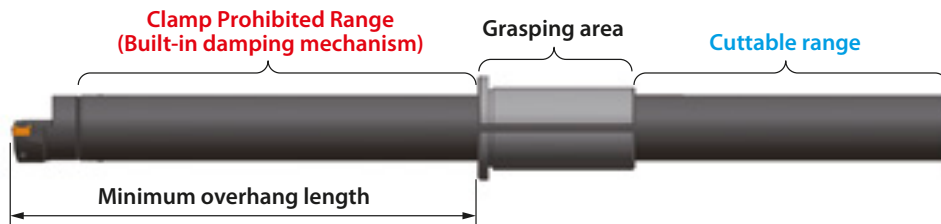

- Use the appropriate inserts and parts. Use of damaged parts may result in tool breakage and injury.
- Do not touch the cutting edge of the insert directly with your bare hands. There is a risk of injury.
- Make sure that there are no foreign materials such as chips in the insert seating area, serrated area, or shank grip area before mounting.
- Do not use the product under chattering conditions. This can lead to damage of the built-in damping mechanism.
- If tool falls or hits the part while machining, do not use it. The impact can cause tool damage and lead to large chattering.
- Avoid high humidity and store at room temperature (about 20°C).

| Anti-Vibration |

Max L/D = 10



Interchangeable head boring bars
with anti-vibration dampener system

KAV Series



www.kyocera-unimerco.com

The information contained in this brochure is current as of June 2024.
Duplication or reproduction of any part of this brochure without approval is prohibited.

TZE00242

© 2024 KYOCERA Corporation

