



Piranha 1550
Piranha 1850

Vertical panel saws

Saw benches

Cross cut saws

Builder site saws



Piranha 1550
Piranha 1850

Vertical panel saws



Type

**Piranha
1550**

**Piranha
1850**

Max. vertical cut	1550 mm	1850mm
Max. horizontal cut	3300 mm	4300 mm
Max. depth of cut	55 mm	55 mm
Saw-blade diameter	Ø 250	Ø 250
Motor power	3 kW	3 kW
	4hp	4hp
Voltage	400 V/3~	400 V/3~
Spindle speed	2800 rpm	2800 rpm
Weight	485 kg	570 kg

Standard equipment

- locking controller (vert. cuts)
- length stop
- panel mover
- 2 midway fences
- brake motor
- tools

Optional equipment

- self-moving panel support (manually operated)
- self-moving panel support (automatically operated)
- digital read-out (hor. and/

or vert.cuts)



- digital length stop
- transport rollers
- TRK system
- extra midway fence
- extra length stop
- reiteration stop
- stops for horizontal cuts
- emergency stop
- dust extractor
- special motors
- special lengths of cut
- depth of cut 80 or 100 mm
- V grooving device for ACP (Alucobond, Dibond etc.)

Harwi vertical panel saws can be used (with necessary options) for cutting

- aluminium
- Trespa
- blockboard
- hardboard
- woodwool cement sheets
- insulation material
- MDF
- plywood
- various plastics
- chipboard
- ACP (Alucobond, Dibond etc.)

Measurements

type	1550	1850
A	800 mm	900 mm
B	1200 mm	1400 mm
C	2000 mm	2300 mm
D	2450 mm	2700 mm
E	4200 mm	5200 mm

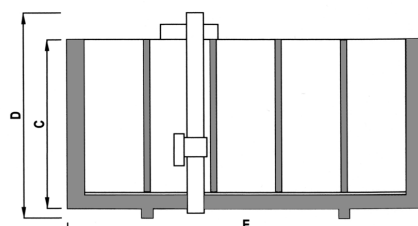

- Unique -two support- frame construction. Welded in one piece.
- Hardly any installation time.

Subject to change without notice. Special models upon request.

Harwi Holland BV

P.O. Box 224, 5700 AE Helmond, The Netherlands
Lage Dijk 28, 5705 BZ Helmond, The Netherlands
T +31 492 543355 F +31 492 522305
E info@harwi.nl I www.harwi.nl

