

K50 and K30 Pro



Bolder Indication for Everyone, Anywhere

- Simplified ordering and design
- Reliable performance in harsh environments
- Improved production efficiency
- Full flexibility of colors and animations with Pro Editor software



Give Your Equipment a Voice



30 or 50 mm dome



Food grade materials



Audible options
(50 mm models only)



Avoid nuisance maintenance and replacement expense



Rely on performance in washdown and humid environments



Select compliant models for use in food and beverage processing




Hear status information directly



Customize device configuration with advanced color and animation options



Simplify ordering, stock and spare parts with flexible, customizable units

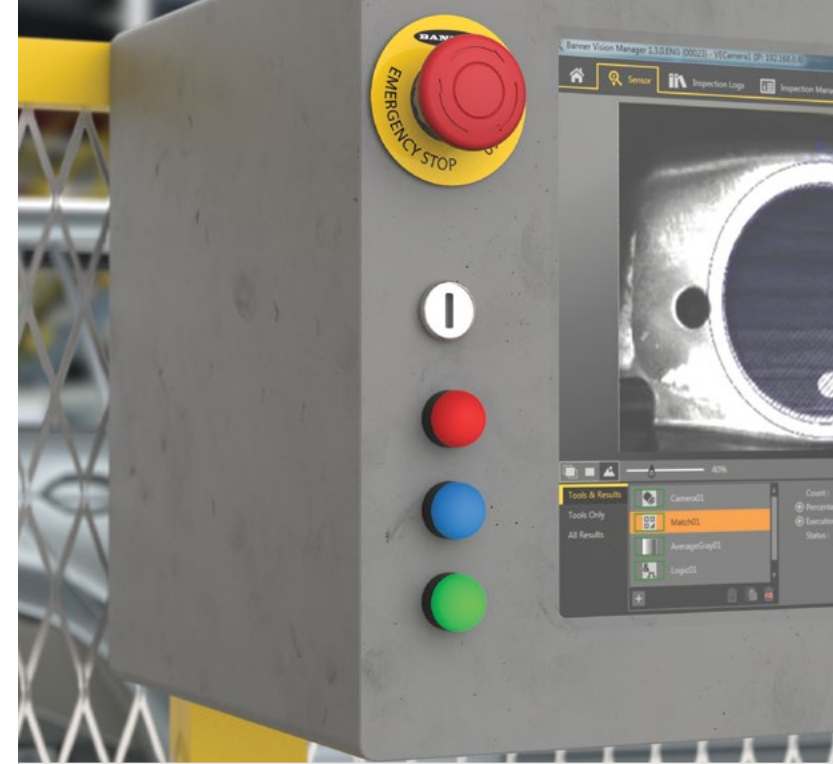

Bolder Indication for Everyone, Anywhere



14 colors now available
in one housing

- Get seven colors via only three inputs
- Save controller outputs and wiring
- Improve production efficiency through enhanced visual management
- Install wherever you need indication to improve communication and productivity
- Standardize to simplify ordering and spare parts
- Collaborate with Banner on custom models
- Enhance troubleshooting and branding with colors
- Program units in the field with Pro Editor software



Factory calibrated color points

Bright, 360° visibility

Impact-resistant polycarbonate material

IP66/67/69K, NEMA/UL Type 4X, 13

Bimodal discrete inputs, plus flashing input


Standard base dimensions and
connector options



Visit www.bannerengineering.com/proeditor
for full details on the Pro Editor software


Limitless Capabilities with IO-Link

- Universal connection
- Millions of color options
- Intensity control
- Animation options
- Drop-in installation
- Simplified wiring

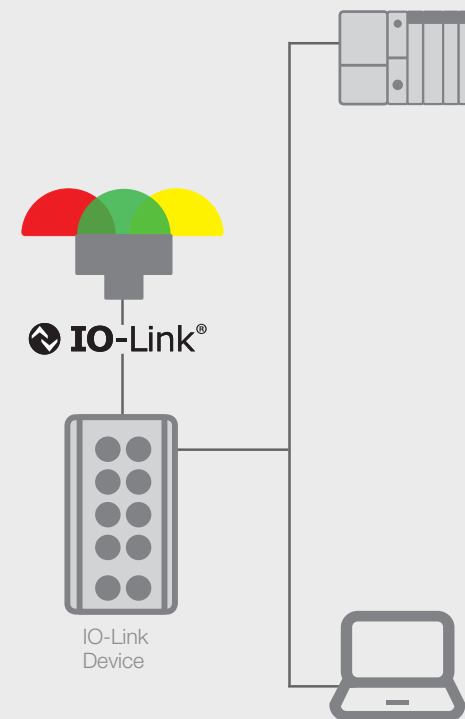

K50L2 Pro

Example Model Number: K50L2RGB7Q

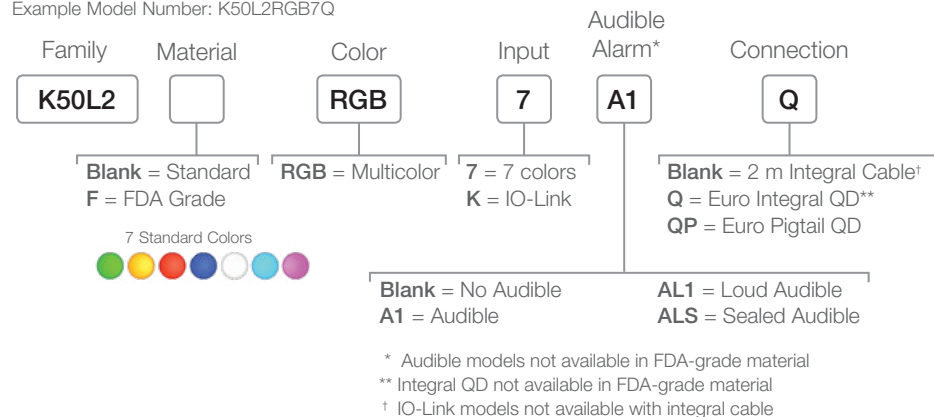


K50L2



K50L2 Audible
(A1, AL1)




K50L2 Adjustable
Audible (ALS)



K30L2

K30L2 Pro

Example Model Number: K30L2RGB7Q

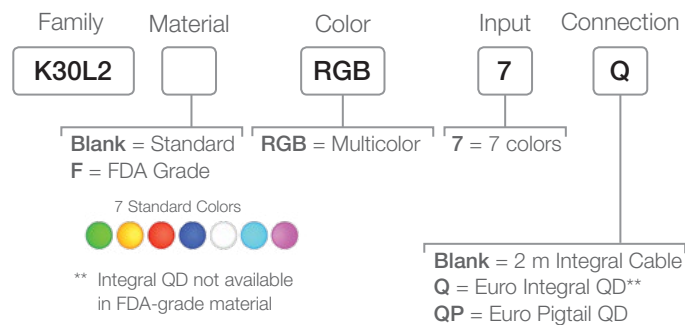

Power

K50L2: 10 to 30 V dc; 220mA Max. at 10 V dc; 100mA Max. at 30 V dc
K30L2: 10 to 30 V dc; 60mA Max. at 10 V dc; 30mA Max. at 30 V dc

Operating Conditions

-40 to 50 °C

Construction

Polycarbonate

Environmental Rating

K50L2: Standard: IEC IP66/IP67/IP69K
Standard Audible: IEC IP50
Sealed Audible: IEC IP66/IP67/IP69K

K30L2: IEC IP66/IP67/IP69K

Certifications



Accessories



SMB30A

SMB30FA

SMB30SC



SMB22A

SMBAMS22P

SMBAMS22RA



Flush Foldable
Mounting

Elevated
Mounting

For more information go to
bannerengineering.com

PRO-KIT-K50 Includes:
K50L2RGB7Q
Pro Series-enabled K50
MQDC-506-USB
Pro Converter Cable

PRO-KIT Includes:
MQDC-506-USB
Pro Converter Cable
CSBM1251FM1251M
Splitter



CSBM1251FM1251M
Splitter

PSW-24-1
Power Supply

PSW-24-1
Power Supply



M12/Euro-Style Cordsets
Straight connector models
listed; for right-angle, add
RA to the end of the model
(example, **MQDC1-506RA**)

4-Pin	5-Pin
MQDC-406 2 m (6.5')	MQDC1-506 2 m (6.5')
MQDC-415 5 m (15')	MQDC1-515 5 m (15')
MQDC-430 9 m (30')	MQDC1-530 9 m (30')



M12/ Euro-Style Washdown Cordset (IP69K)
Straight connector models

5-Pin
MQDC-WDSS-0506 2 m (6.5')
MQDC-WDSS-0515 5 m (15')
MQDC-WDSS-0530 9 m (30')



PN 172048 rev. A

© 2018 Banner Engineering Corp. Minneapolis, MN USA

1-888-373-6767

www.bannerengineering.com

BANNER
more sensors, more solutions