






CROWN LINK®

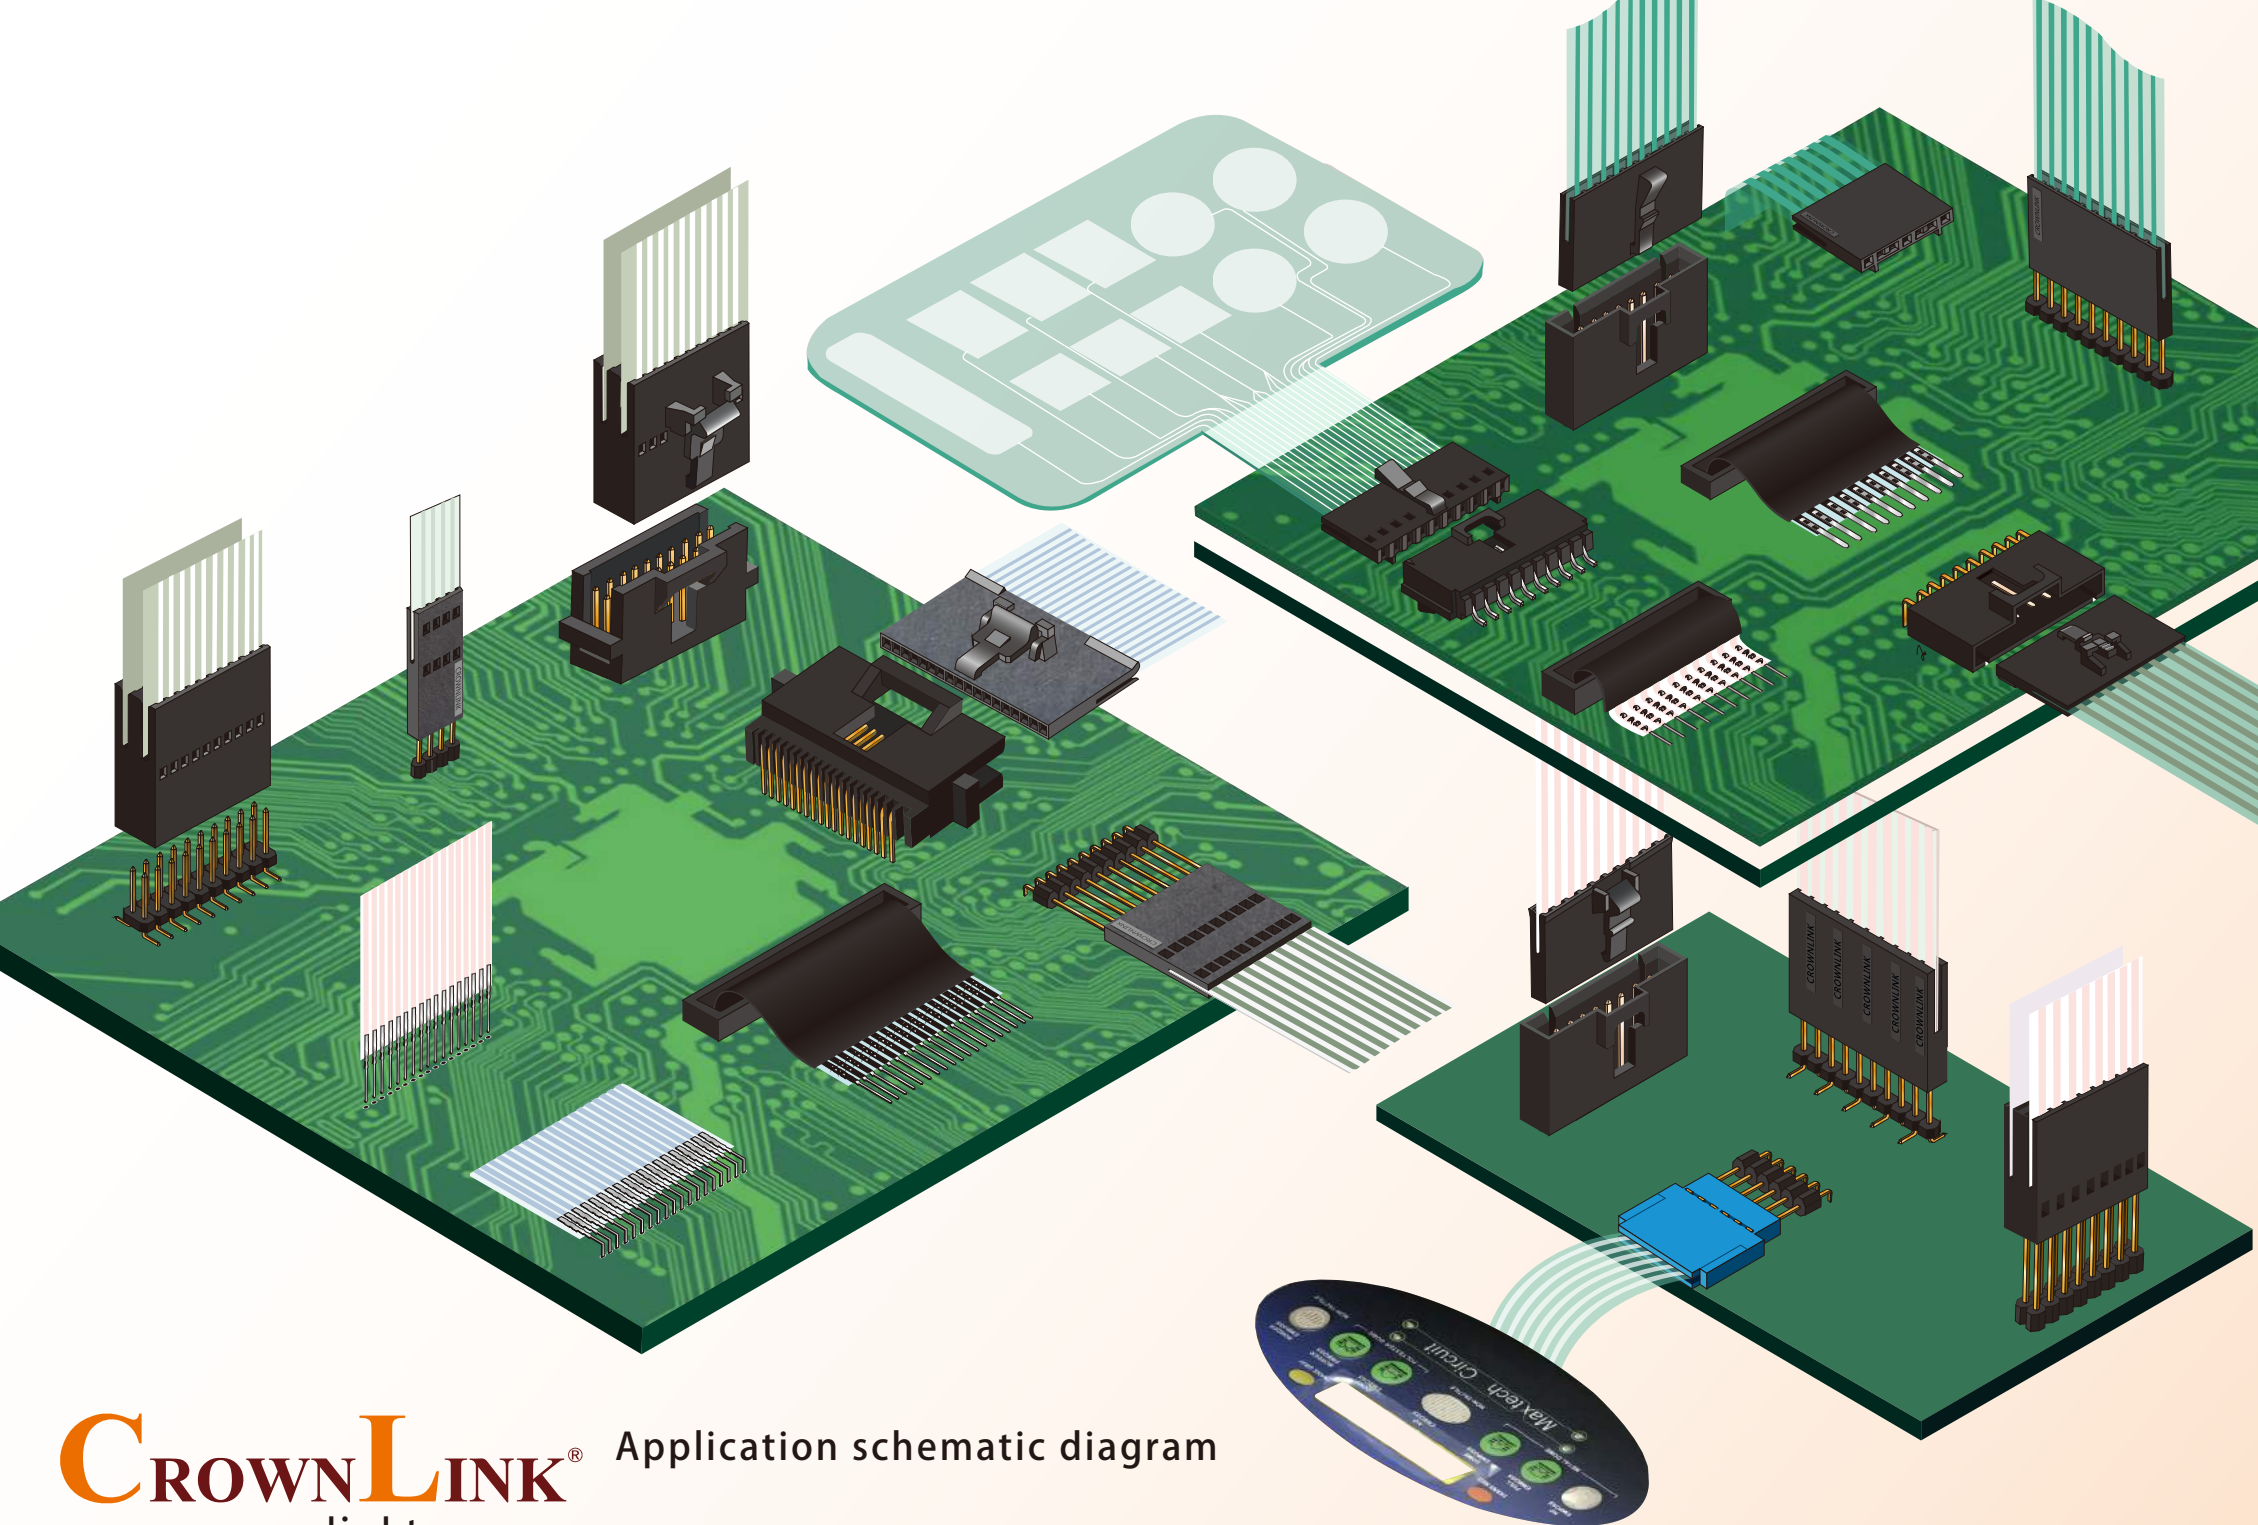

1.27mm Pitch

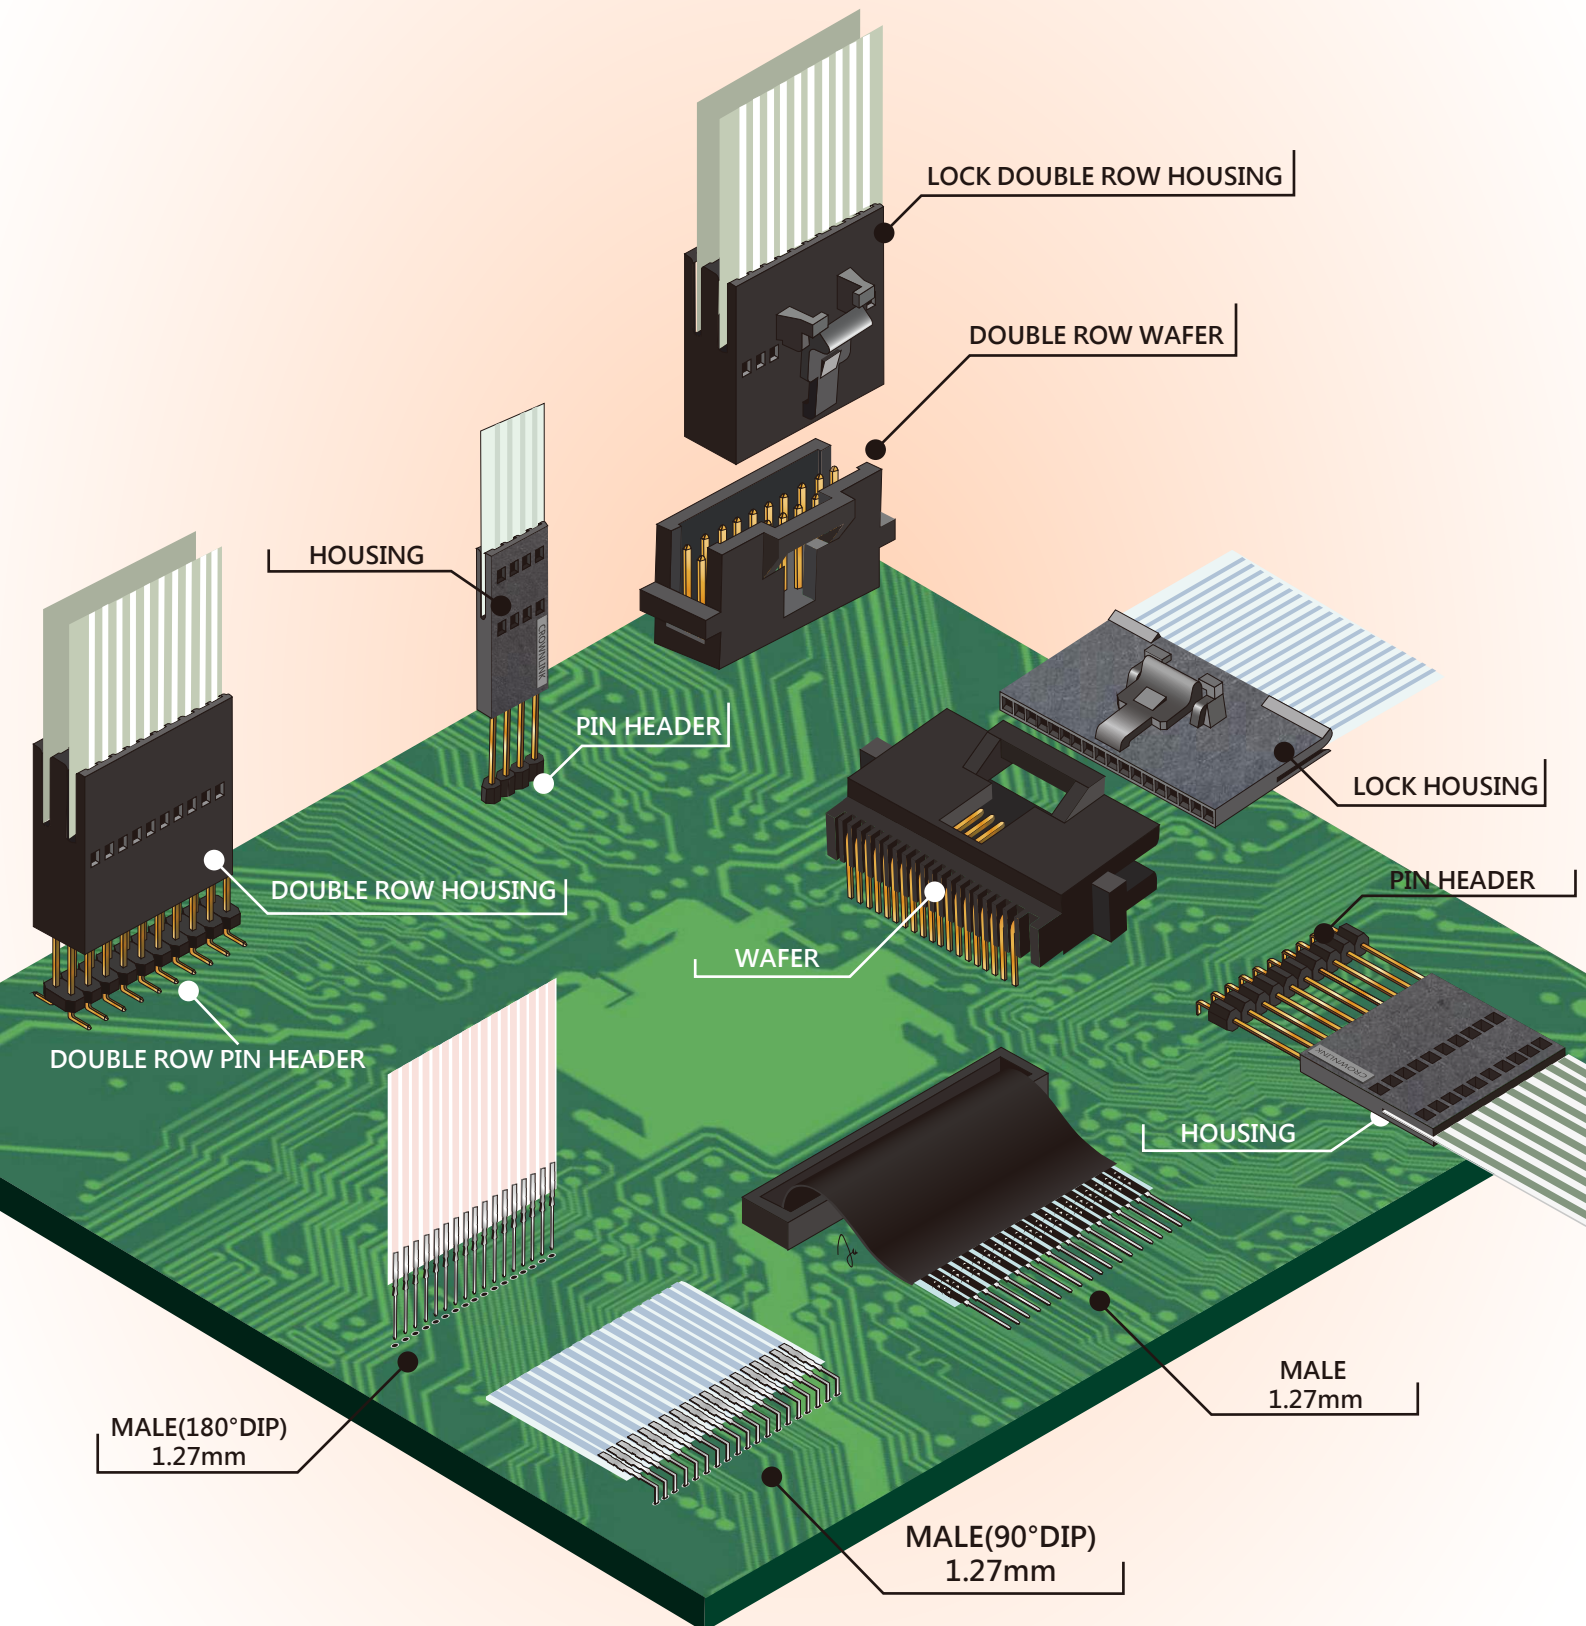


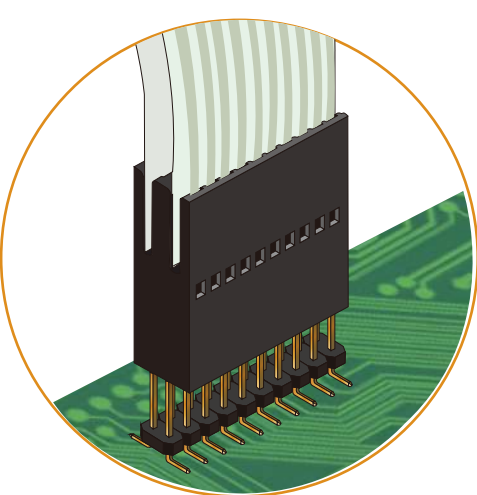

1.27mm


1.27mm

DOUBLE ROW PIN HEADER
1.27mm PCB




2807-30K-0T(0G)-F

2807H-XXDNH
(08~100PIN)

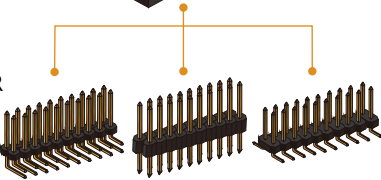

90° DIP
180° DIP
SMT

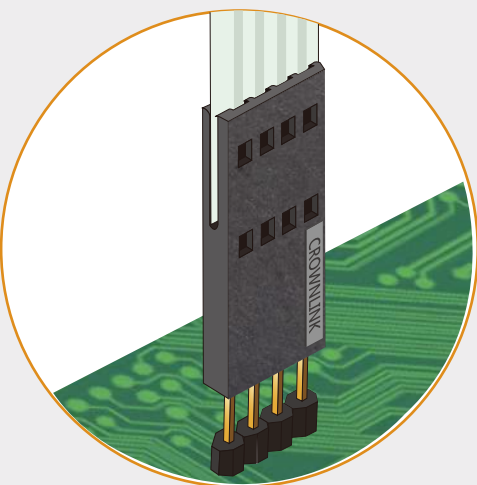

1.27mm


1.27mm

PIN HEADER
1.27mm PCB




2807-30K-0T(0G)-F

2807H-XX (02~30PIN)




L203XX-XX1XXXXXX(90°DIP)
L203XX-XX0XXXXXX(180°DIP)
L205XX-XX2XXXXXX(SMT)

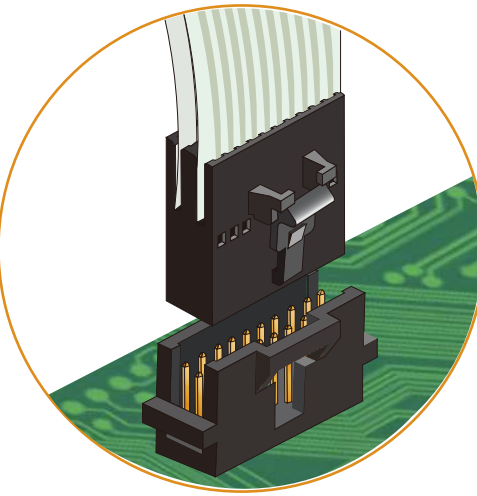

1.27mm


1.27mm

DOUBLE ROW WAFER
1.27mm PCB




2807-30K-0T(0G)-F

2807HLA-XXDNH (16~100PIN)




CLSH1.27R-XXDGNN(90° DIP)
CLSH1.27V-XXDGNN(180° DIP)

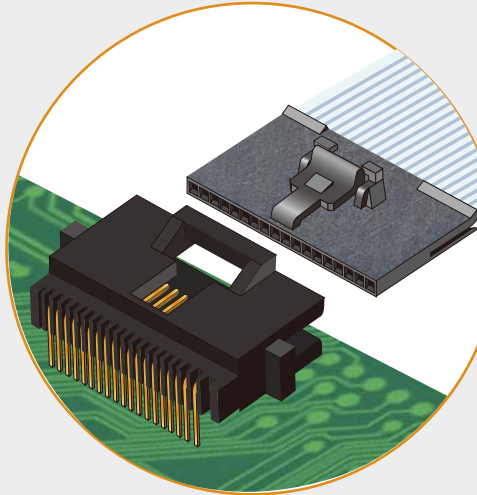


CLSH1.27R-XXGNN
(90° DIP)

1.27mm


1.27mm




CLSH1.27V-XXGNN
(180° DIP)



2807HLA-XX
(04~30PIN)

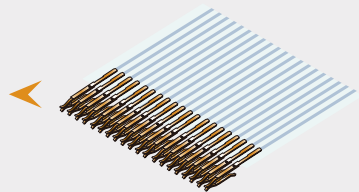


2807-30K-0T(0G)-F

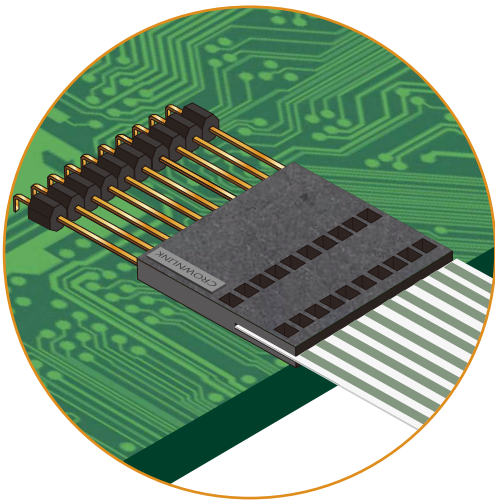

90°
(DIP)


180°
(DIP)

(SMT)

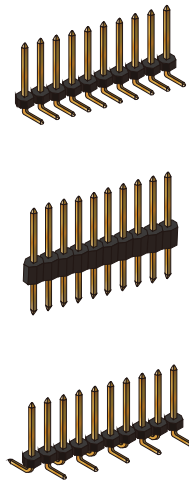



1.27mm

1.27mm




2807H-XX
(02~30PIN)

2807-30K-0T(0G)-F

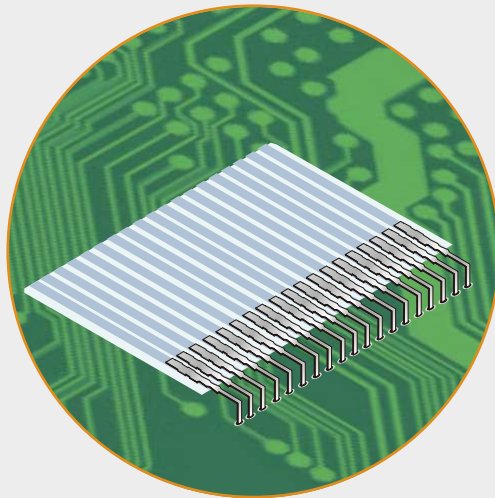


1.27mm

1.27mm PCB

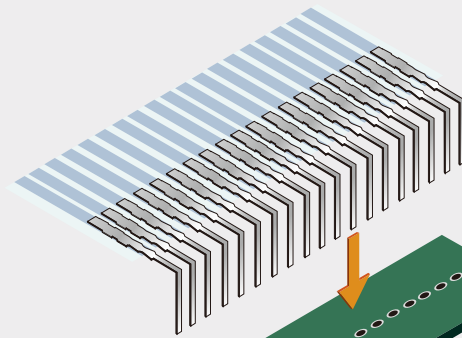


2807-30K-0T(0G)-MH

90°DIP

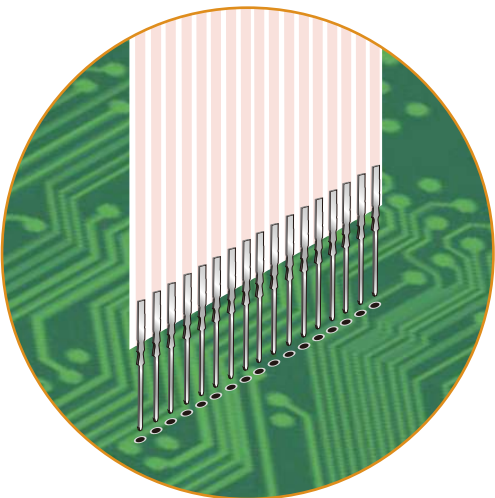


1.27mm

1.27mm PCB

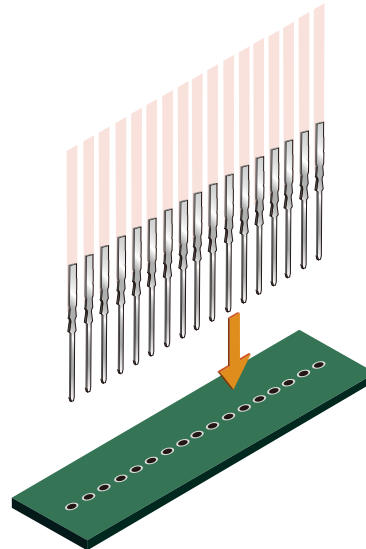


2807-30K-0T(0G)-MH

180°DIP

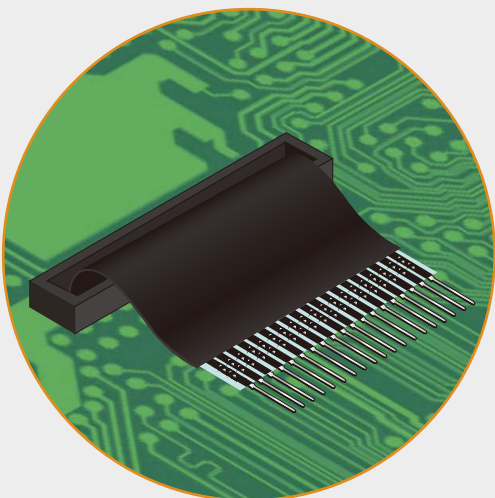


1.27mm








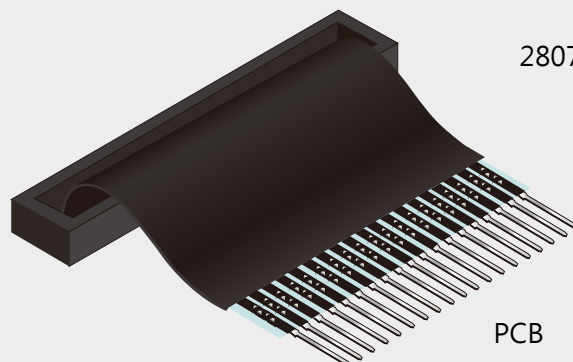



2807-30K-0T(0G)-MH

PCB

2.54mm Pitch

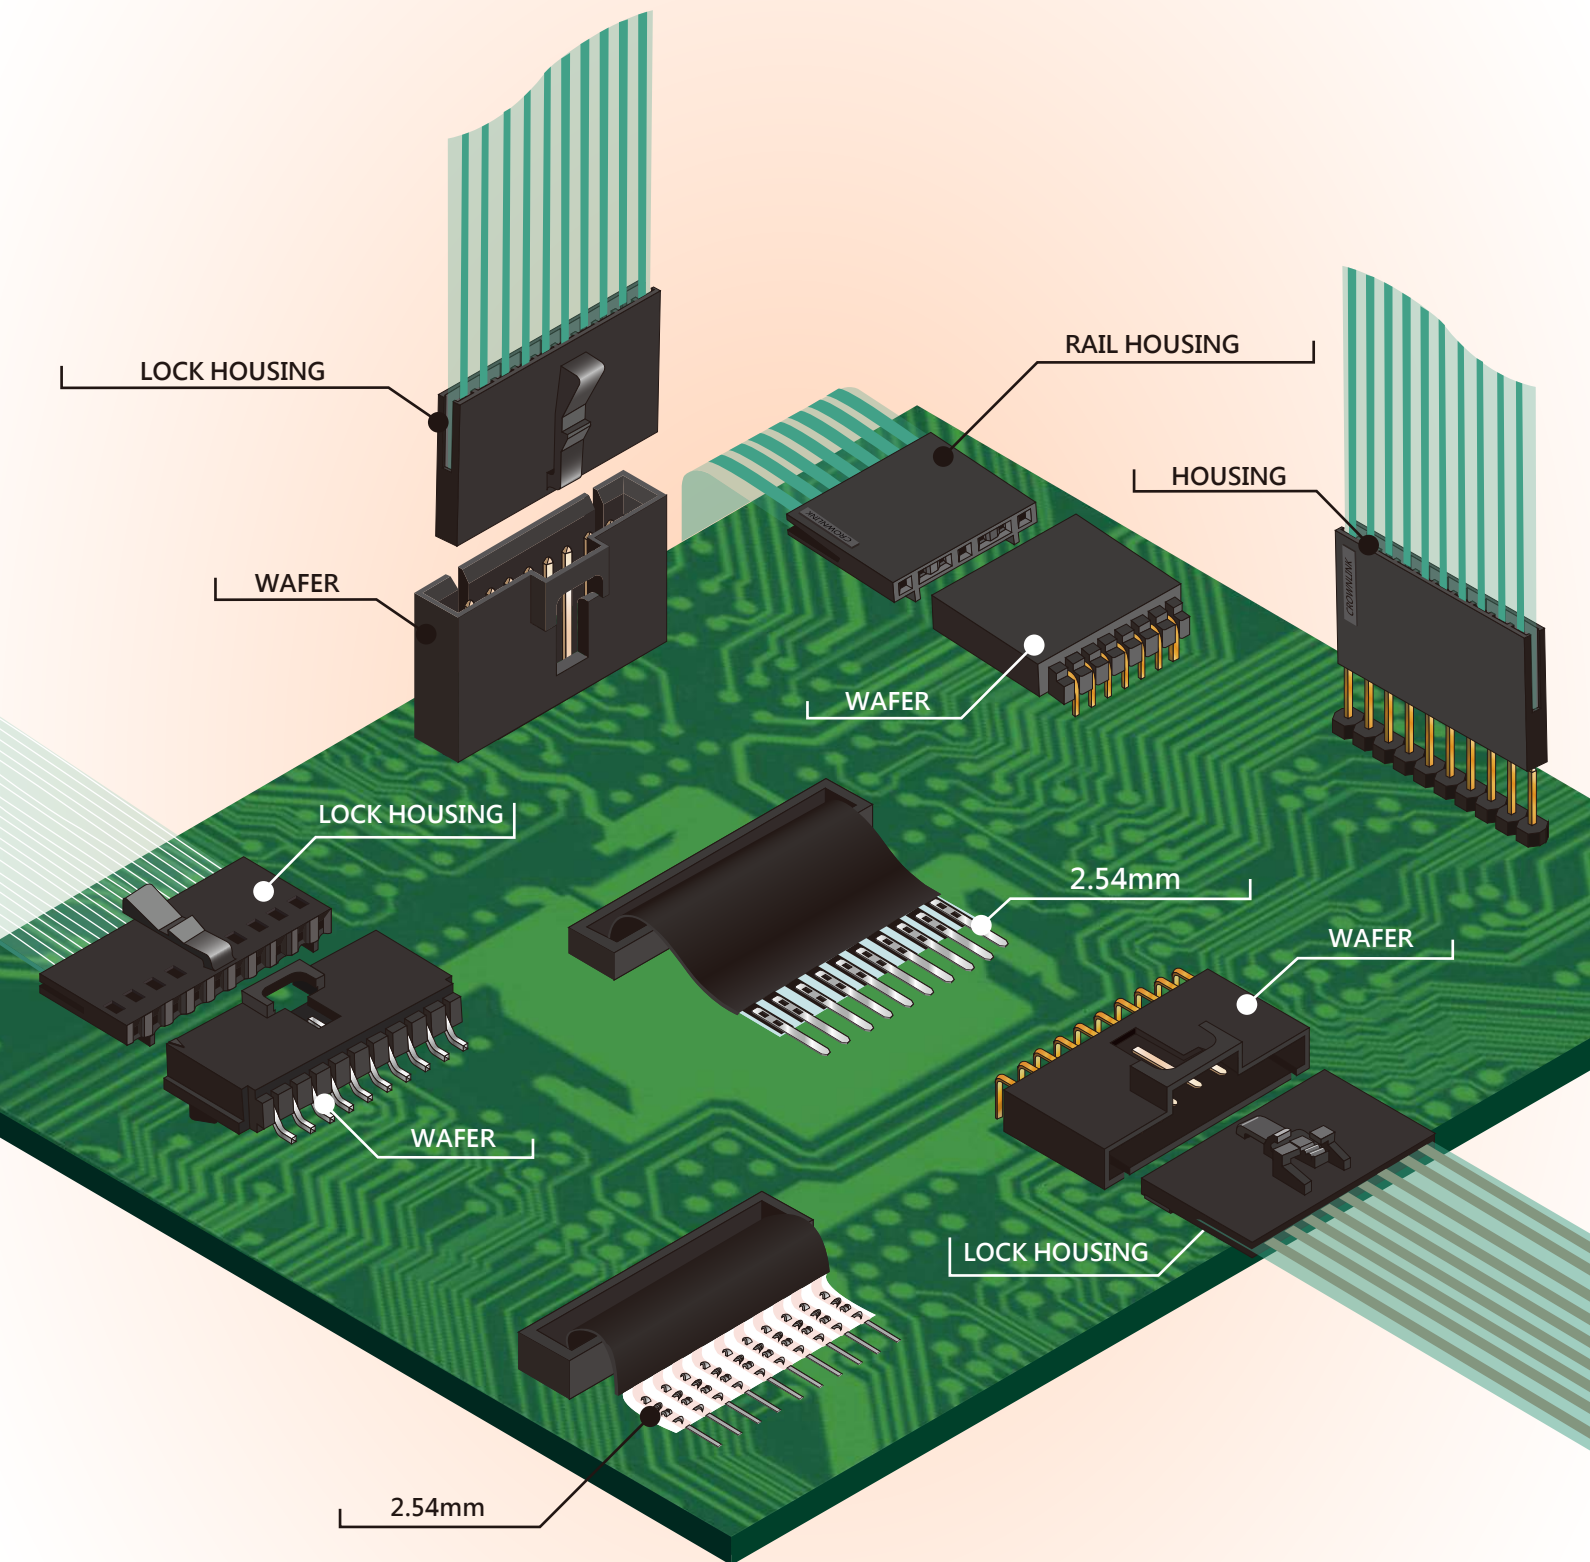

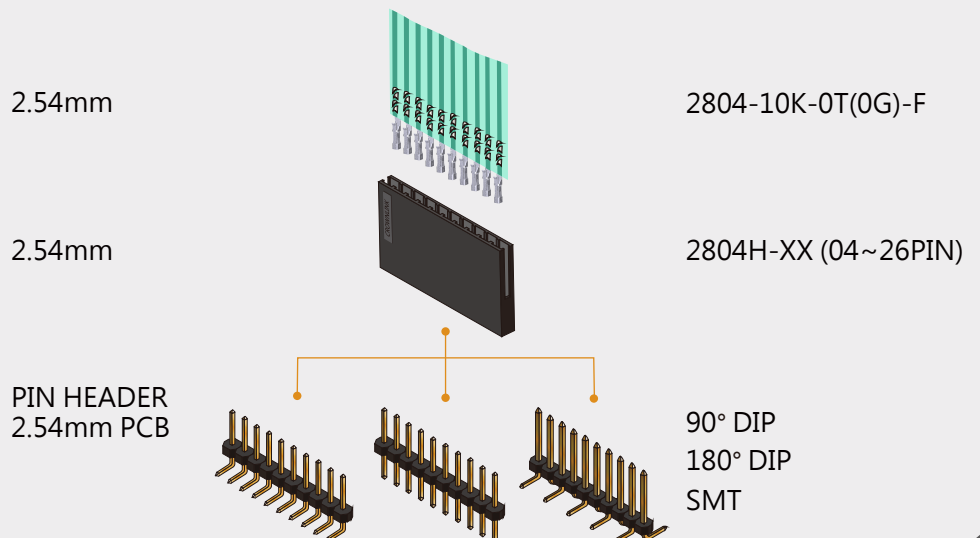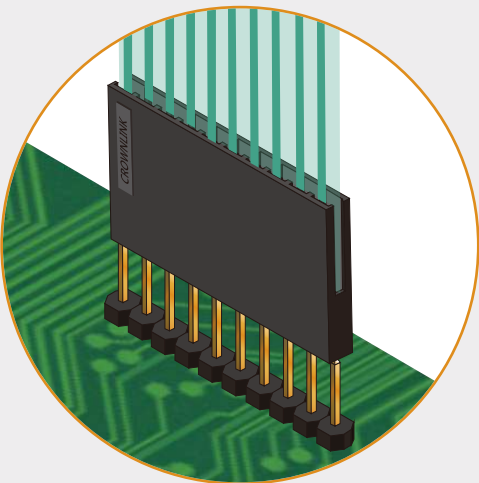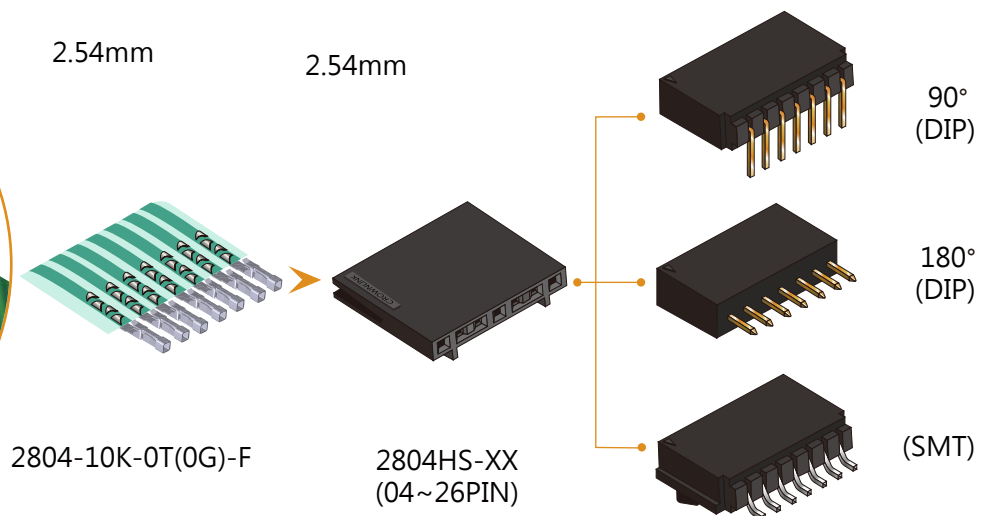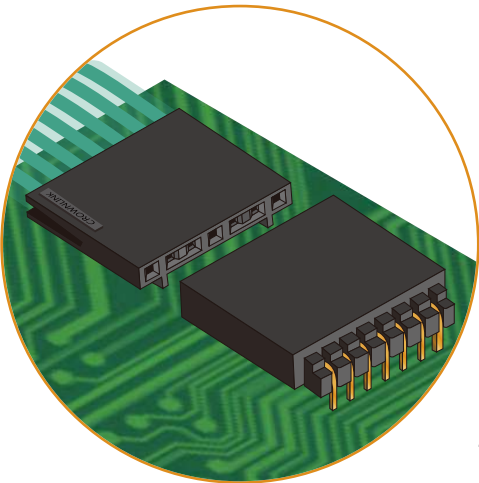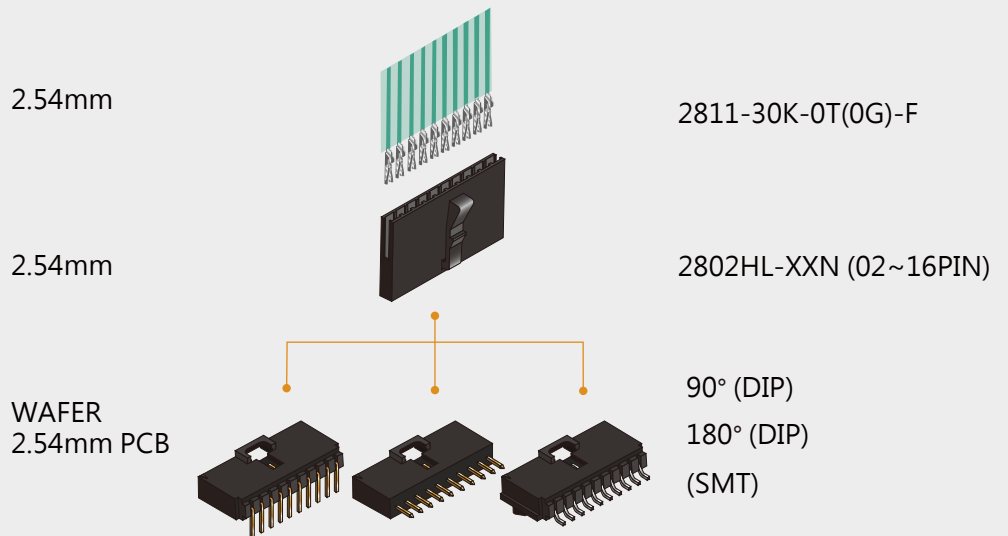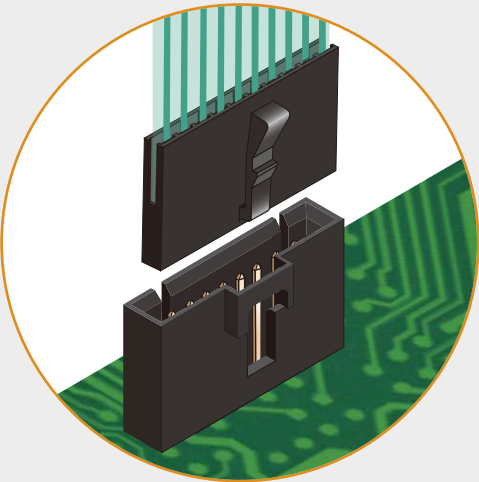
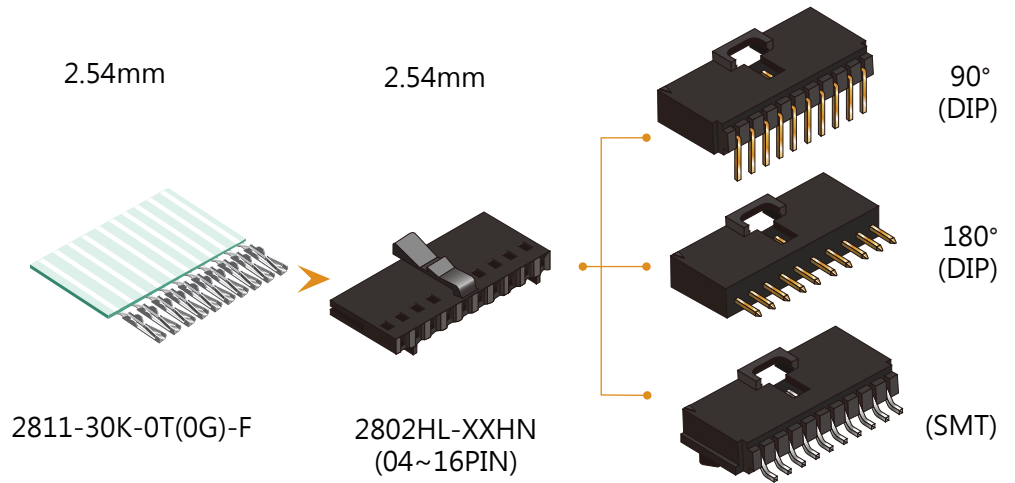
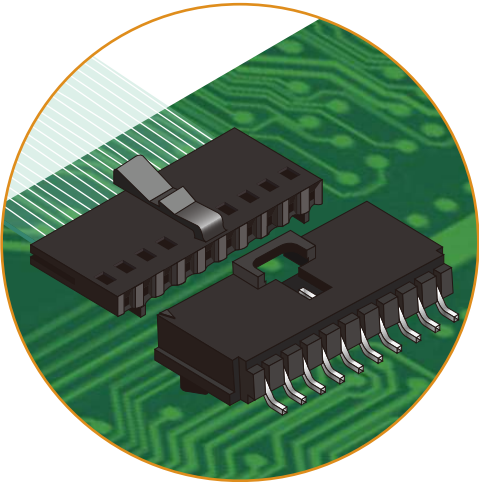


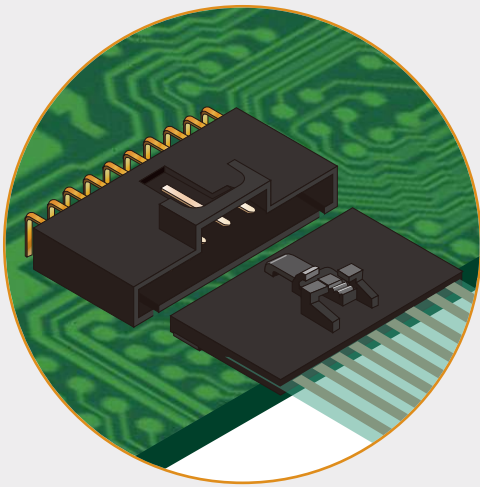

90°
(DIP)

180°
(DIP)

(SMT)




2.54mm


2.54mm

2804HLB-XXN
(04~26PIN)

2804-10K-0T(0G)-F

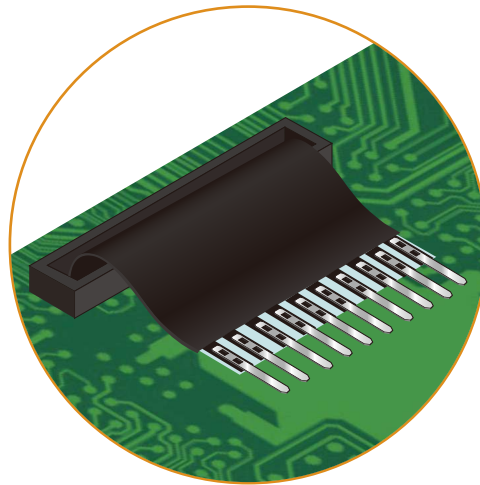


2.54mm

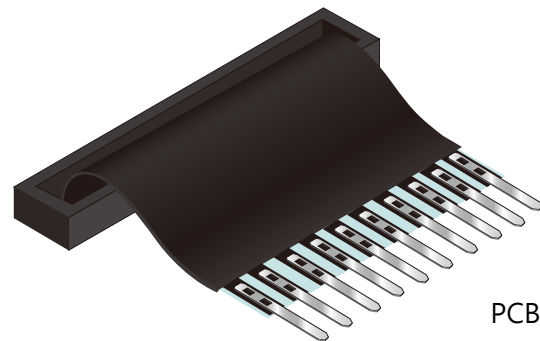


2808-30K-0T-WM

PCB

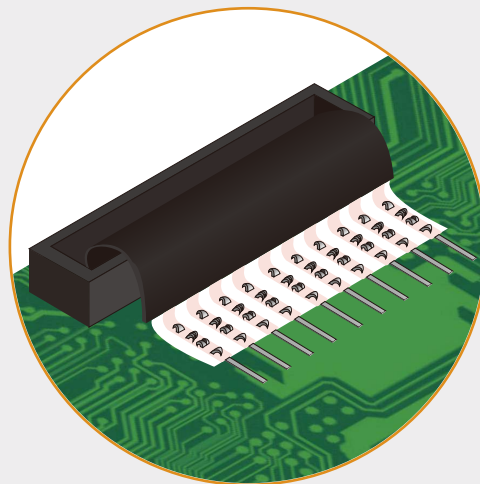


2.54mm

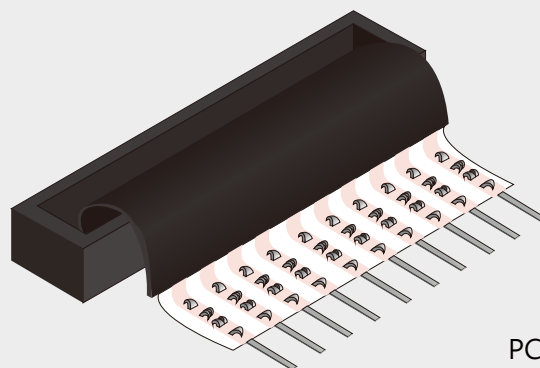


2808-30K-0T-LM

PCB

2.54mm Pitch

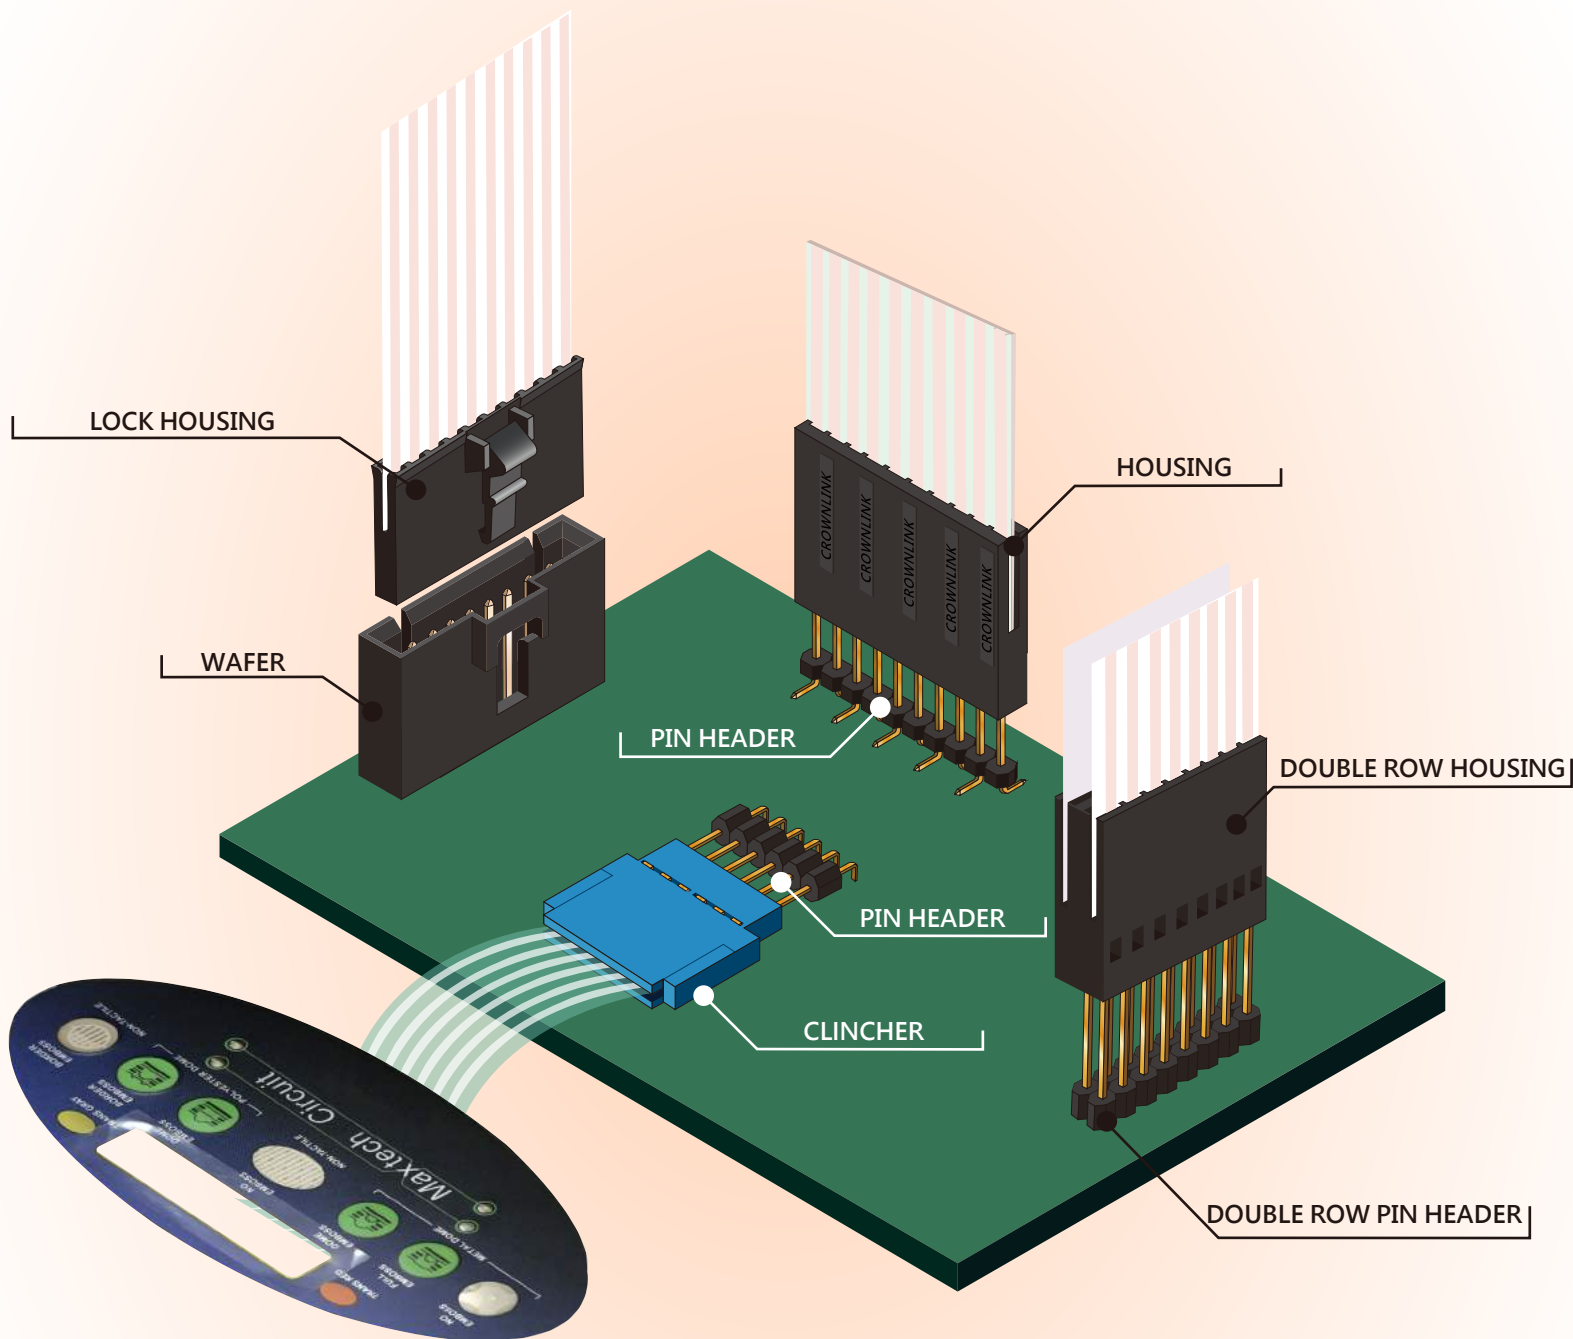


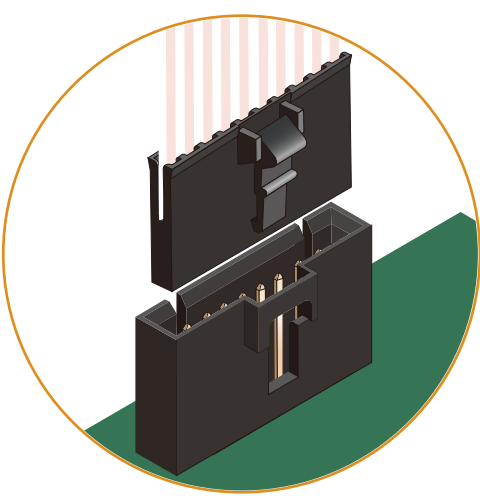

2.54mm

2.54mm


WAFER
2.54mm PCB

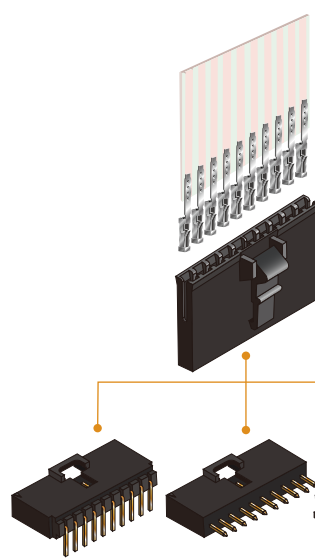

2806P-15K-0T(0G)-FH

2806HLC-XXNH (02~30PIN)


90° DIP
180° DIP
SMT

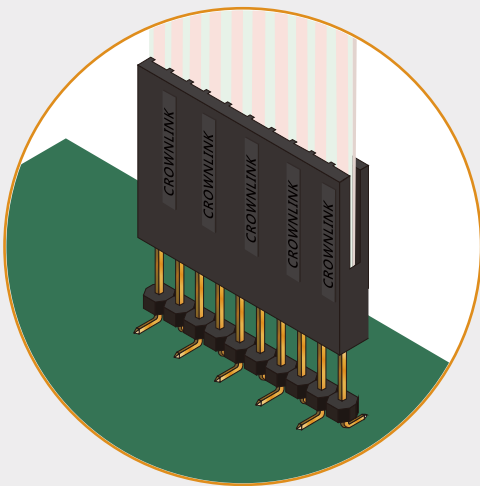

2.54mm

2.54mm


PIN HEADER
2.54mm PCB

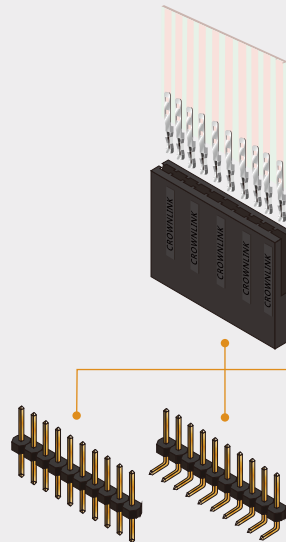

2802-30K-0T(0G)-
F2808-30K-0T(0G)-F
2811-30K-0T(0G)-F

2802H-XX (02~26PIN)


90° DIP
180° DIP
SMT

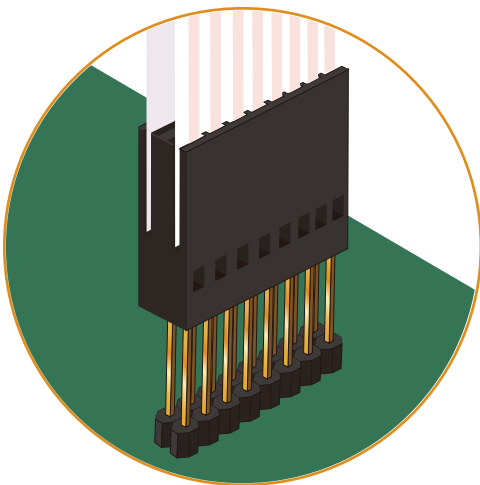

2.54mm

2.54mm


PIN HEADER
2.54mm PCB

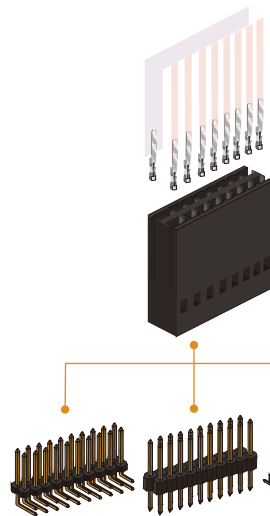

2802-30K-0T(0G)-F

2802H-XXDNS (04~50PIN)


90° DIP
180° DIP
SMT

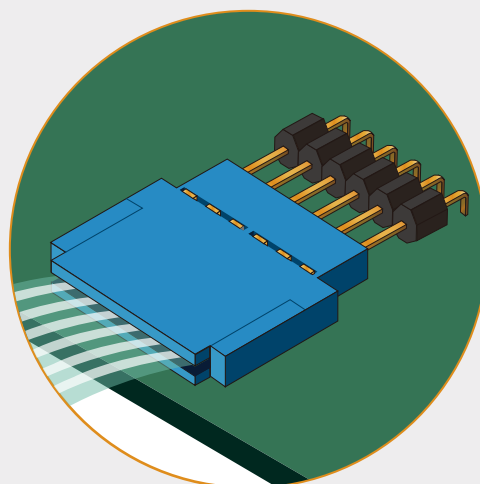


2.54mm

2.54mm

FFC
FPC



90°
(DIP)



180°
(DIP)



(SMT)