



Semi-automatic Auger Filler (1.5KW servo)

- ◇ Type: PE-450
- ◇ Metering Range : $\leq 2\text{kg}$
- ◇ Accuracy: $\pm 0.3\text{-}1\%$ (depend on product property and filling weight)
- ◇ Speed: ≤ 15 bag/min (depends on worker handle speed)
- ◇ Hopper: 50L (split hopper with laxon on top)
- ◇ Voltage: Single-phase 230V 50Hz
- ◇ Servo Motor: 1500W
- ◇ Agitating Motor: 550W
- ◇ Machine Material: SUS304

Main components

- * Touch Screen : Eview5.7"
- * PLC: Panasonic
- * Servo motor: Panasonic
- * Inverter: Schneider
- * Bearing: SKF
- * Level Sensor: Tuning Fork
- * Lower Voltage Electricals: Schneider, etc

Remarks :

- * The contact parts are all high polished, under food standard.
- * Fast-take auger and horizontal semi-open hopper for easy clean.



BAG SEALER.




Continuous heating sealer:

Speed: 24m/min.

Material: Power steel with Painted.

CAPPER TG

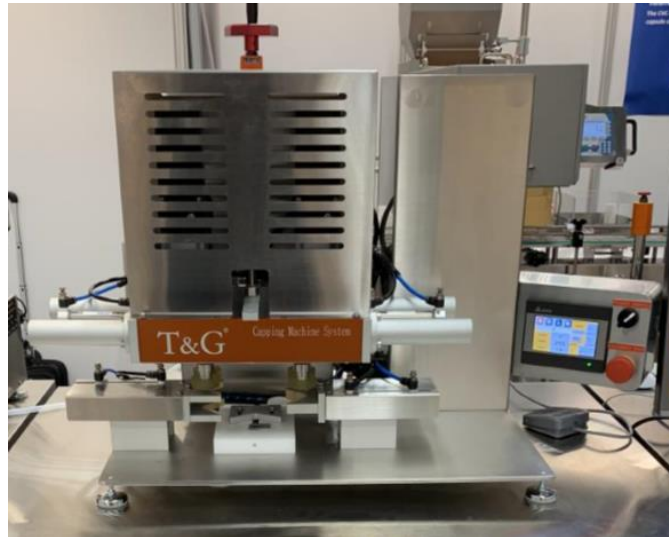

Model name	CP-015SS Semi-automatic Side-wrap Capping Machine (with twin servomotors)
Power Requirement	220V, 50/60HZ, Single Phase
Capping Capacity	About 10-12 pcs/min (vary from products)
Machine Dimension	850(L) x 480(W) x 650(H) mm

INDUCTION SEALER



500W
110V or 220V/1ph
6A/3A
15~120
Air Cooled
IGBT
30~60
340x220x315
20


LABELER PE-50



1. SPECIFICATIONS

Voltage	220 Volts
Phases	Single
Current	2.5 Amperes
Frequency	50 Hz
Consumption	250 Watts
Gap Sensor	RIKO SU07-N
Trigger Sensor	RIKO RN04-N
Label Dispensing Motor	25W AC Motor
Wrap Roller Motor	25W AC Moto
Machine Dimension	(L)605mm × (W)523mm × (H)775mm
Machine Weight	50 Kgs

2. LABEL COPY POSITION DIAGRAM

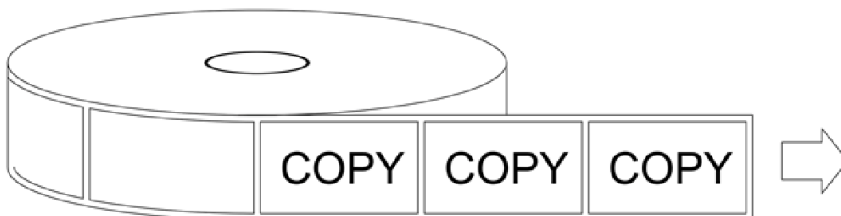

※ Right side of copy dispenses first.