


Touch screen 15" Touch screen 15" Écran tactile 15"


INDUSTRY 4.0 READY



Posizionatore automatico
Automatic positioner
Palpeur automatique

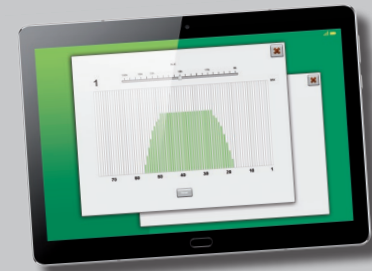


Personalizzazione macchina con controllo remoto, visualizzazione statistiche ed assistenza virtuale
Custom machine with remote control, statistics display and virtual assistance
Machine personnalisée avec télécommande, affichage des statistiques et assistance virtuelle

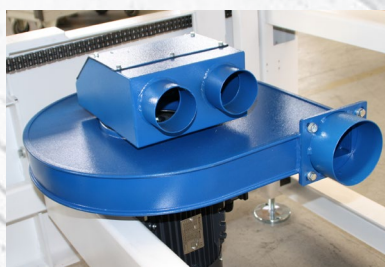

Depressore interno (taratura variabile, invertir)
Internal vacuum fan (setting variable, invertir)
Ventilateur dépression à l'intérieur (réglage variable, invertir)



Scarpette di pressione
Pressure shoes
Sabots presseurs



Scarpette di pressione (pneumatica)
Pressure shoes (pneumatic)
Sabots presseurs (neumatique)




Soffiatore compatto
Compact blower
Soufflette compacte




Spazzola pulizia pezzi
Brush for panels cleaning
Brosse nettoyage des pièces



Spazzola pulizia tappeto
Brush for feed belt cleaning
Brosse nettoyage du tapis




Spazzola rusticatrice
Structuring brush unit
Brosse rusticatrice



Grit-set elettronico
Electronic grit-set
Grit-set électronique




Sistema di bloccaggio manuale
Manual locking system
Système de verrouillage manuel




Sistema on-off pneumatico
On-off pneumatic system
Système on off pneumatique

Transfer ingresso /uscita
Transfer infeed/outfeed
Transfert entrée/sortie



Rulliera folle ingresso/uscita
Roller conveyor infeed/outfeed
Convoyeur à rouleaux entrée / sortie



Rulliere di estensione
Rollers table extension
Rouleaux de prolongement table




MACCHINA BASE
BASIC MACHINE
MACHINE DE BASE

- ✓ Versione a 2/3 operatori
Version 2/3 operators
Version à 2/3 groupes
- ✓ Altezza fissa 980mm
Fixed height 980mm
Hauteur table fixe 980mm

- ✓ Larghezza utile di lavoro:
Working width:
Largeur utile de travail:

650 mm 1100 mm 1300 mm
1350 mm 1650 mm

- ✓ Spessore di lavoro min/max 3-160mm
Working thickness min/max 3-160mm
Épaisseur de travail min/max 3-160mm
- ✓ Dimensione nastri abrasivi (sviluppo) 1900mm
Abrasive belt (length) 1900mm
Dimension de la bande abrasive (développement) 1900mm
- ✓ Soffiatore compatto
Compact blower
Soufflettes compactes
- ✓ Inverter controllo velocità avanzamento
Inverter for feed speed control
Convertisseur vitesse d'entraînement

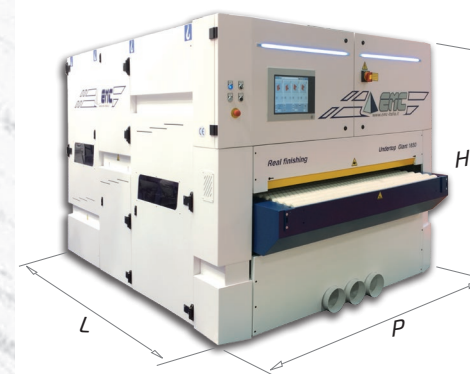

Undertop Line

Layout dedicato
Dedicated layout
Layout dédiée



Need Help?

No problem. Just connect the electronic cable we gave you to the machine. EMC technician will do the rest of the job.

EMC si riserva il diritto di modificare le specifiche tecniche - EMC se réserve le droit de modifier les spécifications techniques - Printed by Nuova Grafica Imola



Undertop Line

650-1100-1300-1350-1650

High production in 4 meters only



Via Brodolini, 23 - 40026 Imola (Bo) Italy
Tel. +39 0542 688034 - Fax +39 0542 643959
E-mail: info@emc-italia.it



f @emcrealfinishing

YouTube emcsrl

www.emc-italia.it



Undertop Line

**Flexibility of configuration,
the choice is yours!**

The highest quality
finishing



650 mm

1100 mm

1300 mm

1350 mm

1650 mm

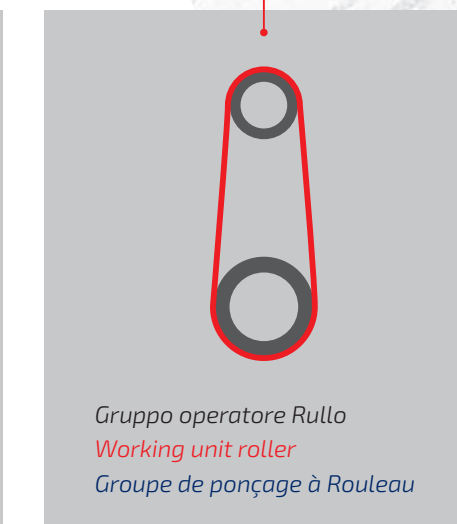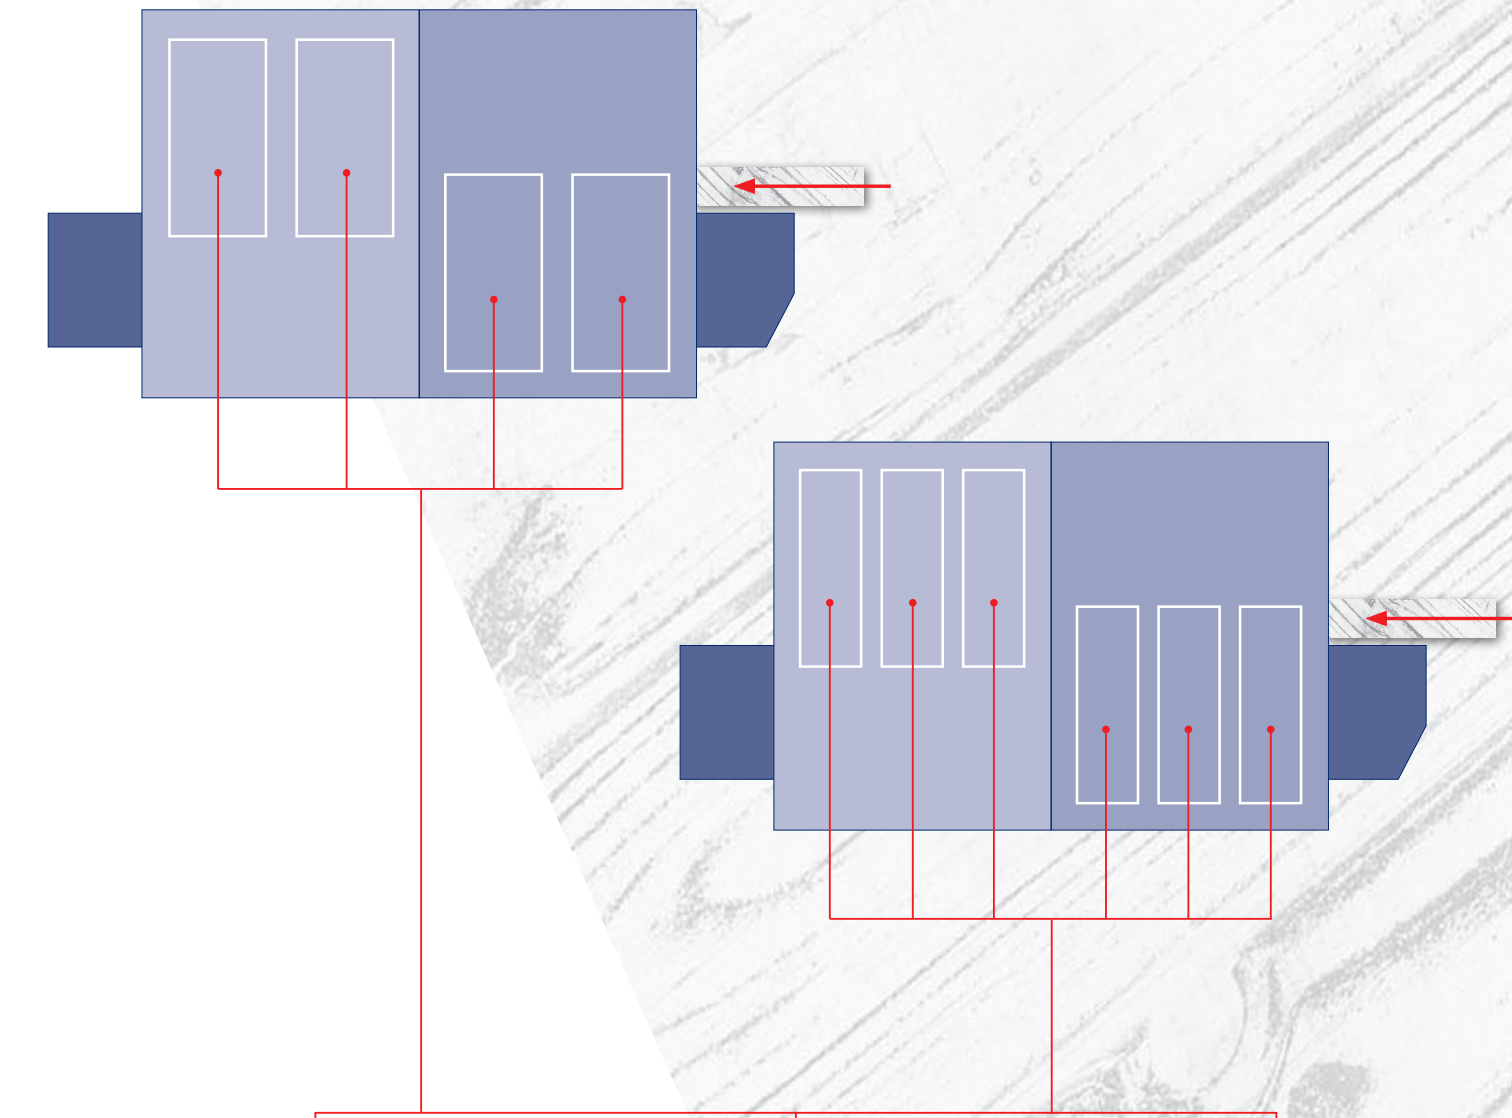

Industrial top and bottom
calibrating sanding line