



# HELIOS · PREISSER

## DIGI-MET® QuickStart Electronic



1

### QuickStart-Electronic with the QuickLock-Function for only one zero setting

All digital calipers with the QuickStart-Electronic also have the **QuickLock** Function. Only set the zero position once, zero position remains stored for all further measurements. When the **QuickLock** Function is activated a lock symbol appears in the display, this ensures that the zero position is protected against any operating error caused by accidental usage of the operating keys (keys are locked). The caliper is immediately ready for measurement; once the caliper is switched ON or the slide is moved, the display is automatically activated.

The need to reset to zero as with a conventional caliper once it is switched on is obsolete.


#### Conventional

① Switch ON

② Close the measuring jaws


③ Set to zero

④ Result of measurement

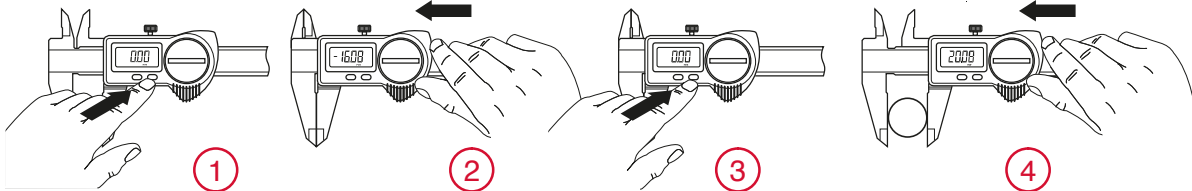

#### QuickStart Electronic


①

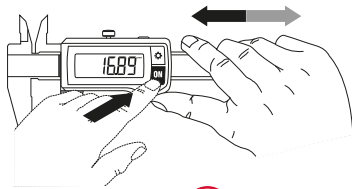

①

Press the ON key or move the slide

②

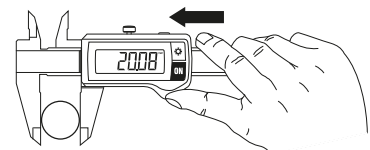


④

## DIGI-MET® QuickLock-Function



1. Set to zero

2. Activate the QuickLock Function

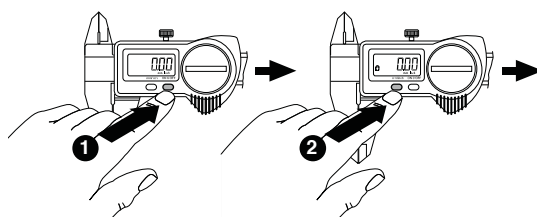


#### Advantages of the QuickLock Function

- The caliper is immediately ready for measurement
- Lock symbol appears in the display. This ensures that the zero position is protected against any operating error caused by accidental usage of the operating keys (keys are locked)



## 1326i DIGI-MET® Pocket calipers IP67 with integrated wireless

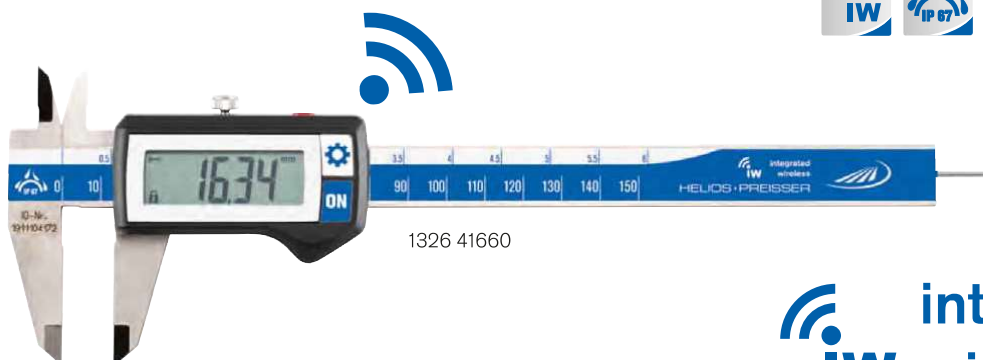

1326 41660

## integrated iw wireless

Wireless Data Transmission

### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 11 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurements

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Integrated Wireless

### Delivery

- Plastic case



More information on our i-series and Integrated Wireless on page 252

	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm			EUR
■	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 41660	218.00
■	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1326 41760	218.00
■	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1326 41860	279.00
■	0 - 300	0 - 12	65	2.5	0.01	.0005	0.03	none	1326 42260	337.00



1998780

### Accessories


	Order no.	List price
Battery, 3V-Lithium, CR 2032	0220 704	3.90
i-Stick USB-receiver for Integrated Wireless	1998 780	95.00

Integrated Wireless is intended to be sold within the European Economic Area only



# HELIOS · PREISSER

## 1320 DIGI-MET® Pocket calipers

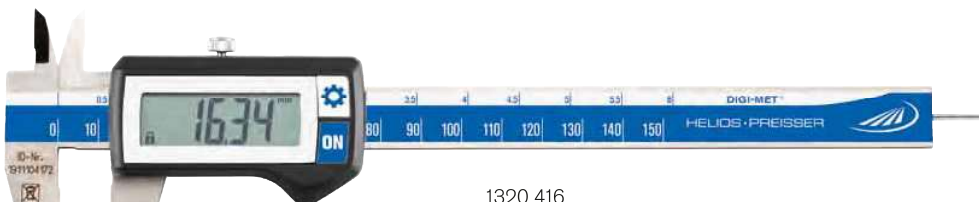

1320 416



DIN  
862

1



1320 517



DIN  
862

### Model

- Inductive measuring system, resistant to moisture and sweat
- Stainless steel
- LCD display 11 mm without data output, 7.5 mm with data output
- DIN 862
- Locking screw
- Inside cross points

- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value 1320 4xx only)
- Variable data output RS 232 + Digimatic + USB (1320 5xx only)

### Delivery

- Plastic case



Video  
electronic

	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm			EUR
<b>Without data output</b>										
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 416	115.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1320 417	115.00
<b>With DATA VARIABLE</b>										
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 516	145.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1320 517	145.00
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1320 519	185.00
▪	0 - 300	0 - 12	65	2.5	0.01	.0005	0.03	none	1320 522	235.00
<b>With DATA VARIABLE, with extra long cross points (40 mm)</b>										
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 518	395.00

More information on 1320 518 on page 48



1998720



1998501



1997501

### Accessories

	Order no.	List price
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to USB	1998 720	72.00



= QuickLock



= QuickStart



= Waterproof acc. IP



= Data output



= DIN



## 1326 DIGI-MET® Pocket calipers IP67



1326 416

### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 11 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)

### Delivery

- Plastic case



Video  
electronic

	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price EUR
	mm	inch	mm	inch	mm	inch				
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 416	159.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1326 417	159.00
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1326 418	225.00
▪	0 - 300	0 - 12	65	2.5	0.01	.0005	0.03	none	1326 422	285.00

### With carbide-tipped measuring jaws

▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 914	343.00
---	---------	-------	----	-----	------	-------	------	-----------	----------	--------

### Accessories

Battery, 3V-Lithium, CR 2032

### Order no.


0220 704

### List price

EUR

3.90

## 0220 Additional depth measuring base



### Model

- Stainless steel
- Bridge length: 75 mm
- Dimensions: 75 x 6.5 mm



### Order no.

0220 705

### List price

EUR

22.40



# HELIOS · PREISSER

## 1326 DIGI-MET® Pocket calipers IP67 with data output



1



### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 7,5 mm
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Plastic case

	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm			EUR
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 516	159.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1326 517	159.00
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1326 518	235.00



1998720



1997501



1998501

### Accessories

Battery, 3V-Lithium, CR 2032

Data cable DATA VARIABLE to RS232

Data cable DATA VARIABLE to digimatic

Data cable DATA VARIABLE to USB

### Order no.

0220 704

1997 501

1998 501

1998 720

### List price

EUR

3.90


50.00

64.00

72.00




## 1348 DIGI-MET® Universal calipers

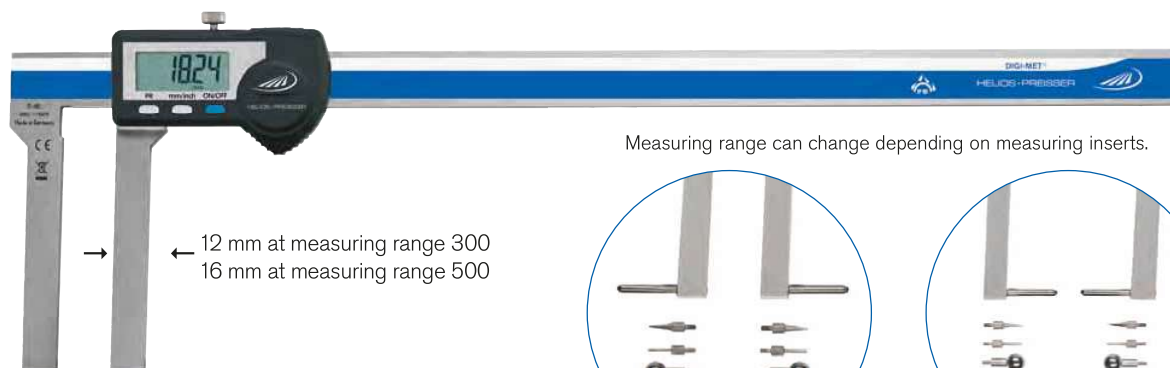


Measuring range can change depending on measuring inserts.

→ 12 mm at measuring range 300  
← 16 mm at measuring range 500



for internal measurements



for external measurements

### Model

- Stainless steel
- Factory standard
- Protection class IP65
- LCD display 10 or 12.5 mm
- Locking screw
- For internal and external measurements
- Individually adaptable on problematic tasks through measuring inserts with thread M 2.5

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden box
- Without measuring inserts  
(correct measuring inserts with thread M 2.5 see pages 125 - 128)

	Measuring range		Jaw length		Reading		Error limit	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm		EUR
	0 - 300	0 - 12	90	3.5	0.01	.0005	0.06	1348 722	607.00
	0 - 500	0 - 20	100	4.0	0.01	.0005	0.06	1348 728	778.00



1998720

1998501

1997501

### Accessories

- Battery, 3V-Lithium, CR 2032
- Data cable DATA VARIABLE to RS232
- Data cable DATA VARIABLE to digimatic
- Data cable DATA VARIABLE to USB

### Order no.

### List price EUR

0220 704

1997 501

1998 501

1998 720

3.90

50.00

64.00

72.00



# HELIOS · PREISSER


## 1326 Universal pocket caliper „Pocket Talent“



1



Incl. setting standard

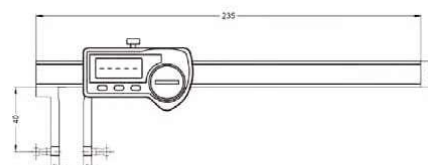

### Model

- Stainless steel
- Protection class IP67
- Factory standard
- LCD display 7.5 mm
- Locking screw
- For internal and external measurements
- Individually adaptable on problematic tasks through measuring inserts with thread M 2.5

### Functions


- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery


- Wooden box
- Measuring inserts No. 0710161\* and 0710177\*  
Planar surface Ø 4.8 mm /  
Ball inserts Ø 5.0 mm
- Setting standard

	Measuring range		Jaw length	Reading		Order no.	List price
	mm	inch		mm	inch		
	0 - 150	0 - 6	40	0.01	.0005	1326 932	359.00


Our all-round talent can be combined with all common types of measuring inserts for indicators with a standard M 2.5 thread. This way, the Pocket Talent offers you various solutions for numerous measurement applications.




0710161\*




0710177\*



0710166



0710167



0710163



1998720



1998501



1997501



Product video

### Accessories


	Order no.	List price
		EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Measuring inserts M 2.5	0710 161	4.30
Measuring inserts M 2.5	0710 163	6.50
Measuring inserts M 2.5	0710 166	5.90
Measuring inserts M 2.5	0710 167	4.10
Measuring inserts M 2.5	0710 177	8.20
Setting standard for Pocket Talent	1326 990	39.00
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to USB	1998 720	72.00







## 1326 DIGI-MET® Pocket calipers for specific measuring tasks

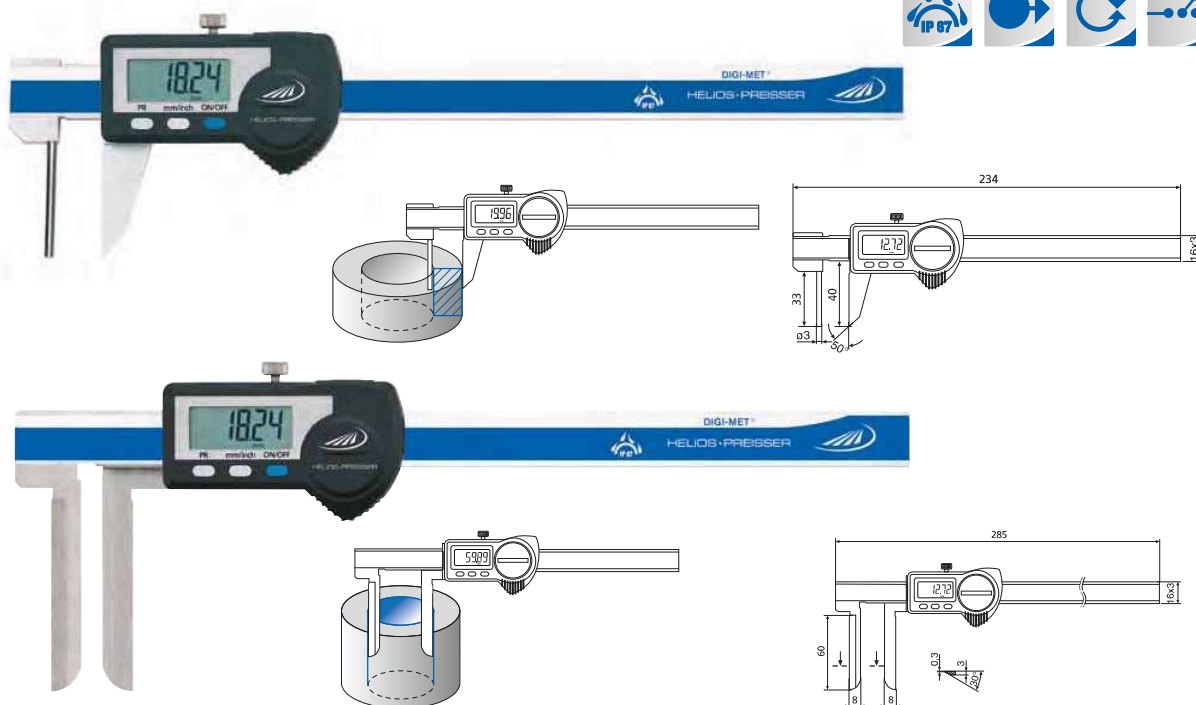

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start
- Quick-Lock (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

	Measuring range		Jaw length		Reading		Order no.	List price EUR
	mm	inch	mm	inch	mm	inch		
Wall thickness caliper								
	0 - 150	0 - 6	40	1.6	0.01	.0005	1326 918	503.00
With long cross jaws for inner measurements								
	10 - 200	0.4 - 8	60	2.4	0.01	.0005	1326 930	653.00

### Accessories



	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to USB	1998 720	72.00










# HELIOS · PREISSER

## 1326 DIGI-MET® Pocket calipers for specific measuring tasks



1

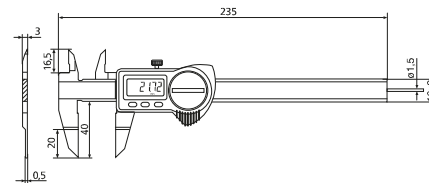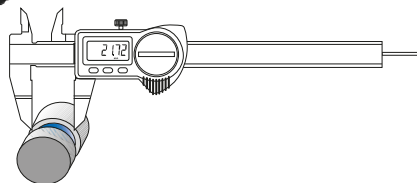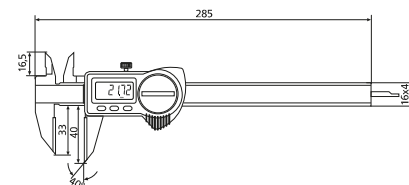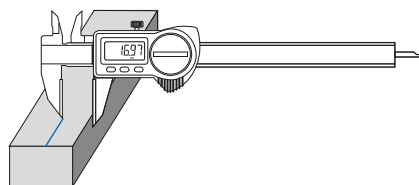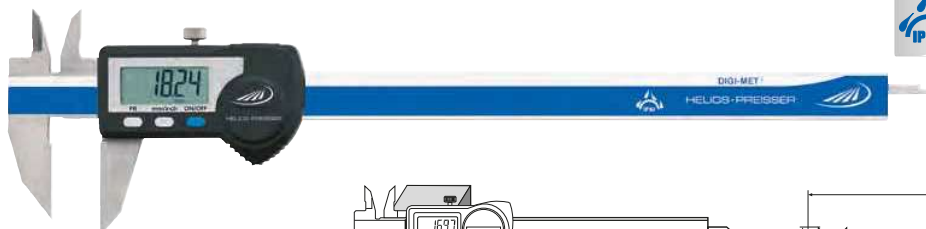

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust


- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

	Measuring range		Jaw length		Reading		Depth gauge	Order no.	List price EUR
	mm	inch	mm	inch	mm	inch			
Scribing caliper with carbide-tipped outer measuring surfaces									
	0 - 200	0 - 8	33	1.3	0.01	.0005	rectangular	1326 912	320.00
With flat measuring surfaces e.g. for outer recesses									
	0 - 150	0 - 6	40	1.6	0.01	.0005	round 1.5	1326 920	545.00

### Accessories



1998720

1997501

1998501

Battery, 3V-Lithium, CR 2032

Data cable DATA VARIABLE to RS232

Data cable DATA VARIABLE to digimatic

Data cable DATA VARIABLE to USB

Order no.

List price

EUR

0220 704

3.90

1997 501

50.00

1998 501

64.00

1998 720

72.00



= QuickLock



= QuickStart



= Waterproof acc. IP




= Data output



= DIN



## 1326 DIGI-MET® Pocket calipers for specific measuring tasks

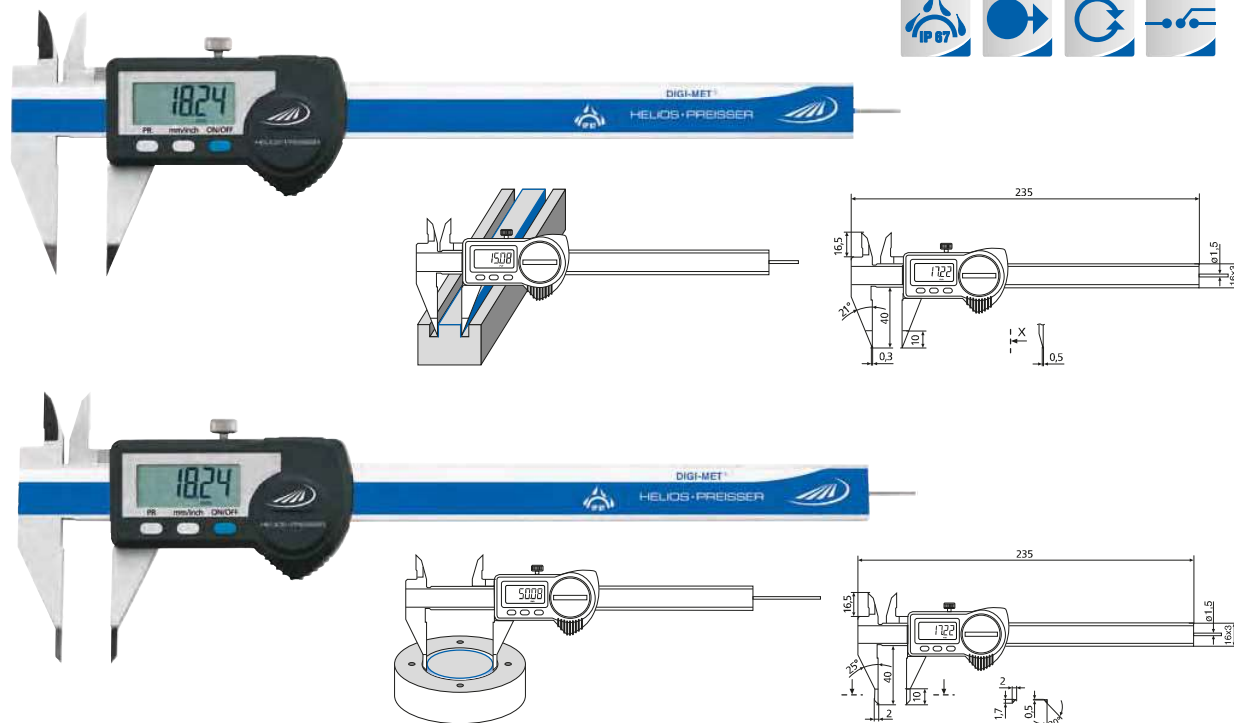

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start
- Quick-Lock (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

	Measuring range		Jaw length		Reading		Order no.	List price EUR
	mm	inch	mm	inch	mm	inch		
<b>With pointed jaws</b>								
	0 - 150	0 - 6	40	1.6	0.01	.0005	1326 916	396.00
<b>With fine measuring tips</b>								
	0 - 150	0 - 6	40	1.6	0.01	.0005	1326 922	447.00



1998720

1998501

1997501

### Accessories

	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to USB	1998 720	72.00




# HELIOS · PREISSER

## 1326 DIGI-MET® Pocket calipers for specific measuring tasks



1

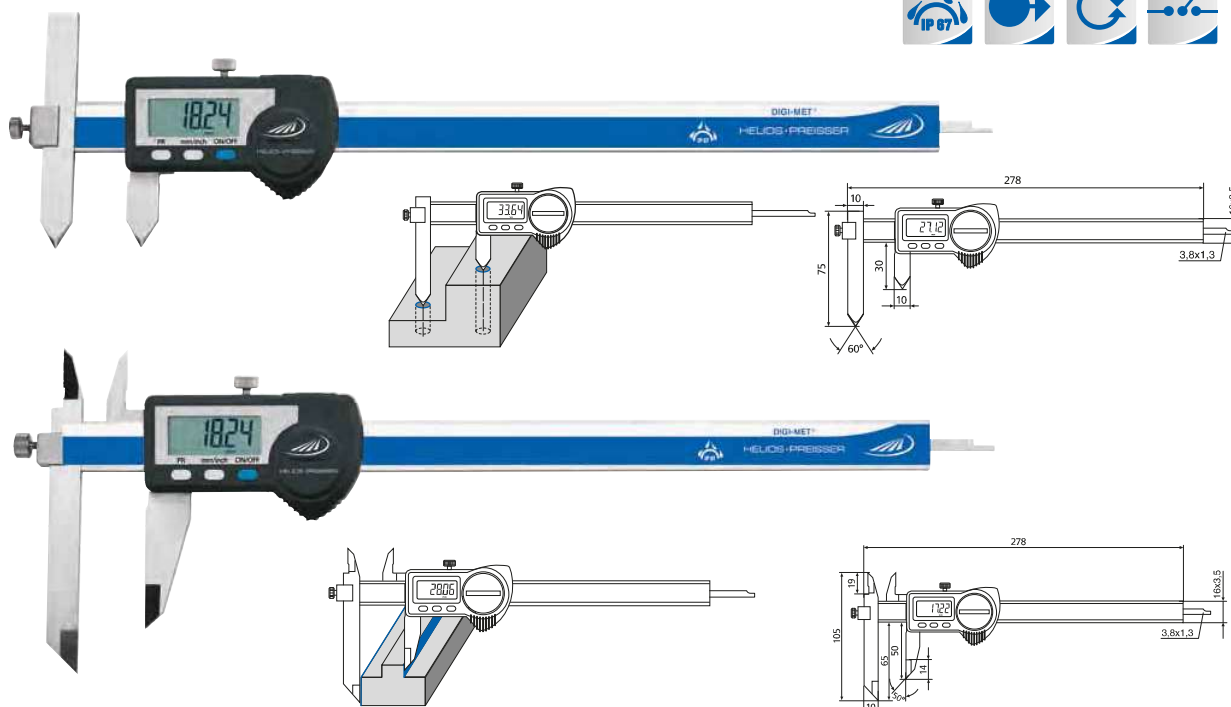

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output  
RS 232 + Digimatic + USB

### Delivery

- Wooden case

	Measuring range		Jaw length		Reading		Order no.	List price EUR
	mm	inch	mm	inch	mm	inch		
Moving jaws for measuring the distance between bores								
	10 - 210	0.4 - 8.3	75	3.0	0.01	.0005	1326 924	443.00
Moving jaws + cross tips								
	0 - 200	0 - 8	65	2.5	0.01	.0005	1326 928	476.00



1998720

1998501

1997501


### Accessories

	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to USB	1998 720	72.00





## 1326 DIGI-MET® Pocket calipers for specific measuring tasks

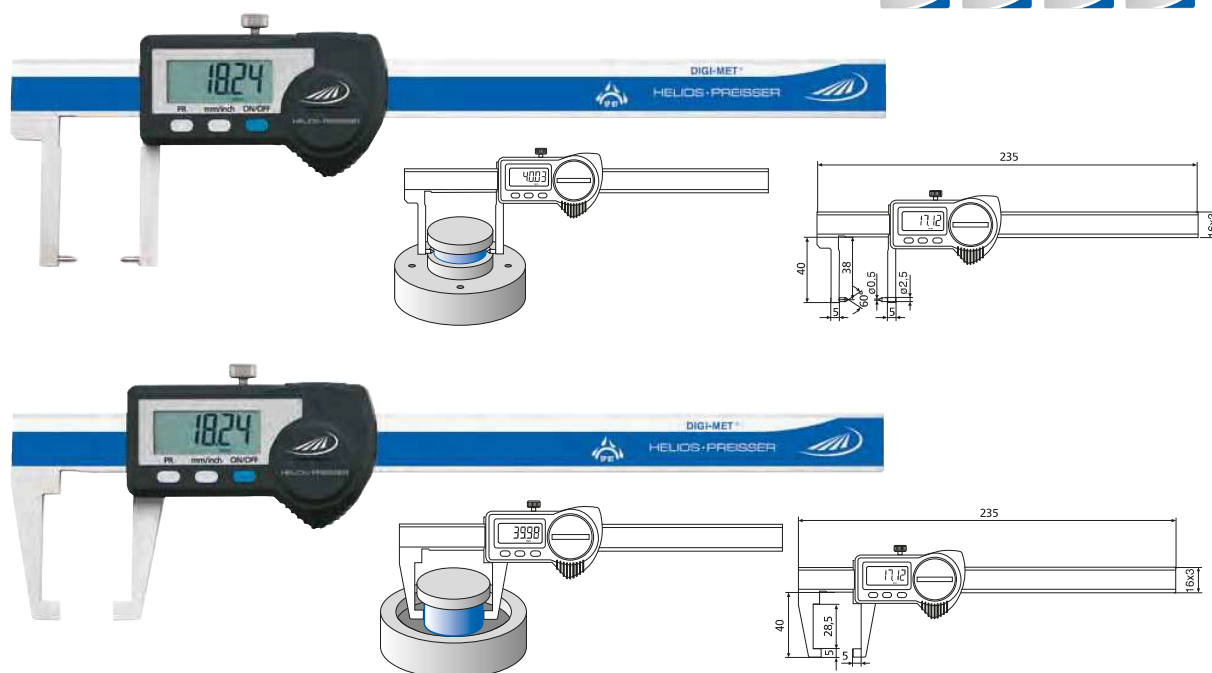

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

	Measuring range		Jaw length		Reading		Order no.	List price EUR
	mm	inch	mm	inch	mm	inch		
Measuring tips angled inwards								
	0 - 150	0 - 6	40	1.6	0.01	.0005	1326 904	573.00
Measuring jaws angled inwards								
	0 - 150	0 - 6	40	1.6	0.01	.0005	1326 908	489.00

### Accessories



1998720

1997501

1998501

	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
data cable DATA VARIABLE to RS232	1997 501	50.00
data cable DATA VARIABLE to digimatic	1998 501	64.00
data cable DATA VARIABLE to USB	1998 720	72.00







# HELIOS · PREISSER

## 1326 DIGI-MET® Pocket calipers for specific measuring tasks



1

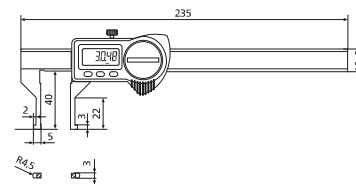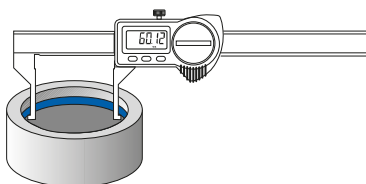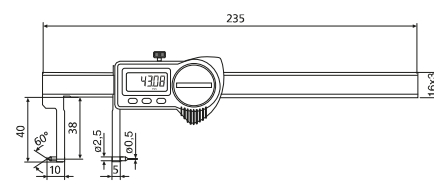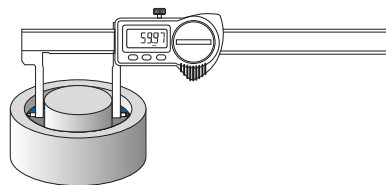

### Model

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Inside cross points
- Locking screw

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Wooden case

	Measuring range		Jaw length		Reading		Order no.	List price EUR
	mm	inch	mm	inch	mm	inch		
Measuring tips angled outwards								
	20.5 - 170	0.8 - 6.7	40	1.6	0.01	.0005	1326 906	568.00
Measuring jaws angled outwards								
	10.5 - 160	0.4 - 6.3	40	1.6	0.01	.0005	1326 910	562.00

### Accessories



	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to USB	1998 720	72.00

