


HIGH PRESSURE AIR DRYER 40 BAR

EM AIR

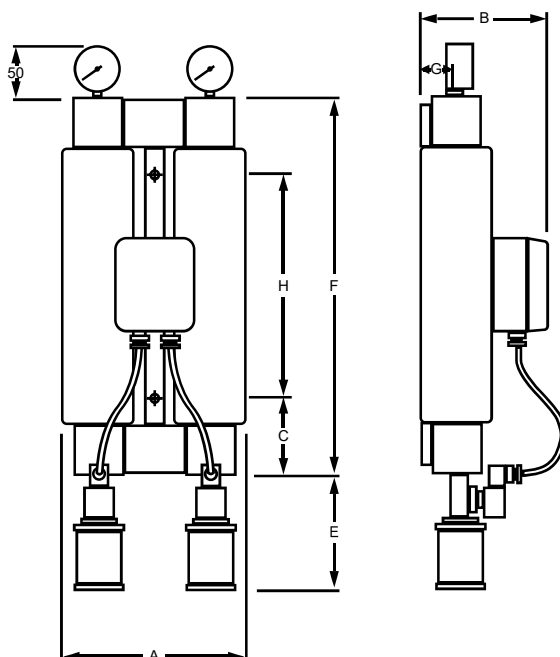

Technical Data

- 16 or 40 bar
- Max. 50°C
- 7 - 620 m³/h
- Dewpoint: -20°C up to -60°C
- 230 V, 50 or 60Hz

We offer 6 different heatless adsorption dryers for compressed air up to 40 bar. For these dryers we recommend our HD high pressure filter housings as pre and after filter.



HD Filter
Housing



Prefilter
MF



Afterfilter
PE



Siemens PLC
230RC

Model	Flow m³/h	Connection in/out	Dimensions (mm)						
			A	B	C	D	E	F	G
EM 10	14,4	3/8"	190	135	95	200	428	40	235
EM 15	18,0	3/8"	190	135	305	200	578	40	175
EM 25	23,4	3/8"	190	135	305	200	778	40	375
EM 40	35,4	3/8"	203	155	305	200	778	50	375
EM 60	58,8	3/4"	292	165	328	260	873	65	385
EM 90	78,6	3/4"	310	177	320	260	1000	70	520

Based on specific operation conditions. For accurate dimensioning contact Ultrafilter.