PRODUCT LAUNCH

OUR NEW MELT FLOW INDEXER



ie

Our most compact entry model

A Melt Flow indexer with **high end measuring** relevant components and highest precision by using **minimal automation** modules.





www.goettfert.com



Highest precision – minimal automation!

- MFR and MVR measurement according ISO1133 und ASTM D1238 – Procedure A – B - C
- Determination of Melt Density
- High resolution displacement transducer
 0,003mm/Impulse
- Handling of measurement via single multifunctional Button
- Display of the Parameter menu and measurement results via VNC – possible on various PC's







Multifunctional Button

-akuma

COLOR	FUNCTION
Red	Temperature not reached / Device is heating
Red flashing	Error
Green	Temperature reached / Device is ready
Green flashing (long OFF short ON)	Melting time is running
Green flashing (long ON short OFF)	Measurement is running

OPERATION	FUNCTION
Green + short pressing	Starting measurement
Green flashing (long OFF short ON) + pressing button for 2 sec.	Cancel melting time
Green flashing (long ON short OFF) + pressing button for 4 sec.	Cancel measurement








Our most compact entry model

- Full featured and precise Melt Index Tester
- Compact design space saving installation
- Flexible use at various locations
- Cost efficient solution

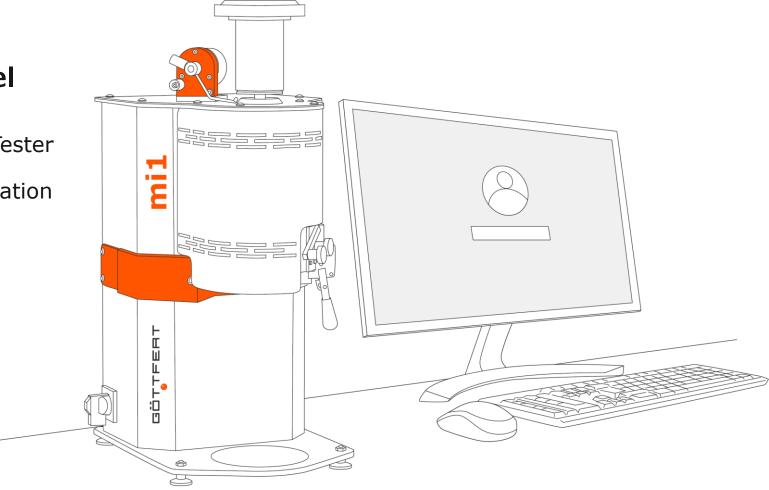






Temperature profile

- Test temperature profile, controlled by two heater elements/zones
- Temperature profile according ISO 1133 Part 2
- Precise temperature display
- Resolution via 16-bit A/D converter rang
- 0 to 320 °C: 0.01 °C
- 320 to 500 °C: 0.1 °C (option)
- Spatial temperature distribution over used barrel range (0-70 mm before die)
- 0.2 °C (60 ... 400 °C)
- 0.3 °C (400 ... 500 °C) (option)
- 5 calibration settings for set temperatures
- High safety standard both heater controlled by a watchdog circuit

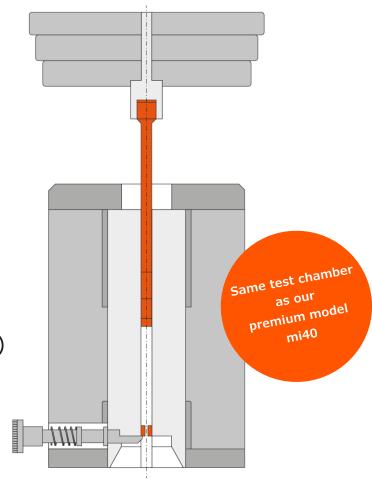




www.goettfert.com



mi1 Measurement

ISO 1133 Method A

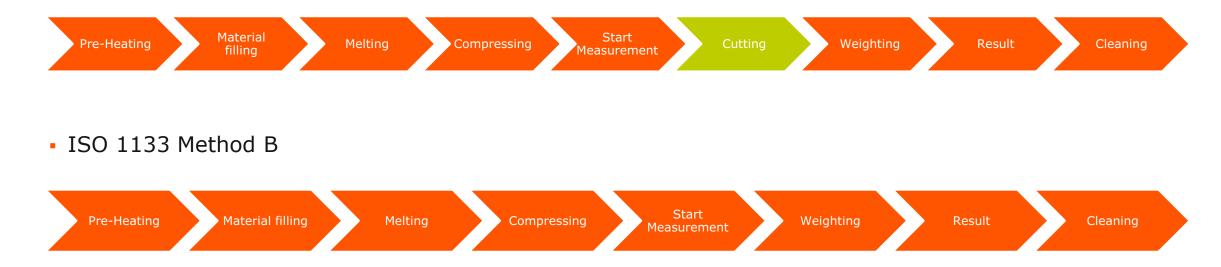





Data sheet

- High-resolution position transducer resolution 0.003 mm/Impulse
- Temperature resolution 0.01 °C
- High-precision timer with a resolution better than 0.001 s
- 5 calibration settings for temperature
- Storage of up to 500 parameter sets with 3000 measurements each, as a stand-alone instrument
- Electronic timer, freely programmable ON/OFF switch of the heaters
- Intelligent service monitoring
- Multifunctional button easy handling
- Flexible Use with various PC's
- Intrinsic Viscosity





Cleaning and filling tools

Standard Accessoires Manual cleaning set Die cleaning tool • Funnel for an optimal filling of the barrel

Optional tools

Plug gauge

- Battery cleaning device
- Feeding tools for low viscosity test materials





WWW.GDETTFER т.сом



Integrated Interfaces

- FTP client data can be transferred directly via a network
- Ethernet connection (LAN, TCP/IP, VNC, Web-Server)
- Integrated Web-Server
- Built-in USB-connection (data stick) for data back-up
- Network printing in stand-alone modus







serviceCONNECT

Fast support via remote access

- Preferred service processing
- Quick and easy registration of your test device
- Overview and tracking of your service requests, information on status
- Overview of all GÖTTFERT devices
- Documents relating to the device, such as operating instructions, circuit diagrams, spare parts lists
- Easy and fast communication with chat and video function
- Communication with GÖTTFERT via PC and Smartphone
- Direct line to our service experts
- Fast reaction times thanks to mobile working directly on site at the machine





www.goettfert.com



serviceCONNECT

Fast support via remote access

- Periodic maintenance (according point 4 & 5)
- Warranty extension to 24 month
- Labor and travel expenses for scheduled maintenance
- Access to serviceCONNECT
- Priority handling for trouble shooting
- Software and firmware updates
- 3% discount on spare parts
- 50% discount on our workshops





