



Hydraulic jacks & accessories
Hydrauliske donkrafte & tilbehør





Index

Single acting jacks 8.4
Aluminum jacks 8.5
Double acting jacks..... 8.6
High double acting jacks..... 8.7
Low profile jacks 8.8
Low profile kit..... 8.8
Flat body jacks 8.9
Flat body jack kits..... 8.9
Hollow jacks - Single 8.10
Hollow jacks - Double..... 8.11
Lock nut jacks..... 8.12
Threaded jacks..... 8.13
High precision jacks..... 8.13
Pull jacks 8.14
Spreader..... 8.14
Hydraulic hand pumps 8.15
Air hydraulic pumps 8.16
Motorized pumps:..... 8.17
Air Pumps..... 8.17
Electrical pumps 8.17
Gas and diesel pumps 8.17
BVA accessories:..... 8.18
Coupler 8.18
Hoses..... 8.18
Hydraulic Pressure gauge..... 8.19
Fitting gauge adapter..... 8.19
Manifolds 8.19
Manifold - Split flow 8.19
Cylinder saddle 8.20
Clevis..... 8.20
Hydraulic oil 8.20
Base..... 8.20
Transport trolleys - Turnable 8.21
Transport trolleys - Fixed 8.21

Indhold

Enkeltvirkende donkrafte..... 8.4
Aluminiums donkrafte..... 8.5
Dobbelt virkende donkrafte..... 8.6
Høje dobbeltvirkende donkrafte..... 8.7
Lave donkrafte 8.8
Lave donkrafte sæt..... 8.8
Flade donkrafte 8.9
Flade donkrafte sæt..... 8.9
Donkrafte m. hulstempel - Enkelt..... 8.10
Donkrafte m. hulstempel - Dobbelt 8.11
Donkrafte m. låse-møtrik 8.12
Donkrafte m. gevind..... 8.13
Høj-præcisions Donkrafte 8.13
Trædonkrafte 8.14
Kiledonkraft 8.14
Hydrauliske håndpumper 8.15
Luftdrevne hydraulik pumper 8.16
Motoriserede pumper:..... 8.17
Luft pumper..... 8.17
Elektriske pumper..... 8.17
Benzin og dieselpumper 8.17
BVA tilbehør:..... 8.18
Kobling 8.18
Slanger..... 8.18
Hydraulisk Manometer..... 8.19
Manometer..... 8.19
Manifold 8.19
Manifold - Med åbne/lukket ventiler..... 8.19
Cylindersadel 8.20
Gaffelhoved..... 8.20
Hydraulikolie 8.20
Fod 8.20
Transportruller - Drejelig 8.21
Transportruller - Fast..... 8.21

Single Acting Jacks

- Solid steel body
- H-D return spring, for quicker retraction
- Capacity: 5 - 1000 tonnes
- Stroke: 25 - 362 mm
- Max. Operating pressure: 700 BAR
- Height: 92 - 838 mm (min. - max.)
- Also available in aluminum

Enkeltvirkende Donkrafte

- Solid stål cylinderhus
- Forstærket returfjeder, for hurtig sænkning
- Kapacitet: 5 - 1000 tons
- Slaglængde: 25 - 362 mm
- Max. Tryk: 700 BAR
- Højde: 92 - 838 mm (min. - max.)
- Kan også leveres i aluminium



Cylinder capacity	Art. No.	Type	Dimensions - mm			Oil capacity cc	Weight kg
			Stroke	Min. Height	Max Height		
5 Ton	11 01 0001	H0501	25	116	142	16	1.4
	11 01 0002	H0503	78	169	247	50	1.5
	11 01 0003	H0505	129	221	350	83	1.8
	11 01 0004	H0507	180	272	452	116	2.1
	11 01 0005	H0509	229	324	552	148	2.5
10 Ton	11 01 0006	H1001	25	92	117	36	1.8
	11 01 0007	H1002	51	124	174	74	2.3
	11 01 0008	H1004	102	174	276	147	3.5
	11 01 0009	H1006	151	250	401	218	4.3
	11 01 0010	H1008	202	301	503	292	5.1
	11 01 0011	H1010	253	352	605	366	5.9
	11 01 0012	H1012	304	403	707	439	6.8
	11 01 0013	H1014	356	450	806	515	7.6
15 Ton	11 01 0014	H1501	25	124	149	50	3.1
	11 01 0015	H1502	51	149	200	103	3.9
	11 01 0016	H1504	101	200	301	205	5.0
	11 01 0017	H1506	152	270	422	308	6.7
	11 01 0018	H1508	203	321	524	411	7.8
	11 01 0019	H1510	254	372	626	515	9.1
	11 01 0020	H1512	305	423	728	618	10.2
	11 01 0021	H1514	356	474	830	721	11.4

Continued →

Single Acting Jacks /
Enkeltvirkende Donkrafte

Cylinder capacity	Art. No.	Type	Dimensions - mm			Oil capacity cc	Weight kg
			Stroke	Min. Height	Max Height		
25 Ton	11 01 0023	H2501	26	143	169	86	5.5
	11 01 0024	H2502	51	168	219	170	6.4
	11 01 0025	H2504	102	219	321	339	8.2
	11 01 0026	H2506	155	272	427	515	10.1
	11 01 0027	H2508	206	323	529	684	11.9
	11 01 0028	H2510	257	374	631	854	13.7
	11 01 0029	H2512	310	426	736	1030	15.6
	11 01 0030	H2514	362	476	838	1203	17.4
30 Ton	11 01 0031	H3008	210	387	597	879	18.5
	11 01 0032	H5502	51	176	227	360	15.0
50 Ton	11 01 0033	H5504	103	227	330	730	18.6
	11 01 0034	H5506*	159	283	442	1126	26.1
	11 01 0035	H5510*	260	385	645	1844	30.6
	11 01 0036	H5513*	337	461	798	2388	39.5
75 Ton	11 01 0037	H7506*	156	285	466	1620	33.6
	11 01 0038	H7513*	333	492	825	3459	55.3
	11 01 0039	H10002*	51	219	270	677	29.9
95 Ton	11 01 0040	H10006*	168	357	525	2229	57.6
	11 01 0041	H10010*	260	449	709	3453	69.4

Available up to a 1000 ton on request / Muligt op til 1000 ton på forespørgsel.
* Cylinder is equipped with carrying handle / Donkraftene er udstyret med håndtag

Aluminum Jacks /
Aluminiums Donkrafte

Cylinder capacity	Art. No.	Type	Dimensions - mm			Oil capacity cc	Weight kg
			Stroke	Closed Height	Max Height		
20 Ton	11 02 0001	HU2002	50	174	224	156	3.0
	11 02 0002	HU2004	100	224	324	312	3.7
	11 02 0003	HU2006	150	274	424	468	4.4
30 Ton	11 02 0004	HU3002	50	181	231	221	4.7
	11 02 0005	HU3004	100	231	331	442	5.4
	11 02 0006	HU3006	150	281	431	663	6.1
50 Ton	11 02 0007	HU5502*	50	186	236	354	7.6
	11 02 0008	HU5504*	100	236	336	709	10.3
	11 02 0009	HU5506*	150	286	436	1063	11.6
	11 02 0010	HU5508*	200	336	536	1418	12.3
	11 02 0011	HU5510*	250	386	636	1772	14.2
95 Ton	11 02 0012	HU10002*	51	165	216	678	16.3
	11 02 0013	HU10004*	102	216	318	1357	19.5
	11 02 0014	HU10006*	152	267	419	2039	23.1
	11 02 0015	HU10010*	254	368	622	3392	30.8

* Cylinders are equipped with carrying handles / Donkraftene er udstyret med håndtag.

Double Acting Jacks

- Solid steel body
- Ideal for pushing and pulling
- Capacity: 10 - 1000 tonnes
- Stroke: 155 - 461 mm
- Pressure: 700 BAR
- Height: 331 - 1269 mm (min. - max.)

Dobbelt Virkende Donkrafte

- Solid stål cylinderhus
- Ideelt til skub og træk
- Kapacitet: 10 - 1000 tons
- Slaglængde: 155 - 461 mm
- Tryk: 700 BAR
- Højde: 331 - 1269 mm (min. - max.)



HD10018



HD10006

High Double Acting Jacks

- Solid steel body
- Capacity: 100 - 1000 tonnes
- Stroke: 50 - 300 mm
- Max. operating pressure: 700 BAR
- Height: 182 - 1114 mm (min. - max.)

Høj Dobbeltvirkende Donkrafte

- Solid stål cylinderhus
- Kapacitet: 100 - 1000 tons
- Slaglængde: 50 - 300 mm
- Max. Tryk: 700 BAR
- Højde: 182 - 1114 mm (min. - max.)



HDG10002

HDG10012

Cylinder capacity	Art. No.	Type	Dimensions - mm			Oil capacity cc		Weight kg
			Stroke	Closed height	Max Height	Push (cc)	Pull (cc)	
10 Ton	11 03 0001	HD1010	255	409	665	367	122	12.1
	11 03 0002	HD1012	304	458	762	438	146	13.6
30 Ton	11 03 0003	HD3008	207	389	596	867	426	19.5
	11 03 0004	HD3014	368	550	918	1542	758	27.5
50 Ton	11 03 0005	HD5506*	157	331	488	1113	323	32
	11 03 0006	HD5513*	335	509	844	2375	690	47.2
	11 03 0007	HD5520*	511	733	1269	3623	1053	66.3
75 Ton	11 03 0008	HD7506*	155	348	503	1608	511	42.5
	11 03 0009	HD7513*	333	526	859	3457	1099	62.1
100 Ton	11 03 0010	HD10006*	167	357	524	2216	1032	62.9
	11 03 0011	HD10010*	257	449	706	3413	1591	76.7
	11 03 0012	HD10013*	333	524	857	4419	2058	87.8
	11 03 0013	HD10018*	461	687	1148	6117	2849	112.6

Available up to a 1000 ton on request / Muligt op til 1000 ton på forespørgsel.
* Cylinder is equipped with carrying handle / Donkraften er med håndtag.

Cylinder capacity	Art. No.	Type	Dimensions - mm			Oil capacity cc		Weight kg
			Stroke	Closed height	Max Height	Push (cc)	Pull (cc)	
95 Ton	11 04 0001	HDG10002	50	182	232	664	309	27.7
	11 04 0002	HDG10004	100	232	332	1327	618	33.6
	11 04 0003	HDG10006	150	282	432	1991	928	39.5
	11 04 0004	HDG10008	200	332	532	2655	1237	45.4
	11 04 0005	HDG10010	250	382	632	3318	1546	51.7
	11 04 0006	HDG10012	300	432	732	3982	1856	57.6
150 Ton	11 04 0007	HDG15002	50	196	246	981	506	46.3
	11 04 0008	HDG15004	100	246	346	1963	1013	55.3
	11 04 0009	HDG15006	150	296	446	2978	1447	64.4
	11 04 0010	HDG15008	200	346	546	3926	2025	73.5
	11 04 0011	HDG15010	250	396	646	4907	2531	82.1
	11 04 0012	HDG15012	300	446	746	5889	3038	91.6

Available up to a 1000 ton on request / Donkraftene er udstyret med håndtag.

Low Profile Jacks

- Solid steel body
- Compact design
- Capacity: 10 - 100 tonnes
- Max. Operating pressure: 700 BAR
- Height: 88 - 198 mm (min. - max.)

Lav Donkraft

- Solid stål cylinderhus
- Kompakt design
- Kapacitet: 10 - 100 tons
- Max. Tryk: 700 bar
- Højde: 88 - 198 mm (min. - max.)



Cylinder capacity	Art. No.	Type	Dimensions - mm			Oil capacity cc	Weight kg
			Stroke	Closed Height	Max Height		
10 Ton	11 05 0001	HL1001	38	88	126	58	2.6
20 Ton	11 05 0002	HL2002	44	99	144	125	5.0
30 Ton	11 05 0003	HL3002	62	117	179	260	6.8
50 Ton	11 05 0004	HL5002	60	122	182	382	9.9
100 Ton	11 05 0005	HL10002	57	141	198	722	20.6

Low Profile Kit

- For truck wheel removal
- Carrying case
- Elongation pieces
- Max. Operating pressure: 700 BAR

Lave Donkrafte Sæt

- Til afmontering af f.eks. lastvognshjul
- Inkl. kuffert
- Forlænger stykker
- Max. Tryk: 700 bar



Cylinder capacity	Art. No.	Type	Cylinder effective area (cm²)	Dimensions - mm					Internal pressure at capacity (BAR)	Weight kg
				Stroke	Closed height	Max Height w/o adapter	Cylinder housing dia.	Plunger dia.		
10 Ton	11 08 0001	HL-1001-D	15.16	38	88	126	70	38	0.59	4.5

Flat Body Jacks

- Solid steel body
- Extremely compact design
- Max. Working pressure: 700 bar
- Capacity: 5 - 150 tonnes
- Height: 32 - 116 mm (min. - max.)

Flade Donkrafte

- Solid stål cylinderhus
- Ekstremt kompakt design
- Max. Tryk: 700 bar
- Kapacitet: 5 - 150 tons
- Højde: 32 - 116 mm (min. - max.)



Cylinder capacity	Art. No.	Type	Dimensions - mm			Oil capacity cc	Weight kg
			Stroke	Closed Height	Max Height		
5 Ton	11 06 0001	HF0500	16	41	57	11	0.9
	11 06 0002	HF0503*	6	32	38	4	0.6
10 Ton	11 06 0003	HF1005	11	43	54	17	1.5
20 Ton	11 06 0004	HF2005	11	51	62	31	2.7
30 Ton	11 06 0005	HF3005	13	59	72	54	4.4
50 Ton	11 06 0006	HF5006	16	67	83	102	6.8
75 Ton	11 06 0007	HF7506	16	80	96	166	11.5
100 Ton	11 06 0008	HF10006	16	86	102	203	14.3
150 Ton	11 06 0009	HF15006	16	100	116	316	24.2

* HF0503 is fitted with coupler CR38F / HF0503 er tilpasser med en kobling CR38F.

Flat Body Jack Kits

- Magnetic adapter in various heights
- Elongation pieces and carrying case
- Max. Working pressure: 700 bar
- Capacity: 5 - 50 tonnes

Flade Donkrafte Sæt

- Magnetiske adaptere i varierende højder
- Inkl. kuffert og forlænger stykker
- Max. Tryk: 700 bar
- Kapacitet: 5 - 50 tons



Cylinder capacity	Art. No.	Model number	Cylinder model	Stroke mm	Closed Height mm	Oil capacity cc	Weight kg
5 Ton	11 07 0001	HF0503B*	HF0503	6	32	4	2.5
10 Ton	11 07 0002	HF1005B	HF1005	11	43	17	4.2
20 Ton	11 07 0003	HF2005B	HF2005	11	51	31	6.8
30 Ton	11 07 0004	HF3005B	HF3005	13	59	54	9.5
45 Ton	11 07 0005	HF5006B	HF5006	16	67	102	14.7

* HF0503B is fitted with coupler CR38F / HF0503 er tilpasser med en kobling CR38F.

Hollow Jacks - Single

- Single acting cylinders
- Capacity: 12 - 100 tonnes
- Height: 68 - 330 mm (min. - max.)
- XT = Without internal threads.
- Max. Operating pressure: 700 BAR

Donkrafte m. Hulstempel - Enkelt

- Enkeltvirkende cylindre
- Kapacitet: 12 - 100 tons
- Højde: 68 - 330 mm (min. - max.)
- XT = Uden indvendig gevind.
- Max. Tryk: 700 bar



Cylinder capacity	Art. No.	Type	Dimensions - mm					Oil capacity cc	Weight kg
			Stroke	Closed Height	Max Height	Hul I.D.	Internal plunger thread length		
12 Ton	11 09 0001	HC1201T	8	60	68	19	16	15	1.5
	11 09 0002	HC1202	41	121	162	19	16	77	2.6
	11 09 0003	HC1202XT	41	121	162	19	-	77	2.6
	11 09 0004	HC1203XT	76	184	260	19	-	143	3.9
20 Ton	11 09 0005	HC2002T	51	162	213	27	19	161	7.2
	11 09 0006	HC2006T	154	306	460	27	19	487	13.4
30 Ton	11 09 0007	HC3002T	64	179	243	33	22	261	10.4
	11 09 0008	HC3006T	155	331	486	33	22	634	19.5
60 Ton	11 09 0009	HC6003T*	76	248	324	54	19	641	29.8
	11 09 0010	HC6006T*	152	324	477	54	19	1282	36.8
100 Ton	11 09 0011	HC10003T*	76	254	330	79	25	1087	51.4

* Cylinder is fitted with carrying handles / Donkraftene er udstyret med håndtag.

Hollow Jacks - Double

- Double acting cylinders
- Height: 165 - 718 mm (min. - max.)
- Capacity:
 - Push: 30 - 1000 tonnes
 - Pull: 20 - 71 tonnes
 - Max. Operating pressure: 700 BAR

Donkrafte m. Hulstempel - Dobbelt

- Dobbeltvirkende cylindre
- Højde: 165 - 718 mm (min. - max.)
- Kapacitet:
 - Tryk: 30 - 1000 tons
 - Træk: 20 - 71 tons
 - Max. Tryk: 700 bar



Cylinder capacity		Art. No.	Type	Dimensions - mm				Oil capacity cc		Top to return port	Weight kg
Push	Pull			Stroke	Closed height	Max Height	Hul I.D.	Push	Pull		
30 Ton	20 Ton	11 10 0001	HDC3007	178	331	509	33	492	328	60	19.5
		11 10 0002	HDC3010	257	432	689	33	1051	658	60	27.5
60 Ton	44 Ton	11 10 0003	HDC6003	89	248	337	54	750	500	67	29.8
		11 10 0004	HDC6006	165	324	489	54	1390	926	67	36.8
		11 10 0005	HDC6010	257	438	695	54	2165	1443	67	51.0
		11 10 0006	HDC10001	38	165	203	79	545	347	44	33.4
100 Ton	71 Ton	11 10 0007	HDC10003	76	254	330	79	1089	694	86	51.4
		11 10 0008	HDC10006	152	343	495	79	2169	1388	86	69.5
		11 10 0009	HDC10010	257	461	718	79	3679	2345	86	90.2

Available up to 1000 Ton on request / Muligt op til 1000 ton på forespørgsel.

Lock Nut Jacks

- Can support load over a longer period of time
- The lock nut can be adjusted at any point
- Max. Operating pressure: 700 BAR
- Capacity: 55 - 1000 tonnes
- Height: 165 - 845 mm (min. - max.)

Donkrafte m. Låse-møtrik

- Kan holde vægten over en længere periode
- Låse-møtrikken kan justeres til hver en tid
- Max. Tryk: 700 bar
- Kapacitet: 55 - 1000 tons
- Højde: 165 - 845 mm (min. - max.)



Cylinder capacity	Art. No.	Type	Dimensions - mm			Oil capacity cc	Weight kg
			Stroke	Closed Height	Max Height		
50 Ton	11 11 0001	HLN5502	50	165	213	355	15.4
	11 11 0002	HLN5504	100	213	315	709	20.2
	11 11 0003	HLN5506	150	264	414	1064	25.0
	11 11 0004	HLN5508	200	315	513	1418	29.9
	11 11 0005	HLN5510	250	363	615	1773	34.7
	11 11 0006	HLN5512	300	414	714	2127	39.5
100 Ton	11 11 0007	HLN10002	50	188	236	664	30.4
	11 11 0008	HLN10004	100	236	338	1327	39.0
	11 11 0009	HLN10006	150	287	437	1991	47.2
	11 11 0010	HLN10008	200	338	536	2654	55.8
	11 11 0011	HLN10010	250	386	638	3318	64.0
	11 11 0012	HLN10012	300	437	737	3981	72.6
150 Ton	11 11 0013	HLN15002	50	209	259	1006	52.6
	11 11 0014	HLN15004	100	259	359	2012	65.8
	11 11 0015	HLN15006	150	309	459	3018	78.9
	11 11 0016	HLN15008	200	359	559	4019	91.6
	11 11 0017	HLN15010	250	409	659	5025	104.8
	11 11 0018	HLN15012	300	459	759	6031	117.5

Available up to 1000 ton on request / Muligt op til 1000 ton på forespørgsel.

Threaded Jacks

- Single acting
- Capacity: 10 - 20 tonnes
- Max. Operating pressure: 700 BAR
- Height: 291 - 646 mm (min. - max.)

Donkrafte m. Gevind

- Enkelt virkende
- Kapacitet: 10 - 20 tons
- Højde: 291 - 646 mm (min. - max.)
- Max. Tryk: 700 bar



Cylinder capacity	Art. No.	Type	Dimensions - mm			Oil capacity cc	Weight kg
			Stroke	Closed Height	Max Height		
10 Ton	11 12 0001	HT1006	151	291	442	218	4.8
	11 12 0002	HT1010	253	393	646	365	6.4
20 Ton	11 21 0003	HT2005	131	299	430	421	10.0

High Precision Jacks

- Double acting
- Ideal for pushing and pull applications
- Capacity: 9 - 16 tonnes
- Height: 350 - 750 mm (min. - max.)

Høj-præcisions Donkrafte

- Dobbeltvirkende
- Ideel til skub og træk opgaver
- Kapacitet: 9 - 16 tons
- Højde: 350 - 750 mm (min. - max.)



Cylinder capacity	Art. No.	Type	Dimensions - mm			Weight kg
			Stroke	Closed height	Max Height	
9 Ton	11 13 0001	HPD0906	155	350	505	6.6
	11 13 0002	HPD0910	257	452	709	8.4
16 Ton	11 13 0003	HPD1606	159	389	548	10.0
	11 13 0004	HPD1610	260	490	750	12.8

Pull Jacks

- Internal pressure relief valve
- Capacity: 2,5 - 60 tonnes
- Height: 268 -450 mm (min. - max.)
- Max. Operating pressure: 700 BAR

Trækdonkrafte

- Intern overtryksventil
- Kapacitet: 2,5 - 60 tons
- Højde: 268 - 450 mm (min. - max.)
- Max. Tryk: 700 bar



Cylinder capacity	Art. No.	Type	Dimensions - mm			Oil capacity cc	Weight kg
			Stroke	Closed Height	Max Height		
2.5 Ton	11 14 0001	HP0205	127	268	395	46	2.9
5 Ton	11 14 0002	HP0505	141	303	444	104	4.2
10 Ton	11 14 0003	HP1006	151	299	450	237	9.5


Available up to 60 ton on request / Muligt op til 60 ton på forespørgsel

Spreader

- Can be used to: Spread, lifting, level machinery or collision repair
- Jaws close automatically, when pressure is released
- Max. Operating pressure: 700 BAR

Kiledonkraft

- Kan bruges til: At sprede, løfte, nivellering af maskiner eller reparation
- Lukker automatisk, når trykket fjernes
- Max. Tryk: 700 bar

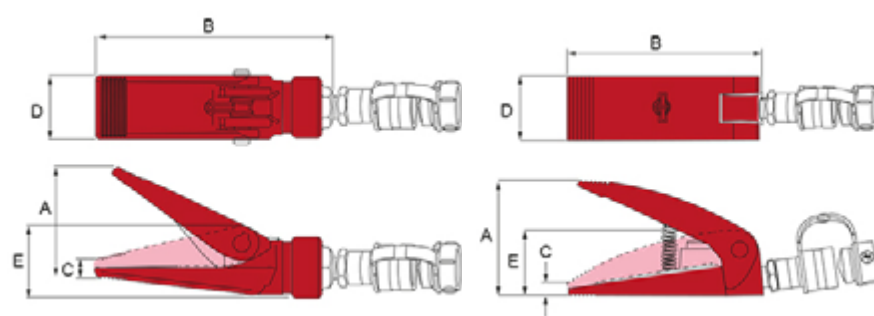

Cylinder capacity	Art. No.	Type	Cylinder effective area mm²	Oil capacity cc	Dimensions / range - mm					Weight kg
					A	B	C	D	E	
0.5 Ton	11 15 0001	SR05	7.87	10	90	192	13	52	60	2.2
1 Ton	11 15 0002	SR10	7.03	14	99	167	12	55	56	2.3

Hydraulic Hand Pumps

- Internal Pressure relief valve
- External load release valve for single acting Cylinders usage
- Is supplied with oil
- Max. Operating pressure: 700 BAR

Hydrauliske Håndpumper

- Intern overtryksventil
- Ekstern lastventil til brug sammen med enkeltvirkende donkrafte
- Leveres med olie
- Max. Tryk: 700 bar



P350



P2301



P8701M



P2301M

Speed	Art. No.	Type	Usable oil capacity cc	Pressure rating / Oil displacement per stroke		Max operating force N	Piston stroke mm	Oil outlet port	Weight incl oil kg
				1st stage (BAR/cc)	2nd stage (BAR/cc)				
single speed single acting	11 16 0001	P601S	600	-	700 / 2.5	485	20	3/8"-18 NPTF	5.9
	11 16 0002	P350	350	14 / 3	700 / 0.8	391	10	1/4"-18 NPTF	3.0
2-speed single acting	11 16 0003	P1000	1000	14 / 13.3	700 / 2.3	440	21	3/8"-18 NPTF	6.2
	11 16 0004	P1201	1100	14 / 13.3	700 / 2.3	440	21	3/8"-18 NPTF	9.3
	11 16 0005	P2301	2200	14 / 13.3	700 / 2.3	440	21	3/8"-18 NPTF	12.6
	11 16 0006	P4301	4100	14 / 13.3	700 / 2.3	440	21	3/8"-18 NPTF	17.1
	11 16 0007	P8701	7800	20 / 126.3	700 / 4.8	636	43	3/8"-18 NPTF	34.5
	11 17 0001	P2301M	2200	14 / 13.3	700 / 2.3	440	21	3/8"-18 NPTF	14.7
2-speed double acting	11 17 0002	P4301M	4100	14 / 13.3	700 / 2.3	440	21	3/8"-18 NPTF	19.0
	11 17 0003	P8701M	7800	20.01 / 126.3	700 / 4.8	636	43	3/8"-18 NPTF	35.1

Air Hydraulic Pumps

- Internal pressure relief valve
- Designed for single acting cylinders
- Is supplied with oil

Luftdrevne Hydraulik Pumper

- Intern overtryksventil
- Til enkeltvirkende donkrafte
- Leveres med olie



PA1500 - Control of pressure

Pressure can be adjusted externally from 70 bar to 700 bar.

Pumps for use with:	Art. No.	Type	Oil capacity cc	Oil capacity L/min		Weight incl oil kg
				No load	with load	
Single acting cylinders	11 18 0001	PA600	600	1.00	0.15	6.4
	11 18 0002	PA600H	600	1.00	0.15	5.7
	11 18 0003	PA1500	1500	1.08	0.18	8.2
	11 18 0004	PA1500A*	1500	1.08	0.18	8.2
	11 18 0005	PA2000	2000	1.07	0.20	9.1
	11 18 0006	PA3801	3800	1.07	0.18	12.3
	11 18 0007	PA7550	7550	1.07	0.18	16.3
	11 18 0008	PA1500L**	1500	1.00	0.16	8.8
	11 18 0009	PA3801L**	3800	1.00	0.16	13.8
Double acting cylinders	11 18 0010	PA1500M	1500	1.08	0.18	8.7
	11 18 0011	PA3801M	3800	1.07	0.18	10.9

* This unit is equipped with an external pressure adjustment (70-700 bar) / Muligt op til 1000 ton på forespørgsel.
** These pumps are equipped with a hand held air powered pendant / Disse pumper er udstyret med et håndholdt luftdrevet vedhæng

Motorized Pumps / Motoriserede Pumper

- Air Pumps / Luft pumper



Motorized Pumps / Motoriserede Pumper

- Electrical pumps / Elektriske pumper



Motorized Pumps / Motoriserede Pumper

- Gas and diesel pumps / Benzin og dieselpumper



BVA Accessories:

Coupler

- 700 BAR



CH38

BVA Tilbehør:

Kobling

- 700 BAR



CQ38

Coupler type		Type		
		Complete set	Male half	Female half
Art. No.	High-flow coupler	CH38	CH38M	CH38F
		11 23 0001	11 23 0101	11 23 0201
Art. No.	Regular-flow coupler	CR38	CR38M	CR38F
		11 23 0002	11 23 0102	11 23 0202
Art. No.	Regular coupler Zinc	CRZ14	CRZ14M	CRZ14F
		11 23 0003	11 23 0103	11 23 0203
Art. No.	High-flow coupler	CH14	CH14M	CH14F
		11 23 0005	11 23 0105	11 23 0205
Art. No.	Quick connection	CQ38	CQ38M	CQ38F
		11 23 0004	11 23 0104	11 23 0204
Art. No.	Flat face coupler			CQF38F
				11 23 0304

Hoses

- 700 BAR
- External 3/8" - 18NPTF threads in both ends
- Is not supplied with couplers



Slanger

- 700 BAR
- Udvendig 3/8" - 18NPTF gevind i begge ender
- Leveres uden koblinger



Art. No.	Type	Length cm
11 24 0001	CS3814-1	100
11 24 0002	CS3814-2	200
11 24 0003	CS3814-3	300
11 24 0004	CS3814-4	400
11 24 0005	CS3814-6	600
11 24 0006	CS3814-10	1000

**Hydraulic Pressure Gauge /
Hydraulisk Manometer**



GBW1460



GBW12100


Art. No.	Type	Face dia. mm	Material	Thread	Pressure range (bar)	Graduation	
						major (bar)	Minor (bar)
11 25 0001	GBW1460	63	Brass	1/4"-18NPTF	0-1000	100	20
11 25 0002	GBW12100	105	Brass	1/4"-18NPTF	0-1000	100	20
11 25 0003	GSW1460	63	Stainless Steel	1/4"-18NPTF	0-700	100	20

**Fitting Gauge Adapter /
Manometer Adapter**

Art. No.	Type
11 26 0001	CF3814
11 26 0003	CF3814-45



CF3814



Option: CF3814-45

Manifold



CMH6



CM7




CM14

Manifold type	Art. No.	Type	Number of ports
6-Port hexagon manifold	11 27 0001	CMH6	6
17.8 cm long manifold	11 27 0002	CM7	7
35.6 cm long manifold	11 27 0003	CM14	7

**Manifold - Split Flow /
Manifold - Med Åbne/Lukke Ventiler**

Manifold type	Art. No.	Type	Number of ports
Manifold with two needle valves	11 28 0001	MFC2	2
Manifold with four needle valve	11 28 0002	MFC4	4



MFC2



MFC4

Cylinder Saddle / Cylindersadel

Saddle type	Art. No.	Type	For use with cylinder capacity
Grooved	11 29 0001	SD05	5
	11 29 0002	SD10	10
	11 29 0003	SD15	15
	11 29 0004	SD25	25
Tilt	11 29 0005	SDT05	5
	11 29 0006	SDT10	10
	11 29 0007	SDT15	15
	11 29 0008	SDT25	25
	11 29 0009	SDT55	50 - 100
Threaded	11 29 0010	HTD10	10



Transport Trolleys - Turnable

- Rotating unit with handle/pull rod
- Supplied with 4 or 8 fixed Ø 80 mm nylon or polyurethane wheels
- Non-slip rubber coating
- Red powder coating



Transportruller - Drejelig

- Drejelig enhed med håndtag/trækstang
- Leveres med 4 eller 8 faste Ø 80 mm nylon- eller polyuretanhjul
- Skridsikker gummibelægning
- Rød pulverlakering

Clevis / Gaffelhoved

Clevis type	Art. No.	Type	For use with cylinder capacity
Plunger	11 30 0001	CEP05	5
	11 30 0003	CEP15	10 & 15
	11 30 0004	CEP25	25
	11 30 0005	CEB05	5
Base	11 30 0006	CEB10	10
	11 30 0007	CEB15	15
	11 30 0008	CEB25	25
Plunger & base	11 30 0009	CP10*	Only HP1006



* 2 pcs. Set with an adapter / 2 stk. Sæt med adapter.

Transport Trolleys - Fixed

- For handling machines and other heavy load items
- Supplied with 2, 4 or 6 fixed Ø 80 mm nylon or polyurethane rollers
- Non-slip rubber coating
- Red powder coating



Transportruller - Fast

- Til håndtering af maskiner og andre sværlast emner
- Leveres med 2, 4 eller 6 faste Ø 80 mm nylon- eller polyuretanruller
- Skridsikker gummioverflade
- Rød pulverlakering

Hydraulic Oil / Hydraulikolie

Art. No.	Type	Volume liter	Oil type	Viscosity	For pump
11 31 0001	HV155	5	Hydro HV15	15	Hand / Air
11 31 0002	HV685	5	Hydro HV68	68	Electric



Base / Fod

Art. No.	Type	For use with cylinder capacity
11 32 0001	CB05	5
11 32 0002	CB10	10
11 32 0003	CB15	15
11 32 0004	CB25	25



Art. No	Load kg	Dimensions mm			Plate mm	Wheel	Weight kg
		L	B	H			
11 42 0001	2000	260	115	110	200 x 115	2x Nylon	4.0
11 42 0002	1000	260	115	110	200 x 115	2x Polyurethane	4.0
11 42 0003	4000	420	230	100	300 x 230	4x Nylon	13.3
11 42 0004	2000	420	230	100	300 x 230	4x Polyurethane	13.3
11 42 0005	6000	420	230	100	300 x 230	6x Nylon	15.5
11 42 0006	3000	420	230	100	300 x 230	6x Polyurethane	15.5

NOS A/S is supplier to the WIND POWER INDUSTRY

At NOS A/S we are proud to be able to contribute to ensure growth in Denmark by delivering equipment to wind power companies.

The wind power industry sets high demands for safety and service, and we are happy to be able to live up to these expectations.

We have many years of experience, extensive product knowledge and deliver products such as:

- Steel wire ropes
- Lifting equipment
- Fall protection equipment
 - Hoists
 - Lifting jacks

NOS A/S er leverandør til VINDENERGI INDUSTRIEN

Hos NOS A/S er vi stolte af at få lov til at bidrage lidt til at sikre vækst i Danmark, ved at levere udstyr til vindmølleindustrien.

Vindenergi industrien er en branche, der stiller store krav til sikkerhed og service, og det er vi glade for at kunne leve op til.

Vi har mange års erfaring, et stort produktkendskab og leverer kvalitets produkter såsom:

- Stålwirer
- Løftegrej
- Faldsikring
- Taljer
- Donkrafte

