



Linear Light Technology

LEDSECTION OXA

The perfect match for halogen and CFL replacements

Advantages

- Energy savings up to 50 %
- Long lifetime guaranteed 20 years*
- Barely measurable IR- and no UV-radiation
- Good color rendering


Product details

- Clean Light Technology structure eliminates glare
- Easy installation with plug and play
- Full brightness immediately unlike fluorescents
- No mercury or other harmful substances involved




* Under regular use 4 hours a day.

Datasheet

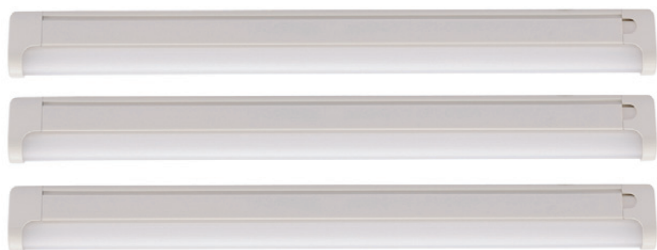

Dimension

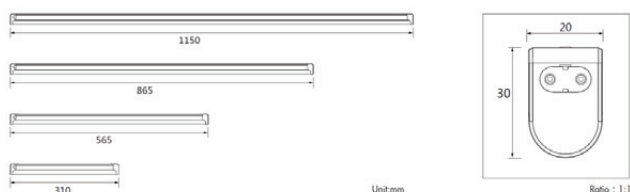

EQUAL TO	CONSUMPTION	EFFICIENCY
CFL 16W T5LO	8W	90 lm/W
AC-NET	IP-CODE	DIMMABLE
230V	IP21	No

	CW	WW	NW	R	G	B	A
Lumens	N/A	720	N/A	N/A	N/A	N/A	N/A
Lumens pr. watt	N/A	90	N/A	N/A	N/A	N/A	N/A
Color Temp	N/A	3000	N/A	N/A	N/A	N/A	N/A
CRI	N/A	85	N/A	N/A	N/A	N/A	N/A

Cool White			Warm White			Natural White		
Ft	Lux	fc	Ft	Lux	fc	Ft	Lux	fc
2	TBA	TBA	2	TBA	TBA	2	TBA	TBA
4	TBA	TBA	4	TBA	TBA	4	TBA	TBA
6	TBA	TBA	6	TBA	TBA	6	TBA	TBA
8	TBA	TBA	8	TBA	TBA	8	TBA	TBA



Plug-in power end



No gap



Color index



Mounting kit



Light diffuse cover

Linear fixture

Type: **OXA Linear**
Itemnr.: **2229300016**

Oxa is the most powerful and functional version of under cabinet LED lighting on the market. The fitting can be used in everything from common lighting concepts in kitchens to exclusive architectural lighting concepts, where powerful indirect lighting is required. The tiny high power SMD LEDs combined with the small linear lamp housing makes it easy to have powerful lighting almost everywhere. Oxa comes in 4 different sizes and are delivered with clips for installation, power cord and the extension plugs for great finish.

Technical Data

Lumen	360lm, 720lm, 1.080lm or 1.440lm
Beam Angle	Wide: 120°
Colors Available	Warm white or Cold white
Color Temperature	Warm white 3000K, Cold white 5000K
Color Rendering	Warm white: CRI85+
Consumption	4W, 8W, 12W or 16W
Voltage Range	AC90 ~ 120V or AC200 ~ 240V
Efficiency	Warm white: 90 lm/W
Equal To	CFL 8W CRI85 120° = 1x16W T5 low output
Lifetime	30.000 hours at Ta = 25°C
Dimmable	No
IP Code	IP21
Class	2, Double Insulated
Size	L310 x W20 x H30 mm L565 x W20 x H30 mm L865 x W20 x H30 mm L1150 x W20 x H30 mm
Weight	0,3 KG
Housing	White

Shipping

The products are to be delivered in package of 30 pcs.

Energy savings up to 50%

CFL 16W TC-DEL ➡ OXA 8W CRI85

Power comparison (Compared to traditional T5 tube)

