


209541

TKHM-Z/TSM-Z/T4

Function adapters

- Suitable for all standard sensors
- Compact design
- Can be retrofitted quickly and easily
- High temperature use range
- LED display for status and switching output

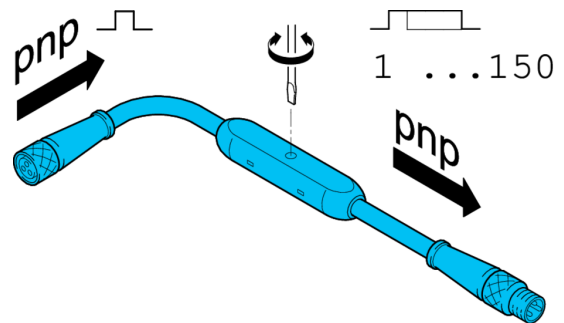

1) Potentiometer (only ...TSM-Z/T)

2) LED STATUS

3) LED SWITCHING OUTPUT

BK: black

BN: brown

BU: blue

WH: white

| Function | | | | | | | | | | | | |
|----------|--|--|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | | | | |

| Technical data (typ.) | +20°C, 24 V DC |
|--------------------------------------|--|
| Current-carrying capacity | 200 mA, short-circuit-proof |
| Service voltage | 10 ... 35 V DC |
| No-load current (max.) | 20 mA |
| Thread | M8 x 1 |
| Housing material | Plastic |
| Protection class | III, operation on protective low voltage |
| Operating principle | pnp pulse stretcher |
| Application | Digital signal |
| Function selection | pnp |
| Switching output | pnp (1 ... 150 ms) |
| Switching frequency | 500 Hz |
| Ambient temperature during operation | -20 ... +70 °C |
| Protection type | IP 67 |
| Connection | Pigtail, Coupling, M8, 4-pin |
| Connection 2 | Pigtail, Connector, M8, 4-pin |

More information / accessories <https://www.di-soric.com/209541>