


Datasheet

Type: NS92
Itemnr.: 3416200003

Product description

The NS92 is an exclusive series for wall mounting, either as a sleek, integrated lamp built in the wall, or as regular mounting on the wall. The NS92 is not only exclusive in looks and styling. It is also an incredibly strong and robust series, obtaining IK10 status, which simply means it is specifically developed to withstand shocks, blows and even vandalism. The series is delivered with the latest LED technology and driver, ensuring you a very long lifespan and the best energy efficiency on the market. The NS92 is delivered as IP65, meaning it is waterproof and enabling you use it as an outdoor lamp or installing it in damp rooms. Are you in the mood for some colour? The NS92 can be delivered in various colours, but is delivered in the sleek graphite white as shown on the picture.

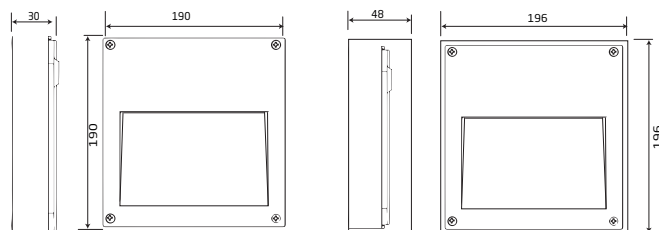

Normasym Intl.
Phone +4571995825
hello@normasym.com
www.normasym.com

Technical Data

Lumen	405lm
Beam Angle	50 Asymmetric
Colors Available	Warm white or Neutral white
Color Temperature	Warm white 3000K or Neutral white: 4000K
Color Rendering	CRI80+
MacAdam	Step 3
Color Bin	V6
Consumption	4.5W
Voltage Range	220 ~ 240VAC 50/60Hz
Efficiency	90 LPW
Equal To	NS92 4.5W = Fluorescent tube TC-TEL 11W
Lifetime LEDs	50K hours at Ta = 25°C (L70) B10
Lifetime driver	50K hours at Ta = 25°C (MTBF) B10
Dimmable	No
IP Code	IP65
IK class	IK10
Class	2, Double Insulated
Size	L190 x W190 x H45 mm
Installation	Wall mounted
Weight	1,5 Kg
IES File	Yes
Certificates	CE, ROHS, TM21, LM80, IES
Warranty	5 years*
Housing	Graphit dark grey, black or optional



Shipping

The products are to be delivered in package of 12 pcs.

Energy savings up to 80%

One-lamp tube TC-DEL 11W ➡ NS92 4.5W
Halogen QT 20W ➡ NS92 4.5W