

RL

www.felder.at

FELDER

Clean air in professional format



Clean air for a healthy workshop

Commercial and industrial woodworkers benefit from wood dust tested and BG certified (DGUV) FELDER clean air dust extractors in different price and performance classes.


All models achieve dust emissions of less than 0.1 mg/m³, in accordance with H3.

FELDER briquetting presses

The Felder briquetting presses reduce the volume of waste by 90 % and also eliminate the need for investment in a chip container or silo. High-quality briquettes can be used to reduce workshop heating costs or alternatively, the briquettes can be sold, opening up a new source of income.



	RL 125	RL 140	RL 160	RL 200	RL 250	RL 300	RL 350
Extraction connection (Ø mm)	125	140	160	200	250	300	350
Chip volume (l)	200	200	2x200	2x200	2x250	2x250	2x250
Max. airflow (m ³ /h)	1900	2500	3200	4000	5000	6000	8000
Dust emission quality (mg/m ³)	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
Acoustic pressure (dB)	74	74	70	70	75	75	75
Automatic filter cleaning	-	-	Yes	Yes	Yes	Yes	Yes
Cartridge filter	-	-	-	-	Yes	Yes	Yes
JET filter cleaning system	Yes	Yes	Yes	Yes	-	-	-
Filter surface area (m ²)	5	10	10	20	50	50	71
Space requirement mm (L x W x H mm)	1040 x 898 x 1940	1040 x 898 x 1940	1775 x 898 x 2005	1775 x 898 x 2005	2640 x 1140 x 2260	2640 x 1140 x 2260	2640 x 1140 x 2260

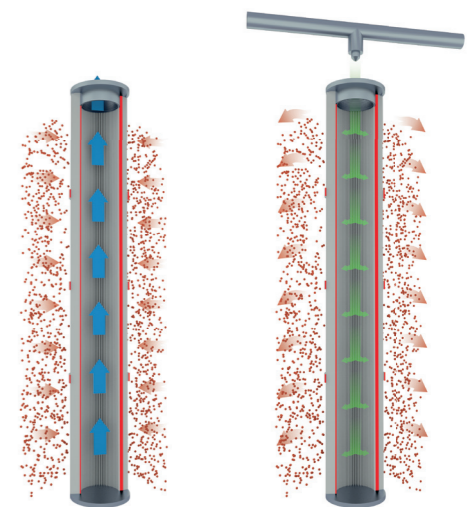

- Cartridge filter**
- ✓ Large filter area with small space requirement
 - ✓ Reduced load on the filters
 - ✓ Maximum filter durability

- JET filter cleaning system**
- Continuous automatic blasts of compressed air clean the filter completely and guarantee long lasting perfect extraction results



Even more practical accessories can be found at: www.feldershop.com

