


## ABS Submersible Dewatering Drainage Pump XJ, 50Hz


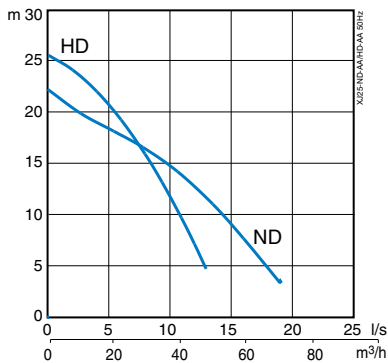


### ABS XJ 25

**XJ 25 ND\***  
**XJ 25 HD\***

Motor rating $P_2$	2.5 kW, 3 ~
Voltage (V)	230 / 400 / 500 / 1000
Full load (A)	8.8 / 5.1 / 4.1 / 2.0
Speed	2920 rpm
Strainer hole	7.5 x 22 mm
Discharge connections	Hose 2 1/2", 3", 4" Thread G/BSP 2 1/2", 3", 4"
Weight (excl. cable)	39 kg
Motor protection	Built in
Electric cable	20 m S1BN8-F

\* Option: AquaTronic, built-in electronic pump control.

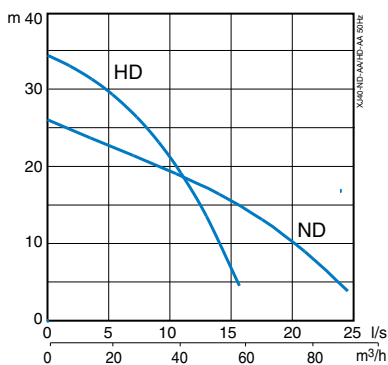
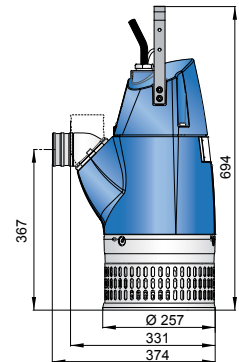


### ABS XJ 40

**XJ 40 ND\***  
**XJ 40 HD\***

Motor rating $P_2$	3.7 kW, 3 ~
Voltage (V)	230 / 400 / 500 / 1000
Full load (A)	13.2 / 7.6 / 6.1 / 3.0
Speed	2860 rpm
Strainer hole	7.5 x 22 mm
Discharge connections	Hose 2 1/2", 3", 4" Thread G/BSP 2 1/2", 3", 4"
Weight (excl. cable)	42 kg
Motor protection	Built in
Electric cable	20 m S1BN8-F

\* Option: AquaTronic, built-in electronic pump control.

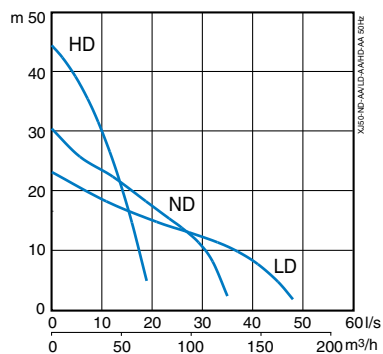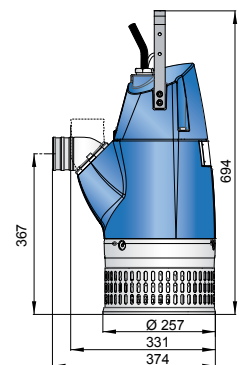



### ABS XJ 50

**XJ 50 ND\***  
**XJ 50 LD\***  
**XJ 50 HD\***

Motor rating $P_2$	5.6 kW, 3 ~
Voltage (V)	230 / 400 / 500 / 1000
Full load (A)	19.7 / 11.3 / 9.0 / 4.5
Speed	2930 rpm
Strainer hole	7.5 x 22 mm
Discharge connections	Hose 3", 4", 6" Thread G/BSP 3", 4", 6"
Weight (excl. cable)	59 kg
Motor protection	Built in
Electric cable	20 m S1BN8-F

\* Option: AquaTronic, built-in electronic pump control.

\*\* Max measurement based on largest discharge size.

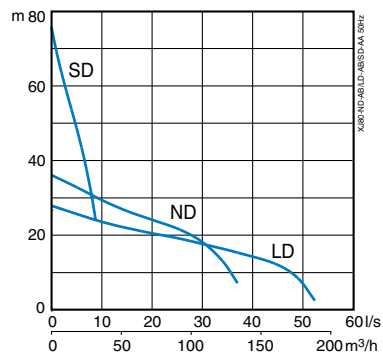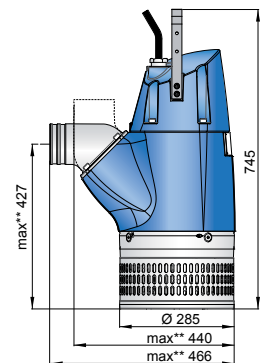


### ABS XJ 80

**XJ 80 ND\***  
**XJ 80 LD\***  
**XJ 80 SD\***


Motor rating $P_2$	8.3 kW, 3 ~
Voltage (V)	230 / 400 / 500 / 1000
Full load (A)	27.8 / 16 / 12.8 / 6.4
Speed	2920 rpm
Strainer hole	7.5 x 22 mm
Discharge connections	Hose 3", 4", 6" Thread G/BSP 3", 4", 6" ND/LD: 63 kg, SD: 74 kg
Weight (excl. cable)	Built in
Motor protection	Built in
Electric cable	20 m S1BN8-F

\* Option: AquaTronic, built-in electronic pump control.

\*\* Max measurement based on largest discharge size.

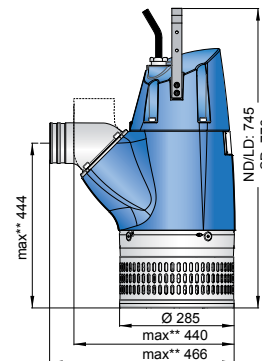

## ABS Submersible Dewatering Drainage Pump XJS, 50Hz


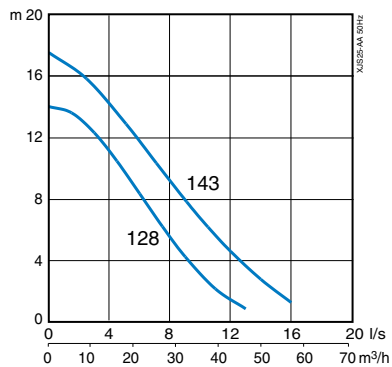


### ABS XJS 25

**XJS 25 D\* -128**  
**XJS 25 D\* -143**

Motor rating P <sub>2</sub>	2.5 kW, 3 ~
Voltage (V)	230 / 400 / 500 / 1000
Full load (A)	8.8 / 5.1 / 4.1 / 2.0
Speed	2920 rpm
Free passage	45 x 55 mm
Discharge connections	Hose 2 1/2", 3", 4" Thread G/BSP 2 1/2", 3", 4"
Weight (excl. cable)	39 kg
Motor protection	Built in
Electric cable	20 m S1BN8-F

\* Option: AquaTronic, built-in electronic pump control.

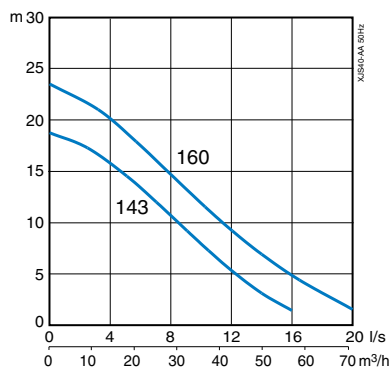



### ABS XJS 40

**XJS 40 D\* -143**  
**XJS 40 D\* -160**

Motor rating P <sub>2</sub>	3.7 kW, 3 ~
Voltage (V)	230 / 400 / 500 / 1000
Full load (A)	13.2 / 7.6 / 6.1 / 3.0
Speed	2860 rpm
Free passage	45 x 55 mm
Discharge connections	Hose 2 1/2", 3", 4" Thread G/BSP 2 1/2", 3", 4"
Weight (excl. cable)	41 kg
Motor protection	Built in
Electric cable	20 m S1BN8-F

\* Option: AquaTronic, built-in electronic pump control.

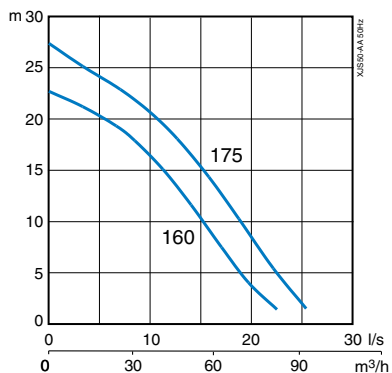



### ABS XJS 50

**XJS 50 D\* -160**  
**XJS 50 D\* -175**

Motor rating P <sub>2</sub>	5.6 kW, 3 ~
Voltage (V)	230 / 400 / 500 / 1000
Full load (A)	19.7 / 11.3 / 9.0 / 4.5
Speed	2930 rpm
Free passage	48 x 60 mm
Discharge connections	Hose 2 1/2", 3", 4" Thread G/BSP 2 1/2", 3", 4"
Weight (excl. cable)	59 kg
Motor protection	Built in
Electric cable	20 m S1BN8-F

\* Option: AquaTronic, built-in electronic pump control.

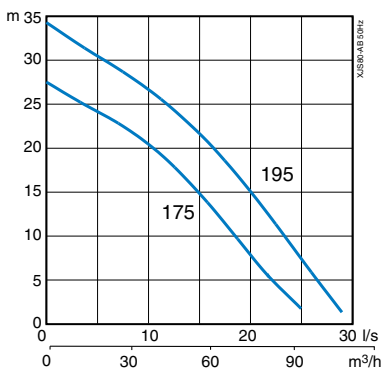

### ABS XJS 80

**XJS 80 D\* -175**  
**XJS 80 D\* -195**

Motor rating P <sub>2</sub>	8.3 kW, 3 ~
Voltage (V)	230 / 400 / 500 / 1000
Full load (A)	27.8 / 16 / 12.8 / 6.4
Speed	2920 rpm
Free passage	48 x 60 mm
Discharge connections	Hose 2 1/2", 3", 4" Thread G/BSP 2 1/2", 3", 4"
Weight (excl. cable)	64 kg
Motor protection	Built in
Electric cable	20 m S1BN8-F

\* Option: AquaTronic, built-in electronic pump control.

