# **ECONOMYARM**

# **FLEXIBLE EXTRACTION ARM**

Hose tube arm with spring balanced support mechanism. The hood has a safety mesh and a shut-off damper damper. The arm is 360° rotatable.

The EconomyArm arm is available in two different types:

- type H: for hanging mounting (wall bracket included)
  type S: for standing mounting (e.g. on a mobile unit)



### **APPLICATIONS**

The EconomyArm is intended to be used for the following applications:



- MIG-MAG/GMAW welding
- TIG welding
- FCAW welding
- stick/MMAW welding


### **SPECIFICATIONS**

■ Physical dimensions and properties					
Diameter:	(A 160 mm (6 2 in )				
<ul><li>tubes</li><li>hood opening</li></ul>	• Ø 160 mm (6.3 in.) • Ø 300 mm (11.8 in.)				
Material of hose	flame-retardant PVC, reinforced with spring steel wire				
Colour	black				
<b>■</b> Performance					
Recommended airflow	800-1200 m <sup>3</sup> /h (470-710 cfm)				
■ Ambient and process	conditions				
Process temperature: • min. • nom. • max.	• 5°C (41°F) • 20°C (68°F) • 70°C (158°F)				
Max. relative humidity	90%				
Outdoor use allowed	no				
Storage conditions	• 5-45°C (41-113°F) • relative humidity max. 90%				
Options and accessor	ries				
S-100	manual on/off switch for hood mounting				
HL-20/24-160	manual on/off switch, incl. working light				
■ Product combination	s				
EA-2/H   EA-3/H   EA-4	1/H				
FUA-1800   FUA-2100	extraction fan				
FM-15   FM-25   FM-35   FM-45	extension crane				
ERC	extraction rail				

stanchion

SLE-30	extension hose				
EA-2/S   EA-3/S   EA-4/S					
MobilePro	mobile fume extractor				
■ Scope of supply					
<ul><li>H types: hose tube arm (in parts) – Wall bracket</li><li>S types: hose tube arm (in parts)</li></ul>					
■ Order information					
Number/package	1				
■ Shipping data					
Harmonized Tariff Code	84219990				

## **MOUNTING POSSIBILITIES**

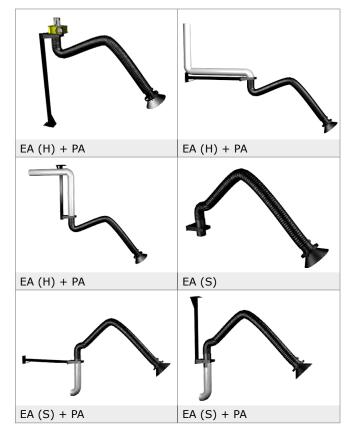

PA-110 | PA-220





clean air at work

# **Remaining specifications**

	EA-2/H	EA-2/S	EA-3/H	EA-3/S	EA-4/H	EA-4/S		
■ Physical di	mensions and pro	perties						
Length	2 m (6.6 ft)	2 m (6.6 ft)	3 m (9.8 ft)	3 m (9.8 ft)	4 m (13.1 ft)	4 m (13.1 ft)		
Weight (net)	17,5 kg (39 lbs.)	14,5 kg (32 lbs.)	21 kg (46 lbs.)	16,5 kg (36 lbs.)	23 kg (51 lbs.)	20 kg (44 lbs.)		
Order information								
Art. no.	0000101141	0000111793	0000101143	0000101149	0000101146	0000101151		
■ Shipping d	ata							
Gross weight	18,5 kg (41 lbs.)	15 kg (33 lbs.)	22 kg (49 lbs.)	17,5 kg (39 lbs.)	24 kg (53 lbs.)	21 kg (46 lbs.)		
Packing dimensions	1200 x 300 x 400 mm (47.2 11.8 x 15.7 in.)	1600 x 300 x 500 mm (63 x 11.8 x 19.7 in.)		2100 x 300 x 500 mm (82.7 x 11.8 x 19.7 in.)		2270 x 300 x 500 mm (89.4 x 11.8 x 19.7 in.		

### PRESSURE DROP





## **FEATURES & BENEFITS**





Product type EΑ refer to Order information

Product category

Always check the latest version on  $\boldsymbol{www.plymovent.com}$